
An In-Silico Instrument for Pre-Validating Corpus-Bounded Instruction: Reference-Policy Transfer Measurement with Bidirectional Corpus-Gap and Leakage Diagnosis

Anonymous Author(s)

Affiliation

Address

email

Abstract

1 When a model answers correctly with a corpus in context, did it *need* the corpus, or
2 did it already know the answer? We present an *in-silico measurement instrument*
3 that answers this—and the dual question of whether a corpus is *sufficient*—as a
4 behavioral task outcome, before any human-subject study. The central quantity is
5 *corpus necessity*: ablate a corpus item and measure the change in a task outcome
6 scored against a reference. Our headline contribution is that we make necessity
7 *non-confounded* by calibrating it against a *known parametric baseline*: we *con-*
8 *struct* the ground truth by teaching a fact into a model’s weights and showing
9 necessity falls as a *dose-response*. We demonstrate this in **two domains with in-**
10 **dependent objectives**, one of which uses *no simulator at all*: (i) a control-regret
11 simulator (maritime collision avoidance), where teaching a hidden charted haz-
12 ard into the weights collapses necessity from a full-barrier swing to ≈ 0 , with
13 the LoRA-scale and training-checkpoint gradients agreeing; and (ii) a simulator-
14 free *fictional-fact question answering* task scored by an answer checker, where
15 teaching invented facts into a 7B model drives necessity *smoothly and monoton-*
16 *ically from 1.00 to 0.03*. This calibrated necessity measure is the basis of two
17 products: a *corpus diagnosis* that ranks each item by necessity, localizes which
18 item is missing from task failures, and—crucially—splits an unrelieved-upon item
19 into *redundant* (the model already knows it) versus *unusable* (the model fails even
20 with it present); and a *corpus-sufficiency* verdict that surfaces *false sufficiency*—a
21 corpus that only appears sufficient because the model is coasting on priors and is
22 therefore fragile to distribution shift. Unlike faithfulness (RAGAS) and context-
23 attribution (ContextCite), which measure whether context *supported* or *influenced*
24 an output, we measure whether the model *needed* it, against a weight-level base-
25 line they lack. The method is *closed-model compatible* (API access only) and
26 operates *per item*. As breadth we report: cross-model discrimination across cur-
27 rent LLMs; a second control domain (roadside tire change); KC→single-metric
28 identifiability and estimator-recovery calibration; and a machine-unlearning arm
29 that yields a *says $\neq$ does* dissociation (gentle unlearning changes what a model
30 *says* but not what the instrument sees it *do*) as supporting weight-level evidence.
31 All results are **simulation-based mechanism evidence, not human-subject ex-**
32 **ternal validity**; we scope the contribution accordingly and pre-register the human
33 study as future work.

Plain-language summary. When an AI answers correctly with a rulebook in front of it, you cannot easily tell whether it *needed* the rulebook or already knew the answer—and you cannot tell whether the rulebook has holes. Normally you would find out with an expensive human study. We build a cheap “test bench” that answers both questions first. We remove a single item from the corpus and watch what breaks: if performance drops, the model genuinely relied on it; if nothing changes, it did not. To prove that “nothing changes” really means the knowledge was already in the model—and not some prompt artifact—we *construct* the answer: we teach a fact into the model’s weights and show reliance falls step by step (a “dose-response”). We do this in two settings, one of which uses no simulator at all: a ship-steering task, and a set of *made-up facts* about fictional places no model could know—taught into a real model, reliance on the corpus drops smoothly from 100% to near zero. The payoff is a corpus audit: which items are truly needed, which are *redundant* (already known—delete them), which are *unusable* (present but the model can’t act on them), and whether the corpus only *looks* sufficient because the model is coasting on what it already knew. Everything here is controlled simulation that checks the machinery—not yet a claim that human learners learn more, which is the study we set up next.

1 Introduction

Generic retrieval-augmented (RAG) assistants optimize for semantic relevance: give a plausible answer to whatever is asked. That objective is wrong for training in safety-critical procedural domains, where a semantically accurate answer can still be instructionally wrong—delivered at the wrong complexity, skipping a prerequisite, or worse, confidently fabricated. A growing body of work therefore builds *corpus-bounded* tutors that abstain outside a curated corpus. But a designer who has built such a system faces a prior question: *does the mechanism work?* Does the tutor actually rely on its corpus, and does the corpus actually cover the domain? Answering this by human-subject study is slow and expensive, and a null result there conflates many causes.

We argue that the *mechanism* of a corpus-bounded method can be falsified cheaply and in silico, and we build the instrument to do it (Figure 1). Our contribution is a *methods/measurement* one, not a new tutor and not a new collision-avoidance technique. Concretely:

The central storyline (Sections 4–6):

- **Necessity, calibrated by construction.** We measure *corpus necessity*—the change in a task outcome when a corpus item is ablated—and make it non-confounded by *constructing* the parametric baseline: teach a fact into the weights and necessity falls as a *dose-response*. We show this in **two domains with independent objectives**, one *simulator-free*: a control-regret simulator (teaching a hidden hazard collapses necessity to ≈ 0 ; LoRA-scale and checkpoint gradients agree) and a simulator-free fictional-fact QA task scored by an answer checker (teaching invented facts drives necessity smoothly $1.00 \rightarrow 0.03$ on a 7B model). This is a known-groups validation of the measure.
- **The corpus diagnosis** ranks each item by necessity, localizes a missing item from task failures, and splits an unrelayed-upon item into *redundant* (already known) versus *unusable* (present but the model fails with it)—distinct fixes (prune vs. fix the model).
- **Corpus sufficiency**, the product face of the audit, surfaces *false sufficiency*: a corpus that only looks sufficient because the model coasts on priors (necessity ≈ 0 everywhere), a fragility ordinary RAG metrics report as all-green.

Additional breadth (supporting the above, not the headline): a *transfer instrument* that scores a learner by its *regret against a reference-policy solver* with KC $\rightarrow$ single-metric identifiability (Section 3); a second control domain and estimator-recovery calibration; cross-model discrimination on current LLMs (Section 4); and a machine-unlearning arm that yields a *says $\neq$ does* dissociation as secondary weight-level evidence (Section 6).

Our contribution is a *methods/measurement* one, not a new tutor. Every *component* we build on is prior art; the *calibrated necessity measure* and its *corpus-value/sufficiency audit* are the open ground (Section 2). We are explicit throughout that our evidence is simulation-based: it tests whether the machinery behaves as designed, not whether humans learn more.

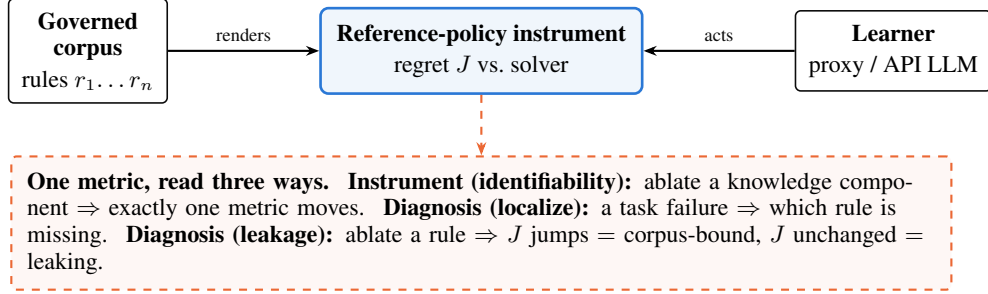


Figure 1: The instrument, used bidirectionally. A governed corpus and a learner both feed one reference-policy simulator that scores the learner’s *regret* J against an automatic solver. The same metric is then read three ways—to verify KC→single-metric identifiability (the *instrument*), to localize a missing rule from task failures, and to detect parametric leakage by rule ablation (the *diagnosis*)—needing only API access to the learner. The diagnosis is the instrument run backwards, not a separate tool.

2 Related work and positioning

Each strand below is established prior art; we reuse it as infrastructure and mark where our delta departs from it.

Learner modeling and instructional theory. Knowledge tracing [Corbett and Anderson, 1994], the Elo rating system for adaptive systems [Pelánek, 2016], the Knowledge-Learning-Instruction framework [Koedinger et al., 2012], open learner models [Bull and Kay, 2007], and the Zone of Proximal Development [Vygotsky, 1978] are all established. We reuse them as infrastructure, not as contributions.

Corpus-bounded tutoring, leakage, and faithfulness. RAG tutors that abstain outside a corpus are standard engineering. A large line asks whether a model uses provided context or parametric memory: faithfulness metrics score whether an answer is grounded in context [Es et al., 2023]; context attribution ablates context sources and measures the change in output probability to attribute a generation to them [Cohen-Wang et al., 2024, Or, 2026]; knowledge-conflict work studies which side wins when context contradicts memory [Xu et al., 2024, Zhang et al., 2025]; leakage-free benchmarking filters items answerable with no context [Liu et al., 2026a]; and intermediate-step scoring looks beyond the final answer [Jain and Vedam, 2026]. All of these measure whether context *influenced* the output, judged on *answer text*, per answer or system-wide. We differ on three axes: (a) we score a *behavioral task outcome* against a reference-optimal policy, not answer text; (b) we attribute *per corpus rule* and localize which rule is missing or wrong, not per token or system-wide; and (c) we measure not merely *influence* but *necessity*—calibrated by manipulating the parametric baseline directly (weight-level construction and unlearning, Section 6), so a fact the model already knew is not mistaken for one it relied on. No context-attribution method has that weight-level ground truth. The gap is structural, not incidental: a faithfulness or context-relevance score is a function of the *(question, retrieved context, answer)* triple, which does not encode necessity. For a model that already knows a fact and one that does not, *both* answering correctly *with* the corpus present, that triple—and therefore the score—is identical, and reads *high* in both (the correct answer is entailed by the context whether or not the model used it). Such a metric thus cannot separate a load-bearing corpus from a redundant one, and reports the redundant case as sufficient—the false-sufficiency failure our measure is built to catch (we confirm the invariance empirically in the released harness, but it follows from the metric’s definition). **ContextCite** [Cohen-Wang et al., 2024] is the closest relative: because it ablates context and measures the change in the response’s log-probability against the model’s own baseline, it *partially* tracks necessity—but it requires open weights and per-token log-probabilities (so it cannot run on the closed API models our necessity test does), attributes text-influence rather than a task outcome, carries no weight-level known-groups calibration, and yields no *redundant/unusable* split or sufficiency verdict. That join is the *Corpus Diagnosis*.

Objective competency instruments. Deviation-from-optimal scoring appears in flight [Zinn et al., 2023] and construct-validity-by-novice/expert-separation in surgery [Van Dongen et al., 2007]; control-theoretic notation has been applied to knowledge dynamics [Anonymous, 2024b]; regret is used in RL transfer [Tuynman and Ortner, 2022]; maritime training analytics regress simulator measures onto instructor ratings [Lall and Liu, 2025]. None uses a *reference solver’s regret* as the *learner* transfer outcome with KC→single-metric identifiability. That is the *Transfer Instrument*. We borrow mature maritime-autonomy tooling—velocity obstacles [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]—purely as reference solvers, never as a new collision-avoidance method [Anonymous, 2024a, International Maritime Organization, 1972].

Proxy learners. Simulated students have long authored and evaluated tutors; LLM student agents now pilot assessment items [Lu and Wang, 2024] and simulate learners for tutoring-system development [Gao et al., 2025], and controlled variants suppress knowledge by prompting [Apartsin et al., 2026], interpolate parametric competence [Liu et al., 2026b], or unlearn a model into a novice [Song et al., 2026]. Pre-deployment simulated-learner screens have very recently appeared [Fan et al., 2026, Lee et al., 2026]. We therefore *demote* the proxy-learner idea to an application: our narrow residual claim is running *two complementary proxy classes* (parametric competence *and* unlearned LLM) scored on the *same regret-to-reference instrument* the human trial would use—which none of these do.

3 The Transfer Instrument

This section defines and verifies the instrument’s *forward* use—measuring transfer and skill. The *backward* use that measures corpus necessity, the paper’s central contribution, follows in Section 4; the construct-validity, identifiability, and robustness checks below are the support that licenses it.

Task and metric. The worked domain is COLREG collision avoidance: a power-driven vessel must choose course and speed to resolve an encounter. We implement a kinematic simulator with an elliptical ship domain and a Collision Risk Index, and two reference solvers—velocity obstacles [Fiorini and Shiller, 1998] and simulation-based MPC [Johansen et al., 2016]. For a learner policy π on scenario set S we define the transfer outcome as regret against a reference policy π^* ,

$$\mathcal{R}(\pi) = \frac{1}{|S|} \sum_{s \in S} [J(\pi, s) - J(\pi^*, s)], \quad (1)$$

where J is the per-encounter objective (a weighted sum of a safety-margin barrier, COLREG compliance penalty, and route deviation; lower is better) and π^* is the reference maneuver. Unlike item correctness, $\mathcal{R}$ is continuous, objective, and instructor-free.

On “reference,” not “optimal.” We deliberately avoid claiming a global optimum. VO and SB-MPC are strong, widely-used near-optimal solvers, but neither is proven globally optimal for the full nonconvex encounter; calling their output “optimal” would overclaim. The instrument does not need a true optimum—only a reference that construct validity shows separates naive from expert behavior (below). Regret is thus measured against a fixed, reproducible reference policy, and we report which solver is used.

Construct validity and metric grading. The instrument must separate good from bad policies before any learning claim, and—if it is to be a transfer measure rather than a pass/fail check—the metric must *grade*, not collapse to two values. Across a varied set of nine encounters (head-on, starboard/port crossing, overtaking, and restricted-visibility geometries), three policies of increasing competence separate cleanly and continuously on J (Table 1): a naive hold-course policy (mean $J \approx 1765$, clearing only 11% of domains), a velocity-obstacle reference ($J \approx 0.70$, all clear), and SB-MPC ($J \approx 0.01$). The objective takes 20 distinct values in $[0.00, 1995.18]$ over the policy×scenario cells—a graded metric, with the safe regime (VO/SB-MPC) itself spanning a continuous 0.00–1.27 range. On the discrete procedural domain the same logic holds: an expert policy scores $J = 0$ against a reckless $J = 200$ with the safety violation caught. This is the novice/expert-separation logic of Van Dongen et al. [2007], applied to a decision/control task rather than manual skill.

Policy	mean J	median	min	max	cleared
naive (hold course)	1765.44	1988.08	1.08	1995.18	11%
VO reference	0.70	0.58	0.33	1.27	100%
SB-MPC reference	0.01	0.01	0.00	0.03	100%

Table 1: Construct validity and grading across nine varied encounters. The objective J separates the three competence levels cleanly and takes a continuous range of values (20 distinct across all cells, $[0.00, 1995.18]$)—it is a graded transfer metric, not a near-binary check. `npm run colreg:construct`.

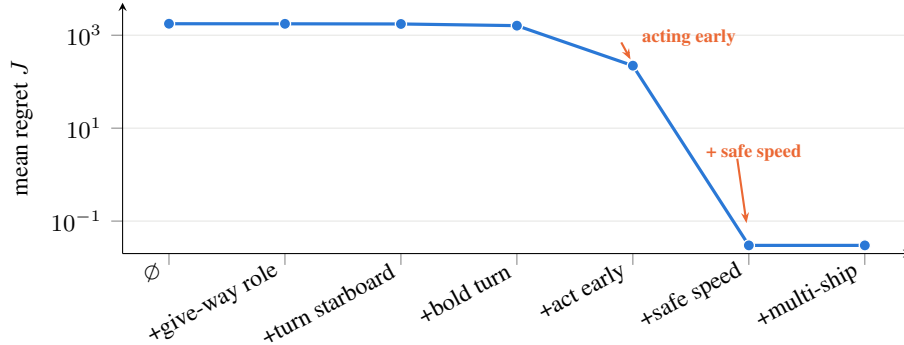


Figure 2: Competence→performance gradient on the nine-encounter instrument. Mean regret J (log scale) as the six knowledge components are acquired in curriculum order (left to right); each point is a competence stage, from the empty learner ($\emptyset$) to full competence. J spans nearly five orders of magnitude and collapses as the two domain-clearing competencies—acting *early* and at a *safe speed*—come online, the graded behavior Table 1 reports numerically. `npm run colreg:construct`.

154 **KC→single-metric identifiability.** We design each knowledge component to govern exactly
155 one metric, so ablating a KC degrades that metric and no other. On the procedural domain
156 this is *exact*: each ablated competence degrades only its governed metric, and a monotone
157 competence→performance gradient ($J : 204 \rightarrow 0$) follows as competence is acquired in curricu-
158 lum order; on the COLREG instrument the same gradient spans nearly five orders of magnitude
159 (Figure 2). Because the property holds on both a continuous-control and a discrete-procedural in-
160 strument, it is a general measurement-design property, not a COLREG artifact.

161 **Is identifiability tautological?** A fair objection is that the mapping is a design choice, so “ablate
162 the KC, that metric moves” is true by construction. Two things make it a testable property rather than
163 a tautology. First, the *cross-effect* claim can fail: designing the metrics is not enough to guarantee
164 that ablating one KC leaves the *others* unchanged—if the objective’s terms are entangled (e.g. a
165 safety barrier that also moves the deviation term), ablation bleeds across metrics, and we measure
166 and report that it does not. Identifiability is the empirically-checked *absence* of that bleed, not the
167 presence of the intended effect. Second, the mapping is what makes the Corpus Diagnosis (Section 4)
168 actionable: without it, a task failure cannot be attributed to a specific corpus rule. We therefore treat
169 identifiability as a design *requirement to be verified per instrument*—a property an instrument can
170 lack—and verifying it is part of building one, exactly as construct validity is. On the procedural
171 domain the verification is clean (Table 2): ablating each knowledge component degrades only its
172 governed metric, with maximum off-diagonal change 0.0000—no cross-bleed.

173 **Robustness to weighting choices.** The objective embeds weighting choices—the elliptical ship-
174 domain radii and the margin/compliance/deviation weights—and a fair worry is that the compe-
175 tence ranking is an artifact of those choices. We falsify this with a sensitivity analysis (`npm run`
176 `colreg:sensitivity`) that holds every policy’s *behavior* fixed and re-scores under 232 perturba-
177 tions: a one-at-a-time ± 25 –50% sweep of each parameter plus 200 joint samples with every param-
178 eter independently scaled in $[0.6, 1.4]$. Across the whole ensemble, both orderings are preserved
179 exactly—the naive policy stays worst and the six-component competence gradient stays monotone

ablated KC ↓ / metric →	safety	core	sequencing	finishing
safety	−1.00	0.00	0.00	0.00
core steps	0.00	−1.00	0.00	0.00
sequencing	0.00	0.00	−0.22	0.00
finishing	0.00	0.00	0.00	−1.00

Table 2: KC→single-metric identifiability (procedural domain). Change in each metric after ablating each knowledge component. The diagonal (bold) is the intended governed metric; every off-diagonal cell is 0.00 (max $|\Delta| = 0.0000$)—ablation does not bleed across metrics. `npm run proc:identifiability`.

Estimator	Recovery of known ground truth	Calibration (ECE)
Elo	static ability, mean abs. error 0.046	0.023
BKT	latent state $P(\hat{L}) = 0.997$ (learned) vs. 0.175 (not)	0.004

Table 3: Estimator-recovery and calibration on synthetic data with a known ground truth. The measurement, not just the metric, is validated.

180 in J (Kendall $\tau = 1.00$ on every perturbation, invariant rate 100%). The CRI parameters are ex-
181 cluded because CRI is a reported diagnostic, not a term in the scored objective, so the ranking is
182 invariant to them by construction. The protocol’s conclusions are thus a property of the competence
183 structure, not of the weight calibration.

184 **Estimator recovery and calibration.** Feeding the instrument’s outcomes into a generic learner-
185 agent estimator, we recover known ground truth on synthetic data (Table 3). This turns “we have a
186 metric” into “the measurement is valid.”

187 4 The Corpus Diagnosis: the same instrument, read backwards

188 The Corpus Diagnosis is not a second tool. It is the Transfer Instrument of Section 3 run in reverse:
189 the *same* objective metric answers two opposite questions. This backward reading—*does the learner*
190 *rely on a given corpus item?*—is the paper’s central contribution; the forward construct validity of
191 Section 3 is what licenses it.

192 **(i) Corpus-gap localization.** When the corpus is missing or wrong on a rule, the learner’s failures
193 on the governed metric have a signature that attributes the failure to a *specific* rule/node. We com-
194 pute, per rule, an ablation-delta—the rise in the governed penalty when that rule is removed—and a
195 localization that names the governed component. A large delta plus a matching localization means
196 the learner *relied on* that corpus rule.

197 **(ii) Parametric leakage detection (necessity).** The mirror image: ablate a rule from the corpus;
198 if the metric it governs does *not* degrade, the model is answering from pretrained priors, not the
199 corpus. We combine the ablation-delta with a *counterfactual* test (replace “alter to starboard” with
200 “alter to port”; does the learner follow the altered rule?) and a *closed-book* contamination baseline
201 (no corpus supplied). The verdict—CORPUS-BOUND, LEAKING, or INCONCLUSIVE—is read from
202 the same metric, by a majority vote over the three signals so that a clear ablation-and-contamination
203 pattern is not vetoed by a single dissenting sub-test. Section 6.1 calibrates this necessity against
204 a known parametric baseline by construction. Because the bounded compliance penalty is a *term*
205 *inside* the objective J , this necessity is read off the graded regret instrument itself—not a decoupled
206 side-metric—and is visible per model in the $\delta_{\mathcal{R}}$ column of Table 4.

207 **(iii) Why an item is not needed: *redundant* vs. *unusable*.** A small ablation-delta says the corpus
208 did not move behavior, but not *why*, and the two reasons demand opposite fixes. We split a LEAKING
209 item by its *with-corpus* performance: *redundant* (the learner is competent *with* the item present—
210 it already knows the rule, so the item is dead weight and should be pruned) versus *unusable* (the
211 learner fails the task *even with* the item present—the content has value but this model cannot act
212 on it, so the fix is the model/prompting/retrieval, not the corpus). The delta alone conflates these;

the with-corpus outcome (regret in the control domain, accuracy in QA) separates them. On the real-model sweep this is not hypothetical: on the corpus-only hazard, Claude Haiku and Sonnet read CORPUS-BOUND while Llama-3.3-70B grounds regardless (with-corpus regret $\approx 1207 \approx$ full barrier)—*unusable*, not redundant.

Corpus sufficiency, and false sufficiency. Rolling the per-item verdicts to the corpus level yields a sufficiency judgement for a query set: *contributing* (every item relied upon), *partial*, *unusable*, or—the diagnostic ordinary RAG metrics cannot produce—*false sufficiency*: task accuracy is high yet necessity is ≈ 0 everywhere, so the corpus is not carrying the load and success rides on priors, fragile to distribution shift. The claim is explicitly scoped to the probed query set (sufficiency is always “for these queries”); the false-sufficiency signal (necessity ≈ 0) is precisely the measurable warning that a bounded-query sufficiency claim will not survive a shift.

Offline recovery of known ground truth. Against two reference mock learners whose truth is known, the instrument recovers it exactly: the corpus-bound mock yields ablation-delta 1.000 (regret-ablation 1981), follows the counterfactual, and abstains closed-book ($\Rightarrow$ CORPUS-BOUND); the leaking mock yields ablation-delta 0.000 (regret-ablation 0), ignores the counterfactual, and answers closed-book from priors ($\Rightarrow$ LEAKING).

Real-model discrimination. We run the necessity test on ten production models over AWS Bedrock—Claude Haiku/Sonnet/Opus 4.5, Llama-3.1-8B / 3.3-70B, Nova micro/lite/pro, and OpenAI gpt-oss 20B/120B—contrasting a *standard-COLREG* corpus with the *corpus-only charted hazard* of Section 6.1 (Table 4). Three findings.

(1) “Redundant” is a property of the (corpus, learner) pair, not the corpus. The frontier models rely on little of the standard corpus (relied 0–1 of 4; it duplicates their parametric COLREG—*redundant*, an actionable “do not ship” verdict), yet the open gpt-oss reasoning models genuinely *rely* on the *same* corpus (relied 2/4 for 120B, 3/4 for 20B $\Rightarrow$ CONTRIBUTING)—their COLREG priors are less complete and, being reasoning models, they can exploit the retrieved rule. The identical corpus is redundant for one learner and necessary for another, so necessity must be read per learner—the point of a per-item diagnosis. (Within gpt-oss the *smaller* model relies *more*: a larger knowledge gap at equal exploit-ability.)

(2) Necessity has wide dynamic range on the hazard. $\delta_{\mathcal{R}}$ spans 0 to ~ 2000 : Nova-micro ignores the corpus ($\delta_{\mathcal{R}}=0$) while Opus reads it and clears at the full barrier ($\delta_{\mathcal{R}}=1998$, $\mathcal{R}_{\text{with}}=0.2$)—the cleanest CORPUS-BOUND reader.

(3) The redundant-vs-unusable split shows on real models. With-corpus regret separates *usable* from *unusable*: all clear once given the rule ($\mathcal{R}_{\text{with}} \approx 0.2$) *except* Llama-3.3-70B (457), Nova-micro (670), and gpt-oss-120B (431), which ground *even with the rule present*—the content has value but the model cannot act on it (UNUSABLE; fix the model, not the corpus). (A prompt-condition study on Gemini gives the binding-fidelity control: under a strict binding prompt necessity grades monotonically with capability; removing the clause flips every model to LEAKING.) The continuous $\delta_{\mathcal{R}}$ and $\mathcal{R}_{\text{with}}$ are more reliable than the categorical verdict, a noisier three-signal majority vote.

Per-rule, not just per-corpus. To show the diagnosis attributes reliance to a *specific* rule rather than to corpus presence in general, we add a second, independent rule—Rule 15 crossing give-way—exercised on its own crossing scenarios (a rule only moves the metric on scenarios that invoke it, so each probe carries a matched subset). Ablating each rule produces a large regret signal on its own encounters: on *gemini-flash-latest* under the bound prompt, ablating Rule 14 gives $\delta_{\mathcal{R}}=1981$ (head-on) and ablating Rule 15 gives 1285 (crossing); on *gemini-flash-lite-latest*, 658 and 662 respectively. The two rules are localized on disjoint scenario subsets, so the instrument reads reliance per rule.

External validity on real charted dangers. The corpus-bound reading is not an artifact of our synthetic hazard—it holds on *real*, publicly-documented dangers. We closed-book-screen four candidates on Claude Opus (dropping any it already names) and run the survivors through the same hazard probe. Two obscure, official-gazetteer-verified rocks—Elwha Rock (Cayou Channel, Puget Sound) and Fullastern Rock (Adelaide Island, Antarctica)—read CORPUS-BOUND at the full barrier ($\delta_{\mathcal{R}} \approx 1998$, $\mathcal{R}_{\text{with}}=0.2$), exactly as the constructed hazard does. Whittle Rock (False Bay) was

Model	Standard relied/4	Charted hazard (corpus-only)		
		$\delta_{\mathcal{R}}$	$\mathcal{R}_{\text{with}}$	reads hazard as
<i>mock corpus-bound</i>	—	1981	0.2	CORPUS-BOUND
<i>mock leaking</i>	0	0	—	LEAKING
Claude Haiku 4.5	0	669	0.2	INCONCL.
Claude Sonnet 4.5	1	669	0.2	LEAKING
Claude Opus 4.5	1	1998	0.2	CORPUS-BOUND
Llama-3.1-8B	0	667	0.1	LEAKING
Llama-3.3-70B	0	213	457	UNUSABLE
Nova-micro	1	0	670	UNUSABLE
Nova-lite	0	145	0.2	INCONCL.
Nova-pro	1	669	0.2	INCONCL.
gpt-oss-120B	2	932	431	INCONCL. (grounds)
gpt-oss-20B	3		<i>n/a</i>	<i>n/a</i>

Table 4: Cross-model necessity on AWS Bedrock (ten models). **relied/4**: standard-COLREG rules the model relies on, of four (per-item audit); 0–1 reads *redundant*/false-sufficiency, 2–3 reads *contributing*. **Hazard**: $\delta_{\mathcal{R}}$ is necessity (regret rise when the corpus-only rule is ablated); $\mathcal{R}_{\text{with}}$ is regret with the rule present (≈ 0.2 = clears, so *usable*; $\gg 0$ = grounds anyway = *UNUSABLE*). Standard COLREG is *redundant* for the frontier models but *relied-upon* by the open gpt-oss models—necessity is a property of the (corpus, learner) pair. On the hazard, necessity spans 0 (Nova-micro ignores it) to 1998 (Opus, full-barrier CORPUS-BOUND), and $\mathcal{R}_{\text{with}}$ exposes three models that ground even with the rule. Mock learners bound the scale; gpt-oss-20B’s hazard cell is *n/a*—on the harder hazard scenario its analysis-channel reasoning did not terminate within the decode budget, a capability-linked effect absent in the larger 120B. The continuous $\delta_{\mathcal{R}}/\mathcal{R}_{\text{with}}$ are more reliable than the categorical verdict.

265 *screened out*—Opus named it unprompted, so it is parametric, not corpus-only—which is the screen
266 working. (A famous control, the Seven Stones reef, was *not* named for its track—Opus recalled
267 adjacent dangers instead—so it did not screen out as expected; we report this rather than force it.)
268 The instrument thus reads corpus reliance on real charted facts, not only a hand-built one.

269 **What in the corpus changes the answer: presence vs. retrieval.** The leakage test asks a binary
270 question—does the learner rely on the corpus at all. A deployed RAG tutor raises a finer one: of the
271 value curation adds, how much comes from the fact being *present* in the corpus versus from the re-
272 triever actually *surfacing* it? We decompose this over two binary factors—in-corpus and retrieved—
273 whose three reachable cells are three scorable conditions (Table 5): NONE (closed-book, priors only),
274 RETRIEVED (the deployed dense retriever’s top-*k*), and ORACLE (the answer-bearing chunk, i.e. per-
275 fect retrieval). Reading accuracy across them attributes the gain: $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$ is the
276 *content ceiling* (value if retrieval were perfect), $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$ is what the deployed
277 pipeline *delivers*, and their difference is the *retrieval gap*—value present in the corpus but never
278 surfaced. Running the three conditions through a small local generator (Qwen2.5-1.5B) on seven
279 equipment-SOP fact-recall queries makes the split concrete: closed-book accuracy is 0/7 (empty pri-
280 ors), ORACLE is 7/7 (every fact is recoverable from its chunk), and the deployed MiniLM pipeline
281 lands between at 3/7—so of a 100% content ceiling the pipeline *delivers* 43% and *forfeits* a 57% re-
282 trieval gap; a generator-independent recall@5 of any answer-bearing chunk (4/7) localizes it. Here
283 the binding constraint is retrieval, not corpus coverage or model capability, and a curation failure
284 (fact absent), a retrieval failure (present but unranked), and a priors success are distinct outcomes
285 the binary leakage verdict cannot separate. (Numbers illustrate the method—one small model, seven
286 queries—not a benchmark.)

287 5 Proxy learners as a pre-trial screen (application)

288 We exercise the instrument with *two complementary* controlled-competence proxy classes: (a) a
289 parametric competence-vector learner, and (b) a knowledge-suppressed / unlearned LLM learner.
290 Because both are scored on the *same* $\mathcal{R}$ instrument, a method that fails to move the instrument in the

	not retrieved	retrieved
not in corpus	priors only (NONE)	— (unreachable)
in corpus	retriever misses (<i>gap</i>)	RAG success (RETRIEVED→ORACLE)

Table 5: Decomposing a RAG answer’s outcome over in-corpus $\times$ retrieved. The three reachable cells are the NONE/RETRIEVED/ORACLE conditions; $\text{acc}(\text{ORACLE}) - \text{acc}(\text{NONE})$ is the content ceiling, $\text{acc}(\text{RETRIEVED}) - \text{acc}(\text{NONE})$ what the pipeline delivers, their difference the retrieval gap. Har-ness: experiments/retrieval-decomp.

291 expected direction is a *no-go* before any human is recruited. This differs from prior proxy-learner
292 work [Apartsin et al., 2026, Liu et al., 2026b, Song et al., 2026, Fan et al., 2026, Lee et al., 2026]
293 in scoring on an objective control-task outcome rather than dialogue behavior, profile alignment, or
294 LLM-judge helpfulness.

295 6 Validating necessity at the weight level

296 The necessity/leakage test infers a fact about a model’s *weights* from a change in the *prompt*: ablate
297 an item from the corpus, and if the governed outcome does not move, the model did not need it.
298 The sharpest objection is that corpus *context* removal is not weight-level *knowledge* change, so a
299 small necessity could be the no-context heuristic in disguise—or, conversely, a large necessity could
300 reflect a fact the model happens not to know for reasons we did not control. We close this two ways,
301 in increasing strength.

302 6.1 Validation by construction: the necessity dose-response

303 The holding this section establishes: *necessity is a non-confounded, calibrated measure*—teaching
304 a fact into the weights drives it down as a dose-response—so a near-zero reading is evidence the
305 model already knew the item, not a context-removal artifact. The decisive test is *known-groups*:
306 build models along a gradient from fact-naïve to fact-knowing *by construction*, and show necessity
307 falls monotonically. We teach a target fact into the weights (LoRA SFT) and sweep two indepen-
308 dent knowledge gradients—the LoRA scale α (one adapter, evaluated at $\alpha \in [0, 1]$) and training
309 checkpoints—so their agreement rules out a gradient-method artifact. We run this in two domains
310 with *independent objectives*, the second of which uses no simulator at all.

311 **Domain 1 — control-regret (a hidden hazard).** Standard COLREG rules have no dynamic range
312 for this test—every current model already knows them (Section 4)—so we use a *corpus-only charted*
313 *hazard*: a danger scored by the objective barrier but not shown in the prompt, knowable only from
314 the corpus. Teaching it into a Qwen2.5-3B model collapses necessity from a full-barrier swing ($\mathcal{R}$ -
315 necessity ≈ 667 , naïve) to ≈ 0.2 (taught), and the α and checkpoint sweeps *agree* on the transition.
316 The curve is a *step*, not graded—the correct signature for a *single discrete fact*, which is learned as
317 a threshold (the model either lacks the fact and grounds, or has it and clears)—so the hazard arm
318 establishes the large-effect known-groups *endpoints*, and the graded curve is Domain 2’s job.

319 **Domain 2 — simulator-free fictional-fact QA.** We invent facts about fictional entities (research
320 outposts and their attributes) that no model can have memorized, and score answers with a pro-
321 grammatic checker—*no simulator, no reference policy*. Because the facts are fictional, a competent
322 model is necessarily corpus-bound at baseline, and because there are many *independent* facts, par-
323 tial teaching learns a fraction of them, so the aggregate necessity is *graded*. Teaching the facts
324 into a Qwen2.5-7B-Instruct model drives mean necessity smoothly and monotonically down the
325 LoRA- α gradient: $1.00 \rightarrow 0.93 \rightarrow 0.29 \rightarrow 0.03$ (Table 6), with the verdict flipping CORPUS-
326 BOUND→LEAKING as the facts are internalized. A training-checkpoint sweep reproduces the same
327 curve ($1.00 \rightarrow 0.25 \rightarrow 0.03$)—the two gradients are built differently (scaling one converged adapter
328 vs. genuine partial training), so their agreement rules out a gradient-method artifact. This is the
329 clean dose-response, in a domain we did not build a simulator for—answering the objection that the
330 measure is an artifact of one hand-built environment. (Necessity here is measured closed-book: the
331 without-corpus condition permits parametric answering, so taught knowledge surfaces rather than
332 being suppressed by a strict “answer only from the provided facts” instruction.)

Domain / objective	necessity across the knowledge gradient				
	naive	... step ...			taught
Hazard / $\mathcal{R}$ (Qwen-3B)	667				0.2
	$\alpha=0$	0.25	0.5	0.75	$\alpha=1$
Fictional-fact QA / accuracy (Qwen-7B)	1.00	0.93	0.29	0.03	0.03

Table 6: Necessity dose-response by construction. Teaching a fact into the weights drives the instrument’s necessity for that fact down. The hazard (control-regret objective) gives a large-effect *step*—the known-groups endpoints for one discrete fact, with α /checkpoint sweeps agreeing—while the simulator-free fictional-fact QA (answer-accuracy objective) gives the *graded* monotone curve over many independent facts. Two objectives, one measure. Harness: experiments/unlearning (dose_response.py), src/engine/factqa.

333 6.2 Validation by unlearning: a *says* $\neq$ *does* dissociation (supporting)

334 The complementary direction removes a rule the model *does* know and asks whether necessity rises.
335 This arm is secondary—it has dynamic range only on a rule with a real corpus-vs-prior gap, which
336 the standard rules lack—but it yields an independently interesting result. We remove the alter-to-
337 starboard knowledge from an open-weight model with a real unlearning method—SimNPO [Fan
338 et al., 2024] as primary (reference-free, length-normalized), with NPO [Zhang et al., 2024], RMU
339 [Li et al., 2024], and gradient ascent [Jang et al., 2022] as baselines—and score the base vs. un-
340 learned model on the reference-policy instrument. A removal audit [Lynch et al., 2024] reports
341 whether the knowledge is *gone* vs. merely *suppressed*; for a stable novice that resists benign re-
342 learning we layer in a robust utility-preserving recipe [Singh et al., 2025]. A completed GPU run
343 (gentle, guardrailed SimNPO on Qwen2.5-3B; config in Table 7) delivers not just the audit half but
344 a first instrument-scoring result, whose lesson is sharper than the predicted 2×2 : **the standard**
345 **free-text unlearning metrics overstate removal because they measure what the model *says*; the**
346 **reference-policy instrument measures what the model *does*—its steering decision—and shows**
347 **the decision is untouched.**

348 **Primary result: a *says* $\neq$ *does* dissociation.** Every metric that reads the model’s *words* registers
349 forgetting: on the GPU run the forget-probe “starboard” rate falls $0.43 \rightarrow 0.27$, the forget-set NLL
350 rises $7.4 \rightarrow 32.4$ (retain-set NLL, teacher-forced, even *improves* $4.3 \rightarrow 1.07$), and—most tellingly—
351 the Rule-14 *citation* disappears, the model reattributing its maneuver to Rules 15/16/17. (A CPU
352 run reproduces the likelihood collapse method-agnostically: forget NLL $4.6 \rightarrow 92$, direction-cue
353 $5/6 \rightarrow 0/6$.) Yet scored on the head-on instrument (corpus present vs. ablated) the 2×2 does
354 not move a cell: both base and unlearned read LEAKING, ablation-delta 0.000, and the unlearned
355 completions *still turn +30° to starboard*—the steering *decision* is unchanged; only the citation
356 and verbalization moved (model damage flat at 0.10, retain-coherence 0.91). A words-level metric
357 reports a fact removed while the policy that governs behavior is entirely intact.

358 **Suppressed, not removed (benign relearning).** A gone-vs.-suppressed test [Hu et al., 2024,
359 Deeb and Roger, 2024] confirms the reading from the other side. Twenty benign fine-tuning
360 steps pull the forget-set NLL $32.4 \rightarrow 9.2$, back near its base value—the textbook *suppressed-*
361 *not-removed* signature: the fact was never gone, only pushed down. Across the whole pipeline—
362 base $\rightarrow$ unlearned $\rightarrow$ relearned—the one quantity that never moves is the decision the instrument
363 measures: starboard, verdict LEAKING, at every stage. The likelihood rises and falls; the policy
364 does not.

365 **Contrast: aggressive unlearning *inverts* the rule.** The gentleness is load-bearing. An earlier, ag-
366 gressive recipe ($\text{lr } 1 \times 10^{-4}$, retain_weight 1.0, no guardrail) drove model damage $0.10 \rightarrow 0.33$ and
367 turned the ship to *port*—the wrong way—on 6/8 prompts, moving the 2×2 to 6/8 port and verdict
368 INCONCLUSIVE. Because the head-on turn is essentially binary, the default objective (push down
369 “starboard”) simply relocated the mass onto “port,” *inverting* the safety rule rather than removing it—
370 a caution that naive weight-level unlearning of a safety rule can yield *confident non-compliance*. The
371 two recipes bracket the finding: gentle unlearning suppresses the *words* but not the *policy* (the instru-
372 ment stays flat and so exposes the illusion), while aggressive unlearning moves the instrument—in
373 the wrong direction. In both, the probe metrics track words and the instrument tracks the decision.

Metric	1.5B (CPU, SimNPO)		3B (GPU, gentle SimNPO)	
	base	unlearned	base	unlearned
Forget-target NLL ($\uparrow$)	4.6	92.0	7.4	32.4
Retain-set NLL, teacher-forced ($\downarrow$)	3.2	0.18	4.3	1.07
Forget-probe “starboard” rate ($\downarrow$)	5/6	0/6	0.43	0.27
Retain-coherence, free-gen ($\uparrow$)	—	—	1.00	0.91
Model damage (wrong+degen., $\downarrow$)	—	—	0.10	0.10
<i>Steering decision (instrument)</i>	—	—	<i>stbd</i>	<i>stbd</i>

Table 7: Gentle, guardrailed SimNPO unlearning of the alter-to-starboard rule, on a 1.5B model (CPU) and Qwen2.5-3B (GPU, bf16; lr 5×10^{-5} , retain_weight 3.0, Rule-14 kept in the retain set). Every *words-level* metric registers forgetting—the forget-target likelihood collapses (NLL $\uparrow$), the “starboard” probe rate drops, and the Rule-14 citation disappears (model cites 15/16/17)—while retain utility is preserved (retain NLL improves; free-generation coherence 0.91) and there is no inversion (model damage flat at 0.10). Yet the *decision* the reference-policy instrument scores is untouched: the unlearned model still turns $+30^\circ$ to starboard, and the 2×2 stays verdict LEAKING, ablation-delta 0.000—a *says* $\neq$ *does* dissociation. Benign relearning (20 steps) pulls forget NLL $32.4 \rightarrow 9.2$, confirming the fact was *suppressed*, not removed; the decision holds throughout. Harness: experiments/unlearning.

374 **Why the 2×2 is flat.** Rule 14 is already LEAKING at baseline—every pretrained model knows
375 head-on $\rightarrow$ starboard (Section 4)—so ablating it changes nothing (ablation-delta 0), leaving no dy-
376 namic range for the corpus-bound cell to travel. The LEAKING verdicts are therefore *correct*; this
377 is exactly why the primary weight-level validation is the construction dose-response (Section 6.1),
378 where a corpus-only fact *does* have range, and not this arm. A broader suite of corpus-only probes
379 across effect sizes (a medium-effect routing convention, a conflicting fact about another vessel’s
380 intention) is future work (Section 7).

381 7 Limitations and scope

382 **Mechanism, not external validity.** Every result here is simulation-based mechanism evidence. We
383 make no learning-gains claim and pre-register the human cohort study as future work. **Proxy va-**
384 **lidity.** Simulated learners can be unfaithful—prompt-suppressed and unlearned models may be too
385 capable, may learn unrealistically fast, and need not reproduce authentic human misconceptions; re-
386 cent work cautions that student simulation is valid only under specific conditions [Yuan et al., 2026]
387 and documents systematic fidelity gaps between LLM “students” and real learners [Wu et al., 2025,
388 Srivatsa et al., 2025]. We therefore treat the two proxy classes as a mutual cross-check, not a substi-
389 tute for human data—which is exactly why the human cohort study is a pre-registered requirement
390 rather than an optional extension. **Instrument sensitivity.** The protocol embeds weighting choices
391 (ship domain, objective); we show the ranking survives a $\pm 40\%$ reweighting ($\tau = 1.00$, §3), but
392 robustness beyond that range, and to the elliptical-domain *form* itself, is untested. **Small evidence**
393 **base — illustrative, not a benchmark.** The numbers here demonstrate that the *method* behaves
394 as designed; they are not a validity claim at scale. The discrimination result (Table 4) covers six
395 models within *one* provider family, and reports the head-on rule; the released harness now exercises
396 *three* rules across *two* metric axes—turn direction (Rule 14 head-on, Rule 15 crossing) and, on a
397 restricted-visibility subset, speed (Rule 6/19 safe speed, scored through the decision’s speed rather
398 than its heading)—and the unlearning arm turns on a single rule and model family. A persuasive
399 claim still needs cross-provider models and many more rules/encounters—which is why we release
400 the harness (experiment.sh, and a Bedrock provider $\times$ size sweep) built to run exactly that, and
401 report these as worked examples rather than a leaderboard. **Single-rule decomposability may not**
402 **generalize.** KC $\rightarrow$ single-metric identifiability and clean per-rule ablation are properties we *design*
403 *into* a governed corpus and *verify* per instrument (Table 2); they are not guaranteed for an arbitrary
404 corpus, whose rules may be entangled, redundant, or jointly govern one outcome. Where a single
405 rule cannot be cleanly isolated, the localization degrades to a coarser attribution and the leakage
406 test to a group-level one; how far clean decomposition extends beyond corpora we constructed is
407 open. **The unlearning arm is a single model at one scale.** The *says* $\neq$ *does* result (Section 6.2)
408 is informative—a gentle recipe suppresses the *words* while the scored *decision* is untouched, an ag-

gressive one *inverts* the rule—but it is one 3B model, and seed/method variance is outstanding. It is a *supporting* result: a clean necessity transition is structurally out of reach for any pretrained COLREG rule (all leak), which is exactly why the primary weight-level validation is the *construction* dose-response (Section 6.1), where we build the knowledge into the weights and observe necessity fall—already run in two domains, though on single models per domain; more seeds and sizes (and a 7B hazard replication in bfloat16, not 4-bit, since quantization noise would confound the effect) remain breadth. **Sufficiency is scoped to a query set.** Every sufficiency verdict is relative to the probed queries; we mitigate rather than escape this by always reporting the query count and by treating the false-sufficiency signal as the measurable warning of fragility to shift, but a corpus adequate for one query distribution may be insufficient for another.

Future work. The pre-registered human cohort study is the external-validity test this in-silico screen is built to de-risk. Method-side, we plan to scale the cross-model discrimination (more providers and rule sets; the harness already runs class×size sweeps) and to broaden the weight-level battery from one discrete hazard to a *suite* of corpus-only probes across effect sizes—a medium-effect routing convention and a conflicting fact about another vessel’s intention, building on the real charted-danger leg already shown (Section 4)—so necessity is validated as a distribution across probe kinds, not a single test.

8 Conclusion

We have described an in-silico instrument that measures whether a learner *needs* a corpus, and whether a corpus is *sufficient*, before human-subject effort. The central contribution is a *necessity* measure made non-confounded by *construction*: teaching a fact into a model’s weights drives the instrument’s necessity for that fact down as a dose-response, which we demonstrate in two domains with independent objectives—a control-regret simulator (large-effect known-groups endpoints) and a *simulator-free* fictional-fact QA task (the graded monotone curve, $1.00 \rightarrow 0.03$). On that calibrated measure we build a corpus-value audit—ranking items by necessity, localizing a missing item, and splitting the unrelayed-upon into *redundant* versus *unusable*—and a corpus-sufficiency verdict that surfaces *false sufficiency*. Distinct from faithfulness and context-attribution, we measure need against a weight-level baseline they lack. Supporting breadth—a reference-policy transfer instrument with KC→single-metric identifiability, cross-model discrimination, a second control domain, and a *says* ≠ *does* unlearning dissociation—rounds out the picture. The claim is testable and narrow; the domains are worked examples, the evidence base is deliberately small, and the measurement method is the point.

Reproducibility. The simulator, the answer-checker QA domain, the diagnosis and sufficiency harness, the construction dose-response, and the open-weight unlearning scaffold will be released, along with a deterministic no-key dry-run that recovers the mock ground truth and one-tap GPU notebooks for the dose-response. (Code is withheld here to preserve double-blind review.)

References

- Anonymous. Quantitative COLREG compliance evaluation for autonomous ships. *Ocean Engineering*, 2024a.
- Anonymous. Control knowledge tracing: A control-theoretic view of knowledge dynamics. In *Conf. on AI in Education (CAEI)*, 2024b.
- Alexander Apartsin, Omri Sason, and Yehudit Aperia. Toward a benchmark for controllable simulation of imperfect students with large language models, 2026.
- Susan Bull and Judy Kay. Student models that invite the learner in: The SMILI open learner modelling framework. *International Journal of Artificial Intelligence in Education*, 17(2):89–120, 2007.
- Benjamin Cohen-Wang, Andrew Ilyas, Jonathan Wu, and Aleksander Madry. Contextcite: Attributing model generation to context. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024.
- Albert T. Corbett and John R. Anderson. Knowledge tracing: Modeling the acquisition of procedural knowledge. *User Modeling and User-Adapted Interaction*, 4(4):253–278, 1994.
- Aghyad Deeb and Fabien Roger. Do unlearning methods remove information from language model weights?, 2024.

459 Shahul Es, Jithin James, Luis Espinosa-Anke, and Steven Schockaert. RAGAS: Automated evaluation of
460 retrieval augmented generation, 2023.

461 Chongyu Fan, Jiancheng Liu, Licong Lin, Jinghan Jia, Ruiqi Zhang, Song Mei, and Sijia Liu. Simplicity
462 prevails: Rethinking negative preference optimization for llm unlearning, 2024.

463 Shuyi Fan, Boyuan Deng, Mengyu Xu, Jiale Liu, Hongyang Zhang, Qiaoxin Yang, and Chongyang Gao. Re-
464 thinking llm-judged helpfulness as a pedagogy signal: A pre-registered audit across tutor models, 2026.

465 Paolo Fiorini and Zvi Shiller. Motion planning in dynamic environments using velocity obstacles. *International*
466 *Journal of Robotics Research*, 17(7):760–772, 1998.

467 Weibo Gao, Qi Liu, Linan Yue, Fangzhou Yao, Rui Lv, Zheng Zhang, Hao Wang, and Zhenya Huang.
468 Agent4edu: Generating learner response data by generative agents for intelligent education systems, 2025.

469 Shengyuan Hu, Yiwei Fu, Zhiwei Steven Wu, and Virginia Smith. Unlearning or obfuscating? joggling the
470 memory of unlearned llms via benign relearning, 2024.

471 International Maritime Organization. Convention on the international regulations for preventing collisions at
472 sea (COLREGs), 1972.

473 Siddharth Jain and Venkat Narayan Vedam. Cue-r: Beyond the final answer in retrieval-augmented generation,
474 2026.

475 Joel Jang, Dongkeun Yoon, Sohee Yang, Sungmin Cha, Moontae Lee, Lajanugen Logeswaran, and Minjoon
476 Seo. Knowledge unlearning for mitigating privacy risks in language models, 2022.

477 Tor A. Johansen, Tristan Perez, and Andrea Cristofaro. Ship collision avoidance and COLREGS compliance
478 using simulation-based control behavior selection with predictive hazard assessment. *IEEE Transactions on*
479 *Intelligent Transportation Systems*, 17(12):3407–3422, 2016.

480 Kenneth R. Koedinger, Albert T. Corbett, and Charles Perfetti. The Knowledge-Learning-Instruction frame-
481 work: Bridging the science-practice chasm to enhance robust student learning. *Cognitive Science*, 36(5):
482 757–798, 2012.

483 Vishakha Lall and Yisi Liu. Ai meets maritime training: Precision analytics for enhanced safety and perfor-
484 mance, 2025.

485 Unggi Lee, Sookbun Lee, Yeil Jeong, Eunjoo Lee, Minchul Shin, and Hoilym Kwon. Educlaw-bench: A
486 long-horizon benchmark for pedagogical llm agents with simulated learners, 2026.

487 Nathaniel Li, Alexander Pan, Anjali Gopal, Summer Yue, Daniel Berrios, Alice Gatti, Justin D. Li, Ann-Kathrin
488 Dombrowski, Shashwat Goel, Long Phan, Gabriel Mukobi, Nathan Helm-Burger, Rassin Lababidi, Lennart
489 Justen, Andrew B. Liu, Michael Chen, Isabelle Barrass, Oliver Zhang, Xiaoyuan Zhu, Rishub Tamirisa,
490 Bhruu Bharathi, Adam Khoja, Zhenqi Zhao, Ariel Herbert-Voss, Cort B. Breuer, Samuel Marks, Oam Patel,
491 Andy Zou, Mantas Mazeika, Zifan Wang, Palash Oswal, Weiran Lin, Adam A. Hunt, Justin Tienken-Harder,
492 Kevin Y. Shih, Kemper Talley, John Guan, Russell Kaplan, Ian Steneker, David Campbell, Brad Jokubaitis,
493 Alex Levinson, Jean Wang, William Qian, Kallol Krishna Karmakar, Steven Basart, Stephen Fitz, Mindy
494 Levine, Ponnurangam Kumaraguru, Uday Tupakula, Vijay Varadharajan, Ruoyu Wang, Yan Shoshitaishvili,
495 Jimmy Ba, Kevin M. Esvelt, Alexandr Wang, and Dan Hendrycks. The wmdp benchmark: Measuring and
496 reducing malicious use with unlearning, 2024.

497 Jiayi Liu, Jiaxing Zhang, Bowen Jin, and Jennifer Neville. Generating leakage-free benchmarks for robust rag
498 evaluation, 2026a.

499 Ruochen Liu, Zhiyuan Wen, Hao Yan, Jun Yin, Senzhang Wang, and Jiannong Cao. Ps²: Parameterized control
500 for fine-grained student proficiency simulation, 2026b.

501 Xinyi Lu and Xu Wang. Generative students: Using llm-simulated student profiles to support question item
502 evaluation, 2024.

503 Aengus Lynch, Phillip Guo, Aidan Ewart, Stephen Casper, and Dylan Hadfield-Menell. Eight methods to
504 evaluate robust unlearning in llms, 2024.

505 Barak Or. Quantifying prior dominance in rag systems, 2026.

506 Radek Pelánek. Applications of the Elo rating system in adaptive educational systems. *Computers & Education*,
507 98:169–179, 2016.

508 Naman Deep Singh, Maximilian Müller, Francesco Croce, and Matthias Hein. Unlearning that lasts: Utility-
509 preserving, robust, and almost irreversible forgetting in llms, 2025.

510 Jiajia Song, Zhihan Guo, and Jionghao Lin. Simulating novice students using machine unlearning and relearn-
511 ing in large language models, 2026.

512 KV Aditya Srivatsa, Kaushal Kumar Maurya, and Ekaterina Kochmar. Can llms reliably simulate real students’
513 abilities in mathematics and reading comprehension?, 2025.

514 Adrienne Tuynman and Ronald Ortner. Transfer in reinforcement learning via regret bounds for learning agents,
515 2022.

516 K. W. Van Dongen et al. Construct validity of the LapSim: Can the LapSim virtual reality simulator distinguish
517 between novices and experts? *Surgical Endoscopy*, 21(8):1413–1417, 2007.

518 Lev S. Vygotsky. *Mind in Society: The Development of Higher Psychological Processes*. Harvard University
519 Press, 1978.

520 Tao Wu, Jingyuan Chen, Wang Lin, Mengze Li, Yumeng Zhu, Ang Li, Kun Kuang, and Fei Wu. Embracing
521 imperfection: Simulating students with diverse cognitive levels using llm-based agents, 2025.

522 Rongwu Xu, Zehan Qi, Zhijiang Guo, Cunxiang Wang, Hongru Wang, Yue Zhang, and Wei Xu. Knowledge
523 conflicts for LLMs: A survey. In *Proceedings of EMNLP*, 2024.

524 Zhihao Yuan, Yunze Xiao, Ming Li, Weihao Xuan, Richard Tong, Mona Diab, and Tom Mitchell. Towards
525 valid student simulation with large language models, 2026.

526 Qinggang Zhang, Zhishang Xiang, Yilin Xiao, Le Wang, Junhui Li, Xinrun Wang, and Jinsong Su. Faithfulrag:
527 Fact-level conflict modeling for context-faithful retrieval-augmented generation, 2025.

528 Ruiqi Zhang, Licong Lin, Yu Bai, and Song Mei. Negative preference optimization: From catastrophic collapse
529 to effective unlearning, 2024.

530 Zinn et al. Assessing flight competency from deviation to an optimal trajectory. *Cognition, Technology & Work*,
531 2023.