





A journey through Rails

@wrtsptr

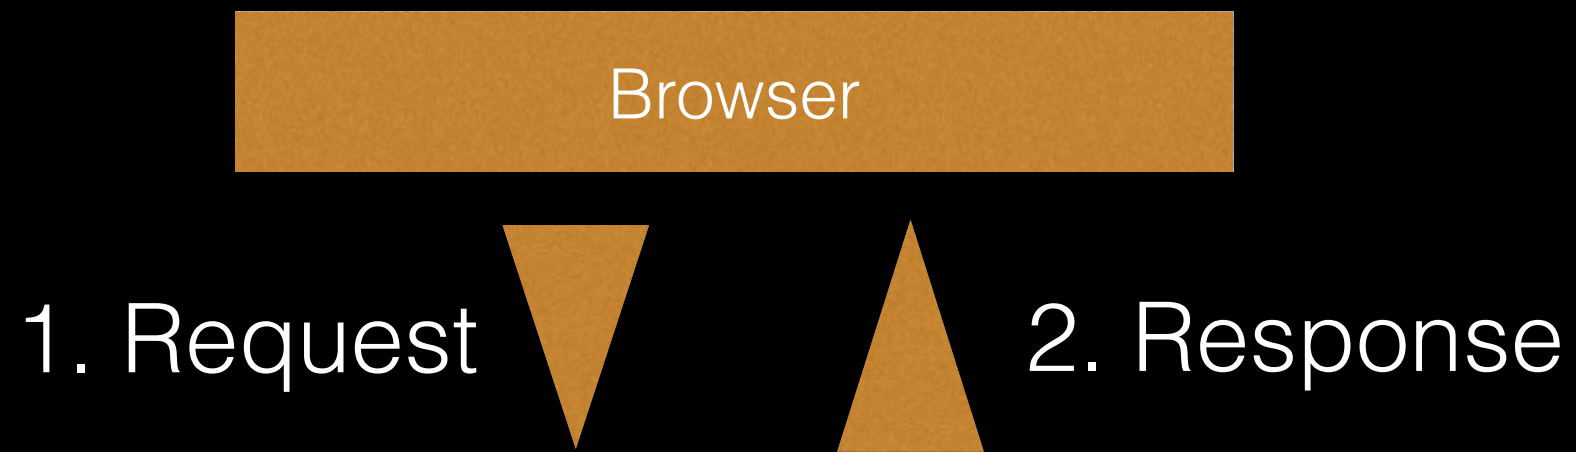

Rails Application

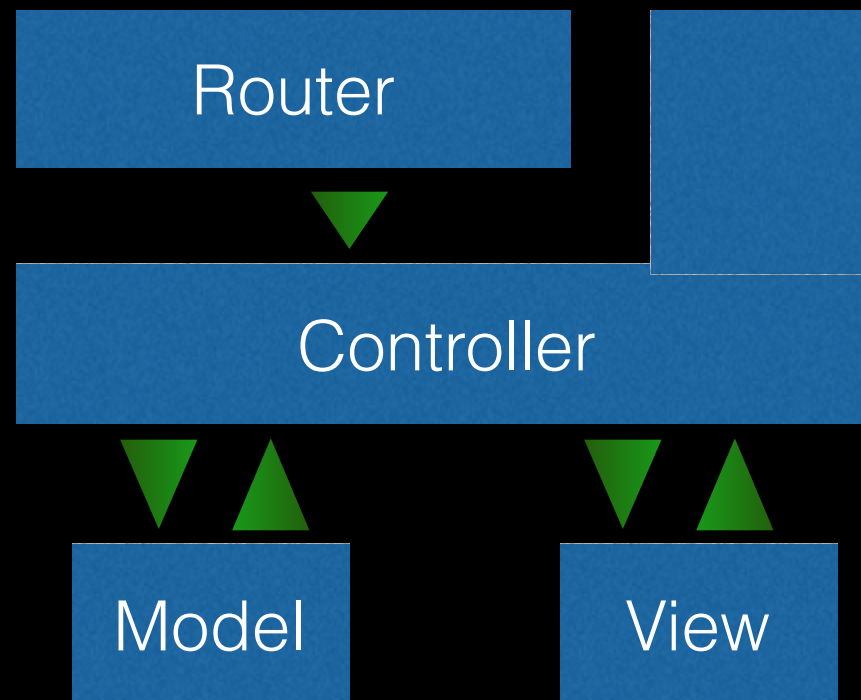


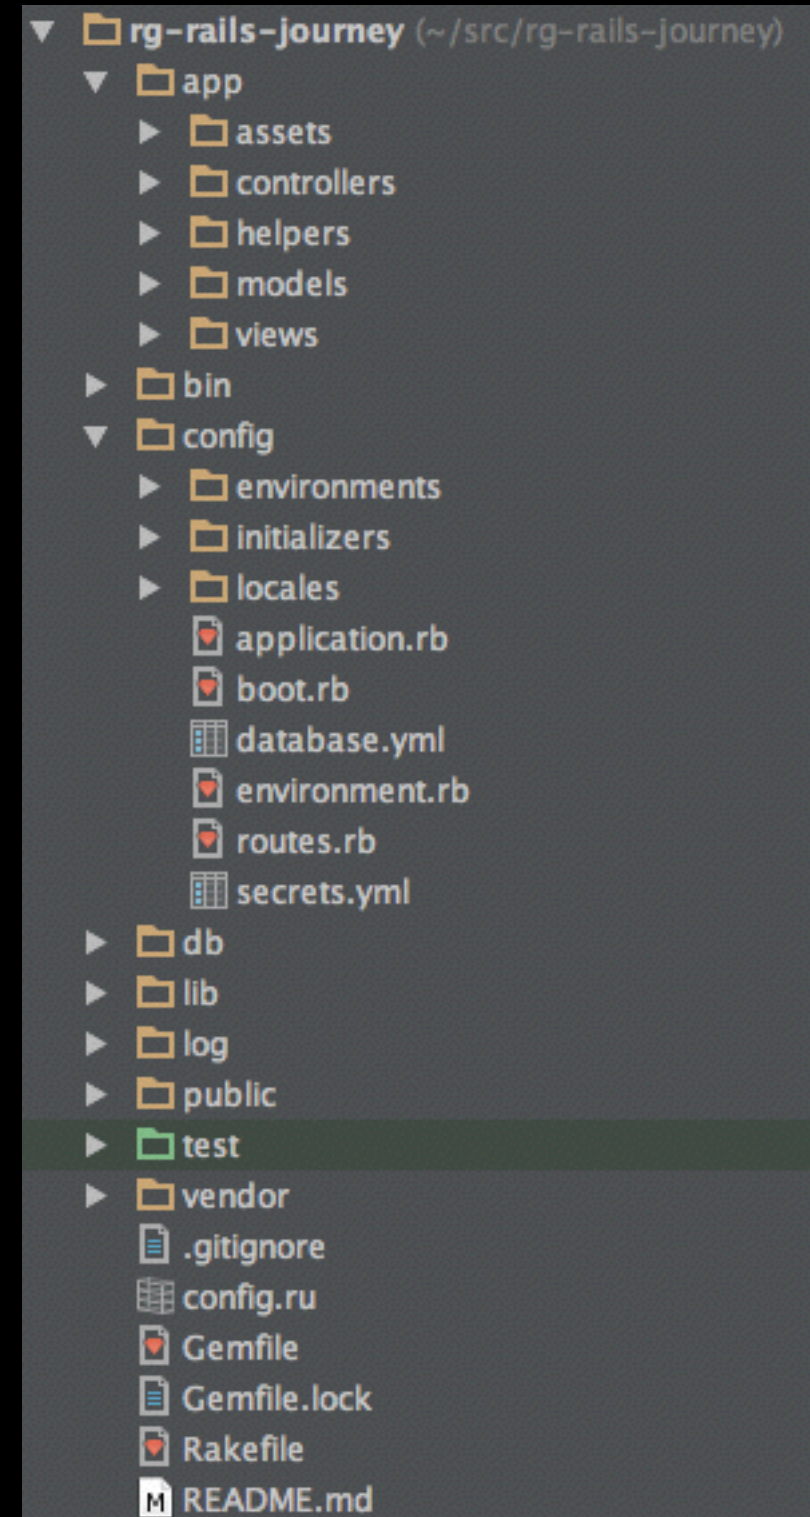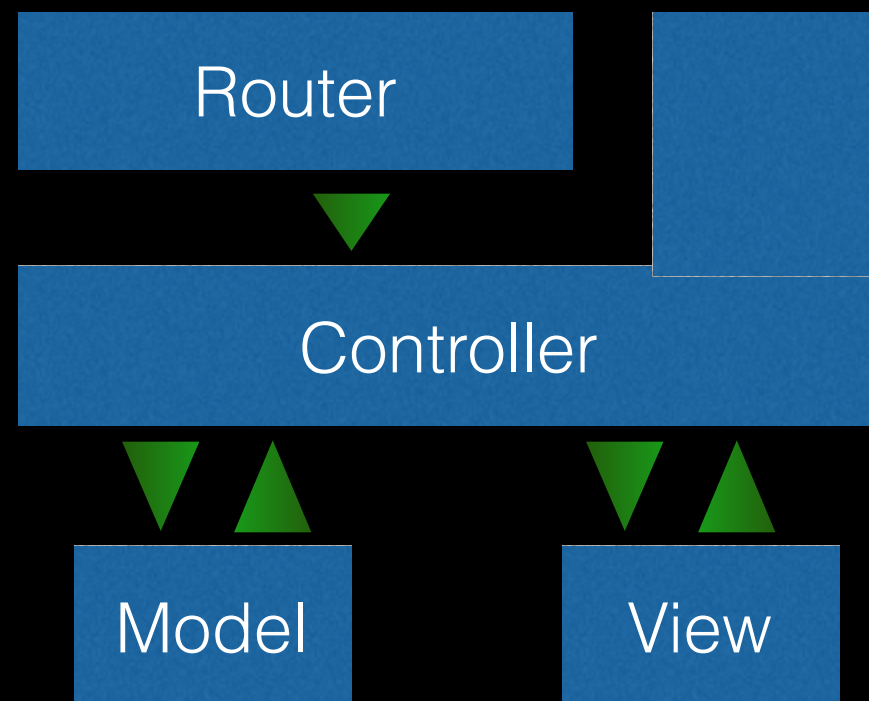


Article

Title


Body


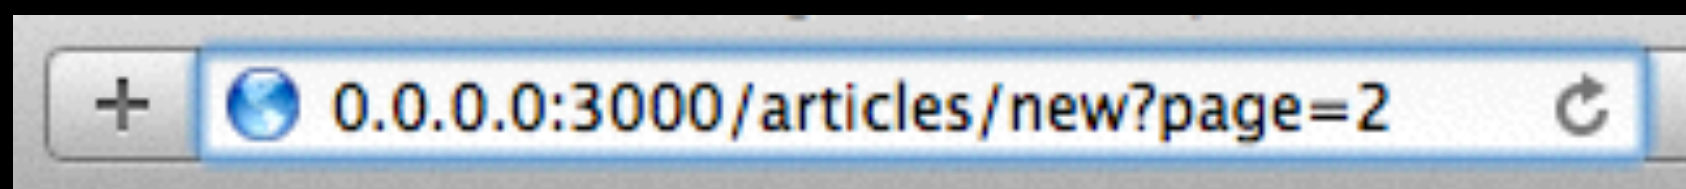


```
GET /articles/new?page=2  
Host: 0.0.0.0:3000
```


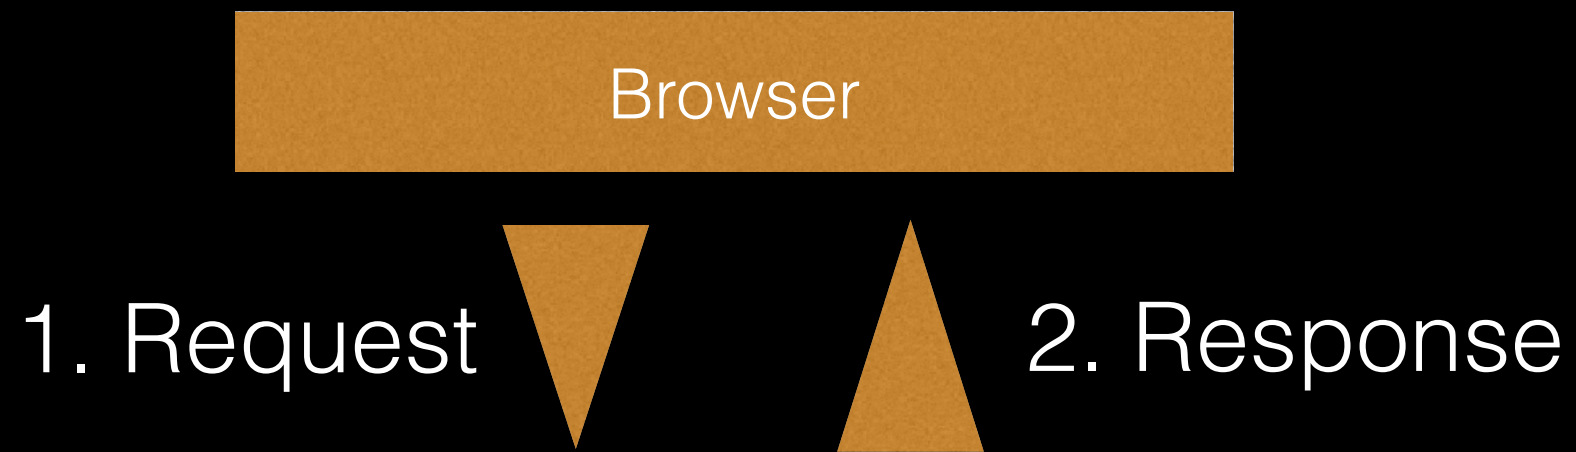


Rails Application

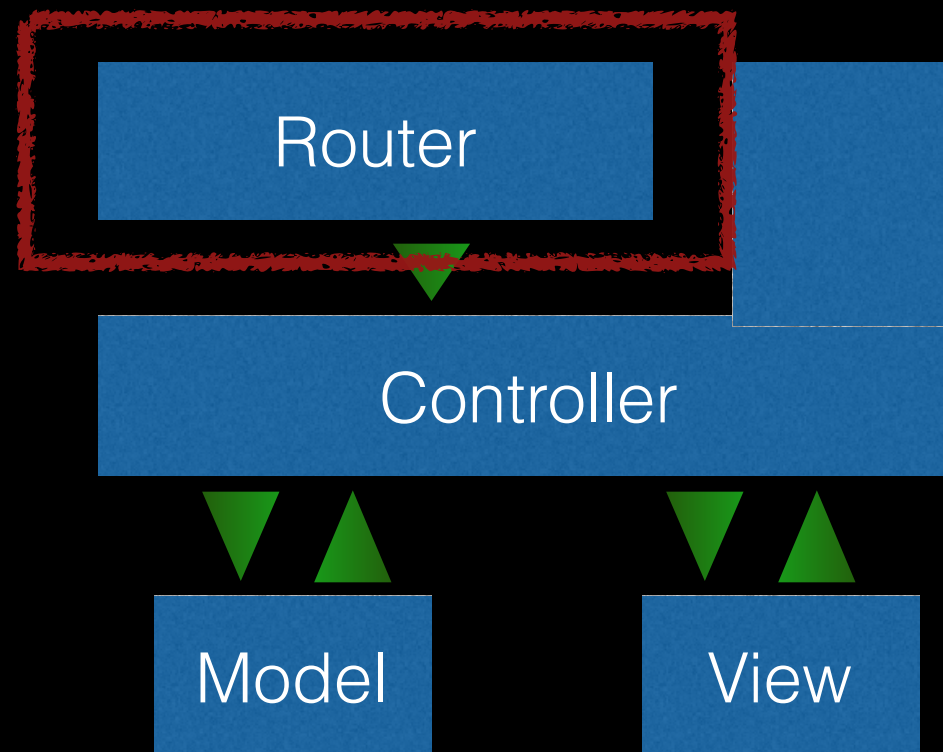

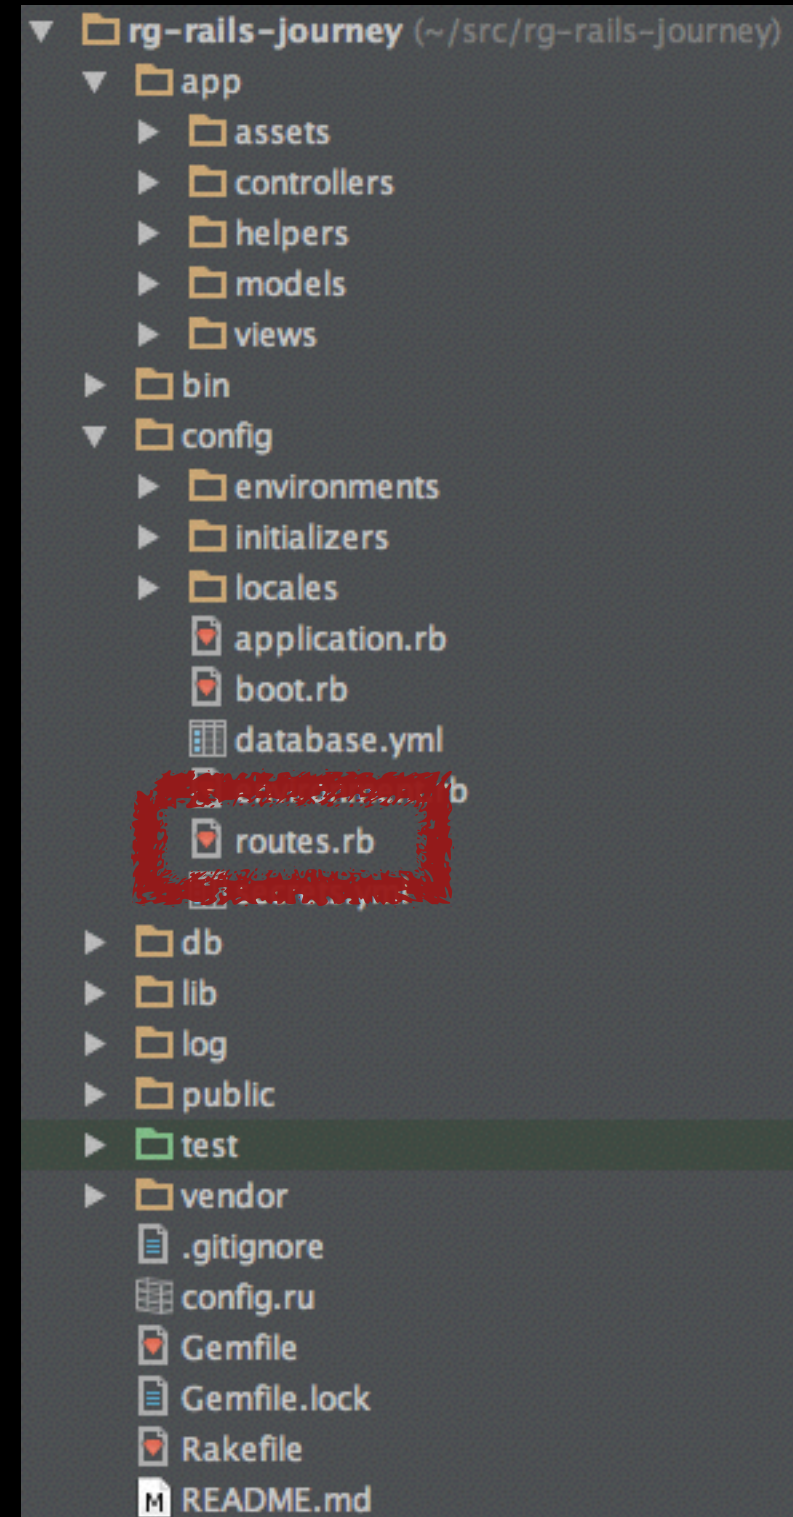
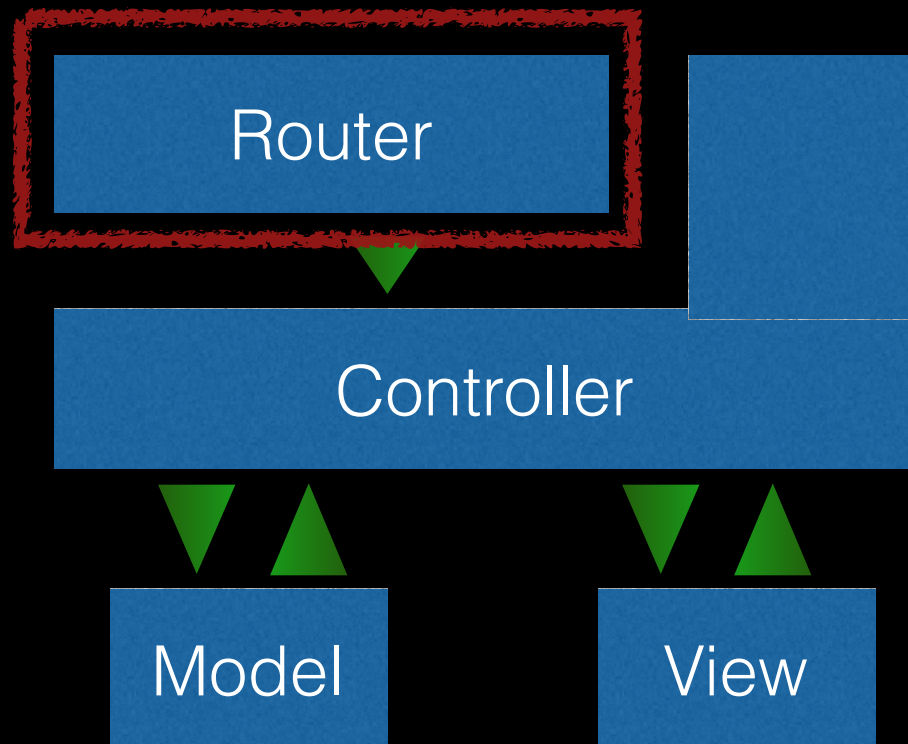



```
1
2 Rails.application.routes.draw do
3
4   get 'articles' => 'articles#index'
5   get 'articles/new' => 'articles#new', as: 'new_article'
6   get 'articles/:id' => 'articles#show', as: 'article'
7   get 'articles/:id/edit' => 'articles#edit', as: 'edit_article'
8   post 'articles' => 'articles#create'
9   put 'articles/:id' => 'articles#update'
10  delete 'articles/:id' => 'articles#destroy'
11
12  # resources :articles
13
14  # root 'articles#index'
15
16 end
~
~
config/routes.rb [+] 1/16 col:0 [buffer: 1][1/6%]
```

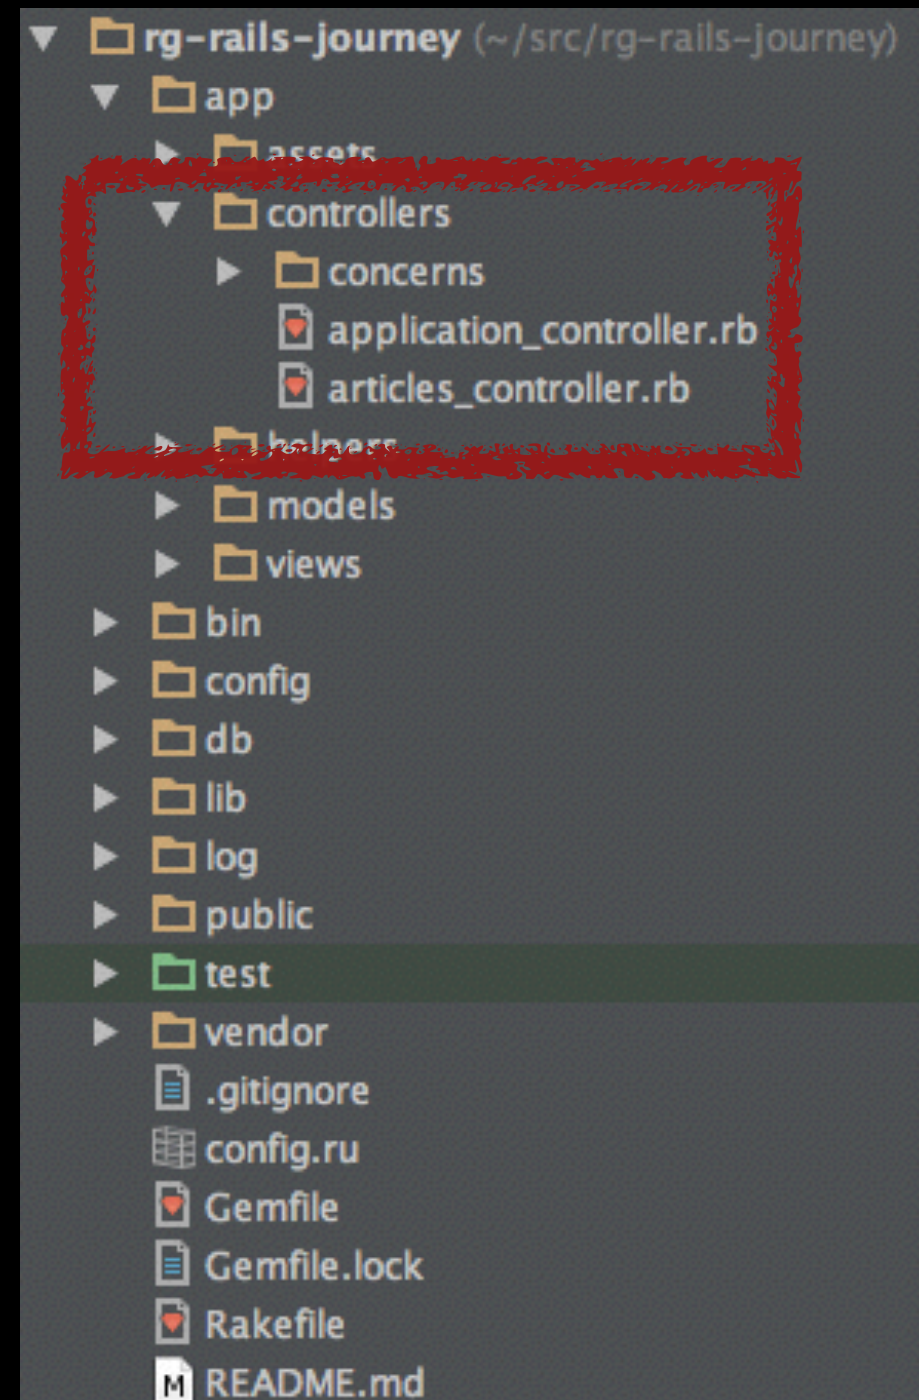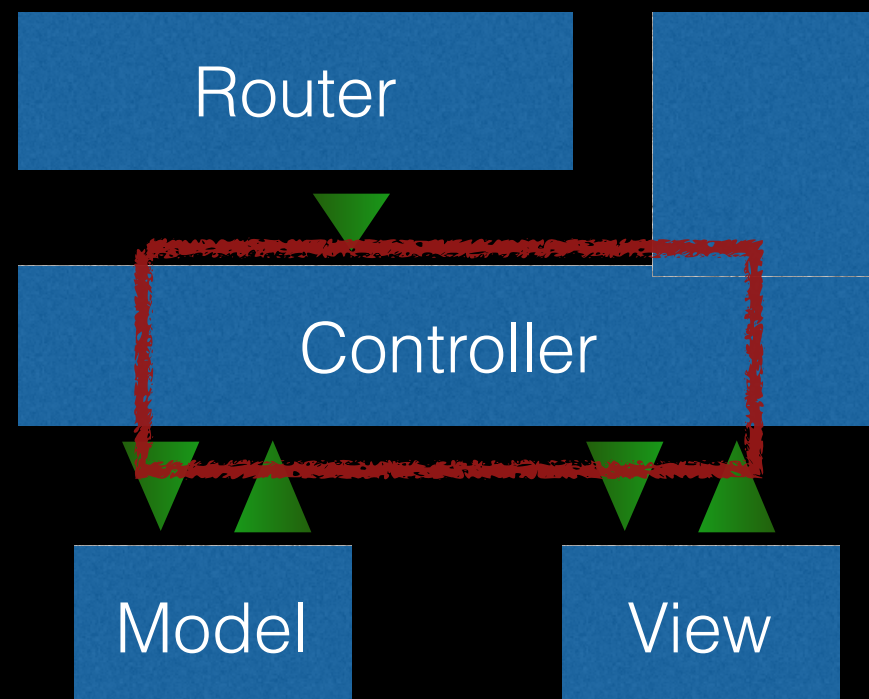


```
1 class ArticlesController < ApplicationController
2   before_action :set_article, only: [:show, :edit, :update, :destroy]
3
4   # GET /articles
5   def index
6     @articles = Article.all
7     render :index
8   end
9
10  # GET /articles/1
11  def show
12    render :show
13  end
14
15  # GET /articles/new
16  def new
17    @article = Article.new
18    render :new
19  end
20
```

app/controllers/articles_controller.rb [+] 3/73 col:0 [buffer: 2][3/4%]

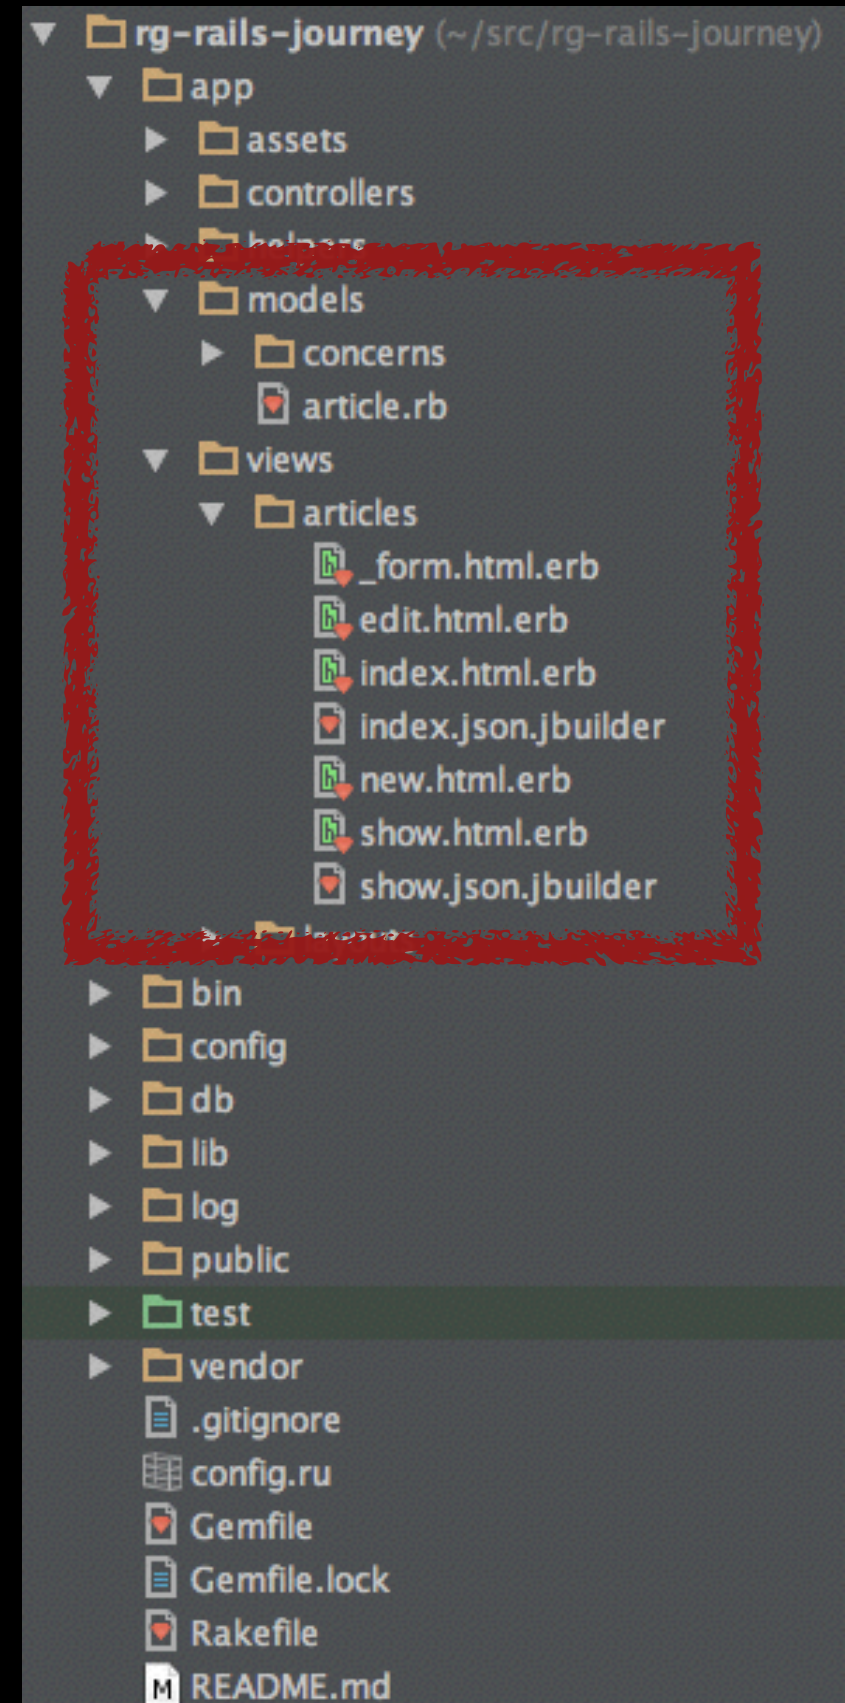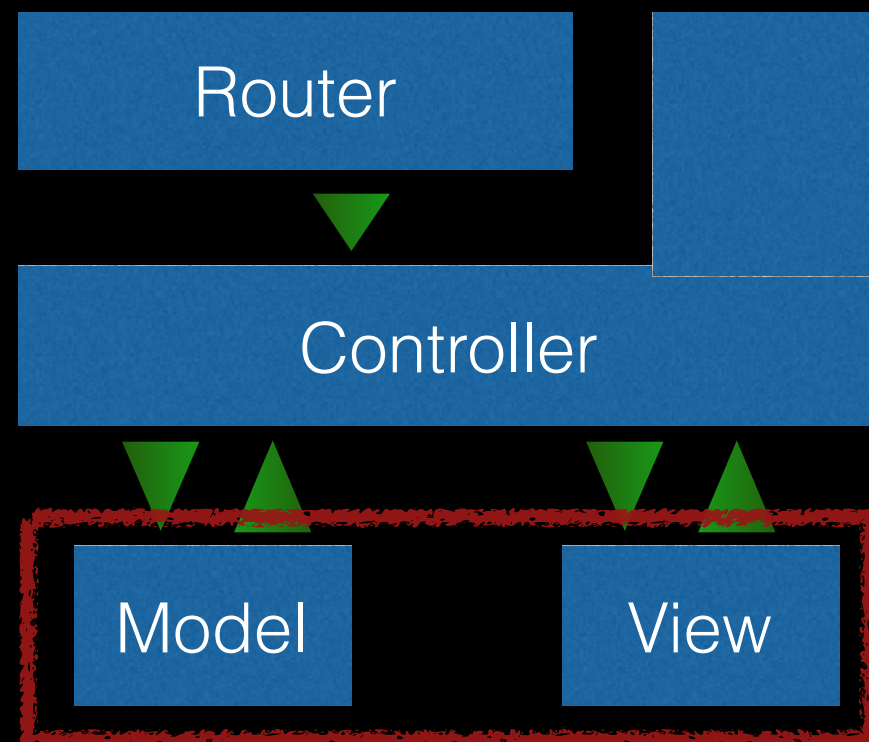


```
1 class ArticlesController < ApplicationController
2   before_action :set_article, only: [:show, :edit, :update, :destroy]
3
4   # GET /articles
5   def index
6     @articles = Article.all
7     render :index
8   end
9
10  # GET /articles/1
11  def show
12    render :show
13  end
14
15  # GET /articles/new
16  def new
17    @article = Article.new
18    render :new
19  end
20
```

app/controllers/articles_controller.rb [+] 3/73 col:0 [buffer: 2][3/4%]

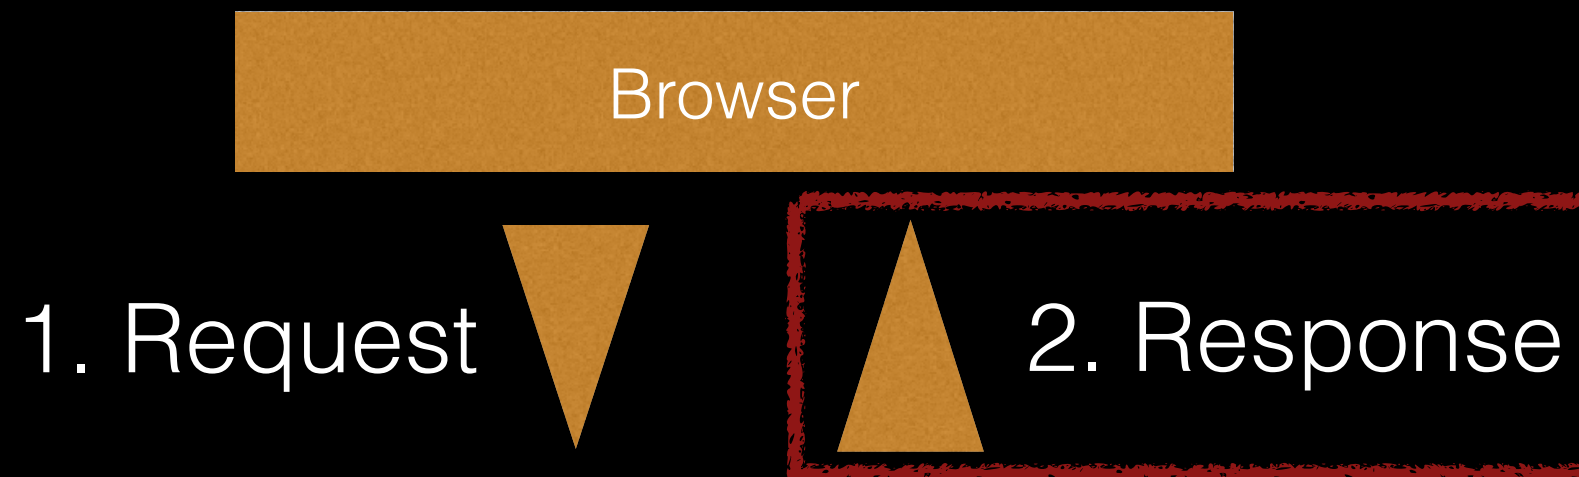

Rails Application

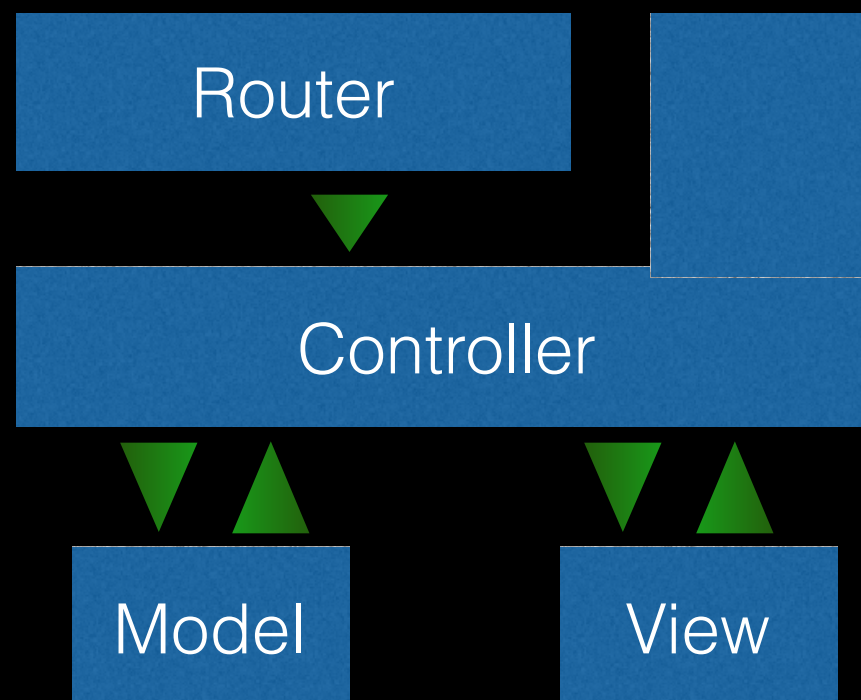

```
▼ <html>
  ▶ <head>...</head>
  ▼ <body>
    ▼ <div class="container">
      <h1>New article</h1>
      ▼ <form accept-charset="UTF-8" action="/articles" class="new_article" id="new_article" method="post">
        ▶ <div style="display:none">...</div>
        ▼ <div class="form-group">
          <label for="article_title">Title</label>
          <br>
          <input class="form-control" id="article_title" name="article[title]" type="text">
        </div>
        ▼ <div class="form-group">
          <label for="article_body">Body</label>
          <br>
          <textarea class="form-control" id="article_body" name="article[body]"></textarea>
        </div>
        ▼ <div class="actions">
          <input class="btn" name="commit" type="submit" value="new">
        </div>
      </form>
      <a href="/articles">Back</a>
    </div>
  </body>
</html>
```

RgRailsJourney

⏪ ⏩

+

0.0.0.0:3000/articles/new?page=2

↺

Reader

⏭

RgRailsJourney

+


New article

Title

Body

new

Back

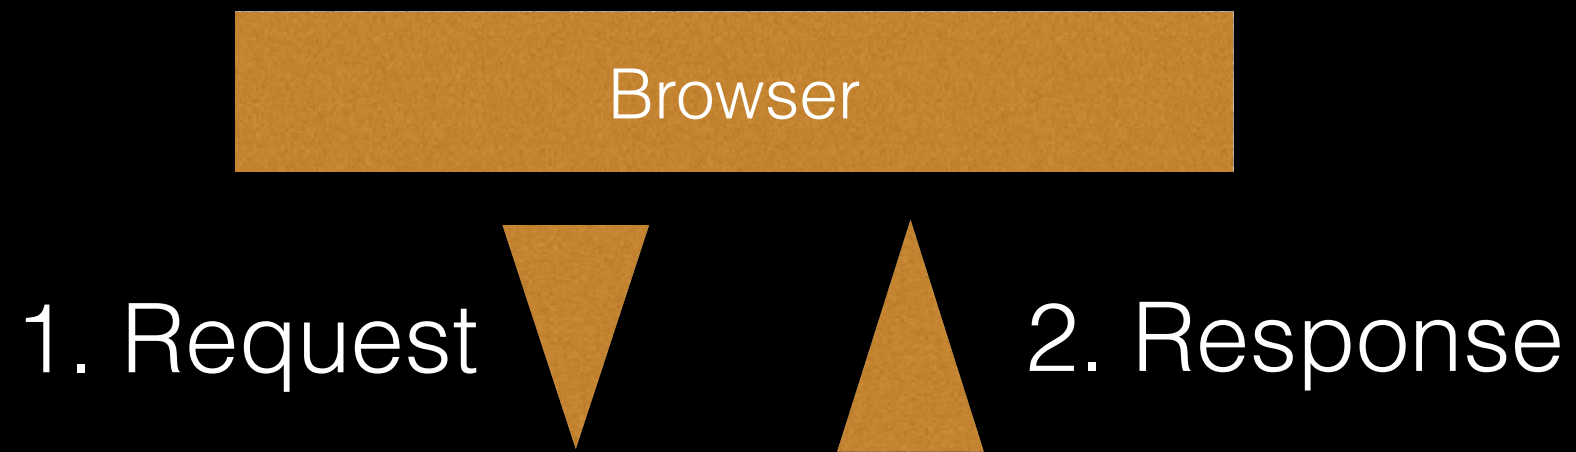

Rails Application

