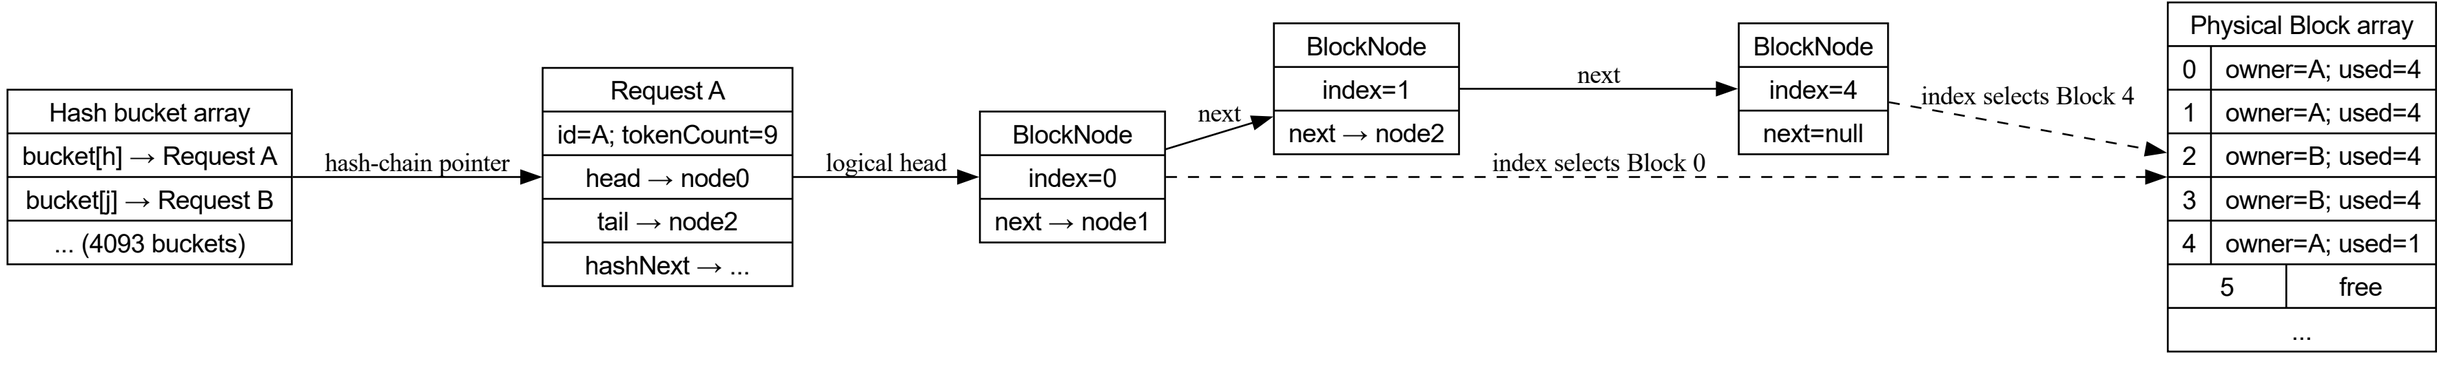
Hash bucket array
bucket[h] → Request A
bucket[j] → Request B
... (4093 buckets)
hash-chain pointer
Request A
id=A; tokenCount=9
head → node0
tail → node2
hashNext → ...
logical head
BlockNode
index=0
next → node1
next
BlockNode
index=1
next → node2
next
BlockNode
index=4
next=null
index selects Block 4
index selects Block 0
Physical Block array
0
owner=A; used=4
1
owner=A; used=4
2
owner=B; used=4
3
owner=B; used=4
4
owner=A; used=1
5
free
...