



(b) Client masking

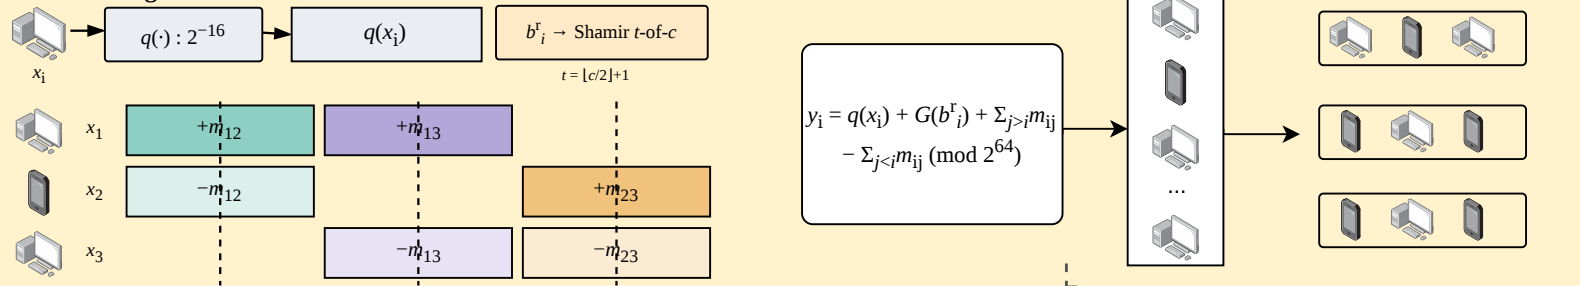

Legends

- malicious client
- clean / kept
- flagged / excluded
- sealed masked cluster sum $\rightarrow S_{j,t}$
- privacy boundary (server sees only aggregates)
- client's group in a round (re-randomized each round)

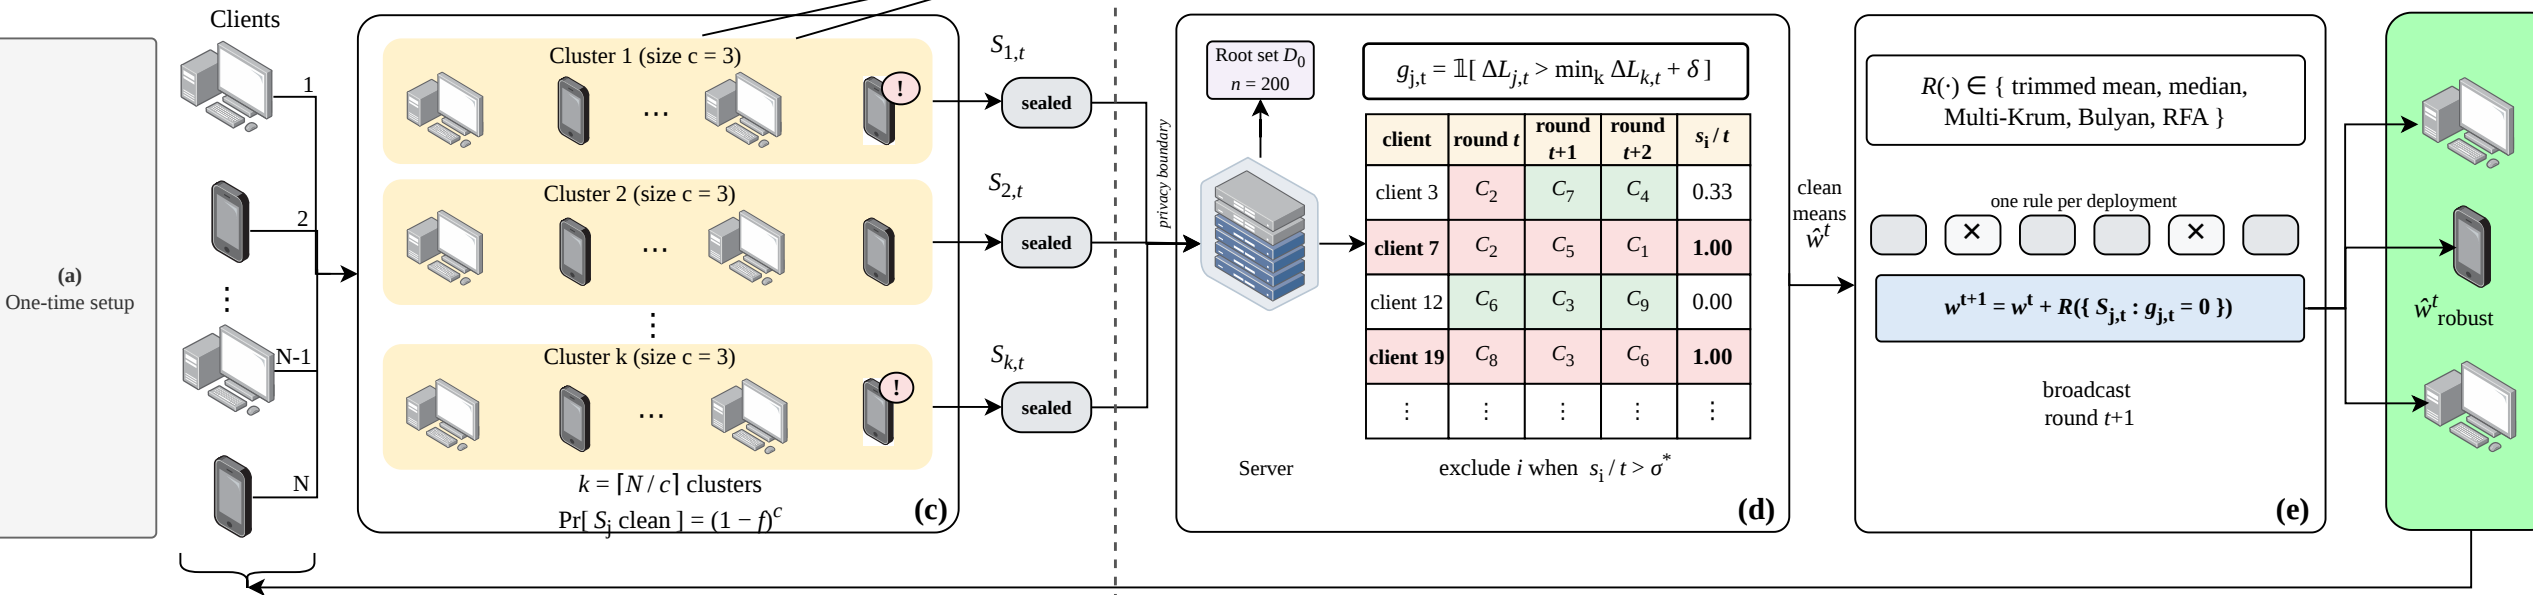

$K = (\text{KeyGen}, \text{Encaps}, \text{Decaps})$

HQC-128
code-based

ML-KEM-512
lattice



(ct, ss_{ij})



$ss_{ij} = \text{Decaps}(sk_j, ct)$

$H(ss_{ij}, r)$

$m_{ij} = G(H(ss_{ij}, r))$