


The Minimal Iterator Relation R^* — Ordered Pair Structure

Blue circle = P-component of pair · Red circle = W-component · g advances in W



Arrow key

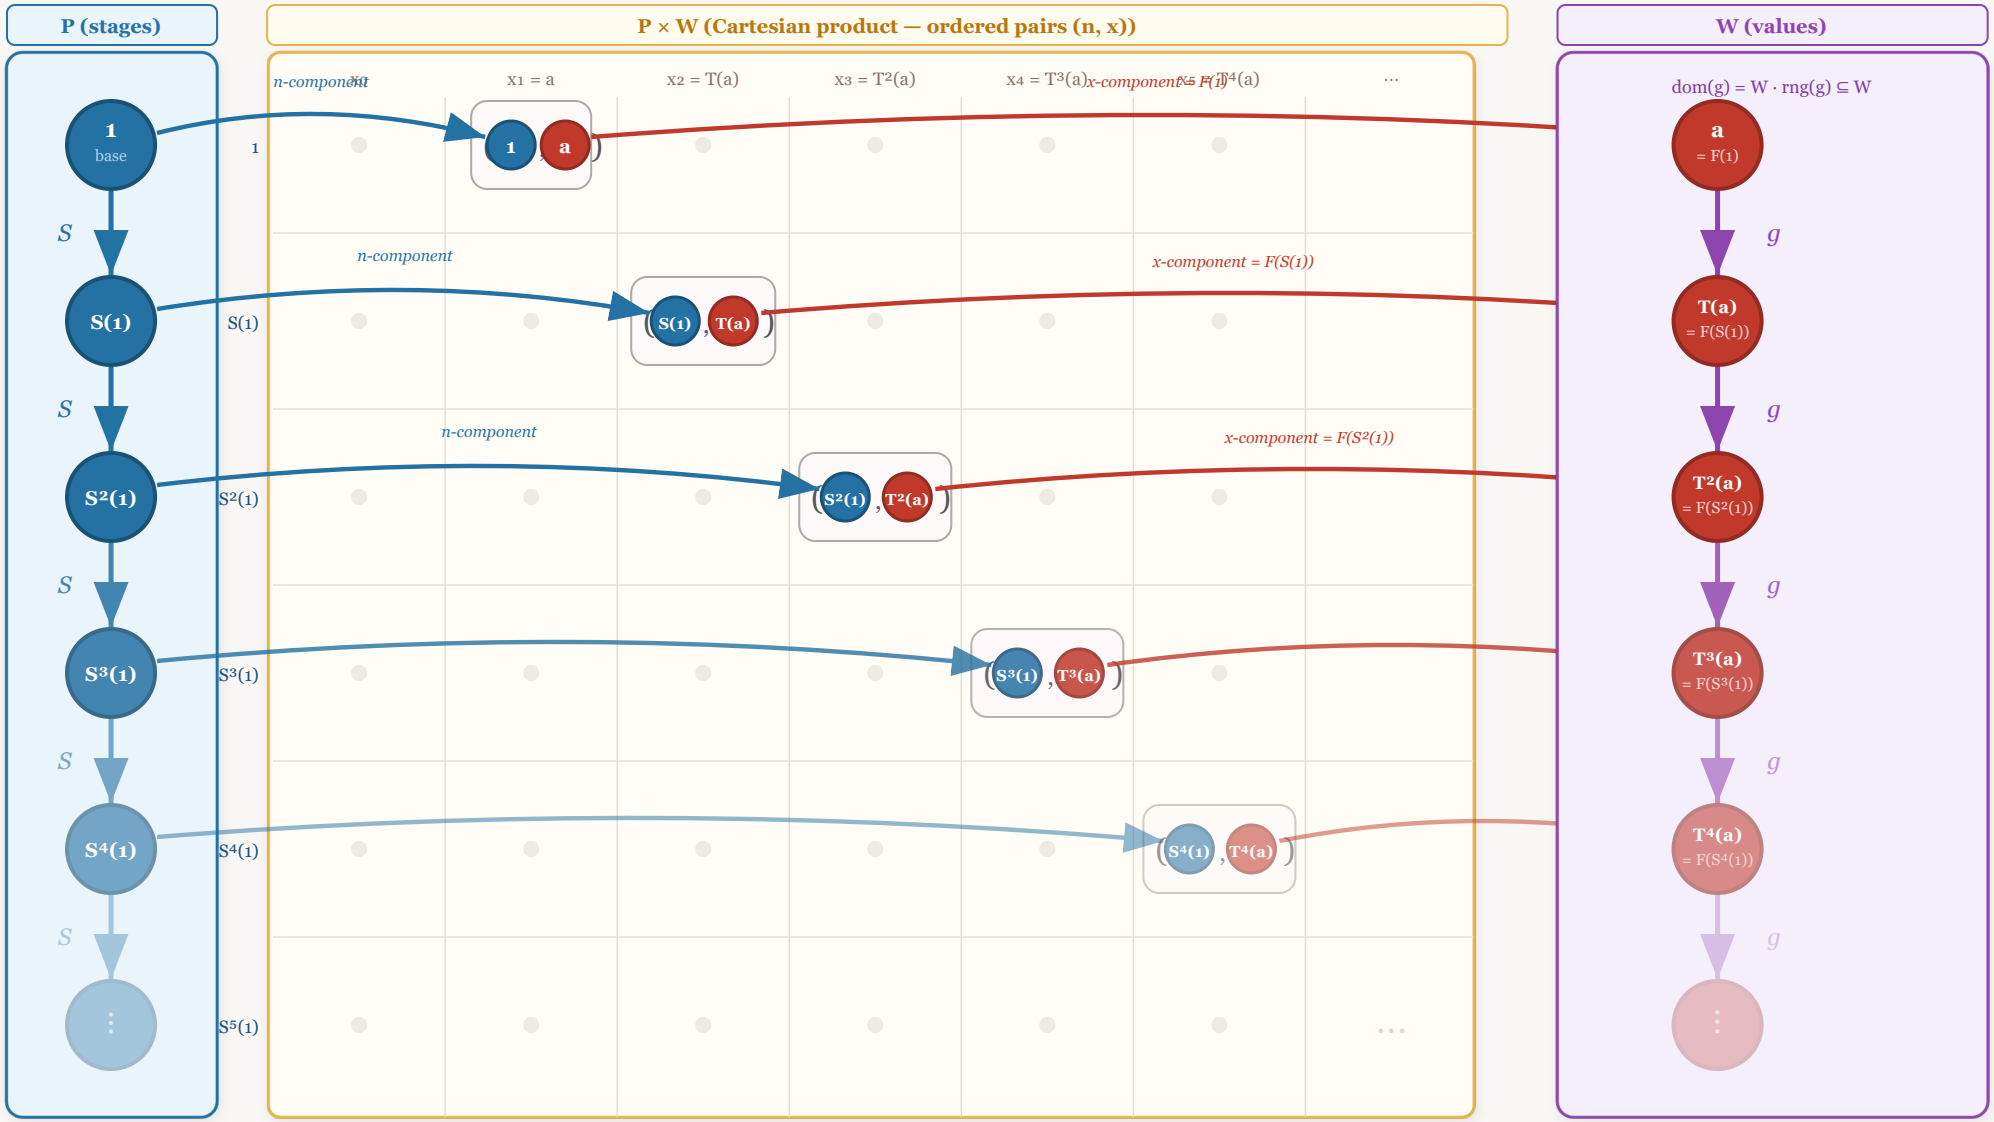

$S : P \rightarrow P$ (successor)



$g : W \rightarrow W$ (step rule)

n -component of pair $\rightarrow$ blue circle x -component = $F(n) \rightarrow$ W node

The two iterator clauses

$F(1) = a$ [blue arc lands on a in row 1]
 $F(S(n)) = g(F(n))$ [red arc + g arrow = next row]

Anatomy of an ordered pair in R^*

(n, x) $\leftarrow$ stage $n \in P$

$\leftarrow$ value $x = F(n) \in W$

$R^* = \{ \text{all such pairs forced by the recursion} \}$