


FROM CANTOR TO ITO

Logic, Sets, and Proof

Mathematical Logic and Proof

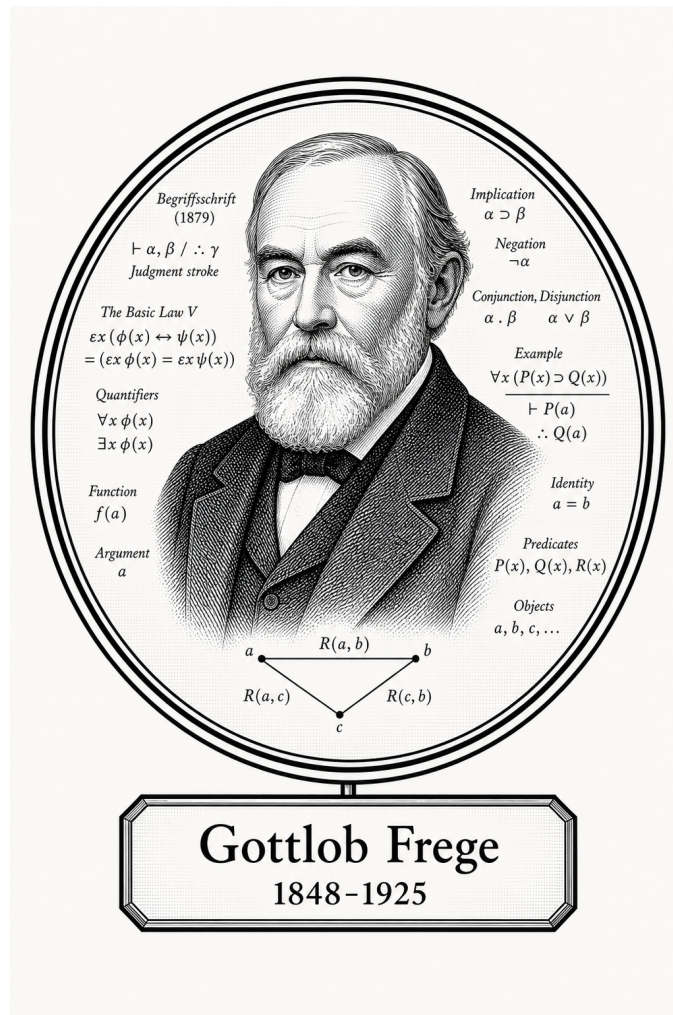

Gottlob Frege

1848-1925

Self-Study Notes

William Sollers

June 28, 2026

For every reader learning to make mathematics their own.

Contents

1	Propositional Logic	1
1.1	Model-Theoretic View	1
1.2	Axiom Schemas	3
1.3	Notation and Conventions	3
1.4	Syntax	6
1.5	Semantics	19
1.6	Algebra of Propositions	31
1.7	Normal Forms	38
1.8	Functional Completeness	57
1.9	Argument Forms and Informal Proof Patterns	69
1.10	Compactness and Finite Satisfiability Preview	81
2	Predicate Logic	148
2.1	Model-Theoretic View	148
2.2	Axiom Schemas	150
2.3	Syntax	151
2.3.1	Syntax of First-Order Logic: Terms and Formulas	151
2.3.2	Syntax: Free Variables, Bound Variables, and Substitution	159
2.3.3	Syntax: Formula Depth	164
2.4	Semantics	164
2.4.1	Semantics: Structures and Variable Assignments	164
2.4.2	Semantics: Satisfaction and Truth	169
2.4.3	Semantics: Models, Theories, and Logical Consequence	172
2.4.4	Semantics: Open Formulas, Definable Relations, and Substitution Lemmas	176
2.5	Quantifiers	179
2.6	Proof Theory	193
2.6.1	Proof Theory: Quantifier Inference Rules	193
2.6.2	Proof Strategies for Quantified Statements	195
2.6.3	Proof Theory: Equality Rules	200
2.6.4	Proof Theory: Soundness and Completeness	202
2.7	Translation	203
2.8	Reference	212

3	Many-Sorted Logic	243
3.1	Introduction	245
3.1.1	Examples	245
3.1.2	Reduction to and comparison with first-order logic	245
3.1.3	Uses of many-sorted logic	245
3.1.4	Many-sorted logic as a unifier logic	245
3.2	Structures	245
3.2.1	Definition (signature)	245
3.2.2	Definition (structure)	245
3.3	Formal many-sorted language	245
3.3.1	Alphabet	245
3.3.2	Expressions: formulas and terms	245
3.3.3	Remarks on notation	245
3.3.4	Abbreviations	245
3.3.5	Induction	245
3.3.6	Free and bound variables	245
3.4	Semantics	245
3.4.1	Definitions	245
3.4.2	Satisfiability, validity, consequence and logical equivalence	245
3.5	Substitution of a term for a variable	245
3.6	Semantic theorems	245
3.6.1	Coincidence lemma	245
3.6.2	Substitution lemma	245
3.6.3	Equals substitution lemma	245
3.6.4	Isomorphism theorem	245
3.7	The completeness of many-sorted logic	245
3.7.1	Deductive calculus	245
3.7.2	Syntactic notions	245
3.7.3	Soundness	245
3.7.4	Completeness theorem (countable language)	245
3.7.5	Compactness theorem	245
3.7.6	Löwenheim–Skolem theorem	245
3.8	Reduction to one-sorted logic	245
3.8.1	The syntactical translation (relativization of quantifiers)	245
3.8.2	Conversion of structures	245
4	Standard Second-Order Logic	246
4.1	Introduction	248
4.1.1	General idea	248
4.1.2	Expressive power	248
4.1.3	Model-theoretic counterparts of expressiveness	248
4.1.4	Incompleteness	248
4.2	Second-order grammar	248
4.2.1	Definition (signature and alphabet)	248
4.2.2	Expressions: terms, predicates and formulas	248

4.2.3	Remarks on notation	248
4.2.4	Induction	248
4.2.5	Free and bound variables	248
4.2.6	Substitution	248
4.3	Standard structures	248
4.3.1	Definition of standard structures	248
4.3.2	Relations between standard structures established without the formal language	248
4.4	Standard semantics	248
4.4.1	Assignment	248
4.4.2	Interpretation	248
4.4.3	Consequence and validity	248
4.4.4	Logical equivalence	248
4.4.5	Simplifying our language	248
4.4.6	Alternative presentation of standard semantics	248
4.4.7	Definable sets and relations in a given structure	248
4.4.8	More about the expressive power of standard SOL	248
4.4.9	Negative results	248
4.5	Semantic theorems	248
4.5.1	Coincidence lemma	248
4.5.2	Substitution lemma	248
4.5.3	Isomorphism theorem	248
5	Languages, Axioms, and Models	249
5.1	Signatures	249
5.2	Axioms	253
5.3	Theories	256
5.4	Models	259
5.5	Consistency	265
5.6	Independence	267
5.7	Comparing Theories	268
5.8	Examples And Previews	268
5.9	Summary	268
6	Proof Techniques	269

Chapter 1

Propositional Logic



1.1 Model-Theoretic View

Toolkit

This section presents classical propositional logic as a syntax-plus-semantics model, with the syntactic language connected to the two-valued semantics by the shared free-algebra evaluation machinery.

Theory (Propositional Logic)

Depends on: Propositional language; formula; bridge:consequence; Cn_+

Language

$$\mathcal{L}_P = (P, \neg, \wedge, \vee, \rightarrow, \leftrightarrow), \quad \text{Form}_P.$$

Presented Theory

$$T := Cn_+(\Sigma), \quad \Sigma \subseteq \text{Form}_P, \quad \text{CPL} := Cn_+(\emptyset).$$

Theorems and Consequences

$$1. \quad \Gamma \vdash_{\text{CPL}} \varphi \iff \Gamma \models_{\text{CPL}} \varphi \quad (\text{completeness}).$$

Model (Classical Propositional Logic)

Model 1.1.1 (Classical Propositional Logic). **Depends on:** Propositional language; valuation; bridge:free-sigma-algebra-evaluation; bridge:consequence

Note

The seed is the model datum itself.

$$v : \mathbf{P} \rightarrow |\mathbf{2}|, \quad |\mathbf{2}| = \{0, 1\}.$$

Binding

$$\Sigma := \Omega, \quad X := \mathbf{P}, \quad \text{target} := \mathbf{2}, \quad \sigma := v, \quad \widehat{v} := \text{eval}(\mathbf{2})(v).$$

Syntax–Semantics Bridge

1.

$$v \models \varphi \iff \widehat{v}(\varphi) = 1.$$

Theorems and Consequences

1. Connective recursion is inherited from *Free Σ -Algebra and Evaluation*.
2. Semantic consequence, validity, and $\text{Th}(v)$ are inherited from *Consequence*.

Definitional Extension (Propositional Logic)

Depends on: theory:propositional-logic; truth-function; conservative extension

Admissibility

A connective $\star$ of arity n is admissible by a defining equivalence:

$$\star(\bar{\varphi}) \leftrightarrow \theta(\bar{\varphi}), \quad \widehat{v}(\star(\bar{\varphi})) = F_{\star}(\widehat{v}(\varphi_1), \dots, \widehat{v}(\varphi_n)).$$

There is no $\exists!$ obligation because formulas already evaluate to truth values.

Instances

$$\begin{aligned} \top &:= (p_0 \rightarrow p_0), & \perp &:= \neg \top, \\ \varphi \oplus \psi &:= ((\varphi \vee \psi) \wedge \neg(\varphi \wedge \psi)). \end{aligned}$$

Theorems and Consequences

1.

$$\text{CPL}^+ \vdash \sigma \iff \text{CPL} \vdash \sigma \quad (\sigma \in \mathcal{L}_{\mathbf{P}}).$$

2. Every extended formula has a base-language equivalent.

1.2 Axiom Schemas

Propositional Axiom Schemas

The propositional-logic development uses the following classical Hilbert-style axiom schemas as logical starting points. They are schemas: each substitution of formulas for the displayed schematic letters gives an axiom instance.

Axiom Schema (Propositional Weakening)

Axiom 1.2.1 (Propositional Weakening). For all formulas P and Q ,

$$P \implies (Q \implies P).$$

Remark (Interpretation). If P is available, then it remains available under any additional assumption Q .

Axiom Schema (Implication Distribution)

Axiom 1.2.2 (Implication Distribution). For all formulas P , Q , and R ,

$$(P \implies (Q \implies R)) \implies ((P \implies Q) \implies (P \implies R)).$$

Remark (Interpretation). Implications may be composed under a common hypothesis.

Axiom Schema (Classical Contraposition)

Axiom 1.2.3 (Classical Contraposition). For all formulas P and Q ,

$$(\neg Q \implies \neg P) \implies (P \implies Q).$$

Remark (Interpretation). This is the classical contrapositive principle. It is the axiom schema that marks the background logic as classical rather than intuitionistic.

1.3 Notation and Conventions

Toolkit

This notation ledger records the propositional symbols, metavariables, semantic notation, and normal-form abbreviations used in the chapter.

Remark (Exposition). The notation section fixes the symbolic vocabulary used throughout the chapter. It identifies which symbols are global conventions, which are local to propositional logic, and where each item is introduced by the formal development.

Symbol	Name	Meaning	Introduced by
$\mathbb{B}$	truth-value set	the set of truth values (global, canonical)	Truth Value
Prop	propositional variable set	the set of propositional variables (global, canonical)	Propositional Language
$\neg$	negation	unary propositional connective (global, canonical)	Propositional Language
$\wedge$	conjunction	binary propositional connective (global, canonical)	Propositional Language
$\vee$	disjunction	binary propositional connective (global, canonical)	Propositional Language
$\rightarrow$	conditional	binary propositional connective (global, canonical)	Propositional Language
$\leftrightarrow$	biconditional	binary propositional connective (global, canonical)	Propositional Language
P, Q, R	propositional variables	schematic propositional variables (chapter, canonical)	Propositional Variable
$P_1, \dots, P_n$	finite list of propositional variables	a finite schematic list of propositional variables (chapter, local)	Propositional Variable
$\circ$	generic binary connective	an arbitrary member of $\{\wedge, \vee, \rightarrow, \leftrightarrow\}$ (global, canonical)	Logical Connective
WFF	well-formed formula set	the set of propositional well-formed formulas (chapter, canonical)	Well-Formed Formula
$\varphi, \psi, \chi, \theta$	formula metavariables	metavariables ranging over propositional well-formed formulas (global, canonical)	Well-Formed Formula
α, β	additional formula metavariables	formula metavariables used in comparison statements (chapter, local)	Constructor Injectivity for Propositional Formulas
$\text{Tree}(\varphi)$	syntax tree	parse tree or formation tree of a formula (chapter, canonical)	Parse Tree
$\text{Var}(\varphi)$	variable set of a formula	the set of propositional variables occurring in a formula (chapter, canonical)	Variable Set of a Formula
$\text{Sub}(\varphi)$	subformula set	the set of subformulas of a formula (chapter, canonical)	Subformula
$\text{depth}(\varphi)$	formula depth	height, rank, or complexity of the formula formation tree (chapter, canonical)	Formula Depth

$\text{conn}(\varphi)$	connective count	the number of connective occurrences in a formula (chapter, canonical)	Connective Count
v	truth assignment	a truth assignment on propositional variables (chapter, canonical)	Truth Assignment
w	second truth assignment	truth assignment on propositional variables (global, canonical)	Truth Assignment
$\hat{v}$	extended truth assignment	unique extension of a truth assignment to formulas (chapter, canonical)	Unique Extension of a Truth Assignment
$\neg, \wedge, \vee, \rightarrow, \leftrightarrow$	standard connectives	standard propositional connectives (global, canonical)	Unique Extension of a Truth Assignment
$v \models \varphi$	satisfaction of a formula	truth assignment satisfies a formula (chapter, canonical)	Satisfaction of a Formula
$\models \varphi$	tautology notation	formula valid under every truth assignment (global, canonical)	Satisfaction of a Formula
$v \models \Gamma$	satisfaction of a set	truth assignment satisfies each formula in a set (chapter, canonical)	Satisfaction of a Set of Formulas
Γ	set of premise formulas	a set of propositional formulas (chapter, canonical)	Satisfaction of a Set of Formulas
$\Gamma \models \varphi$	semantic consequence	semantic consequence from premises to conclusion (chapter, canonical)	Logical Consequence
$\varphi \equiv \psi$	logical equivalence	same truth value under every truth assignment (chapter, canonical)	Logical Equivalence
$f : \mathbb{B}^n \rightarrow \mathbb{B}$	n-ary Boolean function	function from truth-value tuples to a truth value (chapter, canonical)	Boolean Function
f_φ	truth function induced by a formula	Boolean function represented by a formula (chapter, canonical)	Truth Function Induced by a Formula
$\equiv$	logical equivalence symbol	logical equivalence relation between formulas (global, canonical)	Propositional Equivalence Law
$\top$	tautological formula	a formula chosen as a true constant (chapter, canonical)	Identity and Domination Laws

$\perp$	contradictory formula	a formula chosen as a false constant (chapter, canonical)	Identity and Domination Laws
$C[-]$	formula context	a one-hole propositional formula context (chapter, canonical)	Formula Context
$C[\varphi]$	context substitution	formula obtained by filling a context with a formula (chapter, canonical)	Formula Context

1.4 Syntax

Toolkit

This section uses truth values, propositional variables, connectives, well-formed formulas, formation trees, and subformulas to build syntax.

Definitional Root (Truth Value)

Definition 1.4.1 (Truth Value). The set of truth values is

$$\mathbb{B} := \{\text{False}, \text{True}\}.$$

Some sources identify this set with $\{0, 1\}$, with 0 read as false and 1 read as true.

Remark (Standard quantified statement).

$$\mathbb{B} = \{\text{False}, \text{True}\}.$$

Remark (Interpretation). Truth values are the semantic targets of propositional formulas. Syntax determines which strings are formulas; semantics later assigns elements of $\mathbb{B}$ to formulas.

Definitional Root (Propositional Language)

Definition 1.4.2 (Propositional Language). A propositional language consists of:

1. a set **Prop** of propositional variables;
2. logical connectives;
3. punctuation symbols such as parentheses;
4. recursive formation rules specifying the well-formed formulas.

Remark (Standard quantified statement).

$$\mathcal{L}_{\text{prop}} = (\text{Prop}, \{\neg, \wedge, \vee, \rightarrow, \leftrightarrow\}, \text{punctuation}, \text{formation rules}).$$

Remark (Interpretation). The language supplies symbols and grammar. It does not yet assign truth values, truth conditions, or logical consequence.

Definition (Propositional Variable)

Definition 1.4.3 (Propositional Variable). A propositional variable is an atomic symbol intended to stand for a proposition. A standard supply of variables is

$$\mathbf{Prop} = \{P_1, P_2, P_3, \dots\}.$$

Informally, variables are often written $P, Q, R, S, \dots$

Remark (Standard quantified statement).

$$\text{PropositionalVariable}(P) \iff P \in \mathbf{Prop}.$$

Remark (Definition predicate reading). $\text{PropositionalVariable}(P)$ means $P \in \mathbf{Prop}$.

Remark (Interpretation). A propositional variable has no internal syntactic structure in propositional logic. It is a basic symbol from which more complex formulas are formed.

Remark (Examples). P, Q, R, P_1, P_2 are propositional variables when they belong to $\mathbf{Prop}$.

Remark (Non-examples). $\neg P, P \wedge Q$, and $(P \rightarrow Q)$ are not propositional variables; they are compound formulas.

Remark (Dependencies).

- [Propositional Language](#)

Definition (Logical Connective)

Definition 1.4.4 (Logical Connective). The standard primitive propositional connectives are

$$\neg, \quad \wedge, \quad \vee, \quad \rightarrow, \quad \leftrightarrow.$$

The connective $\neg$ is unary. The connectives $\wedge, \vee, \rightarrow, \leftrightarrow$ are binary.

Symbol	Name	Arity	Formation pattern	Reading
$\neg$	negation	unary	$\neg\varphi$	not φ
$\wedge$	conjunction	binary	$(\varphi \wedge \psi)$	φ and ψ
$\vee$	disjunction	binary	$(\varphi \vee \psi)$	φ or ψ
$\rightarrow$	conditional	binary	$(\varphi \rightarrow \psi)$	if φ , then ψ
$\leftrightarrow$	biconditional	binary	$(\varphi \leftrightarrow \psi)$	φ iff ψ

Remark (Standard quantified statement).

$\text{UnaryConnective}(\neg)$ and $\text{BinaryConnective}(\wedge) \wedge \text{BinaryConnective}(\vee) \wedge \text{BinaryConnective}(\rightarrow) \wedge \text{BinaryConnective}(\leftrightarrow)$

Remark (Interpretation). Arity records how many formulas a connective uses to form a new formula. The truth behavior of these connectives belongs to semantics, not to the syntactic definition.

Remark (Dependencies).

- [Propositional Language](#)

Definition (Well-Formed Formula)

Definition 1.4.5 (Well-Formed Formula). The set **WFF** of well-formed formulas is the smallest set of strings satisfying the following formation rules:

1. Every propositional variable $P \in \mathbf{Prop}$ belongs to **WFF**.
2. If $\varphi \in \mathbf{WFF}$, then $\neg\varphi \in \mathbf{WFF}$.
3. If $\varphi, \psi \in \mathbf{WFF}$ and $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$, then $(\varphi \circ \psi) \in \mathbf{WFF}$.
4. No string is a well-formed formula unless it is obtained by finitely many applications of the previous clauses.

Remark (Standard quantified statement).

$$\mathbf{WFF} = \bigcap \left\{ S : \mathbf{Prop} \subseteq S, (\forall \varphi \in S)(\neg\varphi \in S), (\forall \varphi, \psi \in S)(\forall \circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\})((\varphi \circ \psi) \in S) \right\}.$$

Remark (Definition predicate reading). $\text{WellFormedFormula}(\varphi)$ means $\varphi \in \mathbf{WFF}$, read as “ φ is a well-formed formula.”

Remark (Negated quantified statement).

$$\sigma \notin \mathbf{WFF} \iff \exists S [\mathbf{Prop} \subseteq S \wedge (\forall \varphi \in S)(\neg\varphi \in S) \wedge (\forall \varphi, \psi \in S)(\forall \circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\})((\varphi \circ \psi) \in S) \wedge \sigma \notin S]$$

Remark (Negation predicate reading). $\neg \text{WellFormedFormula}(\sigma)$ means the string σ is excluded by at least one formation-closed set containing **Prop**; equivalently, it is not generated by finitely many applications of the formation rules.

Remark (Failure modes). A string fails to be well formed when it violates the formation grammar: an operand may be missing, a connective may be missing, parentheses may be unmatched, or the string may not be generated by finitely many formation steps.

Remark (Failure mode decomposition).

$$\underbrace{P \wedge}_{\text{missing right operand}} \quad \underbrace{(P \ Q)}_{\text{missing binary connective}} \quad \underbrace{\neg \vee P}_{\text{negation applied to a non-formula}}.$$

Remark (Interpretation). Well-formed formulas are exactly the strings to which the semantic and proof-theoretic machinery of propositional logic applies.

Remark (Examples). P , $\neg P$, $(P \rightarrow Q)$, and $(P \rightarrow (Q \vee R))$ are well-formed formulas.

Remark (Non-examples). $P \wedge$, (PQ) , and $\neg \vee P$ are not well-formed formulas.

Remark (Dependencies).

- [Propositional Variable](#)

- Logical Connective

Lemma (Closure Under Formation)

Lemma 1.4.6 (Closure Under Formation). *The set WFF is closed under the propositional formation rules.*

That is, if $\varphi \in \text{WFF}$, then

$$\neg\varphi \in \text{WFF}.$$

If $\varphi, \psi \in \text{WFF}$ and

$$\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\},$$

then

$$(\varphi \circ \psi) \in \text{WFF}.$$

Go to proof.

Remark (Standard quantified statement).

$$(\forall\varphi \in \text{WFF})(\neg\varphi \in \text{WFF})$$

and

$$(\forall\varphi, \psi \in \text{WFF})(\forall\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\})((\varphi \circ \psi) \in \text{WFF}).$$

Remark (Interpretation). Closure says that every legal use of a formation rule produces another well-formed formula. It is the forward direction of the recursive grammar.

Remark (Dependencies).

- Well-Formed Formula

Theorem (Minimality of Well-Formed Formulas)

Theorem 1.4.7 (Minimality of Well-Formed Formulas). *Let S be a set of strings over the propositional alphabet. Suppose:*

1. $\text{Prop} \subseteq S$;
2. *if $\varphi \in S$, then $\neg\varphi \in S$;*
3. *if $\varphi, \psi \in S$ and $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$, then $(\varphi \circ \psi) \in S$.*

Then

$$\text{WFF} \subseteq S.$$

Go to proof.

Remark (Standard quantified statement).

$$(\forall S) \left[\text{Prop} \subseteq S \wedge (\forall\varphi \in S)(\neg\varphi \in S) \right. \\ \left. \wedge (\forall\varphi, \psi \in S)(\forall\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\})((\varphi \circ \psi) \in S) \right] \rightarrow \text{WFF} \subseteq S.$$

Remark (Interpretation). Minimality is the formal content of the clause “nothing else is a wff.” It says that WFF is contained in every set of strings that contains the propositional variables and is closed under the formation rules.

Remark (Dependencies).

- [Well-Formed Formula](#)

Definition (Atomic Formula)

Definition 1.4.8 (Atomic Formula). An atomic formula is a well-formed formula that is a propositional variable.

Remark (Standard quantified statement).

$$\text{AtomicFormula}(\varphi) \iff \varphi \in \text{WFF} \wedge \varphi \in \text{Prop}.$$

Remark (Definition predicate reading). $\text{AtomicFormula}(\varphi)$ means that φ is a propositional variable viewed as a well-formed formula.

Remark (Interpretation). Atomic formulas are the base cases of the recursive grammar. They contain no connective structure.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Propositional Variable](#)

Definition (Molecular Formula)

Definition 1.4.9 (Molecular Formula). A molecular formula is a well-formed formula that is not atomic. Equivalently, it is a well-formed formula formed using at least one logical connective.

Remark (Standard quantified statement).

$$\text{MolecularFormula}(\varphi) \iff \varphi \in \text{WFF} \wedge \neg \text{AtomicFormula}(\varphi).$$

Remark (Definition predicate reading). $\text{MolecularFormula}(\varphi)$ means that φ has nontrivial connective structure.

Remark (Interpretation). Molecular formulas are exactly the formulas obtained by applying negation or a binary connective at least once.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Atomic Formula](#)
- [Logical Connective](#)

Definition (Main Connective)

Definition 1.4.10 (Main Connective). The main connective of a molecular formula is the connective introduced at the final formation step:

1. for $\neg\varphi$, the main connective is $\neg$;
2. for $(\varphi \circ \psi)$, the main connective is $\circ$.

Atomic formulas have no main connective.

Remark (Standard quantified statement).

$$\text{MainConnective}(\neg\varphi, \neg) \quad \text{and} \quad \text{MainConnective}((\varphi \circ \psi), \circ).$$

Remark (Definition predicate reading). $\text{MainConnective}(\varphi, c)$ means that c is the outermost connective introduced in the final formation step of φ .

Remark (Interpretation). The main connective identifies the outermost syntactic operation. It is the first connective used when analyzing a formula from the outside inward.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Molecular Formula](#)
- [Logical Connective](#)

Theorem (Structural Induction for Propositional Formulas)

Theorem 1.4.11 (Structural Induction for Propositional Formulas). Let $A(\varphi)$ be a property of well-formed formulas. Suppose:

1. $A(P)$ holds for every $P \in \mathbf{Prop}$;
2. if $A(\varphi)$ holds, then $A(\neg\varphi)$ holds;
3. if $A(\varphi)$ and $A(\psi)$ hold, then $A((\varphi \circ \psi))$ holds for every $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$.

Then $A(\theta)$ holds for every $\theta \in \mathbf{WFF}$.

Go to proof.

Remark (Standard quantified statement).

$$[(\forall P \in \mathbf{Prop})A(P) \wedge (\forall \varphi \in \mathbf{WFF})(A(\varphi) \rightarrow A(\neg\varphi)) \wedge (\forall \varphi, \psi \in \mathbf{WFF})(\forall \circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\})((A(\varphi) \wedge A(\psi)) \rightarrow A(\varphi \circ \psi))]$$

Remark (Interpretation). To prove a statement for all formulas, it suffices to prove it for propositional variables and show it is preserved by each formula-forming operation.

Remark (Dependencies).

- Well-Formed Formula

Theorem (Structural Recursion for Propositional Formulas)

Theorem 1.4.12 (Structural Recursion for Propositional Formulas). *To define a function F on WFF, it suffices to specify:*

1. $F(P)$ for every $P \in \text{Prop}$;
2. $F(\neg\varphi)$ in terms of $F(\varphi)$;
3. $F((\varphi \circ \psi))$ in terms of $F(\varphi)$, $F(\psi)$, and $\circ$.

When these clauses respect the formation rules, they determine a unique function on WFF.

Go to proof.

Remark (Standard quantified statement).

recursive data on the formation clauses of WFF $\implies \exists! F : \text{WFF} \rightarrow X$ satisfying those clauses. ■

Remark (Interpretation). Structural recursion justifies recursive definitions such as variables of a formula, subformulas, depth, connective count, syntax tree, and truth evaluation.

Remark (Dependencies).

- Well-Formed Formula
- Structural Induction for Propositional Formulas

Lemma (Constructor Disjointness for Propositional Formulas)

Lemma 1.4.13 (Constructor Disjointness for Propositional Formulas). *The three outer formation cases for propositional formulas are disjoint:*

1. *no propositional variable is a negation formula;*
2. *no propositional variable is a binary formula;*
3. *no negation formula is a binary formula.*

Go to proof.

Remark (Standard quantified statement).

$$P \in \text{Prop} \implies [(\forall \varphi \in \text{WFF})(P \neq \neg\varphi) \wedge (\forall \varphi, \psi \in \text{WFF})(\forall \circ)(P \neq (\varphi \circ \psi))]$$

and

$$(\forall \varphi, \psi, \chi \in \text{WFF})(\forall \circ)(\neg\varphi \neq (\psi \circ \chi)).$$

Remark (Predicate reading).

$$\underbrace{P}_{\text{atomic}} \quad \underbrace{\neg\varphi}_{\text{negation case}} \quad \underbrace{(\varphi \circ \psi)}_{\text{binary case}}$$

belong to three distinct outer-form classes.

Remark (Interpretation). A formula cannot be parsed as two different outer formation types.

Remark (Dependencies).

- Well-Formed Formula
- Atomic Formula
- Main Connective

Lemma (Constructor Injectivity for Propositional Formulas)

Lemma 1.4.14 (Constructor Injectivity for Propositional Formulas). *The propositional formula constructors are injective:*

1. if $\neg\varphi = \neg\psi$, then $\varphi = \psi$;
2. if $(\varphi \circ \psi) = (\alpha \star \beta)$, then $\varphi = \alpha$, $\psi = \beta$, and $\circ = \star$.

Go to proof.

Remark (Standard quantified statement).

$$(\forall\varphi, \psi \in \mathbf{WFF})(\neg\varphi = \neg\psi \rightarrow \varphi = \psi)$$

and

$$(\forall\varphi, \psi, \alpha, \beta \in \mathbf{WFF})(\forall\circ, \star \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}) [(\varphi \circ \psi) = (\alpha \star \beta) \rightarrow (\varphi = \alpha \wedge \psi = \beta \wedge \circ = \star)].$$

Remark (Interpretation). If two formulas are built by the same outer constructor and are equal as strings, then their immediate constituents are equal.

Remark (Dependencies).

- Well-Formed Formula
- Logical Connective

Theorem (Unique Decomposition for Propositional Formulas)

Theorem 1.4.15 (Unique Decomposition for Propositional Formulas). *Every $\varphi \in \text{WFF}$ has exactly one outermost form:*

1. $\varphi = P$ for a unique $P \in \text{Prop}$;
2. $\varphi = \neg\psi$ for a unique $\psi \in \text{WFF}$;
3. $\varphi = (\psi \circ \chi)$ for unique $\psi, \chi \in \text{WFF}$ and a unique binary connective $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$.

Go to proof.

Remark (Standard quantified statement).

$\forall \varphi \in \text{WFF}, \quad \text{exactly one of the following holds:}$

$\varphi \in \text{Prop}, \quad \exists! \psi \in \text{WFF} (\varphi = \neg\psi), \quad \exists! \psi, \chi \in \text{WFF} \exists! \circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\} (\varphi = (\psi \circ \chi)).$

Remark (Predicate reading).

$$\varphi \in \underbrace{\text{Prop}}_{\text{atomic case}} \quad \text{or} \quad \varphi = \underbrace{\neg\psi}_{\text{negation case}} \quad \text{or} \quad \varphi = \underbrace{(\psi \circ \chi)}_{\text{binary case}},$$

and exactly one of these alternatives holds.

Remark (Interpretation). Unique decomposition makes recursive definitions and induction on formulas unambiguous.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Constructor Disjointness for Propositional Formulas](#)
- [Constructor Injectivity for Propositional Formulas](#)

Definition (Parse Tree)

Definition 1.4.16 (Parse Tree). The parse tree, or syntax tree, of a well-formed formula is the tree representation of its recursive construction:

1. a propositional variable is represented by a single leaf;
2. a formula $\neg\varphi$ is represented by a root labeled $\neg$ with one child, the parse tree of φ ;
3. a formula $(\varphi \circ \psi)$ is represented by a root labeled $\circ$ with two children, the parse trees of φ and ψ .

Remark (Standard quantified statement).

$$\text{Tree} : \text{WFF} \rightarrow \{\text{finite rooted labeled trees}\}$$

is defined recursively by the three formation clauses for propositional formulas.

Remark (Interpretation). The parse tree records the same structure described by unique decomposition. It turns the recursive construction of a formula into a visible tree.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Unique Decomposition for Propositional Formulas](#)

Theorem (Unique Syntax Tree for Propositional Formulas)

Theorem 1.4.17 (Unique Syntax Tree for Propositional Formulas). *Every propositional well-formed formula has a unique parse tree.*

Go to proof.

Remark (Standard quantified statement).

$$\forall \varphi \in \text{WFF}, \quad \exists! T (T = \text{Tree}(\varphi)).$$

Remark (Interpretation). A formula has exactly one tree representation of its recursive construction. This is the tree form of unique decomposition.

Remark (Dependencies).

- [Parse Tree](#)
- [Unique Decomposition for Propositional Formulas](#)

Definition (Variable Set of a Formula)

Definition 1.4.18 (Variable Set of a Formula). The variable set $\text{Var}(\varphi)$ of a formula φ is defined recursively:

1. if $\varphi = P \in \text{Prop}$, then $\text{Var}(\varphi) = \{P\}$;
2. if $\varphi = \neg\psi$, then $\text{Var}(\varphi) = \text{Var}(\psi)$;
3. if $\varphi = (\psi \circ \chi)$, then
$$\text{Var}(\varphi) = \text{Var}(\psi) \cup \text{Var}(\chi).$$

Remark (Standard quantified statement).

$$\text{Var}(P) = \{P\}, \quad \text{Var}(\neg\psi) = \text{Var}(\psi), \quad \text{Var}((\psi \circ \chi)) = \text{Var}(\psi) \cup \text{Var}(\chi).$$

Remark (Interpretation). The variable set records exactly which propositional variables occur in a formula.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Structural Recursion for Propositional Formulas](#)

Definition (Subformula)

Definition 1.4.19 (Subformula). The set $\text{Sub}(\varphi)$ of subformulas of a formula φ is defined recursively:

1. if φ is atomic, then $\text{Sub}(\varphi) = \{\varphi\}$;

2. if $\varphi = \neg\psi$, then

$$\text{Sub}(\varphi) = \{\varphi\} \cup \text{Sub}(\psi);$$

3. if $\varphi = (\psi \circ \chi)$, then

$$\text{Sub}(\varphi) = \{\varphi\} \cup \text{Sub}(\psi) \cup \text{Sub}(\chi).$$

Remark (Standard quantified statement).

$$\text{Sub}(P) = \{P\}, \quad \text{Sub}(\neg\psi) = \{\neg\psi\} \cup \text{Sub}(\psi),$$

$$\text{Sub}((\psi \circ \chi)) = \{(\psi \circ \chi)\} \cup \text{Sub}(\psi) \cup \text{Sub}(\chi).$$

Remark (Interpretation). Subformulas are the formulas that occur at nodes of the parse tree.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Unique Decomposition for Propositional Formulas](#)

Definition (Proper Subformula)

Definition 1.4.20 (Proper Subformula). Let $\varphi \in \text{WFF}$. A *proper subformula* of φ is a formula ψ such that

$$\psi \in \text{Sub}(\varphi) \quad \text{and} \quad \psi \neq \varphi.$$

Remark (Standard quantified statement).

$$\text{ProperSubformula}(\psi, \varphi) \iff \psi \in \text{Sub}(\varphi) \wedge \psi \neq \varphi.$$

Remark (Interpretation). Proper subformulas are the strict syntactic parts of a formula. They exclude the whole formula itself.

Remark (Dependencies).

- [Subformula](#)

- [Well-Formed Formula](#)

Definition (Formula Depth)

Definition 1.4.21 (Formula Depth). The depth of a formula φ , denoted $\text{depth}(\varphi)$, is defined recursively:

1. if φ is atomic, then $\text{depth}(\varphi) = 0$;
2. if $\varphi = \neg\psi$, then $\text{depth}(\varphi) = \text{depth}(\psi) + 1$;
3. if $\varphi = (\psi \circ \chi)$, then

$$\text{depth}(\varphi) = \max\{\text{depth}(\psi), \text{depth}(\chi)\} + 1.$$

Remark (Standard quantified statement).

$$\text{depth}(P) = 0, \quad \text{depth}(\neg\psi) = \text{depth}(\psi) + 1,$$

$$\text{depth}((\psi \circ \chi)) = \max\{\text{depth}(\psi), \text{depth}(\chi)\} + 1.$$

Remark (Interpretation). Formula depth measures the height of the syntax tree. Some authors call this the rank, complexity, or formation depth of the formula.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Parse Tree](#)

Definition (Connective Count)

Definition 1.4.22 (Connective Count). The connective count of a formula φ , denoted $\text{conn}(\varphi)$, is defined recursively:

1. if φ is atomic, then $\text{conn}(\varphi) = 0$;
2. if $\varphi = \neg\psi$, then $\text{conn}(\varphi) = \text{conn}(\psi) + 1$;
3. if $\varphi = (\psi \circ \chi)$, then

$$\text{conn}(\varphi) = \text{conn}(\psi) + \text{conn}(\chi) + 1.$$

Remark (Standard quantified statement).

$$\text{conn}(P) = 0, \quad \text{conn}(\neg\psi) = \text{conn}(\psi) + 1,$$

$$\text{conn}((\psi \circ \chi)) = \text{conn}(\psi) + \text{conn}(\chi) + 1.$$

Remark (Interpretation). Formula depth measures the height of the syntax tree. Connective count measures the number of connective nodes in the syntax tree.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Parse Tree](#)

Lemma (Proper Subformula Depth)

Lemma 1.4.23 (Proper Subformula Depth). *If ψ is a proper subformula of φ , then*

$$\text{depth}(\psi) < \text{depth}(\varphi).$$

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi \in \mathbf{WFF}) [\psi \in \text{Sub}(\varphi) \wedge \psi \neq \varphi \rightarrow \text{depth}(\psi) < \text{depth}(\varphi)].$$

Remark (Interpretation). Every descent into a proper subformula lowers formula depth. This justifies induction on formula depth and recursive proofs over subformulas.

Remark (Dependencies).

- [Subformula](#)
- [Formula Depth](#)

Lemma (Finiteness of Variables in a Formula)

Lemma 1.4.24 (Finiteness of Variables in a Formula). *For every $\varphi \in \mathbf{WFF}$, the set $\text{Var}(\varphi)$ is finite.*

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi \in \mathbf{WFF}) \quad \text{Var}(\varphi) \text{ is finite.}$$

Remark (Interpretation). Every formula depends on only finitely many propositional variables, even though the language may contain infinitely many variables.

Remark (Dependencies).

- [Variable Set of a Formula](#)
- [Structural Induction for Propositional Formulas](#)

Lemma (Finiteness of Subformulas)

Lemma 1.4.25 (Finiteness of Subformulas). *For every $\varphi \in \mathbf{WFF}$, the set $\text{Sub}(\varphi)$ is finite.*

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi \in \text{WFF}) \quad \text{Sub}(\varphi) \text{ is finite.}$$

Remark (Interpretation). Every formula has only finitely many syntactic parts.

Remark (Dependencies).

- [Subformula](#)
- [Structural Induction for Propositional Formulas](#)

1.5 Semantics

Toolkit

This section uses truth assignments, recursive extensions, satisfaction, truth tables, and logical equivalence to assign meanings to formulas.

Remark (Exposition). The semantics section assigns truth conditions to the syntactic formulas introduced earlier. Truth assignments, recursive extensions, satisfaction, and truth tables provide the machinery for validity, consequence, equivalence, and semantic classification.

Truth Assignments

Definition (Truth Assignment)

Definition 1.5.1 (Truth Assignment). A *truth assignment* is a function

$$v : \text{Prop} \rightarrow \mathbb{B}.$$

For each propositional variable $P \in \text{Prop}$, the value $v(P)$ is the truth value assigned to P .

Remark (Standard quantified statement).

$$\text{TruthAssignment}(v) \iff v : \text{Prop} \rightarrow \mathbb{B}.$$

Remark (Definition predicate reading).

$$\text{TruthAssignment}(v)$$

means that v assigns exactly one truth value to each propositional variable.

Remark (Interpretation). A truth assignment gives semantic values to the atomic formulas. The recursive truth conditions for the connectives then determine the truth value of every well-formed formula.

Remark (Examples). If $\mathbf{Prop} = \{P_1, P_2, P_3, \dots\}$, then a truth assignment may satisfy

$$v(P_1) = \text{True}, \quad v(P_2) = \text{False}, \quad v(P_3) = \text{True},$$

with values assigned to every remaining propositional variable.

Remark (Non-Examples). A partial assignment that gives values only to P_1 and P_2 is not a truth assignment on $\mathbf{Prop}$. It may be useful for local computations, but it is not a function $\mathbf{Prop} \rightarrow \mathbb{B}$.

Remark (Dependencies).

- [Truth Value](#)
- [Propositional Variable](#)
- [Well-Formed Formula](#)

Definition (Domain of a Truth Assignment)

Definition 1.5.2 (Domain of a Truth Assignment). The *domain* of a truth assignment

$$v : \mathbf{Prop} \rightarrow \mathbb{B}$$

is the set $\mathbf{Prop}$ of propositional variables.

Remark (Standard quantified statement).

$$\text{TruthAssignment}(v) \implies \text{dom}(v) = \mathbf{Prop}.$$

Remark (Interpretation). A truth assignment is global: it assigns truth values to all propositional variables in the language, even when a particular formula uses only finitely many of them.

Remark (Dependencies).

- [Truth Assignment](#)

Extension of a Truth Assignment

Definition (Extension of a Truth Assignment to Formulas)

Definition 1.5.3 (Extension of a Truth Assignment to Formulas). Let

$$v : \text{Prop} \rightarrow \mathbb{B}$$

be a truth assignment. The *extension* of v to well-formed formulas is the function

$$\hat{v} : \text{WFF} \rightarrow \mathbb{B}$$

defined recursively as follows:

$$\hat{v}(P) = v(P) \quad \text{for every } P \in \text{Prop},$$

$$\hat{v}(\neg\varphi) = \text{True} \iff \hat{v}(\varphi) = \text{False},$$

$$\hat{v}(\varphi \wedge \psi) = \text{True} \iff \hat{v}(\varphi) = \text{True} \text{ and } \hat{v}(\psi) = \text{True},$$

$$\hat{v}(\varphi \vee \psi) = \text{True} \iff \hat{v}(\varphi) = \text{True} \text{ or } \hat{v}(\psi) = \text{True},$$

$$\hat{v}(\varphi \rightarrow \psi) = \text{False} \iff \hat{v}(\varphi) = \text{True} \text{ and } \hat{v}(\psi) = \text{False},$$

and

$$\hat{v}(\varphi \leftrightarrow \psi) = \text{True} \iff \hat{v}(\varphi) = \hat{v}(\psi).$$

Remark (Standard quantified statement). For every truth assignment $v : \text{Prop} \rightarrow \mathbb{B}$, its extension is a function

$$\hat{v} : \text{WFF} \rightarrow \mathbb{B}$$

satisfying the recursive truth clauses for propositional variables, negation, conjunction, disjunction, material implication, and biconditional.

Remark (Definition predicate reading).

$$\text{ExtendedTruthAssignment}(\hat{v}, v)$$

means that $\hat{v}$ is the recursively defined truth-value function on WFF induced by the atomic truth assignment v .

Remark (Interpretation). The original assignment v gives truth values only to propositional variables. The extension $\hat{v}$ evaluates every formula by following the formula's syntactic construction.

Remark (Examples).

φ	$\neg\varphi$	φ	ψ	$\varphi \wedge \psi$
True	False	True	True	True
False	True	True	False	False
		False	True	False
		False	False	False

φ	ψ	$\varphi \vee \psi$	φ	ψ	$\varphi \rightarrow \psi$
True	True	True	True	True	True
True	False	True	True	False	False
False	True	True	False	True	True
False	False	False	False	False	True

φ	ψ	$\varphi \leftrightarrow \psi$
True	True	True
True	False	False
False	True	False
False	False	True

Remark (Examples). The truth tables are not additional formation rules. They specify how each primitive connective acts on truth values once the formula has already been formed syntactically.

Remark (Dependencies).

- Truth Assignment
- Well-Formed Formula
- Structural Recursion for Propositional Formulas
- Unique Decomposition for Propositional Formulas

Theorem (Unique Extension of a Truth Assignment)

Theorem 1.5.4 (Unique Extension of a Truth Assignment). *Every truth assignment*

$$v : \mathbf{Prop} \rightarrow \mathbb{B}$$

has a unique extension

$$\hat{v} : \mathbf{WFF} \rightarrow \mathbb{B}$$

satisfying the recursive truth clauses for propositional variables and the primitive connectives.

Go to proof.

Remark (Standard quantified statement).

$$(\forall v : \mathbf{Prop} \rightarrow \mathbb{B})(\exists! \hat{v} : \mathbf{WFF} \rightarrow \mathbb{B})$$

such that $\hat{v}$ agrees with v on $\mathbf{Prop}$ and satisfies the recursive truth clauses for

$$\neg, \wedge, \vee, \rightarrow, \leftrightarrow.$$

Remark (Predicate reading).

$$\text{TruthAssignment}(v) \implies \exists! \hat{v} \text{ ExtendedTruthAssignment}(\hat{v}, v).$$

Remark (Interpretation). This theorem guarantees that semantic evaluation is well-defined. Once the truth values of the propositional variables are fixed, every well-formed formula has exactly one truth value.

Remark (Dependencies).

- Truth Assignment
- Extension of a Truth Assignment to Formulas
- Structural Recursion for Propositional Formulas
- Unique Decomposition for Propositional Formulas

Definition (Satisfaction of a Formula)

Definition 1.5.5 (Satisfaction of a Formula). Let v be a truth assignment and let $\varphi \in \text{WFF}$. We say that v satisfies φ , written

$$v \models \varphi,$$

if

$$\widehat{v}(\varphi) = \text{True}.$$

Remark (Standard quantified statement).

$$v \models \varphi \iff \text{TruthAssignment}(v) \wedge \varphi \in \text{WFF} \wedge \widehat{v}(\varphi) = \text{True}.$$

Remark (Definition predicate reading).

$$\text{SatisfiesFormula}(v, \varphi)$$

means $v \models \varphi$.

Remark (Negated quantified statement).

$$v \not\models \varphi \iff \widehat{v}(\varphi) = \text{False}.$$

Remark (Interpretation). The notation $v \models \varphi$ means that the formula φ is true under the truth assignment v .

Remark (Dependencies).

- Truth Assignment
- Unique Extension of a Truth Assignment
- Well-Formed Formula

Definition (Satisfaction of a Set of Formulas)

Definition 1.5.6 (Satisfaction of a Set of Formulas). Let $\Gamma \subseteq \mathbf{WFF}$. A truth assignment v satisfies Γ , written

$$v \models \Gamma,$$

if $v \models \gamma$ for every $\gamma \in \Gamma$.

Remark (Standard quantified statement).

$$v \models \Gamma \iff \text{TruthAssignment}(v) \wedge \Gamma \subseteq \mathbf{WFF} \wedge (\forall \gamma \in \Gamma)(v \models \gamma).$$

Remark (Definition predicate reading).

$$\text{SatisfiesSet}(v, \Gamma)$$

means v satisfies every formula in Γ .

Remark (Negated quantified statement).

$$v \not\models \Gamma \iff \exists \gamma \in \Gamma \text{ such that } v \not\models \gamma.$$

Remark (Interpretation). Satisfaction of a set means simultaneous satisfaction of every formula in the set.

Remark (Dependencies).

- [Satisfaction of a Formula](#)
- [Truth Assignment](#)

Definition (Truth Table)

Definition 1.5.7 (Truth Table). Let $\varphi \in \mathbf{WFF}$ and suppose the variables occurring in φ are among $P_1, \dots, P_n$. A truth table for φ is a finite table with one row for each assignment

$$a : \{P_1, \dots, P_n\} \rightarrow \mathbb{B}$$

and a final column recording the value of $\widehat{v}(\varphi)$ for any truth assignment v extending a .

Remark (Standard quantified statement).

$$\text{TruthTable}(\varphi) \iff \varphi \in \mathbf{WFF} \wedge \text{Var}(\varphi) = \{P_1, \dots, P_n\} \wedge \text{the table has } 2^n \text{ assignment rows.}$$

Remark (Interpretation). A truth table is finite because every formula contains only finitely many variables. It records the complete truth behavior of a formula.

Remark (Dependencies).

- [Variable Set of a Formula](#)
- [Finiteness of Variables in a Formula](#)

- [Unique Extension of a Truth Assignment](#)

Definition (Tautology)

Definition 1.5.8 (Tautology). A formula $\varphi \in \mathbf{WFF}$ is a tautology, written

$$\models \varphi,$$

if every truth assignment satisfies φ .

Remark (Standard quantified statement).

$$\models \varphi \iff \varphi \in \mathbf{WFF} \wedge (\forall v : \mathbf{Prop} \rightarrow \mathbb{B})(v \models \varphi).$$

Remark (Definition predicate reading).

$$\text{Tautology}(\varphi)$$

means $\models \varphi$.

Remark (Interpretation). A tautology is true under every possible assignment of truth values to propositional variables.

Remark (Dependencies).

- [Satisfaction of a Formula](#)
- [Truth Assignment](#)

Definition (Contradiction)

Definition 1.5.9 (Contradiction). A formula $\varphi \in \mathbf{WFF}$ is a contradiction if no truth assignment satisfies φ .

Remark (Standard quantified statement).

$$\text{Contradiction}(\varphi) \iff \varphi \in \mathbf{WFF} \wedge (\forall v : \mathbf{Prop} \rightarrow \mathbb{B})(v \not\models \varphi).$$

Remark (Definition predicate reading).

$$\text{Contradiction}(\varphi)$$

means that φ is false under every truth assignment.

Remark (Interpretation). A contradiction has no true row in its truth table.

Remark (Dependencies).

- [Satisfaction of a Formula](#)
- [Truth Assignment](#)

Definition (Satisfiable Formula)

Definition 1.5.10 (Satisfiable Formula). A formula $\varphi \in \mathbf{WFF}$ is satisfiable if at least one truth assignment satisfies it.

Remark (Standard quantified statement).

$$\text{SatisfiableFormula}(\varphi) \iff \varphi \in \mathbf{WFF} \wedge \exists v : \mathbf{Prop} \rightarrow \mathbb{B} \text{ such that } v \models \varphi.$$

Remark (Definition predicate reading).

$$\text{SatisfiableFormula}(\varphi)$$

means that φ is true under at least one truth assignment.

Remark (Interpretation). A satisfiable formula has at least one true row in its truth table.

Remark (Dependencies).

- [Satisfaction of a Formula](#)
- [Truth Assignment](#)

Definition (Contingency)

Definition 1.5.11 (Contingency). A formula $\varphi \in \mathbf{WFF}$ is a contingency if it is satisfiable but not a tautology.

Remark (Standard quantified statement).

$$\text{Contingency}(\varphi) \iff \text{SatisfiableFormula}(\varphi) \wedge \neg \text{Tautology}(\varphi).$$

Remark (Definition predicate reading).

$$\text{Contingency}(\varphi)$$

means that φ is true under some truth assignments and false under others.

Remark (Interpretation). A contingency has at least one true row and at least one false row in its truth table.

Remark (Dependencies).

- [Satisfiable Formula](#)
- [Tautology](#)

Definition (Logical Consequence)

Definition 1.5.12 (Logical Consequence). Let $\Gamma \subseteq \mathbf{WFF}$ and $\varphi \in \mathbf{WFF}$. The formula φ is a logical consequence of Γ , written

$$\Gamma \models \varphi,$$

if every truth assignment satisfying Γ also satisfies φ .

Remark (Standard quantified statement).

$$\Gamma \models \varphi \iff \Gamma \subseteq \mathbf{WFF} \wedge \varphi \in \mathbf{WFF} \wedge (\forall v : \mathbf{Prop} \rightarrow \mathbb{B}) [v \models \Gamma \rightarrow v \models \varphi].$$

Remark (Definition predicate reading).

$$\text{LogicalConsequence}(\Gamma, \varphi)$$

means $\Gamma \models \varphi$.

Remark (Negated quantified statement).

$$\Gamma \not\models \varphi \iff \exists v : \mathbf{Prop} \rightarrow \mathbb{B} [v \models \Gamma \wedge v \not\models \varphi].$$

Remark (Interpretation). Logical consequence means truth preservation from premises to conclusion. There is no truth assignment under which all premises are true and the conclusion is false.

Remark (Dependencies).

- [Satisfaction of a Set of Formulas](#)
- [Satisfaction of a Formula](#)

Definition (Logical Equivalence)

Definition 1.5.13 (Logical Equivalence). Formulas $\varphi, \psi \in \mathbf{WFF}$ are logically equivalent, written

$$\varphi \equiv \psi,$$

if they have the same truth value under every truth assignment.

Remark (Standard quantified statement).

$$\varphi \equiv \psi \iff \varphi, \psi \in \mathbf{WFF} \wedge (\forall v : \mathbf{Prop} \rightarrow \mathbb{B}) [\widehat{v}(\varphi) = \widehat{v}(\psi)].$$

Remark (Definition predicate reading).

$$\text{LogicalEquivalence}(\varphi, \psi)$$

means $\varphi \equiv \psi$.

Remark (Interpretation). Logically equivalent formulas have identical truth-table columns. They are interchangeable for semantic purposes.

Remark (Dependencies).

- [Unique Extension of a Truth Assignment](#)
- [Truth Assignment](#)

Lemma (Coincidence Lemma for Propositional Logic)

Lemma 1.5.14 (Coincidence Lemma for Propositional Logic). *Let $v, w : \mathbf{Prop} \rightarrow \mathbb{B}$ be truth assignments. If v and w agree on every propositional variable occurring in φ , then they assign the same truth value to φ :*

$$v|_{\text{Var}(\varphi)} = w|_{\text{Var}(\varphi)} \implies \widehat{v}(\varphi) = \widehat{w}(\varphi).$$

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi \in \mathbf{WFF})(\forall v, w : \mathbf{Prop} \rightarrow \mathbb{B}) [(\forall P \in \text{Var}(\varphi))(v(P) = w(P)) \rightarrow \widehat{v}(\varphi) = \widehat{w}(\varphi)].$$

Remark (Interpretation). The truth value of a formula depends only on the variables actually occurring in that formula.

Remark (Dependencies).

- Variable Set of a Formula
- Unique Extension of a Truth Assignment
- Structural Induction for Propositional Formulas

Theorem (Finite Truth-Table Theorem)

Theorem 1.5.15 (Finite Truth-Table Theorem). *Every propositional formula has a finite truth table. More precisely, if $\text{Var}(\varphi)$ has n elements, then φ has a truth table with 2^n rows.*

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi \in \mathbf{WFF}) [|\text{Var}(\varphi)| = n \rightarrow \text{TruthTable}(\varphi) \text{ has } 2^n \text{ rows}].$$

Remark (Interpretation). Truth tables are finite because every formula contains only finitely many propositional variables.

Remark (Dependencies).

- Truth Table
- Finiteness of Variables in a Formula

Definition (Unary Boolean Function)

Definition 1.5.16 (Unary Boolean Function). A unary Boolean function is a function

$$f : \mathbb{B} \rightarrow \mathbb{B}.$$

Remark (Definition predicate reading).

$$\text{UnaryBooleanFunction}(f)$$

means that f takes one truth value as input and returns one truth value.

Remark (Interpretation). A unary Boolean function has one input row coordinate. It is the semantic shape of a one-place truth operation such as negation.

Remark (Dependencies).

- [Truth Value](#)

Definition (Binary Boolean Function)

Definition 1.5.17 (Binary Boolean Function). A binary Boolean function is a function

$$f : \mathbb{B}^2 \rightarrow \mathbb{B},$$

equivalently a function

$$f : \mathbb{B} \times \mathbb{B} \rightarrow \mathbb{B}.$$

Remark (Definition predicate reading).

$$\text{BinaryBooleanFunction}(f)$$

means that f takes an ordered pair of truth values as input and returns one truth value.

Remark (Interpretation). A binary Boolean function assigns one output truth value to each of the four input rows

$$(T, T), \quad (T, F), \quad (F, T), \quad (F, F).$$

Remark (Dependencies).

- [Truth Value](#)
- [Unary Boolean Function](#)

Definition (Boolean Function)

Definition 1.5.18 (Boolean Function). An n -ary Boolean function is a function

$$f : \mathbb{B}^n \rightarrow \mathbb{B}.$$

Remark (Standard quantified statement).

$$\text{BooleanFunction}_n(f) \iff f : \mathbb{B}^n \rightarrow \mathbb{B}.$$

Remark (Definition predicate reading).

$$\text{BooleanFunction}_n(f)$$

means that f takes n truth values as input and returns one truth value.

Remark (Interpretation). Boolean functions are the abstract truth-functions that formulas may represent.

Remark (Rows versus Boolean functions). An input to an n -ary Boolean function is a tuple $(b_1, \dots, b_n) \in \mathbb{B}^n$. These tuples are the rows of the truth table, and there are 2^n of them. The Boolean function is not a single row; it is the full rule assigning exactly one truth value in $\mathbb{B}$ to every row.

Remark (Dependencies).

- [Truth Value](#)
- [Unary Boolean Function](#)
- [Binary Boolean Function](#)

Definition (Truth Function Induced by a Formula)

Definition 1.5.19 (Truth Function Induced by a Formula). Let $\varphi \in \text{WFF}$, and suppose $\text{Var}(\varphi) \subseteq \{P_1, \dots, P_n\}$. The truth function induced by φ is the Boolean function

$$f_\varphi : \mathbb{B}^n \rightarrow \mathbb{B}$$

defined by

$$f_\varphi(b_1, \dots, b_n) = \widehat{v}(\varphi),$$

where $v(P_i) = b_i$ for each i .

Remark (Standard quantified statement).

$$f_\varphi(b_1, \dots, b_n) = \widehat{v}(\varphi) \quad \text{whenever } v(P_i) = b_i \text{ for } 1 \leq i \leq n.$$

Remark (Definition predicate reading).

$$\text{TruthFunctionOfFormula}(f_\varphi, \varphi)$$

means that f_φ records the truth behavior of φ .

Remark (Interpretation). The induced truth function packages the truth table of a formula as a Boolean function.

Remark (Dependencies).

- [Boolean Function](#)
- [Variable Set of a Formula](#)
- [Unique Extension of a Truth Assignment](#)
- [Coincidence Lemma for Propositional Logic](#)

Theorem (Counting Boolean Functions)

Theorem 1.5.20 (Counting Boolean Functions). *There are exactly*

$$2^{2^n}$$

Boolean functions $\mathbb{B}^n \rightarrow \mathbb{B}$.

Go to proof.

Remark (Standard quantified statement).

$$|\{f : \mathbb{B}^n \rightarrow \mathbb{B}\}| = 2^{2^n}.$$

Remark (Interpretation). The domain $\mathbb{B}^n$ has 2^n elements. A Boolean function chooses one of two truth values for each input row.

Remark (Dependencies).

- [Boolean Function](#)

1.6 Algebra of Propositions

Toolkit

This section uses logical equivalence, equivalence laws, formula contexts, and replacement of logical equivalents to treat propositions algebraically.

Remark (Exposition). The algebra section treats logically equivalent formulas as interchangeable for calculation. Equivalence laws and replacement principles turn semantic agreement under every truth assignment into a controlled rewrite calculus for propositional formulas.

Definition (Propositional Equivalence Law)

Definition 1.6.1 (Propositional Equivalence Law). A propositional equivalence law is a valid schema of the form

$$\varphi \equiv \psi,$$

with $\varphi, \psi \in \text{WFF}$. Each instance of the schema says that the two formulas have the same truth value under every truth assignment.

Remark (Standard quantified statement).

$$\text{PropositionalEquivalenceLaw}(\varphi, \psi) \iff \varphi, \psi \in \text{WFF} \wedge \varphi \equiv \psi.$$

Remark (Definition predicate reading).

$$\text{PropositionalEquivalenceLaw}(\varphi, \psi)$$

means that $\varphi \equiv \psi$ is a valid logical-equivalence schema.

Remark (Interpretation). Equivalence laws are the algebraic rewrite rules of propositional logic. They allow formulas to be transformed without changing truth conditions.

Remark (Dependencies).

- [Logical Equivalence](#)
- [Well-Formed Formula](#)

Theorem (Logical Equivalence is an Equivalence Relation)

Theorem 1.6.2 (Logical Equivalence is an Equivalence Relation). *Logical equivalence is reflexive, symmetric, and transitive on WFF:*

$$\varphi \equiv \varphi, \quad \varphi \equiv \psi \implies \psi \equiv \varphi,$$

and

$$(\varphi \equiv \psi \wedge \psi \equiv \chi) \implies \varphi \equiv \chi.$$

Go to proof.

Remark (Standard quantified statement).

$$\begin{aligned} &(\forall \varphi \in \text{WFF})(\varphi \equiv \varphi), \\ &(\forall \varphi, \psi \in \text{WFF})(\varphi \equiv \psi \rightarrow \psi \equiv \varphi), \\ &(\forall \varphi, \psi, \chi \in \text{WFF})((\varphi \equiv \psi \wedge \psi \equiv \chi) \rightarrow \varphi \equiv \chi). \end{aligned}$$

Remark (Interpretation). Logical equivalence behaves like equality at the semantic level.

Remark (Dependencies).

- [Logical Equivalence](#)

Theorem (Basic Boolean Equivalence Laws)

Theorem 1.6.3 (Basic Boolean Equivalence Laws). *For all formulas $\varphi, \psi, \chi \in \text{WFF}$, the following logical equivalences hold.*

Commutativity:

$$\varphi \wedge \psi \equiv \psi \wedge \varphi, \quad \varphi \vee \psi \equiv \psi \vee \varphi.$$

Associativity:

$$(\varphi \wedge \psi) \wedge \chi \equiv \varphi \wedge (\psi \wedge \chi), \quad (\varphi \vee \psi) \vee \chi \equiv \varphi \vee (\psi \vee \chi).$$

Idempotence:

$$\varphi \wedge \varphi \equiv \varphi, \quad \varphi \vee \varphi \equiv \varphi.$$

Double negation:

$$\neg \neg \varphi \equiv \varphi.$$

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi, \chi \in \mathbf{WFF}) \left[\begin{array}{l} \varphi \wedge \psi \equiv \psi \wedge \varphi, \quad \varphi \vee \psi \equiv \psi \vee \varphi, \\ (\varphi \wedge \psi) \wedge \chi \equiv \varphi \wedge (\psi \wedge \chi), \quad (\varphi \vee \psi) \vee \chi \equiv \varphi \vee (\psi \vee \chi), \\ \varphi \wedge \varphi \equiv \varphi, \quad \varphi \vee \varphi \equiv \varphi, \quad \neg \neg \varphi \equiv \varphi \end{array} \right].$$

Remark (Interpretation). These are the basic algebraic laws for conjunction, disjunction, and negation.

Remark (Dependencies).

- Logical Equivalence
- Unique Extension of a Truth Assignment

Theorem (Identity and Domination Laws)

Theorem 1.6.4 (Identity and Domination Laws). *Let $\top$ be any tautological formula and let $\perp$ be any contradictory formula. Then for every $\varphi \in \mathbf{WFF}$:*

$$\varphi \wedge \top \equiv \varphi, \quad \varphi \vee \perp \equiv \varphi,$$

and

$$\varphi \wedge \perp \equiv \perp, \quad \varphi \vee \top \equiv \top.$$

Go to proof.

Remark (Standard quantified statement).

$$\begin{aligned} &(\text{Tautology}(\top) \wedge \text{Contradiction}(\perp)) \rightarrow (\forall \varphi \in \mathbf{WFF}) \\ &[(\varphi \wedge \top \equiv \varphi) \wedge (\varphi \vee \perp \equiv \varphi) \wedge (\varphi \wedge \perp \equiv \perp) \wedge (\varphi \vee \top \equiv \top)]. \end{aligned}$$

Remark (Interpretation). Tautologies act like true constants; contradictions act like false constants.

Remark (Dependencies).

- Tautology
- Contradiction
- Logical Equivalence

Theorem (De Morgan Laws for Propositional Logic)

Theorem 1.6.5 (De Morgan Laws for Propositional Logic). *For all $\varphi, \psi \in \mathbf{WFF}$,*

$$\neg(\varphi \wedge \psi) \equiv \neg\varphi \vee \neg\psi,$$

and

$$\neg(\varphi \vee \psi) \equiv \neg\varphi \wedge \neg\psi.$$

Go to proof.

Remark (Standard quantified statement).

$$\begin{aligned}(\forall \varphi, \psi \in \mathbf{WFF}) [\neg(\varphi \wedge \psi) &\equiv \neg\varphi \vee \neg\psi], \\(\forall \varphi, \psi \in \mathbf{WFF}) [\neg(\varphi \vee \psi) &\equiv \neg\varphi \wedge \neg\psi].\end{aligned}$$

Remark (Predicate reading).

$$\underbrace{\neg(\varphi \wedge \psi)}_{\text{not both}} \equiv \underbrace{\neg\varphi \vee \neg\psi}_{\text{at least one fails}}, \quad \underbrace{\neg(\varphi \vee \psi)}_{\text{neither}} \equiv \underbrace{\neg\varphi \wedge \neg\psi}_{\text{both fail}}.$$

Remark (Interpretation). Negation swaps conjunction with disjunction when pushed inward.

Remark (Dependencies).

- Logical Equivalence
- Unique Extension of a Truth Assignment

Theorem (Distributive Laws for Propositional Logic)

Theorem 1.6.6 (Distributive Laws for Propositional Logic). *For all $\varphi, \psi, \chi \in \mathbf{WFF}$,*

$$\varphi \wedge (\psi \vee \chi) \equiv (\varphi \wedge \psi) \vee (\varphi \wedge \chi),$$

and

$$\varphi \vee (\psi \wedge \chi) \equiv (\varphi \vee \psi) \wedge (\varphi \vee \chi).$$

Go to proof.

Remark (Standard quantified statement).

$$\begin{aligned}(\forall \varphi, \psi, \chi \in \mathbf{WFF}) [\varphi \wedge (\psi \vee \chi) &\equiv (\varphi \wedge \psi) \vee (\varphi \wedge \chi)], \\(\forall \varphi, \psi, \chi \in \mathbf{WFF}) [\varphi \vee (\psi \wedge \chi) &\equiv (\varphi \vee \psi) \wedge (\varphi \vee \chi)].\end{aligned}$$

Remark (Interpretation). Conjunction distributes over disjunction, and disjunction distributes over conjunction. These laws are the main algebraic engine behind CNF and DNF conversion.

Remark (Dependencies).

- Logical Equivalence
- Unique Extension of a Truth Assignment

Theorem (Absorption Laws)

Theorem 1.6.7 (Absorption Laws). *For all $\varphi, \psi \in \mathbf{WFF}$,*

$$\varphi \wedge (\varphi \vee \psi) \equiv \varphi,$$

and

$$\varphi \vee (\varphi \wedge \psi) \equiv \varphi.$$

Go to proof.

Remark (Standard quantified statement).

$$\begin{aligned} (\forall \varphi, \psi \in \mathbf{WFF}) [\varphi \wedge (\varphi \vee \psi) &\equiv \varphi], \\ (\forall \varphi, \psi \in \mathbf{WFF}) [\varphi \vee (\varphi \wedge \psi) &\equiv \varphi]. \end{aligned}$$

Remark (Interpretation). Once φ is already required, adding $\varphi \vee \psi$ contributes no additional constraint. Dually, once φ is already allowed, adding $\varphi \wedge \psi$ contributes no additional possibility.

Remark (Dependencies).

- Logical Equivalence
- Basic Boolean Equivalence Laws
- Distributive Laws for Propositional Logic

Theorem (Conditional Equivalence Laws)

Theorem 1.6.8 (Conditional Equivalence Laws). *For all $\varphi, \psi \in \mathbf{WFF}$,*

$$\varphi \rightarrow \psi \equiv \neg\varphi \vee \psi,$$

and

$$\neg(\varphi \rightarrow \psi) \equiv \varphi \wedge \neg\psi.$$

Go to proof.

Remark (Standard quantified statement).

$$\begin{aligned} (\forall \varphi, \psi \in \mathbf{WFF}) [\varphi \rightarrow \psi &\equiv \neg\varphi \vee \psi], \\ (\forall \varphi, \psi \in \mathbf{WFF}) [\neg(\varphi \rightarrow \psi) &\equiv \varphi \wedge \neg\psi]. \end{aligned}$$

Remark (Predicate reading).

$$\underbrace{\varphi \rightarrow \psi}_{\text{no counterexample}} \equiv \underbrace{\neg\varphi \vee \psi}_{\text{premise false or conclusion true}}, \quad \underbrace{\neg(\varphi \rightarrow \psi)}_{\text{counterexample}} \equiv \underbrace{\varphi \wedge \neg\psi}_{\text{premise true and conclusion false}}.$$

Remark (Interpretation). A conditional fails exactly when the antecedent is true and the consequent is false.

Remark (Dependencies).

- Logical Equivalence
- Unique Extension of a Truth Assignment

Theorem (Biconditional Equivalence Laws)

Theorem 1.6.9 (Biconditional Equivalence Laws). *For all $\varphi, \psi \in \text{WFF}$,*

$$\varphi \leftrightarrow \psi \equiv (\varphi \rightarrow \psi) \wedge (\psi \rightarrow \varphi),$$

and

$$\varphi \leftrightarrow \psi \equiv (\varphi \wedge \psi) \vee (\neg\varphi \wedge \neg\psi).$$

Go to proof.

Remark (Standard quantified statement).

$$\begin{aligned} &(\forall \varphi, \psi \in \text{WFF}) [\varphi \leftrightarrow \psi \equiv (\varphi \rightarrow \psi) \wedge (\psi \rightarrow \varphi)], \\ &(\forall \varphi, \psi \in \text{WFF}) [\varphi \leftrightarrow \psi \equiv (\varphi \wedge \psi) \vee (\neg\varphi \wedge \neg\psi)]. \end{aligned}$$

Remark (Predicate reading).

$$\varphi \leftrightarrow \psi \iff (\varphi \rightarrow \psi) \wedge (\psi \rightarrow \varphi)$$

and also

$$\varphi \leftrightarrow \psi \iff (\varphi \wedge \psi) \vee (\neg\varphi \wedge \neg\psi).$$

The biconditional says that the two formulas have the same truth value.

Remark (Interpretation). A biconditional says that two formulas have the same truth value: both true or both false.

Remark (Dependencies).

- [Logical Equivalence](#)
- [Conditional Equivalence Laws](#)

Definition (Formula Context)

Definition 1.6.10 (Formula Context). A formula context $C[-]$ is a well-formed formula with one distinguished placeholder occurrence $[-]$. For each well-formed formula φ , the expression $C[\varphi]$ denotes the formula obtained by replacing the placeholder with φ .

Remark (Standard quantified statement).

$$\text{FormulaContext}(C[-]) \implies (\forall \varphi \in \text{WFF})(C[\varphi] \in \text{WFF}).$$

Remark (Definition predicate reading).

$$\text{FormulaContext}(C[-])$$

means that $C[-]$ is a one-hole propositional formula context.

Remark (Interpretation). A formula context is a syntactic environment into which a formula can be inserted. Contexts make precise the idea of replacing a subformula inside a larger formula.

Remark (Examples). If

$$C[-] := ([-] \wedge R),$$

then

$$C[P] = (P \wedge R)$$

and

$$C[Q \vee S] = ((Q \vee S) \wedge R).$$

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Subformula](#)

Theorem (Replacement of Logical Equivalents)

Theorem 1.6.11 (Replacement of Logical Equivalents). *Replacing logically equivalent formulas inside a formula context preserves logical equivalence:*

$$\varphi \equiv \psi \implies C[\varphi] \equiv C[\psi].$$

[Go to proof.](#)

Remark (Standard quantified statement).

$$(\forall \varphi, \psi \in \mathbf{WFF})(\forall C[-]) [\text{FormulaContext}(C[-]) \wedge \varphi \equiv \psi \rightarrow C[\varphi] \equiv C[\psi]].$$

Remark (Predicate reading).

$$\varphi \equiv \psi \implies C[\varphi] \equiv C[\psi].$$

A logical equivalence may be used inside a larger formula context without changing the truth behavior of the whole formula.

Remark (Interpretation). Logical equivalence is substitutive: equivalent formulas may be replaced inside larger formulas without changing truth behavior.

Remark (Exposition). The equivalence laws in this section may be used as replacement rules inside larger formulas. If a formula contains a subformula matching one side of a listed equivalence law, that subformula may be replaced by the other side.

Common replacement rules include:

$$\neg\neg\varphi \equiv \varphi,$$

$$\neg(\varphi \wedge \psi) \equiv \neg\varphi \vee \neg\psi, \quad \neg(\varphi \vee \psi) \equiv \neg\varphi \wedge \neg\psi,$$

$$\varphi \rightarrow \psi \equiv \neg\varphi \vee \psi,$$

$$\varphi \leftrightarrow \psi \equiv (\varphi \rightarrow \psi) \wedge (\psi \rightarrow \varphi),$$

and

$$\varphi \leftrightarrow \psi \equiv (\varphi \wedge \psi) \vee (\neg\varphi \wedge \neg\psi).$$

Remark (Exposition). The laws in this section allow formulas to be manipulated algebraically. They are not new formation rules; they are semantic equivalences. Later sections use these laws to transform formulas into normal forms and to reduce the set of primitive connectives.

Remark (Exposition). The algebra of propositions is the bridge from semantics to computation: once formulas are equivalent, they can be rewritten without changing truth behavior.

Remark (Dependencies).

- [Formula Context](#)
- [Logical Equivalence](#)
- [Coincidence Lemma for Propositional Logic](#)
- [Unique Extension of a Truth Assignment](#)

1.7 Normal Forms

Toolkit

This section uses logical equivalence, truth assignments, literals, clauses, and algebraic rewrite laws to motivate normal forms.

Remark (Exposition). The normal-forms section studies controlled syntactic shapes for formulas. Logical equivalence is the governing invariant: conversion may change a formula's shape, but it must preserve truth under every assignment while exposing regular literal, clause, DNF, CNF, and canonical structure.

Orientation

Remark (Section map). This section uses the preceding syntax, semantics, and algebra of propositions as its starting point. It first isolates literals and clauses, then introduces negation normal form, disjunctive normal form, conjunctive normal form, canonical normal forms, and semantic classification uses. Later arguments will use these forms to organize satisfiability questions, proof search, functional completeness, and resolution-style methods.

Remark (Why normal forms matter). Normal forms trade arbitrary expression for regular structure. In a truth-table argument, regular structure helps classify formulas as tautologies, contradictions, satisfiable formulas, or contingencies. In proof search and satisfiability procedures, regular structure turns a formula into a finite combinatorial object that can be searched. In functional completeness, normal forms show how complicated truth functions can be built from simpler connectives.

Definition (Literal)

Definition 1.7.1 (Literal). A *literal* is either a propositional variable P or the negation $\neg P$ of a propositional variable P .

Remark (Standard quantified statement). For a formula $\ell \in \text{WFF}$,

$$\ell \text{ is a literal} \iff (\exists P \in \text{Prop})(\ell = P \text{ or } \ell = \neg P).$$

Remark (Definition predicate reading).

$$\text{Literal}(\ell)$$

means that ℓ is an atomic propositional variable or the negation of one atomic propositional variable.

Remark (Interpretation). Literals are the indivisible signed atoms used in normal forms. They remember which propositional variable is being tested and whether it appears positively or negatively.

Remark (Examples). The formulas P , Q , $\neg P$, and $\neg Q$ are literals.

Remark (Non-Examples). The formulas $P \wedge Q$, $P \vee Q$, and $\neg(P \wedge Q)$ are not literals. The last formula is negated, but it negates a compound formula rather than a single propositional variable.

Remark (Dependencies).

- [Propositional Variable](#)
- [Logical Connective](#)

Definition (Positive Literal)

Definition 1.7.2 (Positive Literal). A *positive literal* is a literal of the form P , where P is a propositional variable.

Remark (Standard quantified statement). For a formula $\ell \in \text{WFF}$,

$$\ell \text{ is a positive literal} \iff (\exists P \in \text{Prop})(\ell = P).$$

Remark (Definition predicate reading).

$$\text{PositiveLiteral}(\ell)$$

means that ℓ is a literal whose sign is positive.

Remark (Interpretation). A positive literal asserts the propositional variable directly. It carries no leading negation.

Remark (Examples). The formulas P and Q are positive literals.

Remark (Dependencies).

- [Literal](#)

Definition (Negative Literal)

Definition 1.7.3 (Negative Literal). A *negative literal* is a literal of the form $\neg P$, where P is a propositional variable.

Remark (Standard quantified statement). For a formula $\ell \in \text{WFF}$,

$$\ell \text{ is a negative literal} \iff (\exists P \in \text{Prop})(\ell = \neg P).$$

Remark (Definition predicate reading).

$$\text{NegativeLiteral}(\ell)$$

means that ℓ is a literal whose sign is negative.

Remark (Interpretation). A negative literal denies exactly one propositional variable. In normal forms, negation is pushed down until it appears only at this literal level.

Remark (Examples). The formulas $\neg P$ and $\neg Q$ are negative literals.

Remark (Dependencies).

- [Literal](#)

Definition (Complementary Literals)

Definition 1.7.4 (Complementary Literals). Two literals are *complementary* if they are P and $\neg P$ for the same propositional variable P .

Remark (Standard quantified statement). For literals ℓ_1, ℓ_2 ,

$$\ell_1 \text{ and } \ell_2 \text{ are complementary} \iff (\exists P \in \text{Prop})((\ell_1 = P \wedge \ell_2 = \neg P) \vee (\ell_1 = \neg P \wedge \ell_2 = P)).$$

Remark (Definition predicate reading).

$$\text{ComplementaryLiterals}(\ell_1, \ell_2)$$

means that the two literals name the same propositional variable with opposite signs.

Remark (Interpretation). Complementary literals are the local contradiction pattern inside clauses and terms. The pair $P, \neg P$ is tied to one variable, not merely to two formulas with opposite truth values under a particular assignment.

Remark (Examples). The literals P and $\neg P$ are complementary, as are Q and $\neg Q$.

Remark (Non-Examples). The literals P and $\neg Q$ are not complementary unless $P = Q$.

Remark (Dependencies).

- [Literal](#)

Definition (Clause)

Definition 1.7.5 (Clause). A *clause* is a finite disjunction of literals.

Remark (Standard quantified statement). A formula $C \in \text{WFF}$ is a clause if there are literals $\ell_1, \dots, \ell_n$ with $n \geq 1$ such that

$$C = \ell_1 \vee \dots \vee \ell_n.$$

The empty clause is treated separately as the empty disjunction.

Remark (Definition predicate reading).

$$\text{Clause}(C)$$

means that C is built by finitely disjoining literals.

Remark (Interpretation). A clause records a finite list of literal-level alternatives. It is satisfied when at least one of its literals is true.

Remark (Examples). The formulas $P \vee Q$, $P \vee \neg Q$, and $\neg P \vee Q \vee R$ are clauses.

Remark (Non-Examples). The formula $P \wedge Q$ is not a clause, because its top-level connective is a conjunction. The formula $\neg(P \vee Q)$ is not a clause, because its negation has not been pushed down to the literal level.

Remark (Dependencies).

- [Literal](#)

Definition (Term)

Definition 1.7.6 (Term). A *term*, also called a *conjunction term*, is a finite conjunction of literals.

Remark (Standard quantified statement). A formula $T \in \text{WFF}$ is a term if there are literals $\ell_1, \dots, \ell_n$ with $n \geq 1$ such that

$$T = \ell_1 \wedge \dots \wedge \ell_n.$$

The empty conjunction is treated separately.

Remark (Definition predicate reading).

$$\text{Term}(T)$$

means that T is built by finitely conjoining literals.

Remark (Interpretation). A term records a finite list of literal-level requirements. It is satisfied when all of its literals are true.

Remark (Examples). The formulas $P \wedge Q$, $P \wedge \neg Q$, and $\neg P \wedge Q \wedge R$ are terms.

Remark (Non-Examples). The formula $P \vee Q$ is not a term, because its top-level connective is a disjunction. The formula $\neg(P \wedge Q)$ is not a term, because its negation has not been pushed down to the literal level.

Remark (Dependencies).

- [Literal](#)

Definition (Empty Clause)

Definition 1.7.7 (Empty Clause). The *empty clause* is the empty disjunction of literals. Semantically, it is read as false.

Remark (Standard quantified statement). The empty clause is the disjunction over no literals and has truth value **False** under every truth assignment.

Remark (Definition predicate reading).

$$\text{EmptyClause}(C)$$

means that C is the clause with no disjuncts.

Remark (Interpretation). A nonempty clause is true when at least one listed literal is true. With no literals listed, there is no witness to make the disjunction true, so the empty clause is the false boundary case for clauses.

Remark (Dependencies).

- [Clause](#)
- [Contradiction](#)

Definition (Empty Conjunction)

Definition 1.7.8 (Empty Conjunction). The *empty conjunction* is the conjunction over no literals. Semantically, it is read as true.

Remark (Standard quantified statement). The empty conjunction is the conjunction over no literals and has truth value **True** under every truth assignment.

Remark (Definition predicate reading).

$$\text{EmptyConjunction}(T)$$

means that T is the term with no conjuncts.

Remark (Interpretation). A nonempty term is true when every listed literal is true. With no literals listed, there is no requirement to violate, so the empty conjunction is the true boundary case for terms.

Remark (Dependencies).

- [Term](#)
- [Tautology](#)

Definition (Negation Normal Form)

Definition 1.7.9 (Negation Normal Form). A formula is in *negation normal form* if it uses only propositional variables, negated propositional variables, conjunction, and disjunction, and every negation occurs immediately before a propositional variable.

Remark (Standard quantified statement). For a formula $\varphi \in \text{WFF}$,

$$\varphi \text{ is in negation normal form} \iff \varphi \text{ is built from literals using only } \wedge \text{ and } \vee.$$

Remark (Definition predicate reading).

NegationNormalForm(φ)

means that φ has no conditionals, no biconditionals, and no negation outside the literal level.

Remark (Interpretation). Negation normal form is the first cleanup stage for propositional formulas. It does not force a formula to be a disjunction of terms or a conjunction of clauses; it only restricts the available connectives and pushes negation down to propositional variables.

Remark (Examples). The formulas P , $\neg P$, $P \wedge (\neg Q \vee R)$, and $(P \vee Q) \wedge (\neg R \vee S)$ are in negation normal form.

Remark (Non-Examples). The formulas $P \rightarrow Q$, $P \leftrightarrow Q$, and $\neg(P \wedge Q)$ are not in negation normal form. The first two use connectives not allowed in negation normal form, and the last has a negation applied to a compound formula.

Remark (Dependencies).

- [Literal](#)
- [Well-Formed Formula](#)
- [Logical Equivalence](#)

Definition (NNF Conversion Procedure)

Definition 1.7.10 (NNF Conversion Procedure). The *NNF conversion procedure* converts a propositional formula to an equivalent formula in negation normal form by the following steps:

1. eliminate biconditionals using biconditional equivalence laws;
2. eliminate conditionals using conditional equivalence laws;
3. eliminate double negations;
4. push negations inward using De Morgan laws.

Remark (Standard quantified statement). Starting with $\varphi \in \mathbf{WFF}$, repeatedly apply the equivalences

$$\begin{aligned}\alpha \leftrightarrow \beta &\equiv (\alpha \rightarrow \beta) \wedge (\beta \rightarrow \alpha), & \alpha \rightarrow \beta &\equiv \neg\alpha \vee \beta, \\ \neg\neg\alpha &\equiv \alpha, & \neg(\alpha \wedge \beta) &\equiv \neg\alpha \vee \neg\beta, & \neg(\alpha \vee \beta) &\equiv \neg\alpha \wedge \neg\beta,\end{aligned}$$

until negations occur only immediately before propositional variables and only $\wedge$ and $\vee$ remain above the literal level.

Remark (Definition predicate reading).

NNFConversionProcedure(φ, ψ)

means that ψ is obtained from φ by eliminating biconditionals and conditionals, removing double negations, and pushing remaining negations inward.

Remark (Interpretation). The procedure is a syntax-directed rewrite process. Each rewrite step is backed by a logical equivalence law, so the output formula has the same truth conditions as the input formula.

Remark (Dependencies).

- Conditional Equivalence Laws
- Biconditional Equivalence Laws
- De Morgan Laws for Propositional Logic
- Basic Boolean Equivalence Laws

Theorem (Existence of Negation Normal Form)

Theorem 1.7.11 (Existence of Negation Normal Form). *For every formula $\varphi \in \text{WFF}$, there exists a formula $\psi \in \text{WFF}$ such that ψ is in negation normal form and*

$$\varphi \equiv \psi.$$

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi \in \text{WFF})(\exists \psi \in \text{WFF})(\psi \text{ is in negation normal form} \wedge \varphi \equiv \psi).$$

Remark (Predicate reading).

$$\text{NegationNormalFormExists}(\varphi)$$

means that φ has a logically equivalent representative in negation normal form.

Remark (Interpretation). Every propositional formula can be rewritten so that negation appears only at the variable level. This makes negation normal form a semantic normalizing step: it changes shape while preserving logical equivalence.

Remark (Dependencies).

- Negation Normal Form
- NNF Conversion Procedure
- Replacement of Logical Equivalents
- Structural Induction for Propositional Formulas

Definition (Elementary Conjunction)

Definition 1.7.12 (Elementary Conjunction). An *elementary conjunction* is a finite conjunction of [literals](#). That is, it is a [term](#) of the form

$$L_1 \wedge L_2 \wedge \cdots \wedge L_k,$$

where each L_i is a literal. The one-literal case is permitted.

Remark (Standard quantified statement).

$$L_1 \wedge L_2 \wedge \cdots \wedge L_k, \quad L_i \text{ is a literal for each } i.$$

Remark (Interpretation). Elementary conjunctions are the conjunction terms used as the building blocks of disjunctive normal form. They record simultaneous literal requirements.

Example (Examples).

$$P, \quad P \wedge \neg Q, \quad \neg P \wedge R \wedge S$$

are elementary conjunctions.

Remark (Dependencies).

- [Term](#)
- [Literal](#)

Definition (Minterm)

Definition 1.7.13 (Minterm). Let $P_1, \dots, P_n$ be a finite list of propositional variables. A *minterm* relative to $P_1, \dots, P_n$ is an [elementary conjunction](#) that contains exactly one of P_i or $\neg P_i$ for each $i = 1, \dots, n$.

Remark (Standard quantified statement).

$$M = L_1 \wedge \cdots \wedge L_n,$$

where for each i , exactly one of P_i or $\neg P_i$ appears among the literals $L_1, \dots, L_n$.

Remark (Interpretation). A minterm relative to $P_1, \dots, P_n$ specifies one complete truth-value assignment on those variables: choosing P_i requires P_i to be true, and choosing $\neg P_i$ requires P_i to be false.

Example (Examples). Relative to P, Q, R , the formula

$$P \wedge \neg Q \wedge R$$

is a minterm. Relative to P, Q, R , the formula $P \wedge R$ is not a minterm because it omits both Q and $\neg Q$.

Remark (Dependencies).

- [Elementary Conjunction](#)
- [Variable Set of a Formula](#)

Definition (Disjunctive Normal Form)

Definition 1.7.14 (Disjunctive Normal Form). A formula is in *disjunctive normal form*, abbreviated *DNF*, when it is a finite disjunction of [elementary conjunctions](#). Equivalently, it has the shape

$$C_1 \vee C_2 \vee \cdots \vee C_m,$$

where each C_j is an elementary conjunction.

Remark (Standard quantified statement).

$$\varphi \text{ is in DNF} \iff \varphi = C_1 \vee C_2 \vee \cdots \vee C_m$$

for finitely many elementary conjunctions $C_1, \dots, C_m$.

Remark (Interpretation). DNF is a syntactic form, but it is used semantically: once a formula is replaced by a **logically equivalent** DNF formula, questions about **satisfiability** reduce to questions about individual conjunction terms.

Example (Examples).

$$(P \wedge Q) \vee (\neg P \wedge R) \vee S$$

is in DNF because each disjunct is an elementary conjunction.

Remark (Dependencies).

- Elementary Conjunction
- Logical Equivalence
- Satisfiable Formula

Theorem (Existence of Disjunctive Normal Form)

Theorem 1.7.15 (Existence of Disjunctive Normal Form). *For every formula $\varphi \in \text{WFF}$, there exists a formula $\psi \in \text{WFF}$ such that ψ is in **disjunctive normal form** and*

$$\varphi \equiv \psi.$$

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi \in \text{WFF})(\exists \psi \in \text{WFF})(\psi \text{ is in DNF} \wedge \varphi \equiv \psi).$$

Remark (Interpretation). One first converts φ to negation normal form, then repeatedly applies distributive laws to move conjunctions below disjunctions. Replacement of logical equivalents preserves equivalence at each step.

Remark (Dependencies).

- Disjunctive Normal Form
- Negation Normal Form
- Distributive Laws for Propositional Logic
- Replacement of Logical Equivalents
- Existence of Negation Normal Form

Theorem (DNF Satisfiability Criterion)

Theorem 1.7.16 (DNF Satisfiability Criterion). *Let ψ be a formula in **disjunctive normal form**. Then ψ is **satisfiable** if and only if at least one conjunction term in ψ contains no **complementary pair of literals**. Go to proof.*

Remark (Standard quantified statement).

ψ is a satisfiable DNF formula $\iff$ some conjunction term of ψ has no complementary literals. ■

Remark (Interpretation). A DNF formula is true exactly when at least one of its conjunction terms is true. A conjunction term can be made true exactly when it does not require both a variable and its negation.

Remark (Dependencies).

- **Disjunctive Normal Form**
- **Complementary Literals**
- **Satisfiable Formula**

Definition (Elementary Disjunction)

Definition 1.7.17 (Elementary Disjunction). An *elementary disjunction* is a finite disjunction of **literals**. That is, it is a **clause** of the form

$$L_1 \vee L_2 \vee \cdots \vee L_k,$$

where each L_i is a literal. The one-literal case is permitted.

Remark (Standard quantified statement).

$$L_1 \vee L_2 \vee \cdots \vee L_k, \quad L_i \text{ is a literal for each } i.$$

Remark (Interpretation). Elementary disjunctions are the clause-level building blocks used in conjunctive normal form. They record finite literal alternatives.

Example (Examples).

$$P, \quad P \vee \neg Q, \quad \neg P \vee R \vee S$$

are elementary disjunctions.

Remark (Dependencies).

- **Clause**
- **Literal**

Definition (Maxterm)

Definition 1.7.18 (Maxterm). Let $P_1, \dots, P_n$ be a finite list of propositional variables. A *maxterm* relative to $P_1, \dots, P_n$ is an **elementary disjunction** that contains exactly one of P_i or $\neg P_i$ for each $i = 1, \dots, n$.

Remark (Standard quantified statement).

$$M = L_1 \vee \cdots \vee L_n,$$

where for each i , exactly one of P_i or $\neg P_i$ appears among the literals $L_1, \dots, L_n$.

Remark (Interpretation). A maxterm relative to $P_1, \dots, P_n$ specifies one literal-level alternative for every variable in the list. It is false under exactly the assignment that makes each listed literal false.

Example (Examples). Relative to P, Q, R , the formula

$$P \vee \neg Q \vee R$$

is a maxterm. Relative to P, Q, R , the formula $P \vee R$ is not a maxterm because it omits both Q and $\neg Q$.

Remark (Dependencies).

- [Elementary Disjunction](#)
- [Variable Set of a Formula](#)

Definition (Conjunctive Normal Form)

Definition 1.7.19 (Conjunctive Normal Form). A formula is in *conjunctive normal form*, abbreviated *CNF*, when it is a finite conjunction of [clauses](#). Equivalently, it has the shape

$$C_1 \wedge C_2 \wedge \cdots \wedge C_m,$$

where each C_j is a clause.

Remark (Standard quantified statement).

$$\varphi \text{ is in CNF} \iff \varphi = C_1 \wedge C_2 \wedge \cdots \wedge C_m$$

for finitely many clauses $C_1, \dots, C_m$.

Remark (Interpretation). CNF is a syntactic form used to expose clause-by-clause constraints. Replacing a formula by a [logically equivalent](#) CNF formula turns global validity and [contradiction](#) questions into questions about the interaction of its clauses.

Example (Examples).

$$(P \vee Q) \wedge (\neg P \vee R) \wedge S$$

is in CNF because each conjunct is a clause.

Remark (Dependencies).

- [Clause](#)
- [Logical Equivalence](#)

- Contradiction

Theorem (Existence of Conjunctive Normal Form)

Theorem 1.7.20 (Existence of Conjunctive Normal Form). *For every formula $\varphi \in \text{WFF}$, there exists a formula $\psi \in \text{WFF}$ such that ψ is in *conjunctive normal form* and*

$$\varphi \equiv \psi.$$

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi \in \text{WFF})(\exists \psi \in \text{WFF})(\psi \text{ is in CNF} \wedge \varphi \equiv \psi).$$

Remark (Interpretation). One first converts φ to negation normal form, then repeatedly applies distributive laws to move disjunctions below conjunctions. Replacement of logical equivalents preserves equivalence through every local rewrite.

Remark (Dependencies).

- Conjunctive Normal Form
- Negation Normal Form
- Distributive Laws for Propositional Logic
- Replacement of Logical Equivalents
- Existence of Negation Normal Form

Remark (Equivalence-preserving conversion). Normal form conversion is a rewrite process that replaces a formula by a logically equivalent formula with a prescribed syntactic shape. Each local rewrite is justified by an equivalence law, and each replacement inside a larger formula is justified by [Replacement of Logical Equivalents](#).

The goal is not to preserve the exact parse tree of the original formula. The goal is to preserve truth value under every valuation while moving the formula toward [negation normal form](#), [disjunctive normal form](#), or [conjunctive normal form](#).

Remark (Step 1: eliminate biconditionals). Replace every biconditional by an equivalent formula using the [Biconditional Equivalence Laws](#). A standard replacement is

$$\alpha \leftrightarrow \beta \quad \rightsquigarrow \quad (\alpha \rightarrow \beta) \wedge (\beta \rightarrow \alpha).$$

After this step, no occurrence of $\leftrightarrow$ remains.

Remark (Step 2: eliminate conditionals). Replace every conditional by an equivalent disjunction using the [Conditional Equivalence Laws](#). The standard replacement is

$$\alpha \rightarrow \beta \quad \rightsquigarrow \quad \neg \alpha \vee \beta.$$

After this step, the only connectives still present are $\neg$, $\wedge$, and $\vee$.

Remark (Step 3: push negations inward). Use [De Morgan Laws for Propositional Logic](#) and double-negation simplification to move every negation down to the literal level:

$$\neg(\alpha \wedge \beta) \rightsquigarrow \neg\alpha \vee \neg\beta, \quad \neg(\alpha \vee \beta) \rightsquigarrow \neg\alpha \wedge \neg\beta, \quad \neg\neg\alpha \rightsquigarrow \alpha.$$

When this step terminates, the result is in negation normal form: negations occur only immediately in front of propositional variables.

Remark (Step 4A: distribute for DNF). To obtain DNF from negation normal form, distribute conjunction over disjunction using the [Distributive Laws for Propositional Logic](#):

$$\alpha \wedge (\beta \vee \gamma) \rightsquigarrow (\alpha \wedge \beta) \vee (\alpha \wedge \gamma),$$

and similarly

$$(\beta \vee \gamma) \wedge \alpha \rightsquigarrow (\beta \wedge \alpha) \vee (\gamma \wedge \alpha).$$

Repeatedly applying these rewrites moves disjunctions outward until the formula is a finite disjunction of conjunction terms.

Remark (Step 4B: distribute for CNF). To obtain CNF from negation normal form, distribute disjunction over conjunction:

$$\alpha \vee (\beta \wedge \gamma) \rightsquigarrow (\alpha \vee \beta) \wedge (\alpha \vee \gamma),$$

and similarly

$$(\beta \wedge \gamma) \vee \alpha \rightsquigarrow (\beta \vee \alpha) \wedge (\gamma \vee \alpha).$$

Repeatedly applying these rewrites moves conjunctions outward until the formula is a finite conjunction of clauses.

Remark (DNF conversion workflow). To convert a formula to DNF:

1. eliminate biconditionals;
2. eliminate conditionals;
3. push negations inward to obtain negation normal form;
4. distribute conjunction over disjunction until the result is a finite disjunction of elementary conjunctions.

The resulting formula is logically equivalent to the original formula, but it need not be the shortest or only possible DNF representation.

Remark (CNF conversion workflow). To convert a formula to CNF:

1. eliminate biconditionals;
2. eliminate conditionals;
3. push negations inward to obtain negation normal form;
4. distribute disjunction over conjunction until the result is a finite conjunction of clauses.

The resulting formula is logically equivalent to the original formula, but it need not be the shortest or only possible CNF representation.

Remark (Termination). The first three stages terminate because they remove or strictly simplify specific connective patterns. Eliminating biconditionals reduces the number of $\leftrightarrow$ symbols. Eliminating conditionals reduces the number of $\rightarrow$ symbols. Pushing negations inward reduces the distance between each negation and the propositional variables it governs, while double negations shorten the formula.

The distribution stages terminate when guided by a target measure: for DNF, keep applying distributions that move $\vee$ outward past $\wedge$; for CNF, keep applying distributions that move $\wedge$ outward past $\vee$. Each application lowers the number of target-obstructing connective patterns, even though it may duplicate subformulas.

Remark (Correctness). Correctness is by equivalence preservation. Each rewrite instance is one of the listed logical equivalence laws: [biconditional laws](#), [conditional laws](#), [De Morgan laws](#), or [distributive laws](#). Replacement of logical equivalents permits the rewrite to occur inside an arbitrary larger formula. Therefore the final normal form is logically equivalent to the original formula.

Remark (Non-uniqueness). Ordinary DNF and CNF are not unique. Reordering terms or clauses, reordering literals inside a term or clause, duplicating a term, deleting a redundant term, or applying absorption-style simplifications can produce different formulas with the same truth table and the same normal-form type.

Canonical normal forms impose extra conventions to remove this freedom. The ordinary conversion procedures in this topic do not impose those conventions.

Remark (Size blowup). Distribution can duplicate subformulas. As a result, converting a compact formula to DNF or CNF can produce a formula whose size is much larger than the original. This size blowup is a syntactic cost of forcing a formula into a flat disjunction-of-terms or conjunction-of-clauses shape.

Remark (Comparison).

Target form	Final outer connective pattern	Distribution used
NNF	negations only at literals	none
DNF	disjunction of conjunction terms	$\wedge$ over $\vee$
CNF	conjunction of clauses	$\vee$ over $\wedge$

All three workflows use equivalence-preserving rewrites. DNF and CNF share the same first three stages and differ only in the final distribution direction.

Definition (Truth-Table Row Conjunction)

Definition 1.7.21 (Truth-Table Row Conjunction). Fix a finite variable list $P_1, \dots, P_n$ and a row r of the [truth table](#) for those variables. The *truth-table row conjunction* for r is the conjunction

$$L_1 \wedge L_2 \wedge \cdots \wedge L_n,$$

where

$$L_i = \begin{cases} P_i, & \text{if row } r \text{ makes } P_i \text{ true,} \\ \neg P_i, & \text{if row } r \text{ makes } P_i \text{ false.} \end{cases}$$

Remark (Standard quantified statement). For a fixed row r on variables $P_1, \dots, P_n$,

$$\bigwedge_{i=1}^n L_i, \quad L_i = \begin{cases} P_i, & r(P_i) = \text{True}, \\ \neg P_i, & r(P_i) = \text{False}. \end{cases}$$

Remark (Interpretation). The row conjunction names exactly one truth-table row. It is true on that row and false on every row that disagrees with it on at least one listed variable.

Remark (Dependencies).

- [Truth Table](#)
- [Literal](#)
- [Variable Set of a Formula](#)

Definition (Truth-Table Row Clause)

Definition 1.7.22 (Truth-Table Row Clause). Fix a finite variable list $P_1, \dots, P_n$ and a row r of the [truth table](#) for those variables. The *truth-table row clause* for r is the clause

$$M_1 \vee M_2 \vee \cdots \vee M_n,$$

where

$$M_i = \begin{cases} P_i, & \text{if row } r \text{ makes } P_i \text{ false,} \\ \neg P_i, & \text{if row } r \text{ makes } P_i \text{ true.} \end{cases}$$

Remark (Standard quantified statement). For a fixed row r on variables $P_1, \dots, P_n$,

$$\bigvee_{i=1}^n M_i, \quad M_i = \begin{cases} P_i, & r(P_i) = \text{False}, \\ \neg P_i, & r(P_i) = \text{True}. \end{cases}$$

Remark (Interpretation). The row clause excludes exactly one truth-table row. It is false on row r and true on every row that disagrees with r on at least one listed variable.

Remark (Dependencies).

- [Truth Table](#)

- [Clause](#)
- [Variable Set of a Formula](#)

Definition (Canonical Disjunctive Normal Form)

Definition 1.7.23 (Canonical Disjunctive Normal Form). Let $\varphi \in \text{WFF}$, and fix an ordering $P_1, \dots, P_n$ of the finite variable set of φ . The *canonical disjunctive normal form* of φ relative to this ordering is the disjunction of the [truth-table row conjunctions](#) corresponding to the rows on which φ is true.

Remark (Standard quantified statement). For $\text{Var}(\varphi) = \{P_1, \dots, P_n\}$, the canonical disjunctive normal form is

$$\bigvee_{\hat{v}(\varphi)=\text{True}} (L_1 \wedge \dots \wedge L_n),$$

where each row conjunction is determined by the truth-table row of v .

Remark (Interpretation). Canonical DNF records exactly the truth-table rows on which the formula is true, using one row conjunction for each true row.

Remark (Examples). If φ is a contradiction, then it has no true rows. Its canonical DNF is the empty disjunction, represented by the [empty clause](#).

Remark (Dependencies).

- [Disjunctive Normal Form](#)
- [Truth-Table Row Conjunction](#)
- [Truth Table](#)
- [Empty Clause](#)

Definition (Canonical Conjunctive Normal Form)

Definition 1.7.24 (Canonical Conjunctive Normal Form). Let $\varphi \in \text{WFF}$, and fix an ordering $P_1, \dots, P_n$ of the finite variable set of φ . The *canonical conjunctive normal form* of φ relative to this ordering is the conjunction of the [truth-table row clauses](#) corresponding to the rows on which φ is false.

Remark (Standard quantified statement). For $\text{Var}(\varphi) = \{P_1, \dots, P_n\}$, the canonical conjunctive normal form is

$$\bigwedge_{\hat{v}(\varphi)=\text{False}} (M_1 \vee \dots \vee M_n),$$

where each row clause is determined by the truth-table row of v .

Remark (Interpretation). Canonical CNF records exactly the truth-table rows on which the formula is false, using one row clause for each false row.

Remark (Examples). If φ is a tautology, then it has no false rows. Its canonical CNF is the empty conjunction, represented by the [empty conjunction](#).

Remark (Dependencies).

- [Conjunctive Normal Form](#)
- [Truth-Table Row Clause](#)
- [Truth Table](#)
- [Empty Conjunction](#)

Theorem (Canonical Disjunctive Normal Form)

Theorem 1.7.25 (Canonical Disjunctive Normal Form Theorem). *Every formula $\varphi \in \text{WFF}$ is [logically equivalent](#) to its [canonical disjunctive normal form](#) relative to a fixed ordering of its finitely many variables.*

$$\varphi \equiv \text{CDNF}_{P_1, \dots, P_n}(\varphi).$$

[Go to proof.](#)

Remark (Standard quantified statement).

$$(\forall \varphi \in \text{WFF}) \varphi \equiv \text{CDNF}_{P_1, \dots, P_n}(\varphi),$$

where $P_1, \dots, P_n$ is a fixed ordering of the finitely many variables of φ .

Remark (Interpretation). Canonical DNF rebuilds the formula from exactly the truth-table rows where the formula is true. Each row conjunction recognizes one true row, and the final disjunction accepts any of those rows.

Remark (Dependencies).

- [Canonical Disjunctive Normal Form](#)
- [Finite Truth-Table Theorem](#)
- [Coincidence Lemma for Propositional Logic](#)
- [Logical Equivalence](#)

Theorem (Canonical Conjunctive Normal Form)

Theorem 1.7.26 (Canonical Conjunctive Normal Form Theorem). *Every formula $\varphi \in \text{WFF}$ is [logically equivalent](#) to its [canonical conjunctive normal form](#) relative to a fixed ordering of its finitely many variables.*

$$\varphi \equiv \text{CCNF}_{P_1, \dots, P_n}(\varphi).$$

[Go to proof.](#)

Remark (Standard quantified statement).

$$(\forall \varphi \in \mathbf{WFF}) \varphi \equiv \text{CCNF}_{P_1, \dots, P_n}(\varphi),$$

where $P_1, \dots, P_n$ is a fixed ordering of the finitely many variables of φ .

Remark (Interpretation). Canonical CNF rebuilds the formula by excluding exactly the truth-table rows where the formula is false. Each row clause rejects one false row, and the final conjunction requires all false rows to be rejected.

Remark (Dependencies).

- Canonical Conjunctive Normal Form
- Finite Truth-Table Theorem
- Coincidence Lemma for Propositional Logic
- Logical Equivalence

Theorem (Semantic Classification by Normal Forms)

Theorem 1.7.27 (Semantic Classification by Normal Forms). *Normal forms give finite certificates for semantic classification. For any formula $\varphi \in \mathbf{WFF}$:*

1. φ is *satisfiable* if and only if some *DNF* formula equivalent to φ has a satisfiable conjunction term.
2. φ is a *contradiction* if and only if some *DNF* formula equivalent to φ has no satisfiable conjunction term.
3. φ is a *tautology* if and only if some *CNF* formula equivalent to φ has no falsifiable clause.
4. φ is a *contingency* if and only if it is satisfiable and not a tautology.

Go to proof.

Remark (Standard quantified statement).

$$\begin{aligned} \varphi \text{ is satisfiable} &\iff \text{some equivalent DNF term is satisfiable,} \\ \varphi \text{ is a contradiction} &\iff \text{no equivalent DNF term is satisfiable,} \\ \varphi \text{ is a tautology} &\iff \text{no equivalent CNF clause is falsifiable.} \end{aligned}$$

Remark (Interpretation). The truth-table method classifies φ by evaluating every row directly. The normal-form method first rewrites φ into an equivalent DNF or CNF formula and then checks the finite terms or clauses. Canonical normal forms connect the two approaches: canonical DNF is built from true rows, and canonical CNF is built from false rows.

Remark (Exposition). DNF is naturally witness-producing. A satisfiable term gives an explicit way to make the whole disjunction true. CNF is naturally suited for clause checking: each clause is a local obstruction to falsifying the whole conjunction. This clause-centered view is also the starting point for later resolution methods.

Remark (Dependencies).

- [Disjunctive Normal Form](#)
- [Conjunctive Normal Form](#)
- [Satisfiable Formula](#)
- [Contradiction](#)
- [Tautology](#)
- [Contingency](#)
- [DNF Satisfiability Criterion](#)
- [Canonical Disjunctive Normal Form Theorem](#)
- [Canonical Conjunctive Normal Form Theorem](#)

Summary

Remark (Literal vocabulary). The vocabulary begins at the literal level. A literal is a propositional variable or the negation of one propositional variable. Positive literals and negative literals record the sign of that occurrence. Complementary literals are the opposed pair P and $\neg P$. Clauses are finite disjunctions of literals, while terms are finite conjunctions of literals. The empty clause is the false boundary case, and the empty conjunction is the true boundary case.

Remark (Negation normal form). Negation normal form is the first normalization target. It permits only $\neg$, $\wedge$, and $\vee$, with every negation pushed down to the literal level. Its purpose is to remove conditionals and biconditionals and to make negation local. Once a formula is in NNF, the remaining work is a matter of distributing $\wedge$ and $\vee$ in the direction required by the target normal form.

Remark (Disjunctive normal form). Disjunctive normal form writes a formula as a finite disjunction of terms. It is naturally witness-oriented: to make a DNF formula true, it is enough to make one term true, and a satisfiable term directly records compatible literal requirements. This is why DNF is especially useful for satisfiability checks and for building formulas from true rows of a truth table.

Remark (Conjunctive normal form). Conjunctive normal form writes a formula as a finite conjunction of clauses. It is naturally obstruction-oriented: to falsify a CNF formula, one must falsify a clause, and each clause gives a local disjunctive condition. This clause structure makes CNF the preferred shape for later clause checking, resolution-style arguments, and systematic proof search.

Remark (Canonical normal forms). Ordinary DNF and CNF are not unique. Reordering, duplicating, or simplifying terms and clauses can produce different formulas with the same truth table. Canonical normal forms add truth-table discipline. Canonical DNF records the true rows by minterm-style conjunctions, and canonical CNF records the false rows by maxterm-style clauses. These canonical forms show that every finite truth behavior can be represented syntactically.

Remark (Conversion workflow). The conversion workflow has a common beginning. First eliminate biconditionals. Then eliminate conditionals. Then push negations inward until the formula is in negation normal form. From there, distribute conjunction over disjunction to obtain DNF, or distribute disjunction over conjunction to obtain CNF. Each stage is justified by logical equivalence laws and by replacement of logical equivalents inside larger formulas.

Remark (Back to the algebra of propositions). Normal forms are an application of the algebra of propositions. The conversion rules are not new semantic principles; they are uses of earlier equivalence laws such as De Morgan laws, conditional and biconditional equivalences, distributivity, and replacement of equivalents. The normal-form viewpoint therefore shows how algebraic manipulation and semantic preservation work together.

Remark (Forward to functional completeness). Canonical normal forms point forward to functional completeness. If a truth function can be described by its true rows, then it can be represented by a disjunction of conjunctions of literals. If it can be described by its false rows, then it can be represented by a conjunction of disjunctions of literals. This is the bridge from truth tables to the question of which connectives are enough to express every truth function.

Remark (Forward to arguments and proof systems). Normal forms also prepare the transition from single formulas to arguments and proof systems. DNF gives explicit witnesses for satisfiability, while CNF turns formulas into collections of clauses that can be checked and transformed. The same syntactic regularity used here to classify formulas will later support validity tests, derivation systems, resolution methods, and comparisons between semantic consequence and formal proof.

1.8 Functional Completeness

Toolkit

This section uses Boolean functions, truth functions induced by formulas, logical equivalence, canonical normal forms, and connective rewrite laws.

Remark (Exposition). The functional-completeness section studies expressive power. A connective set is complete exactly when formulas built from it can represent every Boolean function, so normal forms and connective reductions become tests for the adequacy of propositional vocabularies.

Orientation

Remark (Section map). This section begins with Boolean functions and formula representation, then introduces connective bases and definability of connectives. It uses normal forms to

prove completeness of the standard connectives and then reduces the primitive vocabulary further. The final topics show that NAND and NOR each form a one-connective complete basis, while some familiar connective sets fail to be functionally complete.

Remark (Connection with normal forms). Normal forms explain why functional completeness is possible. Canonical DNF and canonical CNF show that the truth behavior of a formula can be reconstructed from finitely many truth-table rows. Once those canonical constructions are available, proving that a connective set is functionally complete amounts to showing that the connectives needed for those normal forms can be defined from that set.

Boolean Functions and Representation

Definition (Representation of a Boolean Function)

Definition 1.8.1 (Representation of a Boolean Function). Let $f : \mathbb{B}^n \rightarrow \mathbb{B}$ be a Boolean function. A formula $\varphi \in \mathbf{WFF}$ with variables among $P_1, \dots, P_n$ *represents* f if for every truth assignment v ,

$$\widehat{v}(\varphi) = f(v(P_1), \dots, v(P_n)).$$

Remark (Standard quantified statement).

$$\text{Represents}(\varphi, f; P_1, \dots, P_n) \iff (\forall v : \mathbf{Prop} \rightarrow \mathbb{B}) (\widehat{v}(\varphi) = f(v(P_1), \dots, v(P_n))).$$

Remark (Definition predicate reading). $\text{Represents}(\varphi, f; P_1, \dots, P_n)$ means that φ has exactly the same truth table as the Boolean function f on the listed variables.

Remark (Interpretation). A formula represents a Boolean function when the formula computes the same truth value as the function for every input row. This turns a semantic table of values into a syntactic object inside the propositional language.

Remark (Dependencies).

- [Boolean Function](#)
- [Truth Function Induced by a Formula](#)
- [Truth Assignment](#)

Theorem (DNF Representation of Boolean Functions)

Theorem 1.8.2 (DNF Representation of Boolean Functions). *Every Boolean function $f : \mathbb{B}^n \rightarrow \mathbb{B}$ is represented by a formula in disjunctive normal form using variables $P_1, \dots, P_n$.*

Go to proof.

Remark (Standard quantified statement).

$$(\forall f : \mathbb{B}^n \rightarrow \mathbb{B}) (\exists \varphi \in \mathbf{WFF}) (\varphi \text{ is in DNF} \wedge \text{Represents}(\varphi, f; P_1, \dots, P_n)).$$

Remark (Predicate reading). Every n -ary Boolean function has a propositional formula representative, and one may choose the representative to be in disjunctive normal form.

Remark (Interpretation). A truth table specifies which input rows make the Boolean function true. For each true row, form the corresponding conjunction of literals; the disjunction of those row conjunctions represents the entire function.

Remark (Dependencies).

- [Representation of a Boolean Function](#)
- [Canonical Disjunctive Normal Form](#)
- [Canonical Disjunctive Normal Form Theorem](#)
- [Disjunctive Normal Form](#)

Connective Bases

Definition (Connective Basis)

Definition 1.8.3 (Connective Basis). A *connective basis* is a specified set B of propositional connectives allowed as primitive connectives for building formulas.

Remark (Standard quantified statement).

$$B \text{ is a connective basis} \iff B \subseteq \{\neg, \wedge, \vee, \rightarrow, \leftrightarrow, \dots\}$$

and formulas over B are built using only connectives from B .

Remark (Definition predicate reading). $\text{ConnectiveBasis}(B)$ means that B is the chosen primitive connective vocabulary for a propositional language or fragment.

Remark (Interpretation). A connective basis controls which connectives are primitive, not which truth functions are expressible. Different bases may have the same expressive power.

Remark (Dependencies).

- [Logical Connective](#)
- [Propositional Language](#)

Definition (Definable Connective)

Definition 1.8.4 (Definable Connective). Let B be a connective basis. A connective $\circ$ is *definable from* B if there is a formula built using only connectives from B whose truth function agrees with the truth function of $\circ$.

Remark (Standard quantified statement).

$$\circ \text{ is definable from } B \iff \exists \theta \in \text{WFF}_B (f_\theta = f_\circ),$$

where WFF_B denotes the formulas built using only connectives from B .

Remark (Definition predicate reading). $\text{DefinableFrom}(\circ, B)$ means that $\circ$ can be treated as an abbreviation for a formula pattern using only connectives from B .

Remark (Interpretation). Definability separates notation from expressive power. A connective can be omitted from the primitive syntax without losing its use, provided it is recoverable as a defined connective.

Remark (Dependencies).

- [Connective Basis](#)
- [Truth Function Induced by a Formula](#)
- [Boolean Function](#)

Definition (Functionally Complete Connective Set)

Definition 1.8.5 (Functionally Complete Connective Set). A connective basis B is *functionally complete* if every Boolean function $f : \mathbb{B}^n \rightarrow \mathbb{B}$, for every $n \geq 1$, is represented by some formula using only connectives from B .

Remark (Standard quantified statement).

$\text{FunctionallyComplete}(B) \iff (\forall n \geq 1)(\forall f : \mathbb{B}^n \rightarrow \mathbb{B})(\exists \varphi \in \mathbf{WFF}_B) \text{Represents}(\varphi, f; P_1, \dots, P_n).$ ■

Remark (Definition predicate reading). $\text{FunctionallyComplete}(B)$ means that formulas over B can represent every finite Boolean input-output table.

Remark (Interpretation). Functional completeness is the central expressive-power property for connective sets. It says that the basis can express all possible truth-functional behavior, not merely the connectives originally listed in the language.

Remark (Dependencies).

- [Connective Basis](#)
- [Representation of a Boolean Function](#)
- [Boolean Function](#)

Definition (Expressively Equivalent Connective Sets)

Definition 1.8.6 (Expressively Equivalent Connective Sets). Two connective bases B and C are *expressively equivalent* if every connective in B is definable from C , and every connective in C is definable from B .

Remark (Standard quantified statement).

$$B \equiv_{\text{expr}} C \iff ((\forall \circ \in B) \text{DefinableFrom}(\circ, C)) \wedge ((\forall \star \in C) \text{DefinableFrom}(\star, B)).$$

Remark (Definition predicate reading). $B \equiv_{\text{expr}} C$ means that the two bases can define exactly the same connective behavior.

Remark (Interpretation). Expressive equivalence lets a proof replace one primitive vocabulary with another. This is why a language can be simplified syntactically without changing which truth functions can be expressed.

Remark (Dependencies).

- [Connective Basis](#)
- [Definable Connective](#)

Completeness of the Standard Connectives

Theorem (Standard Connectives are Functionally Complete)

Theorem 1.8.7 (Standard Connectives are Functionally Complete). *The connective basis*

$$\{\neg, \wedge, \vee\}$$

is functionally complete.

[Go to proof.](#)

Remark (Standard quantified statement).

$$\text{FunctionallyComplete}(\{\neg, \wedge, \vee\}).$$

Remark (Predicate reading). Every Boolean function is represented by a formula using only negation, conjunction, and disjunction.

Remark (Interpretation). Canonical disjunctive normal form uses only literals, conjunctions, and disjunctions. Since literals use variables and negation, the normal-form theorem shows that $\{\neg, \wedge, \vee\}$ can express every Boolean function.

Remark (Dependencies).

- [Functionally Complete Connective Set](#)
- [DNF Representation of Boolean Functions](#)
- [Disjunctive Normal Form](#)

Theorem (Negation and Conjunction are Functionally Complete)

Theorem 1.8.8 (Negation and Conjunction are Functionally Complete). *The connective basis*

$$\{\neg, \wedge\}$$

is functionally complete.

[Go to proof.](#)

Remark (Standard quantified statement).

$$\text{FunctionallyComplete}(\{\neg, \wedge\}).$$

Remark (Predicate reading). Every Boolean function is represented by a formula using only negation and conjunction.

Remark (Interpretation). Disjunction is definable from negation and conjunction by De Morgan's law:

$$\varphi \vee \psi \equiv \neg(\neg\varphi \wedge \neg\psi).$$

Thus every formula using $\neg, \wedge, \vee$ can be translated into an equivalent formula using only $\neg$ and $\wedge$.

Remark (Dependencies).

- [Standard Connectives are Functionally Complete](#)
- [De Morgan Laws for Propositional Logic](#)
- [Replacement of Logical Equivalents](#)

Theorem (Negation and Disjunction are Functionally Complete)

Theorem 1.8.9 (Negation and Disjunction are Functionally Complete). *The connective basis*

$$\{\neg, \vee\}$$

is functionally complete.

Go to proof.

Remark (Standard quantified statement).

$$\text{FunctionallyComplete}(\{\neg, \vee\}).$$

Remark (Predicate reading). Every Boolean function is represented by a formula using only negation and disjunction.

Remark (Interpretation). Conjunction is definable from negation and disjunction by De Morgan's law:

$$\varphi \wedge \psi \equiv \neg(\neg\varphi \vee \neg\psi).$$

Thus every formula using $\neg, \wedge, \vee$ can be translated into an equivalent formula using only $\neg$ and $\vee$.

Remark (Dependencies).

- [Standard Connectives are Functionally Complete](#)
- [De Morgan Laws for Propositional Logic](#)
- [Replacement of Logical Equivalents](#)

Reduction of Connective Sets

Definition (Connective Reduction)

Definition 1.8.10 (Connective Reduction). A *connective reduction* replaces a formula using one connective basis by a logically equivalent formula using a smaller or different connective basis.

Remark (Standard quantified statement).

$$\text{Reduction}_{B \rightarrow C}(\varphi, \psi) \iff \varphi \equiv \psi \quad \text{and} \quad \psi \in \text{WFF}_C.$$

Remark (Definition predicate reading). $\text{Reduction}_{B \rightarrow C}(\varphi, \psi)$ means that ψ is a translation of φ into the connective basis C without changing truth behavior.

Remark (Interpretation). Reduction shows that some primitive connectives are optional. If a connective is definable from the remaining basis, then formulas using that connective can be translated away.

Remark (Exposition). The standard reductions are:

$$\varphi \rightarrow \psi \equiv \neg\varphi \vee \psi,$$

$$\varphi \leftrightarrow \psi \equiv (\varphi \rightarrow \psi) \wedge (\psi \rightarrow \varphi),$$

$$\varphi \vee \psi \equiv \neg(\neg\varphi \wedge \neg\psi), \quad \varphi \wedge \psi \equiv \neg(\neg\varphi \vee \neg\psi).$$

Each replacement preserves logical equivalence and may be performed inside a larger formula context.

Remark (Exposition). Reducing a connective basis can make formulas longer. Functional completeness is therefore an expressive result, not an efficiency result. A small basis may be powerful enough to express every Boolean function while still being awkward for ordinary human-readable formulas.

Remark (Dependencies).

- [Connective Basis](#)
- [Definable Connective](#)
- [Logical Equivalence](#)

NAND

Definition (NAND Connective)

Definition 1.8.11 (NAND Connective). The *NAND* connective, written $\uparrow$, is the binary connective defined by

$$\varphi \uparrow \psi \equiv \neg(\varphi \wedge \psi).$$

Remark (Standard quantified statement).

$$\widehat{v}(\varphi \uparrow \psi) = \text{True} \iff \text{not both } \widehat{v}(\varphi) = \text{True} \text{ and } \widehat{v}(\psi) = \text{True}.$$

Remark (Definition predicate reading). $\text{NAND}(\varphi, \psi)$ means the negation of the conjunction of φ and ψ .

Remark (Interpretation). NAND is read as "not both." It is false only when both inputs are true. This single connective can reproduce negation, conjunction, and disjunction.

Remark (Dependencies).

- [Logical Connective](#)
- [Truth Assignment](#)

Definition (NAND-Only Formula)

Definition 1.8.12 (NAND-Only Formula). A *NAND-only formula* is a well-formed formula whose only connective is $\uparrow$.

Remark (Standard quantified statement).

$$\varphi \text{ is NAND-only} \iff \varphi \in \text{WFF}_{\{\uparrow\}}.$$

Remark (Definition predicate reading). $\text{NANDOnly}(\varphi)$ means that every connective occurrence in φ is an occurrence of $\uparrow$.

Remark (Interpretation). A NAND-only formula is syntactically restricted but expressively powerful. The restriction is severe at the level of primitive symbols, but not at the level of truth functions.

Remark (Dependencies).

- [NAND Connective](#)
- [Well-Formed Formula](#)

Theorem (NAND is Functionally Complete)

Theorem 1.8.13 (NAND is Functionally Complete). *The one-connective basis $\{\uparrow\}$ is functionally complete.*

[Go to proof.](#)

Remark (Standard quantified statement).

$$\text{FunctionallyComplete}(\{\uparrow\}).$$

Remark (Predicate reading). Every Boolean function can be represented by a NAND-only formula.

Remark (Interpretation). NAND can define negation and conjunction:

$$\neg\varphi \equiv \varphi \uparrow \varphi, \quad \varphi \wedge \psi \equiv (\varphi \uparrow \psi) \uparrow (\varphi \uparrow \psi).$$

Once negation and conjunction are definable, functional completeness follows from the functional completeness of $\{\neg, \wedge\}$.

Remark (Dependencies).

- [NAND Connective](#)
- [NAND-Only Formula](#)
- [Functionally Complete Connective Set](#)
- [Negation and Conjunction are Functionally Complete](#)

NOR

Definition (NOR Connective)

Definition 1.8.14 (NOR Connective). The *NOR* connective, written $\downarrow$, is the binary connective defined by

$$\varphi \downarrow \psi \equiv \neg(\varphi \vee \psi).$$

Remark (Standard quantified statement).

$$\widehat{v}(\varphi \downarrow \psi) = \text{True} \iff \widehat{v}(\varphi) = \text{False} \text{ and } \widehat{v}(\psi) = \text{False}.$$

Remark (Definition predicate reading). $\text{NOR}(\varphi, \psi)$ means the negation of the disjunction of φ and ψ .

Remark (Interpretation). NOR is read as "neither." It is true exactly when both inputs are false. Like NAND, this single connective can reproduce the standard functionally complete basis.

Remark (Dependencies).

- [Logical Connective](#)
- [Truth Assignment](#)

Definition (NOR-Only Formula)

Definition 1.8.15 (NOR-Only Formula). A *NOR-only formula* is a well-formed formula whose only connective is $\downarrow$.

Remark (Standard quantified statement).

$$\varphi \text{ is NOR-only} \iff \varphi \in \text{WFF}_{\{\downarrow\}}.$$

Remark (Definition predicate reading). $\text{NOROnly}(\varphi)$ means that every connective occurrence in φ is an occurrence of $\downarrow$.

Remark (Interpretation). A NOR-only formula uses a single primitive connective. Its expressive power comes from the ability of NOR to define negation and disjunction.

Remark (Dependencies).

- [NOR Connective](#)
- [Well-Formed Formula](#)

Theorem (NOR is Functionally Complete)

Theorem 1.8.16 (NOR is Functionally Complete). *The one-connective basis $\{\downarrow\}$ is functionally complete.*

[Go to proof.](#)

Remark (Standard quantified statement).

$$\text{FunctionallyComplete}(\{\downarrow\}).$$

Remark (Predicate reading). Every Boolean function can be represented by a NOR-only formula.

Remark (Interpretation). NOR can define negation and disjunction:

$$\neg\varphi \equiv \varphi \downarrow \varphi, \quad \varphi \vee \psi \equiv (\varphi \downarrow \psi) \downarrow (\varphi \downarrow \psi).$$

Once negation and disjunction are definable, functional completeness follows from the functional completeness of $\{\neg, \vee\}$.

Remark (Dependencies).

- [NOR Connective](#)
- [NOR-Only Formula](#)
- [Functionally Complete Connective Set](#)
- [Negation and Disjunction are Functionally Complete](#)

Incomplete Connective Sets

Definition (Incomplete Connective Set)

Definition 1.8.17 (Incomplete Connective Set). A connective basis is *incomplete* if it is not functionally complete.

Remark (Standard quantified statement).

$$\text{Incomplete}(B) \iff \neg \text{FunctionallyComplete}(B).$$

Remark (Definition predicate reading). $\text{Incomplete}(B)$ means that some Boolean function cannot be represented by any formula using only connectives from B .

Remark (Interpretation). Incompleteness is usually proved by finding an invariant preserved by every formula built from the basis. If some Boolean function fails that invariant, the basis cannot express every Boolean function.

Remark (Dependencies).

- [Functionally Complete Connective Set](#)
- [Boolean Function](#)

Definition (Monotone Boolean Function)

Definition 1.8.18 (Monotone Boolean Function). A Boolean function $f : \mathbb{B}^n \rightarrow \mathbb{B}$ is *monotone* if changing input coordinates from **False** to **True** never changes the output from **True** to **False**.

Remark (Standard quantified statement).

$$\text{Monotone}(f) \iff (\forall a, b \in \mathbb{B}^n)(a \leq b \rightarrow f(a) \leq f(b)),$$

where **False** $\leq$ **True** coordinatewise.

Remark (Definition predicate reading). $\text{Monotone}(f)$ means that increasing truth inputs cannot make the output decrease from true to false.

Remark (Interpretation). The connectives $\wedge$ and $\vee$ are monotone. Negation is not monotone, because changing P from false to true changes $\neg P$ from true to false.

Remark (Dependencies).

- [Boolean Function](#)

Theorem (Conjunction and Disjunction are not Functionally Complete)

Theorem 1.8.19 (Conjunction and Disjunction are not Functionally Complete). *The connective basis $\{\wedge, \vee\}$ is not functionally complete.*

Go to proof.

Remark (Standard quantified statement).

$$\neg \text{FunctionallyComplete}(\{\wedge, \vee\}).$$

Remark (Predicate reading). There is at least one Boolean function that cannot be represented by any formula using only conjunction and disjunction.

Remark (Interpretation). Every formula built using only $\wedge$ and $\vee$ represents a monotone Boolean function. Since negation is not monotone, no formula using only $\wedge$ and $\vee$ can represent negation. Hence the basis is incomplete.

Remark (Dependencies).

- [Incomplete Connective Set](#)
- [Monotone Boolean Function](#)
- [Functionally Complete Connective Set](#)

Minimal Complete Bases

Definition (Minimal Complete Basis)

Definition 1.8.20 (Minimal Complete Basis). A functionally complete connective basis B is *minimal complete* if no proper subset of B is functionally complete.

Remark (Standard quantified statement).

$\text{MinimalComplete}(B) \iff \text{FunctionallyComplete}(B) \wedge (\forall C \subsetneq B) \neg \text{FunctionallyComplete}(C).$

Remark (Definition predicate reading). $\text{MinimalComplete}(B)$ means that B is complete, but removing any primitive connective from B destroys completeness.

Remark (Interpretation). Minimality is relative to deletion of connectives from the basis. It does not mean that formulas using the basis are short or easy to read.

Remark (Dependencies).

- [Functionally Complete Connective Set](#)
- [Connective Basis](#)

Theorem (NAND and NOR are Minimal Complete Bases)

Theorem 1.8.21 (NAND and NOR are Minimal Complete Bases). *The one-connective bases $\{\uparrow\}$ and $\{\downarrow\}$ are minimal complete bases.*

Go to proof.

Remark (Standard quantified statement).

$\text{MinimalComplete}(\{\uparrow\}) \wedge \text{MinimalComplete}(\{\downarrow\}).$

Remark (Predicate reading). NAND alone is complete, NOR alone is complete, and deleting the sole connective from either basis leaves no functionally complete basis.

Remark (Interpretation). A one-connective complete basis is automatically minimal once the empty basis is not functionally complete. NAND and NOR are therefore minimal complete bases because each is complete by itself.

Remark (Dependencies).

- [Minimal Complete Basis](#)
- [NAND is Functionally Complete](#)
- [NOR is Functionally Complete](#)
- [Incomplete Connective Set](#)

Summary and Transition

Remark (Summary). Functional completeness measures the expressive strength of a connective basis. A functionally complete basis can represent every finite Boolean function by a formula using only the connectives in that basis. Normal forms supply the main construction: truth-table rows can be converted into formulas, and those formulas can be assembled into a representative for the desired Boolean function.

Remark (Section map). The standard connectives $\neg$, $\wedge$, and $\vee$ are functionally complete because they can build disjunctive normal forms. De Morgan laws reduce this basis to $\{\neg, \wedge\}$ or $\{\neg, \vee\}$. NAND and NOR go further: each single connective can define a complete two-connective basis and therefore can represent every Boolean function.

Remark (Transition). The next section moves from expressive power to argument forms and informal proof patterns. Functional completeness explains which truth functions can be expressed. Argument forms ask which patterns of inference preserve truth from premises to conclusions.

1.9 Argument Forms and Informal Proof Patterns

Toolkit

This section uses argument forms, inference patterns, replacement rules, informal proof patterns, and semantic validity.

Remark (Exposition). Argument forms organize recurring patterns of propositional reasoning. This section connects valid and invalid forms with replacement principles, informal proof practice, and the semantic tests that justify those patterns.

Orientation

Remark (Working vocabulary). This orientation uses truth assignments, logical consequence, tautology, logical equivalence, formula contexts, and counterexample assignments to justify common argument forms.

Remark (Exposition). Argument forms are reusable patterns of inference. The purpose of this section is to justify the basic inference tools that will be used throughout the rest of the project. The justification is semantic: an argument form is valid when no truth assignment makes every premise true while making the conclusion false.

Remark (Section map). This section introduces argument forms, substitution instances, validity, invalidity, and counterexample assignments. It then proves the validity of the standard inference patterns, isolates common invalid forms, explains rules of replacement, and connects informal proof patterns with semantic consequence. Formal proof systems are previewed but not developed here.

Remark (Boundary). The goal is rigorous senior-undergraduate propositional logic. The section proves that the proof moves used later are truth-preserving, but it does not build Hilbert systems, sequent calculi, cut elimination, or metatheoretic completeness machinery.

Argument Forms

Remark (Working vocabulary). This topic introduces argument forms, premises, conclusions, substitution instances, valid argument forms, invalid argument forms, and counterexample truth assignments.

Definition (Argument Form)

Definition 1.9.1 (Argument Form). An *argument form* is a schematic pattern consisting of a finite list of premise formulas and one conclusion formula.

Remark (Standard quantified statement).

$$\text{ArgumentForm}(\Gamma, \varphi) \iff \Gamma \subseteq \text{WFF is finite and } \varphi \in \text{WFF}.$$

Remark (Definition predicate reading). $\text{ArgumentForm}(\Gamma, \varphi)$ means that Γ is the set or finite list of premises and φ is the conclusion.

Remark (Interpretation). An argument form records a pattern of inference independently of the particular subject matter. Its validity depends on truth preservation, not on whether the individual formulas happen to be true in one example.

Remark (Dependencies).

- [Well-Formed Formula](#)

Definition (Valid Argument Form)

Definition 1.9.2 (Valid Argument Form). An argument form with premises Γ and conclusion φ is *valid* if every truth assignment that satisfies every formula in Γ also satisfies φ .

Remark (Standard quantified statement).

$$\text{ValidArgumentForm}(\Gamma, \varphi) \iff (\forall v)((\forall \gamma \in \Gamma)(v \models \gamma) \rightarrow v \models \varphi).$$

Remark (Definition predicate reading). $\text{ValidArgumentForm}(\Gamma, \varphi)$ means that truth of all premises forces truth of the conclusion under every truth assignment.

Remark (Interpretation). Validity is a preservation property. A valid argument form may have false premises in a particular instance, but it cannot have true premises and a false conclusion under the same truth assignment.

Remark (Dependencies).

- [Argument Form](#)
- [Satisfaction of a Formula](#)
- [Logical Consequence](#)

Definition (Counterexample Assignment)

Definition 1.9.3 (Counterexample Assignment). A *counterexample assignment* to an argument form (Γ, φ) is a truth assignment that satisfies every premise in Γ and does not satisfy φ .

Remark (Standard quantified statement).

$$\text{CounterexampleAssignment}(v, \Gamma, \varphi) \iff (\forall \gamma \in \Gamma)(v \models \gamma) \wedge v \not\models \varphi.$$

Remark (Definition predicate reading). $\text{CounterexampleAssignment}(v, \Gamma, \varphi)$ means that v shows the premises can all be true while the conclusion is false.

Remark (Interpretation). A counterexample assignment is the semantic witness to invalidity. Finding one settles the question: the argument form is not truth-preserving.

Remark (Dependencies).

- [Valid Argument Form](#)
- [Truth Assignment](#)

Theorem (Truth-Table Validity Test for Argument Forms)

Theorem 1.9.4 (Truth-Table Validity Test for Argument Forms). An argument form (Γ, φ) is valid if and only if no row of its truth table makes every formula in Γ true and φ false.

Go to proof.

Remark (Standard quantified statement).

$$\text{ValidArgumentForm}(\Gamma, \varphi) \iff \neg(\exists v) \text{CounterexampleAssignment}(v, \Gamma, \varphi).$$

Remark (Predicate reading). The argument form is valid exactly when there is no counterexample truth assignment.

Remark (Interpretation). The truth-table test is finite because only the variables appearing in the premises and conclusion matter. A failed row is a counterexample assignment; the absence of such rows proves semantic validity.

Remark (Dependencies).

- [Valid Argument Form](#)
- [Counterexample Assignment](#)
- [Truth Table](#)
- [Finite Truth-Table Theorem](#)

Core Valid Inference Patterns

Remark (Working vocabulary). This topic proves the semantic validity of the standard propositional inference patterns used throughout later proof work.

Theorem (Modus Ponens is Valid)

Theorem 1.9.5 (Modus Ponens is Valid). *The argument form*

$$\varphi, \quad \varphi \rightarrow \psi \quad \therefore \quad \psi$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi \in \text{WFF}) \text{ValidArgumentForm}(\{\varphi, \varphi \rightarrow \psi\}, \psi).$$

Remark (Predicate reading). Whenever φ and $\varphi \rightarrow \psi$ are both true, ψ must be true.

Remark (Interpretation). Modus ponens is the basic rule for using a conditional whose antecedent has already been established.

Remark (Dependencies).

- Valid Argument Form
- Truth Assignment

Theorem (Modus Tollens is Valid)

Theorem 1.9.6 (Modus Tollens is Valid). *The argument form*

$$\varphi \rightarrow \psi, \quad \neg \psi \quad \therefore \quad \neg \varphi$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi \in \text{WFF}) \text{ValidArgumentForm}(\{\varphi \rightarrow \psi, \neg \psi\}, \neg \varphi).$$

Remark (Predicate reading). If φ would imply ψ , and ψ is false, then φ must be false.

Remark (Interpretation). Modus tollens is the semantic form of denying an antecedent by denying the conditional's consequent.

Remark (Dependencies).

- Valid Argument Form
- Conditional Equivalence Laws

Theorem (Hypothetical Syllogism is Valid)

Theorem 1.9.7 (Hypothetical Syllogism is Valid). *The argument form*

$$\varphi \rightarrow \psi, \quad \psi \rightarrow \chi \quad \therefore \quad \varphi \rightarrow \chi$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi, \chi \in \text{WFF}) \text{ValidArgumentForm}(\{\varphi \rightarrow \psi, \psi \rightarrow \chi\}, \varphi \rightarrow \chi).$$

Remark (Predicate reading). Conditional implication composes: if φ forces ψ , and ψ forces χ , then φ forces χ .

Remark (Interpretation). Hypothetical syllogism justifies chaining conditional statements.

Remark (Dependencies).

- [Valid Argument Form](#)
- [Logical Consequence](#)

Theorem (Disjunctive Syllogism is Valid)

Theorem 1.9.8 (Disjunctive Syllogism is Valid). *The argument form*

$$\varphi \vee \psi, \quad \neg \varphi \quad \therefore \quad \psi$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi \in \text{WFF}) \text{ValidArgumentForm}(\{\varphi \vee \psi, \neg \varphi\}, \psi).$$

Remark (Predicate reading). If at least one of φ or ψ is true and φ is false, then ψ must be true.

Remark (Interpretation). Disjunctive syllogism eliminates one disjunct after its negation is known.

Remark (Dependencies).

- [Valid Argument Form](#)
- [Truth Assignment](#)

Theorem (Addition is Valid)

Theorem 1.9.9 (Addition is Valid). *The argument form*

$$\varphi \quad \therefore \quad \varphi \vee \psi$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi \in \text{WFF}) \text{ValidArgumentForm}(\{\varphi\}, \varphi \vee \psi).$$

Remark (Predicate reading). A true formula remains true when placed as one disjunct of a disjunction.

Remark (Interpretation). Addition introduces a disjunction from a known true disjunct.

Remark (Dependencies).

- Valid Argument Form

Theorem (Simplification is Valid)

Theorem 1.9.10 (Simplification is Valid). *The argument form*

$$\varphi \wedge \psi \quad \therefore \quad \varphi$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi \in \text{WFF}) \text{ValidArgumentForm}(\{\varphi \wedge \psi\}, \varphi).$$

Remark (Predicate reading). If a conjunction is true, then each conjunct is true.

Remark (Interpretation). Simplification extracts a component from a true conjunction.

Remark (Dependencies).

- Valid Argument Form

Theorem (Conjunction Introduction is Valid)

Theorem 1.9.11 (Conjunction Introduction is Valid). *The argument form*

$$\varphi, \quad \psi \quad \therefore \quad \varphi \wedge \psi$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi \in \mathbf{WFF}) \text{ValidArgumentForm}(\{\varphi, \psi\}, \varphi \wedge \psi).$$

Remark (Predicate reading). If two formulas are both true, then their conjunction is true.

Remark (Interpretation). Conjunction introduction combines independently established formulas into one conjunction.

Remark (Dependencies).

- Valid Argument Form

Theorem (Constructive Dilemma is Valid)

Theorem 1.9.12 (Constructive Dilemma is Valid). *The argument form*

$$\varphi \rightarrow \chi, \quad \psi \rightarrow \theta, \quad \varphi \vee \psi \quad \therefore \quad \chi \vee \theta$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi, \chi, \theta \in \mathbf{WFF}) \text{ValidArgumentForm}(\{\varphi \rightarrow \chi, \psi \rightarrow \theta, \varphi \vee \psi\}, \chi \vee \theta).$$

Remark (Predicate reading). If one of two antecedents holds, and each antecedent has its own consequence, then at least one corresponding consequence holds.

Remark (Interpretation). Constructive dilemma is a proof-by-cases pattern with conditionals attached to both cases.

Remark (Dependencies).

- Valid Argument Form
- Disjunctive Syllogism is Valid

Theorem (Destructive Dilemma is Valid)

Theorem 1.9.13 (Destructive Dilemma is Valid). *The argument form*

$$\varphi \rightarrow \chi, \quad \psi \rightarrow \theta, \quad \neg \chi \vee \neg \theta \quad \therefore \quad \neg \varphi \vee \neg \psi$$

is valid.

Go to proof.

Remark (Standard quantified statement).

$$(\forall \varphi, \psi, \chi, \theta \in \mathbf{WFF}) \text{ValidArgumentForm}(\{\varphi \rightarrow \chi, \psi \rightarrow \theta, \neg \chi \vee \neg \theta\}, \neg \varphi \vee \neg \psi).$$

Remark (Predicate reading). If at least one consequent fails, and each antecedent would force its consequent, then at least one antecedent must fail.

Remark (Interpretation). Destructive dilemma combines disjunction with modus tollens-style reasoning.

Remark (Dependencies).

- Valid Argument Form
- Modus Tollens is Valid

Invalid Argument Forms

Remark (Working vocabulary). This topic uses counterexample assignments to show why familiar invalid forms fail to preserve truth from premises to conclusion.

Theorem (Affirming the Consequent is Invalid)

Theorem 1.9.14 (Affirming the Consequent is Invalid). *The argument form*

$$\varphi \rightarrow \psi, \quad \psi \quad \therefore \quad \varphi$$

is invalid.

Go to proof.

Remark (Standard quantified statement).

$$\neg \text{ValidArgumentForm}(\{\varphi \rightarrow \psi, \psi\}, \varphi).$$

Remark (Predicate reading). There is a truth assignment under which $\varphi \rightarrow \psi$ and ψ are true while φ is false.

Remark (Interpretation). A conditional can be true because both antecedent and consequent are true, but also because the antecedent is false. Therefore truth of the consequent does not force truth of the antecedent.

Remark (Dependencies).

- Counterexample Assignment
- Valid Argument Form

Theorem (Denying the Antecedent is Invalid)

Theorem 1.9.15 (Denying the Antecedent is Invalid). *The argument form*

$$\varphi \rightarrow \psi, \quad \neg\varphi \quad \therefore \quad \neg\psi$$

is invalid.

Go to proof.

Remark (Standard quantified statement).

$$\neg \text{ValidArgumentForm}(\{\varphi \rightarrow \psi, \neg\varphi\}, \neg\psi).$$

Remark (Predicate reading). There is a truth assignment under which $\varphi \rightarrow \psi$ and $\neg\varphi$ are true while $\neg\psi$ is false.

Remark (Interpretation). A conditional does not say that the antecedent is the only way for the consequent to be true. The antecedent can fail while the consequent still holds.

Remark (Exposition). For both invalid forms, take a truth assignment with φ false and ψ true. Then $\varphi \rightarrow \psi$ is true. This assignment makes the premises true and the conclusion false in each corresponding invalid pattern.

Remark (Dependencies).

- [Counterexample Assignment](#)
- [Valid Argument Form](#)

Rules of Replacement

Remark (Working vocabulary). This topic uses formula contexts, logical equivalence, and replacement of logical equivalents to justify algebraic rewriting inside larger formulas.

Definition (Rule of Replacement)

Definition 1.9.16 (Rule of Replacement). A *rule of replacement* is a schematic permission to replace a subformula by a logically equivalent formula inside a formula context.

Remark (Standard quantified statement).

$$\varphi \equiv \psi \implies C[\varphi] \equiv C[\psi].$$

Remark (Definition predicate reading). A rule of replacement licenses an equivalence-preserving rewrite inside a larger formula.

Remark (Interpretation). Rules of replacement differ from rules of inference. Inference rules move from premises to conclusions; replacement rules rewrite formulas without changing truth behavior.

Remark (Dependencies).

- [Formula Context](#)
- [Logical Equivalence](#)
- [Replacement of Logical Equivalents](#)

Theorem (Replacement Rules Preserve Logical Equivalence)

Theorem 1.9.17 (Replacement Rules Preserve Logical Equivalence). *If a formula ψ is obtained from a formula φ by finitely many applications of rules of replacement, then $\varphi \equiv \psi$.*

Go to proof.

Remark (Standard quantified statement).

$$\text{ReplacementSequence}(\varphi, \psi) \implies \varphi \equiv \psi.$$

Remark (Predicate reading). A finite sequence of equivalence-preserving replacements preserves logical equivalence from the first formula to the last formula.

Remark (Interpretation). Replacement rules justify algebraic manipulation of formulas. Each local rewrite preserves truth under every truth assignment, so the entire finite rewrite chain also preserves truth under every truth assignment.

Remark (Exposition). Common replacement rules include double negation, De Morgan replacement, commutativity, associativity, distributivity, material implication, biconditional replacement, and contraposition. Each is justified by a logical equivalence law.

Remark (Dependencies).

- [Rule of Replacement](#)
- [Replacement of Logical Equivalents](#)
- [Logical Equivalence is an Equivalence Relation](#)

Informal Proof Patterns

Remark (Working vocabulary). This topic connects valid argument forms with common informal proof patterns: direct proof, conditional proof, proof by cases, contradiction, contrapositive proof, implication chains, and equivalence chains.

Definition (Informal Proof Pattern)

Definition 1.9.18 (Informal Proof Pattern). An *informal proof pattern* is a reusable truth-preserving strategy for organizing an ordinary mathematical proof.

Remark (Standard quantified statement).

$$\text{InformalProofPattern}(\Pi) \implies \Pi \text{ is justified by one or more valid argument forms.}$$

Remark (Definition predicate reading). $\text{InformalProofPattern}(\Pi)$ means that Π is a recognized proof strategy whose correctness rests on truth-preserving inference.

Remark (Interpretation). Informal proof patterns are not a substitute for proof. They are templates for arranging valid moves so that a proof has a clear logical shape.

Remark (Exposition). A direct proof establishes a target conclusion by moving forward from known premises through valid argument forms. A conditional proof establishes $\varphi \rightarrow \psi$ by assuming φ and deriving ψ inside that assumption context. Proof by cases uses a disjunction of cases and shows that each case leads to the desired conclusion.

Remark (Exposition). Proof by contradiction assumes the negation of the desired conclusion and derives an impossible situation. Contrapositive proof establishes $\varphi \rightarrow \psi$ by showing $\neg\psi \rightarrow \neg\varphi$. Chain-of-implications proofs use repeated hypothetical syllogism, while equivalence-chain proofs use replacement and logical equivalence.

Remark (Exposition). If the target has the form $\varphi \rightarrow \psi$, a conditional proof is often natural. If the available information has the form $\varphi \vee \psi$, proof by cases is often natural. If the target is an equivalence, an equivalence chain or two conditional proofs are often natural.

Remark (Dependencies).

- Valid Argument Form
- Logical Consequence

Semantic Justification of Argument Forms

Remark (Working vocabulary). This topic uses tautology, logical consequence, valid argument forms, and truth-table reasoning to connect named inference patterns with semantic validity.

Theorem (Tautological Implication Gives a Valid Argument Form)

Theorem 1.9.19 (Tautological Implication Gives a Valid Argument Form). *Let $\Gamma = \{\gamma_1, \dots, \gamma_n\} \subseteq \text{WFF}$ and let $\varphi \in \text{WFF}$. If*

$$(\gamma_1 \wedge \dots \wedge \gamma_n) \rightarrow \varphi$$

is a tautology, then the argument form (Γ, φ) is valid.

Go to proof.

Remark (Standard quantified statement).

$$\text{Tautology}((\gamma_1 \wedge \dots \wedge \gamma_n) \rightarrow \varphi) \implies \text{ValidArgumentForm}(\{\gamma_1, \dots, \gamma_n\}, \varphi).$$

Remark (Predicate reading). If the conditional from the conjunction of all premises to the conclusion is always true, then the premises cannot all be true while the conclusion is false.

Remark (Interpretation). This theorem converts a tautology check into an argument-validity check. It is one reason truth tables can validate named inference rules.

Remark (Exposition). The semantic proof pattern for a valid argument form is always the same. Let an arbitrary truth assignment make all premises true. Then show that the conclusion must also be true. If this can be done for an arbitrary truth assignment, then no counterexample assignment exists.

Remark (Exposition). This section does not yet define formal derivations. The word valid here is semantic: it refers to preservation of truth under truth assignments. Later proof systems will turn selected valid patterns into formal rules of inference.

Remark (Dependencies).

- [Tautology](#)
- [Valid Argument Form](#)
- [Logical Consequence](#)

Argument Forms as a Bridge to Formal Systems

Remark (Working vocabulary). This topic distinguishes semantic validity from formal derivability and explains why formal proof systems are deferred.

Remark (Exposition). A valid argument form is a semantic object: it preserves truth under all truth assignments. A formal rule of inference is a syntactic object inside a specified proof system. Many formal systems include rules corresponding to the valid argument forms justified in this section, but the semantic justification and the formal rule are not the same object.

Remark (Exposition). Formal proof systems require additional machinery: formal derivations, assumptions, discharge rules, axioms or axiom schemata, and precise proof-checking rules. Natural deduction, Hilbert systems, tableaux, resolution, and sequent calculus are examples of such systems. They are important, but they are not the main purpose of this introductory propositional-logic section.

Remark (Transition). The tools validated here are safe to use in ordinary mathematical proof because they are truth-preserving. Later, when formal proof systems are introduced, these same patterns can be represented as formal rules, derived rules, or admissible moves depending on the chosen system.

Summary and Transition

Remark (Working vocabulary). This summary reviews argument forms, validity, counterexamples, valid inference patterns, invalid forms, replacement rules, and the semantic foundation for ordinary proof moves.

Remark (Exposition). An argument form is valid when truth of the premises under an arbitrary truth assignment forces truth of the conclusion. The central negative test is a counterexample assignment: one assignment making all premises true and the conclusion false. This section justified both sides of the method by proving standard valid forms and refuting common invalid forms.

Remark (Exposition). The valid tools now grounded include modus ponens, modus tollens, hypothetical syllogism, disjunctive syllogism, addition, simplification, conjunction introduction, constructive dilemma, and destructive dilemma. The invalid forms of affirming the consequent and denying the antecedent were separated by explicit counterexample assignments.

Remark (Transition). The next section turns to compactness and finite satisfiability as a preview of a deeper theme: infinite-looking logical questions can sometimes be controlled by finite witnesses. The semantic foundation developed here remains the base for that discussion.

1.10 Compactness and Finite Satisfiability Preview

Toolkit

This section uses truth assignments, satisfiable sets of formulas, finite subsets, finite satisfiability, finite unsatisfiability witnesses, and propositional compactness.

Remark (Exposition). The compactness preview records the finite-information pattern behind propositional satisfiability: when a set of formulas is unsatisfiable, the failure is already visible in some finite subset.

Orientation

Remark (Orientation). The semantic ideas developed earlier apply formula by formula and also to sets of formulas. This section isolates the finite-information pattern behind that viewpoint. A truth assignment can satisfy a whole set Γ only when it makes every member of Γ true. Failure will be shown, in propositional logic, to be detected by some finite part of Γ . This is the content of compactness.

The goal is not to replace truth tables. It is to record the principle that truth tables suggest: whenever inconsistency appears in propositional logic, it appears after only finitely many formulas have been selected.

Remark (Guiding question). For a possibly infinite set $\Gamma \subseteq \text{WFF}$, when can the existence of truth assignments for every finite piece of Γ be promoted to a truth assignment for all of Γ ?

Remark (Scope of the preview). Everything in this section is stated using truth assignments, formulas, sets of formulas, and finite subsets. Later chapters will need richer semantic data, but this preview stays inside propositional logic.

Satisfiable Sets

Remark (Recall). By [satisfaction of a set of formulas](#), $v \models \Gamma$ means that $v \models \gamma$ for every $\gamma \in \Gamma$.

Definition (Satisfiable Set of Propositional Formulas)

Definition 1.10.1 (Satisfiable Set of Propositional Formulas). Let $\Gamma \subseteq \text{WFF}$. The set Γ is satisfiable if there exists a truth assignment v such that $v \models \Gamma$.

$$\text{SatisfiableSet}(\Gamma) \iff \exists v (\text{TruthAssignment}(v) \wedge v \models \Gamma).$$

Remark (Standard quantified statement).

$$\Gamma \text{ is satisfiable} \iff \exists v \left(\text{TruthAssignment}(v) \wedge \forall \varphi \in \Gamma (\widehat{v}(\varphi) = \text{True}) \right).$$

Remark (Definition predicate reading).

$$\text{SatisfiableSet}(\Gamma)$$

means that one truth assignment makes every formula in Γ true.

Remark (Negated quantified statement).

$$\neg \text{SatisfiableSet}(\Gamma) \iff \forall v \left(\text{TruthAssignment}(v) \Rightarrow \exists \varphi \in \Gamma (\widehat{v}(\varphi) = \text{False}) \right).$$

Remark (Negation predicate reading).

$$\neg \text{SatisfiableSet}(\Gamma)$$

means that every truth assignment fails on at least one formula in Γ .

Remark (Failure modes). Satisfiability fails when every truth assignment is blocked by at least one formula in Γ .

Remark (Failure mode decomposition).

$$\neg \text{SatisfiableSet}(\Gamma) \iff \forall v \left(\text{TruthAssignment}(v) \Rightarrow \exists \varphi \in \Gamma (\widehat{v}(\varphi) = \text{False}) \right).$$

Thus Γ is not satisfiable exactly when every truth assignment is defeated by at least one formula from Γ .

Remark (Interpretation). Satisfiability of a set is a compatibility condition. The formulas in Γ may impose many requirements, but they are satisfiable only if all of those requirements can be met by the same truth assignment.

Remark (Dependencies).

- [Truth Assignment](#)
- [Satisfaction of a Set of Formulas](#)

Definition (Unsatisfiable Set of Propositional Formulas)

Definition 1.10.2 (Unsatisfiable Set of Propositional Formulas). Let $\Gamma \subseteq \text{WFF}$. The set Γ is unsatisfiable if it is not satisfiable.

$$\text{UnsatisfiableSet}(\Gamma) \iff \neg \text{SatisfiableSet}(\Gamma).$$

Remark (Standard quantified statement).

$$\Gamma \text{ is unsatisfiable} \iff \forall v \left(\text{TruthAssignment}(v) \Rightarrow \exists \varphi \in \Gamma (\widehat{v}(\varphi) = \text{False}) \right).$$

Remark (Definition predicate reading).

$$\text{UnsatisfiableSet}(\Gamma)$$

means that no truth assignment makes every formula in Γ true.

Remark (Negated quantified statement).

$$\neg \text{UnsatisfiableSet}(\Gamma) \iff \text{SatisfiableSet}(\Gamma).$$

Remark (Negation predicate reading).

$$\neg \text{UnsatisfiableSet}(\Gamma)$$

means that Γ has at least one satisfying truth assignment.

Remark (Interpretation). Unsatisfiability is global failure of joint truth. It does not say that every formula in Γ is false; it says that no single truth assignment can make them all true at once.

Remark (Dependencies).

- [Satisfiable Set of Propositional Formulas](#)

Finitely Satisfiable Sets

Definition (Finite Subset of a Set of Propositional Formulas)

Definition 1.10.3 (Finite Subset of a Set of Propositional Formulas). Let $\Gamma \subseteq \text{WFF}$. A finite subset of Γ is a set $\Delta \subseteq \Gamma$ containing only finitely many formulas.

Remark (Standard quantified statement).

$$\Delta \text{ is a finite subset of } \Gamma \iff \Delta \subseteq \Gamma \wedge \Delta \text{ is finite.}$$

Remark (Definition predicate reading).

$$\Delta \subseteq \Gamma \quad \text{and} \quad \Delta \text{ is finite}$$

means that Δ is a finite selection of formulas from Γ .

Remark (Interpretation). A finite subset is a finite test case cut out of a larger set of formulas.

Remark (Dependencies).

- [Well-Formed Formula](#)

Definition (Finitely Satisfiable Set of Propositional Formulas)

Definition 1.10.4 (Finitely Satisfiable Set of Propositional Formulas). Let $\Gamma \subseteq \text{WFF}$. The set Γ is finitely satisfiable if every finite subset of Γ is satisfiable.

$$\text{FinitelySatisfiableSet}(\Gamma) \iff \forall \Delta \left((\Delta \subseteq \Gamma \wedge \Delta \text{ is finite}) \Rightarrow \text{SatisfiableSet}(\Delta) \right).$$

Remark (Standard quantified statement).

Γ is finitely satisfiable $\iff \forall \Delta \left((\Delta \subseteq \Gamma \wedge \Delta \text{ is finite}) \Rightarrow \exists v (\text{TruthAssignment}(v) \wedge v \models \Delta) \right)$.

Remark (Definition predicate reading).

FinitelySatisfiableSet(Γ)

means that every finite portion of Γ has at least one satisfying truth assignment.

Remark (Negated quantified statement).

$\neg \text{FinitelySatisfiableSet}(\Gamma) \iff \exists \Delta \left(\Delta \subseteq \Gamma \wedge \Delta \text{ is finite} \wedge \text{UnsatisfiableSet}(\Delta) \right)$.

Remark (Negation predicate reading).

$\neg \text{FinitelySatisfiableSet}(\Gamma)$

means that some finite subset of Γ already has no satisfying truth assignment.

Remark (Failure modes). Finite satisfiability fails when at least one finite subset of Γ is unsatisfiable.

Remark (Failure mode decomposition).

$\neg \text{FinitelySatisfiableSet}(\Gamma) \iff \exists \Delta \left(\Delta \subseteq \Gamma \wedge \Delta \text{ is finite} \wedge \text{UnsatisfiableSet}(\Delta) \right)$.

So failure of finite satisfiability is witnessed by one finite unsatisfiable subcollection.

Remark (Interpretation). Finite satisfiability says that no finite test has found a contradiction. It does not name a single truth assignment for all of Γ ; it only says that each finite test can be passed.

Remark (Dependencies).

- [Finite Subset of a Set of Propositional Formulas](#)
- [Satisfiable Set of Propositional Formulas](#)
- [Truth Assignment](#)

Finite Unsatisfiability Witnesses

Definition (Unsatisfiability Witness)

Definition 1.10.5 (Unsatisfiability Witness). Let $\Gamma \subseteq \text{WFF}$. A subset $\Delta \subseteq \Gamma$ is an unsatisfiability witness for Γ if Δ is unsatisfiable.

Remark (Standard quantified statement).

Δ is an unsatisfiability witness for $\Gamma \iff \Delta \subseteq \Gamma \wedge \text{UnsatisfiableSet}(\Delta)$.

Remark (Definition predicate reading).

$$\Delta \subseteq \Gamma \quad \text{and} \quad \text{UnsatisfiableSet}(\Delta)$$

means that the formulas in Δ already explain why the larger set Γ cannot be satisfied, provided Δ is part of Γ .

Remark (Interpretation). An unsatisfiability witness is a subcollection that already fails to be jointly satisfiable.

Remark (Dependencies).

- Unsatisfiable Set of Propositional Formulas

Definition (Finite Unsatisfiability Witness)

Definition 1.10.6 (Finite Unsatisfiability Witness). Let $\Gamma \subseteq \text{WFF}$. A subset $\Delta \subseteq \Gamma$ is a finite unsatisfiability witness for Γ if Δ is finite and unsatisfiable.

$$\text{FiniteUnsatisfiabilityWitness}(\Delta, \Gamma) \iff \Delta \subseteq \Gamma \wedge \Delta \text{ is finite} \wedge \text{UnsatisfiableSet}(\Delta).$$

Remark (Standard quantified statement).

$$\Delta \text{ is a finite unsatisfiability witness for } \Gamma \iff \Delta \subseteq \Gamma \wedge \Delta \text{ is finite} \wedge \text{UnsatisfiableSet}(\Delta).$$

Remark (Definition predicate reading).

$$\text{FiniteUnsatisfiabilityWitness}(\Delta, \Gamma)$$

means that Δ is a finite subset of Γ and that Δ already has no satisfying truth assignment.

Remark (Interpretation). A finite unsatisfiability witness is a finite obstruction. It says that the failure of Γ is already visible before one inspects all formulas in Γ .

Remark (Dependencies).

- Finite Subset of a Set of Propositional Formulas
- Unsatisfiable Set of Propositional Formulas

Theorem (Finite Unsatisfiability Witness)

Theorem 1.10.7 (Finite Unsatisfiability Witness). Let $\Gamma \subseteq \text{WFF}$. If there exists a finite $\Delta \subseteq \Gamma$ such that Δ is unsatisfiable, then Γ is unsatisfiable.

Go to proof.

Remark (Standard quantified statement).

$$\exists \Delta \text{ FiniteUnsatisfiabilityWitness}(\Delta, \Gamma) \Rightarrow \text{UnsatisfiableSet}(\Gamma).$$

Remark (Predicate reading).

$$\exists \Delta \text{ FiniteUnsatisfiabilityWitness}(\Delta, \Gamma) \Rightarrow \text{UnsatisfiableSet}(\Gamma)$$

means that a single finite unsatisfiable subcollection forces the whole set Γ to be unsatisfiable.

Remark (Failure modes). The theorem can fail only if a truth assignment satisfied Γ while a finite subset $\Delta \subseteq \Gamma$ remained unsatisfiable.

Remark (Failure mode decomposition).

$$\text{SatisfiableSet}(\Gamma) \Rightarrow \forall \Delta (\Delta \subseteq \Gamma \Rightarrow \text{SatisfiableSet}(\Delta)).$$

If the whole set has a satisfying truth assignment, each subset inherits one.

Remark (Contrapositive quantified statement).

$$\text{SatisfiableSet}(\Gamma) \Rightarrow \forall \Delta (\Delta \subseteq \Gamma \Rightarrow \text{SatisfiableSet}(\Delta)).$$

Remark (Contrapositive predicate reading).

$$\text{SatisfiableSet}(\Gamma) \Rightarrow \text{FinitelySatisfiableSet}(\Gamma)$$

means that one truth assignment for all of Γ also satisfies every finite subset of Γ .

Remark (Interpretation). An unsatisfiable finite subset is decisive. Adding more formulas cannot restore a truth assignment that already fails on the finite subset.

Remark (Dependencies).

- [Finite Unsatisfiability Witness](#)
- [Unsatisfiable Set of Propositional Formulas](#)
- [Satisfaction of a Set of Formulas](#)

Corollary (Finite Witness Contrapositive)

Corollary 1.10.8 (Finite Witness Contrapositive). *Let $\Gamma \subseteq \text{WFF}$. If Γ is satisfiable, then every finite subset of Γ is satisfiable.*

Go to proof.

Remark (Standard quantified statement).

$$\text{SatisfiableSet}(\Gamma) \Rightarrow \text{FinitelySatisfiableSet}(\Gamma).$$

Remark (Predicate reading).

$$\text{SatisfiableSet}(\Gamma) \Rightarrow \text{FinitelySatisfiableSet}(\Gamma)$$

means that full satisfiability automatically gives finite satisfiability.

Remark (Interpretation). This is the easy direction connecting full satisfiability to finite satisfiability: one truth assignment that works for all formulas also works for any finite selection.

Remark (Dependencies).

- [Finite Unsatisfiability Witness](#)
- [Finitely Satisfiable Set of Propositional Formulas](#)
- [Satisfiable Set of Propositional Formulas](#)

Propositional Compactness

Theorem (Propositional Compactness)

Theorem 1.10.9 (Propositional Compactness). *Let $\Gamma \subseteq \text{WFF}$. If every finite subset of Γ is satisfiable, then Γ is satisfiable.*

Go to proof.

Remark (Standard quantified statement).

$$\text{FinitelySatisfiableSet}(\Gamma) \Rightarrow \text{SatisfiableSet}(\Gamma).$$

Remark (Predicate reading).

$$\text{FinitelySatisfiableSet}(\Gamma) \Rightarrow \text{SatisfiableSet}(\Gamma)$$

means that passing every finite satisfiability test is enough to produce a truth assignment for all of Γ .

Remark (Negated quantified statement).

$$\text{FinitelySatisfiableSet}(\Gamma) \wedge \neg \text{SatisfiableSet}(\Gamma)$$

is the direct negation of the compactness implication.

Remark (Negation predicate reading).

$$\text{FinitelySatisfiableSet}(\Gamma) \wedge \neg \text{SatisfiableSet}(\Gamma)$$

would mean that all finite tests pass but the full set has no satisfying truth assignment.

Remark (Failure modes).

$$\neg \text{SatisfiableSet}(\Gamma) \Rightarrow \exists \Delta \left(\Delta \subseteq \Gamma \wedge \Delta \text{ is finite} \wedge \neg \text{SatisfiableSet}(\Delta) \right).$$

Compactness says that unsatisfiability cannot first appear only at the infinite level.

Remark (Failure mode decomposition).

$$\text{UnsatisfiableSet}(\Gamma) \Rightarrow \exists \Delta \text{ FiniteUnsatisfiabilityWitness}(\Delta, \Gamma).$$

Remark (Contrapositive quantified statement).

$$\text{UnsatisfiableSet}(\Gamma) \Rightarrow \exists \Delta \text{ FiniteUnsatisfiabilityWitness}(\Delta, \Gamma).$$

Remark (Contrapositive predicate reading). The contrapositive says that if Γ is unsatisfiable, then the failure is already witnessed by some finite subset of Γ .

Remark (Interpretation). Propositional compactness turns infinitely many finite checks into one global truth assignment. Equivalently, every propositional inconsistency has a finite witness.

Remark (Dependencies).

- [Finitely Satisfiable Set of Propositional Formulas](#)
- [Satisfiable Set of Propositional Formulas](#)
- [Finite Unsatisfiability Witness](#)

Finite Truth Table Intuition

Remark (Finite truth table intuition). Truth tables are finite because a single formula contains only finitely many variables. More generally, a finite set of formulas contains only finitely many variables, so its satisfiability can be checked by a finite truth table over those variables.

Remark (Finite test). For a finite $\Delta \subseteq \text{WFF}$, the variables appearing in Δ are finite in number. A truth table over those variables decides whether Δ is satisfiable.

Remark (Why compactness is surprising). Finite truth tables directly decide finite sets. Compactness says that, for propositional logic, passing all finite tests is enough to pass the entire possibly infinite test.

Remark (Dependencies).

- [Finiteness of Variables](#)
- [Finite Truth Table](#)
- [Finitely Satisfiable Set of Propositional Formulas](#)

Summary

Remark (Section summary). The compactness preview records three related ideas.

- A set of propositional formulas is satisfiable when one truth assignment makes all of its formulas true.
- A set is finitely satisfiable when every finite subset is satisfiable.
- Propositional compactness says that finite satisfiability is enough for satisfiability.

Remark (Conceptual takeaway). In propositional logic, an inconsistency always has a finite witness. If no finite witness exists, then the whole set of formulas can be satisfied.

Proofs

Remark (Return). [Return to Theorem](#)

Remark (Proof vault). [Handwritten proof record](#)

Lemma (Closure Under Formation). *The set WFF is closed under the propositional formation rules.*

That is, if $\varphi \in \text{WFF}$, then

$$\neg\varphi \in \text{WFF}.$$

If $\varphi, \psi \in \text{WFF}$ and

$$\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\},$$

then

$$(\varphi \circ \psi) \in \text{WFF}.$$

Professional Standard Proof.

By the recursive definition of WFF, the negation formation rule says that whenever $\varphi \in \text{WFF}$, the formula $\neg\varphi$ also belongs to WFF. Hence

$$\varphi \in \text{WFF} \implies \neg\varphi \in \text{WFF}.$$

The same definition includes the binary connective formation rule: if $\varphi, \psi \in \text{WFF}$ and

$$\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\},$$

then the composite formula $(\varphi \circ \psi)$ belongs to WFF. These are exactly the two closure assertions, so WFF is closed under the propositional formation rules. $\square$

Detailed Learning Proof.

We prove each formation rule separately.

First suppose that $\varphi \in \text{WFF}$. One of the clauses in the definition of a well-formed formula is the negation clause:

$$\text{if } \theta \in \text{WFF}, \text{ then } \neg\theta \in \text{WFF}.$$

Applying this clause with $\theta = \varphi$ gives

$$\neg\varphi \in \text{WFF}.$$

Now suppose that $\varphi, \psi \in \text{WFF}$, and let

$$\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}.$$

Another clause in the definition of WFF is the binary connective clause:

$$\text{if } \theta, \eta \in \text{WFF} \text{ and } \bullet \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}, \text{ then } (\theta \bullet \eta) \in \text{WFF}.$$

Applying this clause with

$$\theta = \varphi, \quad \eta = \psi, \quad \bullet = \circ$$

gives

$$(\varphi \circ \psi) \in \text{WFF}.$$

Since the formulas φ, ψ , and the connective $\circ$ were arbitrary subject to the stated hypotheses, both required closure properties hold. $\square$

Remark (Proof structure). This is a definition-unpacking proof. No induction is needed: the lemma only uses the forward direction of the formation rules that define WFF.

Remark (Dependencies).

- [Well-Formed Formula](#)

Remark (Return). [Return to Theorem](#)

Remark (Proof vault). [Handwritten proof record](#)

Theorem (Minimality of Well-Formed Formulas). *Let S be a set of strings over the propositional alphabet. Suppose:*

1. $\text{Prop} \subseteq S$;
2. if $\varphi \in S$, then $\neg\varphi \in S$;
3. if $\varphi, \psi \in S$ and $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$, then $(\varphi \circ \psi) \in S$.

Then

$$\text{WFF} \subseteq S.$$

Professional Standard Proof.

We prove by structural induction on $\varphi \in \text{WFF}$ that $\varphi \in S$.

If φ is atomic, then $\varphi = P$ for some $P \in \text{Prop}$. Since $\text{Prop} \subseteq S$, it follows that $\varphi = P \in S$.

Suppose $\varphi = \neg\theta$, where $\theta \in \text{WFF}$. By the induction hypothesis, $\theta \in S$. By the second hypothesis on S , $\neg\theta \in S$. Hence $\varphi \in S$.

Suppose $\varphi = (\theta \circ \psi)$, where $\theta, \psi \in \text{WFF}$ and

$$\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}.$$

By the induction hypothesis, $\theta \in S$ and $\psi \in S$. By the third hypothesis on S , $(\theta \circ \psi) \in S$. Hence $\varphi \in S$.

Therefore every $\varphi \in \text{WFF}$ belongs to S , and so

$$\text{WFF} \subseteq S.$$

□

Detailed Learning Proof.

The hypotheses say that S contains the atomic formulas and is closed under the same formation rules used to build well-formed formulas. We show that no well-formed formula can escape S .

Proceed by structural induction on well-formed formulas. The induction claim is:

$$\text{for every } \varphi \in \text{WFF}, \quad \varphi \in S.$$

Base case. Suppose φ is atomic. Then

$$\varphi = P$$

for some propositional variable $P \in \text{Prop}$. Since $\text{Prop} \subseteq S$, we have $P \in S$. Therefore $\varphi \in S$.

Negation step. Suppose φ is obtained by the negation formation rule. Then

$$\varphi = \neg\theta$$

for some $\theta \in \text{WFF}$. By the induction hypothesis, the smaller formula θ already belongs to S . The second hypothesis on S says that whenever a formula belongs to S , its negation also belongs to S . Hence

$$\neg\theta \in S.$$

Since $\varphi = \neg\theta$, this gives $\varphi \in S$.

Binary connective step. Suppose φ is obtained by a binary connective formation rule. Then

$$\varphi = (\theta \circ \psi),$$

where $\theta, \psi \in \text{WFF}$ and

$$\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}.$$

By the induction hypothesis,

$$\theta \in S \quad \text{and} \quad \psi \in S.$$

The third hypothesis on S says that S is closed under each of the binary connectives $\wedge, \vee, \rightarrow, \leftrightarrow$. Therefore

$$(\theta \circ \psi) \in S.$$

Since $\varphi = (\theta \circ \psi)$, we have $\varphi \in S$.

The base case, negation step, and binary connective step cover every way a well-formed formula is built. By structural induction, every member of WFF belongs to S . Thus

$$\text{WFF} \subseteq S.$$

□

Remark (Proof structure). The proof is structural induction following the grammar for WFF . The base case uses $\text{Prop} \subseteq S$. The induction steps use the two closure assumptions on S .

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Structural Induction for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Theorem (Structural Induction for Propositional Formulas). *Let $A(\varphi)$ be a property of well-formed formulas. Suppose:*

1. $A(P)$ holds for every $P \in \mathbf{Prop}$;
2. if $A(\varphi)$ holds, then $A(\neg\varphi)$ holds;
3. if $A(\varphi)$ and $A(\psi)$ hold, then $A((\varphi \circ \psi))$ holds for every $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$.

Then $A(\theta)$ holds for every $\theta \in \mathbf{WFF}$.

Professional Standard Proof.

TODO: professional standard proof for structural-induction-propositional-formulas. □

Detailed Learning Proof.

TODO: detailed learning proof for structural-induction-propositional-formulas. □

Remark (Proof structure).

Remark (Dependencies).

- [Well-Formed Formula](#)

Remark (Return). [Return to Theorem](#)

Theorem (Structural Recursion for Propositional Formulas). *To define a function F on WFF, it suffices to specify:*

1. $F(P)$ for every $P \in \mathbf{Prop}$;
2. $F(\neg\varphi)$ in terms of $F(\varphi)$;
3. $F((\varphi \circ \psi))$ in terms of $F(\varphi)$, $F(\psi)$, and $\circ$.

When these clauses respect the formation rules, they determine a unique function on WFF.

Professional Standard Proof.

TODO: professional standard proof for structural-recursion-propositional-formulas. □

Detailed Learning Proof.

TODO: detailed learning proof for structural-recursion-propositional-formulas. □

Remark (Proof structure).

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Structural Induction for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Lemma (Constructor Disjointness for Propositional Formulas). *The three outer formation cases for propositional formulas are disjoint:*

1. *no propositional variable is a negation formula;*
2. *no propositional variable is a binary formula;*
3. *no negation formula is a binary formula.*

Professional Standard Proof.

TODO: professional standard proof for constructor-disjointness-propositional-formulas. □

Detailed Learning Proof.

TODO: detailed learning proof for constructor-disjointness-propositional-formulas. □

Remark (Proof structure).

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Atomic Formula](#)
- [Main Connective](#)

Remark (Return). [Return to Theorem](#)

Lemma (Constructor Injectivity for Propositional Formulas). *The propositional formula constructors are injective:*

1. *if $\neg\varphi = \neg\psi$, then $\varphi = \psi$;*
2. *if $(\varphi \circ \psi) = (\alpha \star \beta)$, then $\varphi = \alpha$, $\psi = \beta$, and $\circ = \star$.*

Professional Standard Proof.

TODO: professional standard proof for constructor-injectivity-propositional-formulas. □

Detailed Learning Proof.

TODO: detailed learning proof for constructor-injectivity-propositional-formulas. □

Remark (Proof structure).

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Logical Connective](#)

Remark (Return). [Return to Theorem](#)

Theorem (Unique Decomposition for Propositional Formulas). *Every $\varphi \in \text{WFF}$ has exactly one outermost form:*

1. $\varphi = P$ for a unique $P \in \text{Prop}$;
2. $\varphi = \neg\psi$ for a unique $\psi \in \text{WFF}$;
3. $\varphi = (\psi \circ \chi)$ for unique $\psi, \chi \in \text{WFF}$ and a unique binary connective $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$.

Professional Standard Proof.

TODO: professional standard proof for unique-decomposition-propositional-formulas. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for unique-decomposition-propositional-formulas. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Constructor Disjointness for Propositional Formulas](#)
- [Constructor Injectivity for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Theorem (Unique Syntax Tree for Propositional Formulas). *Every propositional well-formed formula has a unique parse tree.*

Professional Standard Proof.

TODO: professional standard proof for unique-syntax-tree-propositional-formulas. □

Detailed Learning Proof.

TODO: detailed learning proof for unique-syntax-tree-propositional-formulas. □

Remark (Proof structure).

Remark (Dependencies).

- [Parse Tree](#)
- [Unique Decomposition for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Lemma (Proper Subformula Depth). *If ψ is a proper subformula of φ , then*

$$\text{depth}(\psi) < \text{depth}(\varphi).$$

Professional Standard Proof.

TODO: professional standard proof for proper-subformula-depth-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for proper-subformula-depth-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Subformula](#)
- [Formula Depth](#)

Remark (Return). [Return to Theorem](#)

Lemma (Finiteness of Variables in a Formula). *For every $\varphi \in \text{WFF}$, the set $\text{Var}(\varphi)$ is finite.*

Professional Standard Proof.

TODO: professional standard proof for finiteness-of-variables-propositional-formulas. □

Detailed Learning Proof.

TODO: detailed learning proof for finiteness-of-variables-propositional-formulas. □

Remark (Proof structure).

Remark (Dependencies).

- [Variable Set of a Formula](#)
- [Structural Induction for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Lemma (Finiteness of Subformulas). *For every $\varphi \in \text{WFF}$, the set $\text{Sub}(\varphi)$ is finite.*

Professional Standard Proof.

TODO: professional standard proof for finiteness-of-subformulas-propositional-formulas. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for finiteness-of-subformulas-propositional-formulas. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Subformula](#)
- [Structural Induction for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Theorem (Unique Extension of a Truth Assignment). *Every truth assignment*

$$v : \text{Prop} \rightarrow \mathbb{B}$$

has a unique extension

$$\widehat{v} : \text{WFF} \rightarrow \mathbb{B}$$

satisfying the recursive truth clauses for propositional variables and the primitive connectives.

Professional Standard Proof.

TODO: professional standard proof for unique-extension-truth-assignment-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for unique-extension-truth-assignment-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Truth Assignment](#)
- [Extension of a Truth Assignment to Formulas](#)
- [Structural Recursion for Propositional Formulas](#)
- [Unique Decomposition for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Lemma (Coincidence Lemma for Propositional Logic). *Let $v, w : \mathbf{Prop} \rightarrow \mathbb{B}$ be truth assignments. If v and w agree on every propositional variable occurring in φ , then they assign the same truth value to φ :*

$$v|_{\text{Var}(\varphi)} = w|_{\text{Var}(\varphi)} \implies \widehat{v}(\varphi) = \widehat{w}(\varphi).$$

Professional Standard Proof.

TODO: professional standard proof for coincidence-lemma-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for coincidence-lemma-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Variable Set of a Formula](#)
- [Unique Extension of a Truth Assignment](#)
- [Structural Induction for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Theorem (Finite Truth-Table Theorem). *Every propositional formula has a finite truth table. More precisely, if $\text{Var}(\varphi)$ has n elements, then φ has a truth table with 2^n rows.*

Professional Standard Proof.

TODO: professional standard proof for finite-truth-table-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for finite-truth-table-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Truth Table](#)
- [Finiteness of Variables in a Formula](#)

Remark (Return). [Return to Theorem](#)

Theorem (Counting Boolean Functions). *There are exactly*

$$2^{2^n}$$

Boolean functions $\mathbb{B}^n \rightarrow \mathbb{B}$.

Professional Standard Proof.

TODO: professional standard proof for counting-boolean-functions. □

Detailed Learning Proof.

TODO: detailed learning proof for counting-boolean-functions. □

Remark (Proof structure).

Remark (Dependencies).

- [Boolean Function](#)

Remark (Return). [Return to Theorem](#)

Theorem (Logical Equivalence is an Equivalence Relation). *Logical equivalence is reflexive, symmetric, and transitive on WFF:*

$$\varphi \equiv \varphi, \quad \varphi \equiv \psi \implies \psi \equiv \varphi,$$

and

$$(\varphi \equiv \psi \wedge \psi \equiv \chi) \implies \varphi \equiv \chi.$$

Professional Standard Proof.

TODO: professional standard proof for logical-equivalence-equivalence-relation. □

Detailed Learning Proof.

TODO: detailed learning proof for logical-equivalence-equivalence-relation. □

Remark (Proof structure).

Remark (Dependencies).

- [Logical Equivalence](#)

Remark (Return). [Return to Theorem](#)

Theorem (Basic Boolean Equivalence Laws). *For all formulas $\varphi, \psi, \chi \in \text{WFF}$, the following logical equivalences hold.*

Commutativity:

$$\varphi \wedge \psi \equiv \psi \wedge \varphi, \quad \varphi \vee \psi \equiv \psi \vee \varphi.$$

Associativity:

$$(\varphi \wedge \psi) \wedge \chi \equiv \varphi \wedge (\psi \wedge \chi), \quad (\varphi \vee \psi) \vee \chi \equiv \varphi \vee (\psi \vee \chi).$$

Idempotence:

$$\varphi \wedge \varphi \equiv \varphi, \quad \varphi \vee \varphi \equiv \varphi.$$

Double negation:

$$\neg\neg\varphi \equiv \varphi.$$

Professional Standard Proof.

TODO: professional standard proof for basic-boolean-equivalence-laws-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for basic-boolean-equivalence-laws-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Logical Equivalence](#)
- [Unique Extension of a Truth Assignment](#)

Remark (Return). [Return to Theorem](#)

Theorem (Identity and Domination Laws). *Let $\top$ be any tautological formula and let $\perp$ be any contradictory formula. Then for every $\varphi \in \text{WFF}$:*

$$\varphi \wedge \top \equiv \varphi, \quad \varphi \vee \perp \equiv \varphi,$$

and

$$\varphi \wedge \perp \equiv \perp, \quad \varphi \vee \top \equiv \top.$$

Professional Standard Proof.

TODO: professional standard proof for identity-domination-laws-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for identity-domination-laws-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Tautology](#)
- [Contradiction](#)
- [Logical Equivalence](#)

Remark (Return). [Return to Theorem](#)

Theorem (De Morgan Laws for Propositional Logic). *For all $\varphi, \psi \in \text{WFF}$,*

$$\neg(\varphi \wedge \psi) \equiv \neg\varphi \vee \neg\psi,$$

and

$$\neg(\varphi \vee \psi) \equiv \neg\varphi \wedge \neg\psi.$$

Professional Standard Proof.

TODO: professional standard proof for de-morgan-laws-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for de-morgan-laws-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Logical Equivalence](#)
- [Unique Extension of a Truth Assignment](#)

Remark (Return). [Return to Theorem](#)

Theorem (Distributive Laws for Propositional Logic). *For all $\varphi, \psi, \chi \in \text{WFF}$,*

$$\varphi \wedge (\psi \vee \chi) \equiv (\varphi \wedge \psi) \vee (\varphi \wedge \chi),$$

and

$$\varphi \vee (\psi \wedge \chi) \equiv (\varphi \vee \psi) \wedge (\varphi \vee \chi).$$

Professional Standard Proof.

TODO: professional standard proof for distributive-laws-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for distributive-laws-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Logical Equivalence](#)
- [Unique Extension of a Truth Assignment](#)

Remark (Return). [Return to Theorem](#)

Theorem (Absorption Laws). *For all $\varphi, \psi \in \text{WFF}$,*

$$\varphi \wedge (\varphi \vee \psi) \equiv \varphi,$$

and

$$\varphi \vee (\varphi \wedge \psi) \equiv \varphi.$$

Professional Standard Proof.

TODO: professional standard proof for absorption-laws-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for absorption-laws-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Logical Equivalence](#)
- [Basic Boolean Equivalence Laws](#)
- [Distributive Laws for Propositional Logic](#)

Remark (Return). [Return to Theorem](#)

Theorem (Conditional Equivalence Laws). *For all $\varphi, \psi \in \text{WFF}$,*

$$\varphi \rightarrow \psi \equiv \neg\varphi \vee \psi,$$

and

$$\neg(\varphi \rightarrow \psi) \equiv \varphi \wedge \neg\psi.$$

Professional Standard Proof.

TODO: professional standard proof for conditional-equivalence-laws-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for conditional-equivalence-laws-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Logical Equivalence](#)
- [Unique Extension of a Truth Assignment](#)

Remark (Return). [Return to Theorem](#)

Theorem (Biconditional Equivalence Laws). *For all $\varphi, \psi \in \text{WFF}$,*

$$\varphi \leftrightarrow \psi \equiv (\varphi \rightarrow \psi) \wedge (\psi \rightarrow \varphi),$$

and

$$\varphi \leftrightarrow \psi \equiv (\varphi \wedge \psi) \vee (\neg\varphi \wedge \neg\psi).$$

Professional Standard Proof.

TODO: professional standard proof for biconditional-equivalence-laws-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for biconditional-equivalence-laws-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Logical Equivalence](#)
- [Conditional Equivalence Laws](#)

Remark (Return). [Return to Theorem](#)

Theorem (Replacement of Logical Equivalents). *Replacing logically equivalent formulas inside a formula context preserves logical equivalence:*

$$\varphi \equiv \psi \implies C[\varphi] \equiv C[\psi].$$

Professional Standard Proof.

TODO: professional standard proof for replacement-of-logical-equivalents-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for replacement-of-logical-equivalents-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Formula Context](#)
- [Logical Equivalence](#)
- [Coincidence Lemma for Propositional Logic](#)
- [Unique Extension of a Truth Assignment](#)
- [Replacement of Logical Equivalents](#)

Remark (Return). [Return to Theorem](#)

Theorem (Canonical Disjunctive Normal Form Theorem). *Every formula $\varphi \in \text{WFF}$ is logically equivalent to its canonical disjunctive normal form relative to a fixed ordering of its finitely many variables.*

$$\varphi \equiv \text{CDNF}_{P_1, \dots, P_n}(\varphi).$$

Professional Standard Proof.

TODO: professional standard proof for canonical-disjunctive-normal-form-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for canonical-disjunctive-normal-form-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Canonical Disjunctive Normal Form](#)
- [Finite Truth-Table Theorem](#)
- [Coincidence Lemma for Propositional Logic](#)
- [Logical Equivalence](#)

Remark (Return). [Return to Theorem](#)

Theorem (Canonical Conjunctive Normal Form Theorem). *Every formula $\varphi \in \text{WFF}$ is logically equivalent to its canonical conjunctive normal form relative to a fixed ordering of its finitely many variables.*

$$\varphi \equiv \text{CCNF}_{P_1, \dots, P_n}(\varphi).$$

Professional Standard Proof.

TODO: professional standard proof for canonical-conjunctive-normal-form-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for canonical-conjunctive-normal-form-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Canonical Conjunctive Normal Form](#)
- [Finite Truth-Table Theorem](#)
- [Coincidence Lemma for Propositional Logic](#)
- [Logical Equivalence](#)

Remark (Return). [Return to Theorem](#)

Theorem (Existence of Conjunctive Normal Form). *For every formula $\varphi \in \text{WFF}$, there exists a formula $\psi \in \text{WFF}$ such that ψ is in [conjunctive normal form](#) and*

$$\varphi \equiv \psi.$$

Professional Standard Proof.

TODO: professional standard proof for existence-conjunctive-normal-form-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for existence-conjunctive-normal-form-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Conjunctive Normal Form](#)
- [Negation Normal Form](#)
- [Distributive Laws for Propositional Logic](#)
- [Replacement of Logical Equivalents](#)
- [Existence of Negation Normal Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (Existence of Disjunctive Normal Form). *For every formula $\varphi \in \text{WFF}$, there exists a formula $\psi \in \text{WFF}$ such that ψ is in [disjunctive normal form](#) and*

$$\varphi \equiv \psi.$$

Professional Standard Proof.

TODO: professional standard proof for existence-disjunctive-normal-form-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for existence-disjunctive-normal-form-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Disjunctive Normal Form](#)
- [Negation Normal Form](#)
- [Distributive Laws for Propositional Logic](#)
- [Replacement of Logical Equivalents](#)
- [Existence of Negation Normal Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (DNF Satisfiability Criterion). *Let ψ be a formula in [disjunctive normal form](#). Then ψ is [satisfiable](#) if and only if at least one conjunction term in ψ contains no [complementary pair of literals](#).*

Professional Standard Proof.

TODO: professional standard proof for dnf-satisfiability-criterion-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for dnf-satisfiability-criterion-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Disjunctive Normal Form](#)
- [Complementary Literals](#)
- [Satisfiable Formula](#)

Remark (Return). [Return to Theorem](#)

Theorem (Existence of Negation Normal Form). *For every formula $\varphi \in \text{WFF}$, there exists a formula $\psi \in \text{WFF}$ such that ψ is in negation normal form and*

$$\varphi \equiv \psi.$$

Professional Standard Proof.

TODO: professional standard proof for existence-negation-normal-form-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for existence-negation-normal-form-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Negation Normal Form](#)
- [NNF Conversion Procedure](#)
- [Replacement of Logical Equivalents](#)
- [Structural Induction for Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Theorem (Semantic Classification by Normal Forms). *Normal forms give finite certificates for semantic classification. For any formula $\varphi \in \mathbf{WFF}$:*

1. φ is *satisfiable* if and only if some *DNF* formula equivalent to φ has a satisfiable conjunction term.
2. φ is a *contradiction* if and only if some *DNF* formula equivalent to φ has no satisfiable conjunction term.
3. φ is a *tautology* if and only if some *CNF* formula equivalent to φ has no falsifiable clause.
4. φ is a *contingency* if and only if it is satisfiable and not a tautology.

Professional Standard Proof.

TODO: professional standard proof for normal-form-semantic-classification-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for normal-form-semantic-classification-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Disjunctive Normal Form](#)
- [Conjunctive Normal Form](#)
- [Satisfiable Formula](#)
- [Contradiction](#)
- [Tautology](#)
- [Contingency](#)
- [DNF Satisfiability Criterion](#)
- [Canonical Disjunctive Normal Form Theorem](#)
- [Canonical Conjunctive Normal Form Theorem](#)

Remark (Return). [Return to Theorem](#)

Theorem (DNF Representation of Boolean Functions). *Every Boolean function $f : \mathbb{B}^n \rightarrow \mathbb{B}$ is represented by a formula in disjunctive normal form using variables $P_1, \dots, P_n$.*

Professional Standard Proof.

TODO: professional standard proof for dnf-representation-of-boolean-functions-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for dnf-representation-of-boolean-functions-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Representation of a Boolean Function](#)
- [Canonical Disjunctive Normal Form](#)
- [Canonical Disjunctive Normal Form Theorem](#)
- [Disjunctive Normal Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (Conjunction and Disjunction are not Functionally Complete). *The connective basis $\{\wedge, \vee\}$ is not functionally complete.*

Professional Standard Proof.

TODO: professional standard proof for conjunction-disjunction-not-functionally-complete-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for conjunction-disjunction-not-functionally-complete-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Incomplete Connective Set](#)
- [Monotone Boolean Function](#)
- [Functionally Complete Connective Set](#)

Remark (Return). [Return to Theorem](#)

Theorem (NAND and NOR are Minimal Complete Bases). *The one-connective bases $\{\uparrow\}$ and $\{\downarrow\}$ are minimal complete bases.*

Professional Standard Proof.

TODO: professional standard proof for nand-nor-minimal-complete-bases-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for nand-nor-minimal-complete-bases-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Minimal Complete Basis](#)
- [NAND is Functionally Complete](#)
- [NOR is Functionally Complete](#)
- [Incomplete Connective Set](#)

Remark (Return). [Return to Theorem](#)

Theorem (NAND is Functionally Complete). *The one-connective basis $\{\uparrow\}$ is functionally complete.*

Professional Standard Proof.

TODO: professional standard proof for nand-functionally-complete-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for nand-functionally-complete-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [NAND Connective](#)
- [NAND-Only Formula](#)
- [Functionally Complete Connective Set](#)
- [Negation and Conjunction are Functionally Complete](#)

Remark (Return). [Return to Theorem](#)

Theorem (NOR is Functionally Complete). *The one-connective basis $\{\downarrow\}$ is functionally complete.*

Professional Standard Proof.

TODO: professional standard proof for nor-functionally-complete-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for nor-functionally-complete-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [NOR Connective](#)
- [NOR-Only Formula](#)
- [Functionally Complete Connective Set](#)
- [Negation and Disjunction are Functionally Complete](#)

Remark (Return). [Return to Theorem](#)

Theorem (Standard Connectives are Functionally Complete). *The connective basis*

$$\{\neg, \wedge, \vee\}$$

is functionally complete.

Professional Standard Proof.

TODO: professional standard proof for standard-connectives-functionally-complete-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for standard-connectives-functionally-complete-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Functionally Complete Connective Set](#)
- [DNF Representation of Boolean Functions](#)
- [Disjunctive Normal Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (Negation and Conjunction are Functionally Complete). *The connective basis*

$$\{\neg, \wedge\}$$

is functionally complete.

Professional Standard Proof.

TODO: professional standard proof for negation-conjunction-functionally-complete-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for negation-conjunction-functionally-complete-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Standard Connectives are Functionally Complete](#)
- [De Morgan Laws for Propositional Logic](#)
- [Replacement of Logical Equivalents](#)

Remark (Return). [Return to Theorem](#)

Theorem (Negation and Disjunction are Functionally Complete). *The connective basis*

$$\{\neg, \vee\}$$

is functionally complete.

Professional Standard Proof.

TODO: professional standard proof for negation-disjunction-functionally-complete-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for negation-disjunction-functionally-complete-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Standard Connectives are Functionally Complete](#)
- [De Morgan Laws for Propositional Logic](#)
- [Replacement of Logical Equivalents](#)

Remark (Return). [Return to Theorem](#)

Theorem (Truth-Table Validity Test for Argument Forms). *An argument form (Γ, φ) is valid if and only if no row of its truth table makes every formula in Γ true and φ false.*

Professional Standard Proof.

TODO: professional standard proof for truth-table-validity-test-argument-forms-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for truth-table-validity-test-argument-forms-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)
- [Counterexample Assignment](#)
- [Truth Table](#)
- [Finite Truth-Table Theorem](#)

Remark (Return). [Return to Theorem](#)

Theorem (Affirming the Consequent is Invalid). *The argument form*

$$\varphi \rightarrow \psi, \quad \psi \quad \therefore \quad \varphi$$

is invalid.

Professional Standard Proof.

TODO: professional standard proof for affirming-consequent-invalid-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for affirming-consequent-invalid-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Counterexample Assignment](#)
- [Valid Argument Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (Denying the Antecedent is Invalid). *The argument form*

$$\varphi \rightarrow \psi, \quad \neg\varphi \quad \therefore \quad \neg\psi$$

is invalid.

Professional Standard Proof.

TODO: professional standard proof for denying-antecedent-invalid-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for denying-antecedent-invalid-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Counterexample Assignment](#)
- [Valid Argument Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (Replacement Rules Preserve Logical Equivalence). *If a formula ψ is obtained from a formula φ by finitely many applications of rules of replacement, then $\varphi \equiv \psi$.*

Professional Standard Proof.

TODO: professional standard proof for replacement-rules-preserve-logical-equivalence-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for replacement-rules-preserve-logical-equivalence-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Rule of Replacement](#)
- [Replacement of Logical Equivalents](#)
- [Logical Equivalence is an Equivalence Relation](#)

Remark (Return). [Return to Theorem](#)

Theorem (Tautological Implication Gives a Valid Argument Form). *Let $\Gamma = \{\gamma_1, \dots, \gamma_n\} \subseteq \text{WFF}$ and let $\varphi \in \text{WFF}$. If*

$$(\gamma_1 \wedge \dots \wedge \gamma_n) \rightarrow \varphi$$

is a tautology, then the argument form (Γ, φ) is valid.

Professional Standard Proof.

TODO: professional standard proof for tautological-implication-valid-argument-form-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for tautological-implication-valid-argument-form-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Tautology](#)
- [Valid Argument Form](#)
- [Logical Consequence](#)

Remark (Return). [Return to Theorem](#)

Theorem (Modus Ponens is Valid). *The argument form*

$$\varphi, \quad \varphi \rightarrow \psi \quad \therefore \quad \psi$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for modus-ponens-validity-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for modus-ponens-validity-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)
- [Truth Assignment](#)

Remark (Return). [Return to Theorem](#)

Theorem (Modus Tollens is Valid). *The argument form*

$$\varphi \rightarrow \psi, \quad \neg\psi \quad \therefore \quad \neg\varphi$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for modus-tollens-validity-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for modus-tollens-validity-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)
- [Conditional Equivalence Laws](#)

Remark (Return). [Return to Theorem](#)

Theorem (Hypothetical Syllogism is Valid). *The argument form*

$$\varphi \rightarrow \psi, \quad \psi \rightarrow \chi \quad \therefore \quad \varphi \rightarrow \chi$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for hypothetical-syllogism-validity-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for hypothetical-syllogism-validity-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)
- [Logical Consequence](#)

Remark (Return). [Return to Theorem](#)

Theorem (Disjunctive Syllogism is Valid). *The argument form*

$$\varphi \vee \psi, \quad \neg\varphi \quad \therefore \quad \psi$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for disjunctive-syllogism-validity-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for disjunctive-syllogism-validity-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)
- [Truth Assignment](#)

Remark (Return). [Return to Theorem](#)

Theorem (Addition is Valid). *The argument form*

$$\varphi \quad \therefore \quad \varphi \vee \psi$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for addition-validity-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for addition-validity-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (Simplification is Valid). *The argument form*

$$\varphi \wedge \psi \quad \therefore \quad \varphi$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for simplification-validity-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for simplification-validity-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (Conjunction Introduction is Valid). *The argument form*

$$\varphi, \quad \psi \quad \therefore \quad \varphi \wedge \psi$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for conjunction-introduction-validity-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for conjunction-introduction-validity-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)

Remark (Return). [Return to Theorem](#)

Theorem (Constructive Dilemma is Valid). *The argument form*

$$\varphi \rightarrow \chi, \quad \psi \rightarrow \theta, \quad \varphi \vee \psi \quad \therefore \quad \chi \vee \theta$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for constructive-dilemma-validity-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for constructive-dilemma-validity-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)
- [Disjunctive Syllogism is Valid](#)

Remark (Return). [Return to Theorem](#)

Theorem (Destructive Dilemma is Valid). *The argument form*

$$\varphi \rightarrow \chi, \quad \psi \rightarrow \theta, \quad \neg\chi \vee \neg\theta \quad \therefore \quad \neg\varphi \vee \neg\psi$$

is valid.

Professional Standard Proof.

TODO: professional standard proof for destructive-dilemma-validity-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for destructive-dilemma-validity-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Valid Argument Form](#)
- [Modus Tollens is Valid](#)

Remark (Return). [Return to Theorem](#)

Theorem (Finite Unsatisfiability Witness). *Let $\Gamma \subseteq \text{WFF}$. If there exists a finite $\Delta \subseteq \Gamma$ such that Δ is unsatisfiable, then Γ is unsatisfiable.*

Professional Standard Proof.

TODO: professional standard proof for finite-unsatisfiability-witness-propositional-logic. $\square$

Detailed Learning Proof.

TODO: detailed learning proof for finite-unsatisfiability-witness-propositional-logic. $\square$

Remark (Proof structure).

Remark (Dependencies).

- [Finite Unsatisfiability Witness](#)
- [Unsatisfiable Set of Propositional Formulas](#)
- [Satisfaction of a Set of Formulas](#)

Remark (Return). [Return to Theorem](#)

Corollary (Finite Witness Contrapositive). *Let $\Gamma \subseteq \text{WFF}$. If Γ is satisfiable, then every finite subset of Γ is satisfiable.*

Professional Standard Proof.

TODO: professional standard proof for finite-unsatisfiability-witness-contrapositive-propositional-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for finite-unsatisfiability-witness-contrapositive-propositional-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Finite Unsatisfiability Witness](#)
- [Finitely Satisfiable Set of Propositional Formulas](#)
- [Satisfiable Set of Propositional Formulas](#)

Remark (Return). [Return to Theorem](#)

Theorem (Propositional Compactness). *Let $\Gamma \subseteq \text{WFF}$. If every finite subset of Γ is satisfiable, then Γ is satisfiable.*

Professional Standard Proof.

TODO: professional standard proof for propositional-compactness. □

Detailed Learning Proof.

TODO: detailed learning proof for propositional-compactness. □

Remark (Proof structure).

Remark (Dependencies).

- [Finitely Satisfiable Set of Propositional Formulas](#)
- [Satisfiable Set of Propositional Formulas](#)
- [Finite Unsatisfiability Witness](#)

Chapter 2

Predicate Logic



2.1 Model-Theoretic View

Toolkit

This section presents first-order logic as a syntax-plus-semantics model, with the language interpreted by structures and formulas evaluated by the shared free-algebra machinery.

Theory (First-Order Logic)

Depends on: Signature; term; formula; sentence; bridge:consequence; Cn_+

Language

$$\mathcal{L} = (\text{Const}_{\mathcal{L}}, \text{Func}_{\mathcal{L}}, \text{Rel}_{\mathcal{L}}, =).$$

$$\text{Term}_{\mathcal{L}}, \quad \text{Form}_{\mathcal{L}}, \quad \text{Sent}_{\mathcal{L}}.$$

Presented Theory

$$T := \text{Cn}_+(\Sigma), \quad \Sigma \subseteq \text{Sent}_{\mathcal{L}}.$$

Theorems and Consequences

$$1. \quad \Gamma \vdash_{\text{FOL}} \varphi \iff \Gamma \models_{\text{FOL}} \varphi \quad (\text{completeness}).$$

Model (First-Order Logic)

Model 2.1.1 (First-Order Logic). **Depends on:** $\mathcal{L}$ -structure; interpretation; assignment; bridge:free-sigma-algebra-evaluation; bridge:consequence

Note

FOL runs the shared machine twice: once for terms, then once for quantifier-free formulas. Quantifiers sit above that fixed-seed machine.

Structure

$$\mathcal{A} = \langle A, I \rangle, \quad A \neq \emptyset.$$

$$I(c) \in A, \quad I(f) : A^n \rightarrow A, \quad I(R) \subseteq A^n, \quad = \text{ is logical equality on } A.$$

Binding

$$s : \text{Var} \rightarrow A \xrightarrow{\text{eval}(\mathcal{A}_{\text{term}})} \llbracket \cdot \rrbracket_{\mathcal{A},s} \xrightarrow{\text{relation/equality tests}} \sigma_s \xrightarrow{\text{eval}(\mathbf{2})} \models_{\text{qf}}.$$

Binding

$$\Sigma_{\text{term}} := \text{Const}_{\mathcal{L}} \cup \text{Func}_{\mathcal{L}}, \quad \mathcal{A}_{\text{term}} := (A, (If)_f, (Ic)_{c \in \text{Const}}).$$

$$\llbracket \cdot \rrbracket_{\mathcal{A},s} := \text{eval}(\mathcal{A}_{\text{term}})(s).$$

Binding

$$\sigma_s(R(\bar{t})) := [(\llbracket t_1 \rrbracket_{\mathcal{A},s}, \dots, \llbracket t_n \rrbracket_{\mathcal{A},s}) \in I(R)],$$

$$\sigma_s(t_1 = t_2) := [\llbracket t_1 \rrbracket_{\mathcal{A},s} = \llbracket t_2 \rrbracket_{\mathcal{A},s}].$$

Syntax–Semantics Bridge

$$\mathcal{A}, s \models \varphi \iff \text{eval}(\mathbf{2})(\sigma_s)(\varphi) = 1 \quad (\varphi \text{ quantifier-free}).$$

Syntax–Semantics Bridge

$$\mathcal{A}, s \models \exists x \varphi \iff \exists a \in A, \mathcal{A}, s[x \mapsto a] \models \varphi.$$

$$\mathcal{A}, s \models \forall x \varphi \iff \forall a \in A, \mathcal{A}, s[x \mapsto a] \models \varphi.$$

Syntax–Semantics Bridge

For $\sigma \in \text{Sent}_{\mathcal{L}}$, $\mathcal{A}, s \models \sigma$ is independent of s by the coincidence lemma, so

$$\mathcal{A} \models \sigma := \mathcal{A}, s \models \sigma \quad (s \text{ arbitrary}).$$

Theorems and Consequences

1. Semantic consequence, $\mathcal{A} \models T$, and $\text{Th}(\mathcal{A})$ are inherited from *Consequence*.
2. Prop is the base case: seed = v . FOL is the inductive case: s is evaluated into term values, then relation tests compute σ_s .

Definitional Extension (First-Order Logic)

Depends on: theory:first-order-logic; expansion; reduct; conservativity; unique existence

Note

$$\exists!y \varphi(y) \quad :\equiv \quad \exists y (\varphi(y) \wedge \forall y' (\varphi(y') \rightarrow y' = y)).$$

Admissibility

Relation symbol R , arity n :

$$\forall \bar{x} (R(\bar{x}) \leftrightarrow \varphi(\bar{x})).$$

Function symbol f , arity n :

$$T \vdash \forall \bar{x} \exists!y \psi(\bar{x}, y), \quad \forall \bar{x} \forall y (f(\bar{x}) = y \leftrightarrow \psi(\bar{x}, y)).$$

Constant symbol c :

$$T \vdash \exists!y \psi(y), \quad \forall y (c = y \leftrightarrow \psi(y)).$$

Theorems and Consequences

1.
$$T^+ \vdash \sigma \quad \Longleftrightarrow \quad T \vdash \sigma \quad (\sigma \in \mathcal{L}).$$
2.
$$\mathcal{A} \models T \implies \exists! \mathcal{A}^+ (\mathcal{A}^+ \upharpoonright \mathcal{L} = \mathcal{A}).$$

2.2 Axiom Schemas

Predicate-Logic Axiom Schemas

The predicate-logic development extends propositional logic with the following quantifier axiom schemas. The side conditions prevent variable capture and ensure that the displayed instances are well formed.

Axiom Schema (Predicate Logic 1)

Axiom 2.2.1 (Universal Instantiation). For every formula $\varphi(x)$ and every term t that is free for x in φ ,

$$\forall x \varphi(x) \implies \varphi(t).$$

Remark (Interpretation). A universally quantified statement may be specialized to any admissible instance.

Axiom Schema (Predicate Logic 2)

Axiom 2.2.2 (Quantifier Distribution). For formulas φ and $\psi(x)$, if x is not free in φ , then

$$\forall x (\varphi \implies \psi(x)) \implies (\varphi \implies \forall x \psi(x)).$$

Remark (Interpretation). When a hypothesis does not depend on the quantified variable, a universal conclusion may be drawn uniformly under that hypothesis.

2.3 Syntax

2.3.1 Syntax of First-Order Logic: Terms and Formulas

Remark (Section toolkit: Syntax ledger). This section fixes the syntactic inventory for first-order logic before any semantic machinery is introduced. The ledger proceeds from symbols to terms, from terms to atomic formulas, and from atomic formulas to all well-formed formulas.

Layer	Item	Role
Symbol stock	Variable	reusable placeholder symbol
Symbol stock	Constant Symbol	nullary name-forming symbol
Symbol stock	Function Symbol	operation-forming symbol
Symbol stock	Predicate Symbol	assertion-forming symbol
Object syntax	Term	expression that names an object syntactically
Formula syntax	Atomic Formula	predicate symbol applied to terms
Formula syntax	Well-Formed Formula	formula generated by the grammar
Formula syntax	Molecular Formula	non-atomic well-formed formula

Remark (Exposition). The grammar has two tracks. Terms are built first, because atomic formulas need terms as their inputs. Formulas are built second, because they begin with atomic formulas and then close under logical connectives and quantifiers. Semantic notions such as structures, assignments, satisfaction, truth, and models enter later; the present section records only which strings count as grammatical expressions.

Remark (Grammar boundary). Terms name objects. Formulas make assertions. A term is not a formula, and a formula is not a term. For example, $f(x)$ is a term, while $P(f(x))$ is a formula.

Remark (Predicate-symbol convention). Object-language predicate symbols, such as P, Q, R , are symbols that occur inside first-order formulas. Project metalanguage predicate readings, such as $\text{Term}(t)$ or $\text{AtomicFormula}(\varphi)$, are external classification predicates used by these notes to describe the grammar. The two levels should not be confused.

Definition (Variable)

Definition 2.3.1 (Variable). For a first-order language $\mathcal{L}$, a *variable* is a symbol drawn from the distinguished variable stock of $\mathcal{L}$. Variables are usually written

$$x, y, z, x_0, x_1, x_2, \dots$$

Remark (Standard quantified statement).

$$\text{Var}_{\mathcal{L}} = \{x, y, z, x_0, x_1, x_2, \dots\}.$$

Remark (Definition predicate reading). $\text{Variable}(x)$ means $x \in \text{Var}_{\mathcal{L}}$.

Remark (Negated quantified statement).

$$x \notin \text{Var}_{\mathcal{L}}.$$

Remark (Negation predicate reading). $\neg \text{Variable}(x)$ means that x is not one of the variable symbols of $\mathcal{L}$.

Remark (Failure modes). A symbol fails to be a variable when it belongs to a different syntactic role, such as a constant symbol, function symbol, predicate symbol, connective, or punctuation mark.

Remark (Failure mode decomposition).

$$\underbrace{c}_{\text{constant symbol}} \quad \underbrace{f}_{\text{function symbol}} \quad \underbrace{P}_{\text{predicate symbol}} \quad \underbrace{\forall}_{\text{logical symbol}}.$$

Remark (Interpretation). A variable is a basic syntactic placeholder. It can occur inside terms and formulas, and later sections explain how quantifiers bind occurrences of variables.

Remark (Examples). x, y, z, x_0 , and x_1 are standard variable symbols.

Remark (Non-Examples). $c, 0, f, P, \forall$, and $\wedge$ are not variables merely because they are symbols of the language.

Remark (Dependencies).

- [Language](#)

Definition (Constant Symbol)

Definition 2.3.2 (Constant Symbol). For a first-order language $\mathcal{L}$, a *constant symbol* is a non-logical symbol of arity 0. A constant symbol may occur as a term without taking input terms.

Remark (Standard quantified statement).

$$\text{Const}_{\mathcal{L}} = \{c \in \mathcal{L} : \text{arity}(c) = 0\}.$$

Remark (Definition predicate reading). $\text{ConstantSymbol}(c)$ means $c \in \text{Const}_{\mathcal{L}}$.

Remark (Negated quantified statement).

$$c \notin \text{Const}_{\mathcal{L}}.$$

Remark (Negation predicate reading). $\neg \text{ConstantSymbol}(c)$ means that c is not a nullary non-logical symbol of $\mathcal{L}$.

Remark (Failure modes). A symbol fails to be a constant symbol when it is not in the language, is logical punctuation, or has positive arity.

Remark (Failure mode decomposition).

$$\underbrace{x}_{\text{variable}} \quad \underbrace{f}_{\text{positive arity}} \quad \underbrace{(}_{\text{punctuation}} \quad .$$

Remark (Interpretation). A constant symbol is a simple name-forming symbol in the grammar. It supplies a base case for terms alongside variables.

Remark (Examples). In an arithmetic language, 0 and 1 are commonly used as constant symbols.

Remark (Non-Examples). $f(x)$ is not a constant symbol; it is a term built from a function symbol and an input term.

Remark (Dependencies).

- [Variable](#)

Definition (Function Symbol)

Definition 2.3.3 (Function Symbol). For a first-order language $\mathcal{L}$, an n -ary *function symbol* is a non-logical symbol of arity $n \geq 1$. If f has arity n , then it forms terms by the pattern

$$f(t_1, \dots, t_n).$$

Remark (Standard quantified statement).

$$\text{Func}_{\mathcal{L}}^{(n)} = \{f \in \mathcal{L} : \text{arity}(f) = n \text{ and } n \geq 1\}.$$

Remark (Definition predicate reading). $\text{FunctionSymbol}(f)$ means $f \in \text{Func}_{\mathcal{L}}^{(n)}$ for some $n \geq 1$.

Remark (Negated quantified statement).

$$\forall n \geq 1 (f \notin \text{Func}_{\mathcal{L}}^{(n)}).$$

Remark (Negation predicate reading). $\neg \text{FunctionSymbol}(f)$ means that f is not a positive-arity function symbol of $\mathcal{L}$.

Remark (Failure modes). A symbol fails to be a function symbol when it is a variable, constant symbol, predicate symbol, logical symbol, punctuation mark, or has no assigned positive arity.

Remark (Failure mode decomposition).

$$\underbrace{c}_{\text{arity 0}} \quad \underbrace{P}_{\text{predicate symbol}} \quad \underbrace{\neg}_{\text{logical symbol}}.$$

Remark (Interpretation). A function symbol is an operation-forming symbol in the grammar. It is not a term by itself; it becomes part of a term only after it is supplied the required number of input terms.

Remark (Examples). In an arithmetic language, S may be unary, while $+$ and $\cdot$ may be binary function symbols.

Remark (Non-Examples). $f(x)$ is not a function symbol. It is a term formed by applying the function symbol f to the term x .

Remark (Dependencies).

- [Constant Symbol](#)

Definition (Predicate Symbol)

Definition 2.3.4 (Predicate Symbol). For a first-order language $\mathcal{L}$, an n -ary *predicate symbol* is a non-logical symbol of arity $n \geq 1$. If P has arity n , then it forms atomic formulas by the pattern

$$P(t_1, \dots, t_n).$$

Remark (Standard quantified statement).

$$\text{Pred}_{\mathcal{L}}^{(n)} = \{P \in \mathcal{L} : \text{arity}(P) = n \text{ and } n \geq 1\}.$$

Remark (Definition predicate reading). $\text{PredicateSymbol}(P)$ means $P \in \text{Pred}_{\mathcal{L}}^{(n)}$ for some $n \geq 1$.

Remark (Negated quantified statement).

$$\forall n \geq 1 (P \notin \text{Pred}_{\mathcal{L}}^{(n)}).$$

Remark (Negation predicate reading). $\neg \text{PredicateSymbol}(P)$ means that P is not a positive-arity predicate symbol of $\mathcal{L}$.

Remark (Failure modes). A symbol fails to be a predicate symbol when it belongs to the term-forming side of the language, is a logical symbol, is punctuation, or has no assigned positive arity as a predicate symbol.

Remark (Failure mode decomposition).

$$\underbrace{x}_{\text{variable}} \quad \underbrace{c}_{\text{constant symbol}} \quad \underbrace{f}_{\text{function symbol}} \quad \underbrace{\exists}_{\text{logical symbol}}.$$

Remark (Interpretation). Predicate symbols are the atomic-formula-forming vocabulary of the language. They are syntactic symbols, not project metalanguage predicates.

Remark (Examples). P , Q , R , $<$, and $=$ may be predicate symbols when the language declares the corresponding arities.

Remark (Non-Examples). $P(x)$ is not a predicate symbol. It is an atomic formula formed from the predicate symbol P and the term x .

Remark (Dependencies).

- **Function Symbol**

Definition (Term)

Definition 2.3.5 (Term). The set of *terms* of a first-order language $\mathcal{L}$, denoted $\text{Term}_{\mathcal{L}}$, is the smallest set of strings satisfying:

1. every variable is a term;
2. every constant symbol is a term;
3. if f is an n -ary function symbol and $t_1, \dots, t_n$ are terms, then $f(t_1, \dots, t_n)$ is a term;
4. no string is a term unless it is generated by finitely many applications of the previous clauses.

Remark (Standard quantified statement).

$$\text{Term}_{\mathcal{L}} = \bigcap \left\{ S : \text{Var}_{\mathcal{L}} \subseteq S, \text{Const}_{\mathcal{L}} \subseteq S, (\forall n \geq 1)(\forall f \in \text{Func}_{\mathcal{L}}^{(n)})(\forall t_1, \dots, t_n \in S) f(t_1, \dots, t_n) \in S \right\}.$$

Remark (Definition predicate reading). $\text{Term}(t)$ means $t \in \text{Term}_{\mathcal{L}}$.

Remark (Negated quantified statement).

$$\sigma \notin \text{Term}_{\mathcal{L}} \iff \exists S \left[\begin{array}{l} \text{Var}_{\mathcal{L}} \subseteq S \wedge \text{Const}_{\mathcal{L}} \subseteq S \\ \wedge (\forall n \geq 1)(\forall f \in \text{Func}_{\mathcal{L}}^{(n)})(\forall t_1, \dots, t_n \in S) f(t_1, \dots, t_n) \in S \\ \wedge \sigma \notin S \end{array} \right].$$

Remark (Negation predicate reading). $\neg \text{Term}(\sigma)$ means that σ is not generated by the term-formation clauses.

Remark (Failure modes). A string fails to be a term when it uses a predicate symbol, connective, or quantifier at the outer syntactic level, when a function symbol has too few or too many input terms, or when punctuation does not match the arity pattern.

Remark (Failure mode decomposition).

$$\underbrace{P(x)}_{\text{atomic formula, not a term}} \quad \underbrace{f(x, y)}_{\text{wrong arity if } f \text{ is unary}} \quad \underbrace{\forall x}_{\text{quantifier fragment}} .$$

Remark (Interpretation). Terms are the noun-like expressions of first-order syntax. They provide the inputs to predicate symbols but do not themselves make assertions.

Remark (Examples). x , c , $f(x)$, $g(c, x)$, and $h(f(x), c)$ are terms when the language assigns the displayed arities.

Remark (Non-Examples). $P(x)$, $\neg P(x)$, $\forall x P(x)$, and $x \wedge y$ are not terms.

Remark (Dependencies).

- [Language](#)

Definition (Atomic Formula)

Definition 2.3.6 (Atomic Formula). An *atomic formula* of a first-order language $\mathcal{L}$ is a string of the form

$$P(t_1, \dots, t_n),$$

where P is an n -ary predicate symbol and $t_1, \dots, t_n$ are terms.

Remark (Standard quantified statement).

$$\text{Atom}_{\mathcal{L}} = \left\{ P(t_1, \dots, t_n) : P \in \text{Pred}_{\mathcal{L}}^{(n)} \text{ and } t_1, \dots, t_n \in \text{Term}_{\mathcal{L}} \right\}.$$

Remark (Definition predicate reading). $\text{AtomicFormula}(\varphi)$ means $\varphi \in \text{Atom}_{\mathcal{L}}$.

Remark (Negated quantified statement).

$$\varphi \notin \text{Atom}_{\mathcal{L}}.$$

Remark (Negation predicate reading). $\neg \text{AtomicFormula}(\varphi)$ means that φ is not a predicate symbol applied to the required number of terms.

Remark (Failure modes). A string fails to be atomic when it does not begin with a predicate symbol, when the predicate symbol receives the wrong number of term inputs, when an input is not a term, or when a logical connective or quantifier has already been applied.

Remark (Failure mode decomposition).

$$\underbrace{f(x)}_{\text{term, not formula}} \quad \underbrace{P(x, y)}_{\text{wrong arity if } P \text{ is unary}} \quad \underbrace{\neg P(x)}_{\text{molecular formula}} .$$

Remark (Interpretation). Atomic formulas are the base cases of formula formation. They are the first strings in the grammar that count as formulas.

Remark (Examples). $P(x)$, $R(x, c)$, $x = y$, and $x < y$ are atomic formulas when the language supplies the relevant predicate symbols and arities.

Remark (Non-Examples). x , $f(x)$, $\neg P(x)$, and $(P(x) \wedge Q(x))$ are not atomic formulas.

Remark (Dependencies).

- [Predicate Symbol](#)
- [Term](#)

Definition (Formula)

Definition 2.3.7 (Formula). For a first-order language $\mathcal{L}$, a *formula* is an expression formed by the formula grammar of $\mathcal{L}$. The grammar starts from atomic formulas and closes under the logical connectives and quantifiers of the language.

Remark (Interpretation). The language supplies the symbols and formation rules; the formula notion is the syntactic category governed by those rules.

Remark (Dependencies).

- [Language](#)

Definition (Well-Formed Formula)

Definition 2.3.8 (Well-Formed Formula). The set of *well-formed formulas* of a first-order language $\mathcal{L}$, denoted $\mathbf{Form}_{\mathcal{L}}$, is the smallest set of strings satisfying:

1. every atomic formula is a well-formed formula;
2. if φ is a well-formed formula, then $\neg\varphi$ is a well-formed formula;
3. if φ and ψ are well-formed formulas and $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$, then $(\varphi \circ \psi)$ is a well-formed formula;
4. if φ is a well-formed formula and x is a variable, then $\forall x \varphi$ and $\exists x \varphi$ are well-formed formulas;
5. no string is a well-formed formula unless it is generated by finitely many applications of the previous clauses.

Remark (Standard quantified statement).

$$\begin{aligned} \mathbf{Form}_{\mathcal{L}} = \bigcap \{ S : & \mathbf{Atom}_{\mathcal{L}} \subseteq S, \\ & (\forall \varphi \in S)(\neg\varphi \in S), \\ & (\forall \varphi, \psi \in S)(\forall \circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\})((\varphi \circ \psi) \in S), \\ & (\forall x \in \mathbf{Var}_{\mathcal{L}})(\forall \varphi \in S)(\forall \varphi \in S \wedge \exists x \varphi \in S) \}. \end{aligned}$$

Remark (Definition predicate reading). $\mathbf{WellFormedFormula}(\varphi)$ means $\varphi \in \mathbf{Form}_{\mathcal{L}}$.

Remark (Negated quantified statement).

$$\varphi \notin \text{Form}_{\mathcal{L}} \iff \exists S \left[\begin{array}{l} \text{Atom}_{\mathcal{L}} \subseteq S \wedge (\forall \psi \in S)(\neg \psi \in S) \\ \wedge (\forall \psi, \chi \in S)(\forall \circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\})((\psi \circ \chi) \in S) \\ \wedge (\forall x \in \text{Var}_{\mathcal{L}})(\forall \psi \in S)(\forall x \psi \in S \wedge \exists x \psi \in S) \\ \wedge \varphi \notin S \end{array} \right].$$

Remark (Negation predicate reading). $\neg \text{WellFormedFormula}(\varphi)$ means that φ is not generated by the formula-formation clauses.

Remark (Failure modes). A string fails to be well formed when it is a bare term, has a missing operand, uses a quantifier without a variable and formula, has unmatched punctuation, or cannot be produced by finitely many formation steps.

Remark (Failure mode decomposition).

$$\underbrace{f(x)}_{\text{term only}} \quad \underbrace{P(x) \wedge}_{\text{missing right formula}} \quad \underbrace{\forall P(x)}_{\text{missing bound variable}} \quad \underbrace{(P(x))}_{\text{unmatched punctuation}}.$$

Remark (Interpretation). Well-formed formulas are exactly the grammatical formula strings of the language. Later semantic and proof-theoretic sections apply only to these strings.

Remark (Examples). $P(x)$, $\neg P(x)$, $(P(x) \rightarrow Q(x))$, and $\forall x (P(x) \rightarrow Q(x))$ are well-formed formulas.

Remark (Non-Examples). x , $f(x)$, $P(x) \wedge$, and $\forall P(x)$ are not well-formed formulas.

Remark (Dependencies).

- [Formula](#)

Definition (Molecular Formula)

Definition 2.3.9 (Molecular Formula). A *molecular formula* is a well-formed formula that is not atomic. Equivalently, it is a well-formed formula whose final formation step uses a logical connective or a quantifier.

Remark (Standard quantified statement).

$$\varphi \in \text{Form}_{\mathcal{L}} \setminus \text{Atom}_{\mathcal{L}}.$$

Remark (Definition predicate reading).

$$\text{MolecularFormula}(\varphi) := \text{WellFormedFormula}(\varphi) \wedge \neg \text{AtomicFormula}(\varphi).$$

Remark (Negated quantified statement).

$$\varphi \notin \text{Form}_{\mathcal{L}} \quad \text{or} \quad \varphi \in \text{Atom}_{\mathcal{L}}.$$

Remark (Negation predicate reading). $\neg \text{MolecularFormula}(\varphi)$ means that φ is either not a well-formed formula or is atomic.

Remark (Failure modes). A string fails to be a molecular formula either because it is not a well-formed formula at all or because it is an atomic formula with no outer logical construction.

Remark (Failure mode decomposition).

$$\underbrace{x}_{\text{not a formula}} \quad \underbrace{P(x)}_{\text{atomic formula}} \quad \underbrace{P(x) \wedge \quad}_{\text{not well formed}}.$$

Remark (Interpretation). Molecular formulas are the compound formulas of first-order syntax. They are formed after the atomic stage by applying a connective or quantifier.

Remark (Examples). $\neg P(x)$, $(P(x) \wedge Q(x))$, and $\forall x P(x)$ are molecular formulas.

Remark (Non-Examples). $P(x)$ is atomic rather than molecular, and $f(x)$ is a term rather than a formula.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Atomic Formula](#)

Variables and Substitution — Quick Reference

Concept	Meaning	Detail
Scope of a quantifier	Formula governed by the quantifier	↓ Def
Bound/free occurrence	Whether x is captured by a quantifier	↓ Def
Free variable $\text{FV}(\varphi)$	Variables whose values affect truth	↓ Def
Sentence	Formula with $\text{FV}(\varphi) = \emptyset$	↓ Def
Substitution $\varphi[t/x]$	Replace free x by term t	↓ Def
Free for substitution	No variable in t becomes bound	↓ Def
Alpha-equivalence	Renaming bound variables	↓ Def

2.3.2 Syntax: Free Variables, Bound Variables, and Substitution

Definition (Scope of a Quantifier)

Definition 2.3.10 (Scope of a Quantifier). Let φ be a formula of a first-order language. If φ is of the form $\forall x \psi$ or $\exists x \psi$, then the formula ψ is called the *scope* of the quantifier. The quantifier is said to *bind* all occurrences of the variable x that appear within its scope.

Remark (Dependencies).

- [Formula](#)
- [Variable](#)
- [Universal Quantifier](#)

- [Existential Quantifier](#)

Remark (English reading). The scope is the reach of a quantifier — the subformula it governs. Scope is syntactically determined by the parenthesisation of the formula, not by proximity to the quantifier symbol.

Example. In $(\forall x P(x)) \wedge Q(x)$, the scope of $\forall x$ is $P(x)$ only. The occurrence of x in $Q(x)$ falls outside the scope and is free.

Definition (Bound and Free Occurrences)

Definition 2.3.11 (Bound and Free Occurrences). An occurrence of a variable x in a formula φ is *bound* if it lies within the scope of a quantifier $\forall x$ or $\exists x$. An occurrence of x is *free* if it is not bound by any quantifier in φ .

Remark (Dependencies).

- [Formula](#)
- [Variable](#)
- [Universal Quantifier](#)
- [Existential Quantifier](#)
- [Scope of a Quantifier](#)

Remark (English reading). The same variable can have both bound and free occurrences in a single formula. Each occurrence is classified independently by checking whether it falls within the scope of a binding quantifier.

Definition (Free Variables of a Formula)

Definition 2.3.12 (Free Variables of a Formula). The set $FV(\varphi)$ of *free variables* of a formula φ is defined recursively:

1. If $\varphi = P(t_1, \dots, t_n)$ is atomic, then $FV(\varphi) = \bigcup_{i=1}^n \text{Var}(t_i)$, where $\text{Var}(t_i)$ is the set of variables in term t_i .
2. $FV(\neg\varphi) = FV(\varphi)$.
3. $FV(\varphi \circ \psi) = FV(\varphi) \cup FV(\psi)$ for any binary connective $\circ$.
4. $FV(\forall x \varphi) = FV(\varphi) \setminus \{x\}$.
5. $FV(\exists x \varphi) = FV(\varphi) \setminus \{x\}$.

Remark (Dependencies).

- [Bound and Free Occurrences](#)

- Atomic Formula
- Formula
- Term
- Variable
- Union
- Set Difference

Remark (English reading). $FV(\varphi)$ collects exactly those variables whose values can influence the truth of φ under a structure. Quantifying over x removes x from the free set because the quantifier takes responsibility for ranging over all (or some) values of x .

Remark (Common error). Terms themselves contain only free variables. Variables become bound only through quantification in formulas. The interpretation of a formula depends exactly on the values assigned to its free variables.

Definition (Sentence)

Definition 2.3.13 (Sentence). A *sentence* (or *closed formula*) is a formula with no free variables.

Formally, φ is a sentence if and only if $FV(\varphi) = \emptyset$.

Remark (Dependencies).

- Formula
- Free Variables of a Formula
- Empty Set

Remark (Consequence). For sentences, truth depends only on the structure, not on the variable assignment. This makes sentences the natural objects to be called true or false in a model, without qualification.

Definition (Substitution Notation)

Definition 2.3.14 (Substitution Notation). Let φ be a formula, x a variable, and t a term.

The expression $\varphi[t/x]$ denotes the formula obtained from φ by replacing every *free* occurrence of x with the term t , leaving bound occurrences of x unchanged.

Remark (Dependencies).

- Variable
- Term
- Formula
- Bound and Free Occurrences

Definition (Free for Substitution)

Definition 2.3.15 (Free for Substitution). A term t is *free for x* in φ if no free occurrence of x in φ lies within the scope of a quantifier $\forall y$ or $\exists y$ where y is a variable occurring in t . Equivalently, t is free for x in φ if the substitution $\varphi[t/x]$ does not result in any variable in t becoming bound.

Remark (Standard quantified statement). The relation “ t is free for x in φ ” is defined by structural induction on formulas. It is automatic for atomic formulas. It is preserved through Boolean connectives:

$$t \text{ free for } x \text{ in } \neg\varphi \iff t \text{ free for } x \text{ in } \varphi,$$

and similarly componentwise for $\varphi \wedge \psi$, $\varphi \vee \psi$, and $\varphi \rightarrow \psi$. For a quantified formula, the capture-avoidance condition is

$$t \text{ free for } x \text{ in } Qy\varphi \iff (x \text{ is not free in } Qy\varphi) \text{ or } (y \notin \text{Var}(t) \text{ and } t \text{ is free for } x \text{ in } \varphi),$$

where Q is either $\forall$ or $\exists$.

Remark (Dependencies).

- Variable
- Term
- Formula
- Bound and Free Occurrences
- Free Variables of a Formula

Remark (Capture-avoiding substitution). A substitution $\varphi[t/x]$ is admissible only if t is free

for x in φ . If this condition is violated, a variable occurring in t may become bound after substitution, silently changing the meaning of the formula. This is called *variable capture*.

Example (Variable capture). In the formula $\exists y (x < y)$, the term $y + 1$ is not free for x . A blind substitution would produce $\exists y (y + 1 < y)$, where the y introduced by the term has been captured by the existing quantifier.

Remark (Common error). Variable capture is one of the most common syntactic mistakes in predicate logic. Always check that the term being substituted introduces no variables that fall inside a binding quantifier in the target formula.

Definition (Alpha-Equivalence)

Definition 2.3.16 (Alpha-Equivalence). Formulas that differ only by the names of bound variables are logically equivalent. This is called *alpha-equivalence* (or *alphabetic variance*):

$$\forall x \varphi \equiv \forall y \varphi[y/x] \quad (\text{provided } y \text{ is not free in } \varphi).$$

Remark (Dependencies).

- [Formula](#)
- [Bound and Free Occurrences](#)
- [Substitution Notation](#)
- [Free for Substitution](#)

Remark (Consequence). Alpha-equivalence is the formal basis for the bound variable renaming used in prenex normal form conversion and in any proof where variable capture must be avoided. Two alpha-equivalent formulas are interchangeable in all contexts.

Formula Depth — Quick Reference

Concept	Meaning	Detail
Formula depth	Max formation steps from atomic formulas	↓ Def

2.3.3 Syntax: Formula Depth

Definition (Formula Depth)

Definition 2.3.17 (Formula Depth). The *depth* (or *complexity*) of a formula φ , denoted $\text{depth}(\varphi)$, is a natural number defined recursively:

1. **Atomic case.** If φ is atomic, then $\text{depth}(\varphi) = 0$.
2. **Negation.** If $\varphi = \neg\psi$, then $\text{depth}(\varphi) = \text{depth}(\psi) + 1$.
3. **Binary connectives.** If $\varphi = (\psi \circ \chi)$ for $\circ \in \{\wedge, \vee, \rightarrow, \leftrightarrow\}$, then

$$\text{depth}(\varphi) = \max\{\text{depth}(\psi), \text{depth}(\chi)\} + 1.$$

4. **Quantifiers.** If $\varphi = \forall x \psi$ or $\varphi = \exists x \psi$, then $\text{depth}(\varphi) = \text{depth}(\psi) + 1$.

Remark (Dependencies).

- [Formula](#)
- Natural Numbers
- [Universal Quantifier](#)
- [Existential Quantifier](#)

Remark (English reading). The depth of a formula measures the maximum number of logical formation steps required to build the formula from atomic formulas. It corresponds to the height of the formula's syntactic parse tree.

Remark (Proof strategy). Formula depth is the standard measure used in structural induction proofs over first-order formulas. The base case is depth 0 (atomic formulas); the inductive step handles each formation rule and assumes the result holds for sub-formulas of strictly smaller depth.

2.4 Semantics

2.4.1 Semantics: Structures and Variable Assignments

Remark (Section toolkit: Semantic setup). This section is the first point at which semantic objects enter the Predicate Logic chapter. A language supplies the symbols; a structure supplies a domain and interpretations for the non-logical symbols; an assignment supplies values for variables; term evaluation turns terms into domain elements.

Item	Notation	Role
First-order language	$\mathcal{L}$	symbol stock with arities
Structure	$\mathcal{M} = \langle D, I \rangle$	semantic object for $\mathcal{L}$
Variable assignment	$s : \text{Var}_{\mathcal{L}} \rightarrow D$	values for variables
Modified assignment	$s[x \mapsto d]$	update at one variable
Term evaluation	$\llbracket t \rrbracket_{\mathcal{M}, s}$	value of a term

Definition (First-Order Language)

Definition 2.4.1 (First-Order Language). A *first-order language* $\mathcal{L}$ consists of variables, logical symbols, and a signature of non-logical symbols: constant symbols, function symbols with assigned arities, and predicate symbols with assigned arities. Equality may be included as a distinguished logical predicate.

Remark (Standard quantified statement).

A first-order language $\mathcal{L}$ has symbol classes

$$\text{Var}_{\mathcal{L}}, \quad \text{Const}_{\mathcal{L}}, \quad \text{Func}_{\mathcal{L}}^{(n)}, \quad \text{Pred}_{\mathcal{L}}^{(n)} \quad (n \geq 1),$$

together with the usual logical connectives, quantifiers, and punctuation.

Remark (Definition predicate reading). $\text{FirstOrderLanguage}(L)$ means that L supplies the variable stock, logical symbols, and arity-indexed non-logical symbols used to form first-order terms and formulas.

Remark (Negated quantified statement).

L is not equipped with the required first-order symbol classes and arities.

Remark (Negation predicate reading). $\neg \text{FirstOrderLanguage}(L)$ means that L lacks some required syntactic stock or arity assignment.

Remark (Failure modes). A proposed language fails when its non-logical symbols are not sorted by role, when positive-arity symbols have no arity, or when the logical grammar is not specified.

Remark (Failure mode decomposition).

$$\underbrace{\text{Const}_L}_{\text{constant symbols}} \quad \underbrace{\text{Func}_L^{(n)}}_{\text{function symbols with arity}} \quad \underbrace{\text{Pred}_L^{(n)}}_{\text{predicate symbols with arity}} .$$

Remark (Interpretation). A first-order language is still syntax. It says which expressions can be formed, but it does not assign objects, functions, or relations to the non-logical symbols.

Remark (Examples). The arithmetic language with constant symbols 0, 1, function symbols $S, +, \cdot$, and predicate symbol $<$ is a first-order language once the arities are fixed.

Remark (Dependencies).

- Variable

- Constant Symbol
- Function Symbol
- Predicate Symbol

Definition (Structure)

Definition 2.4.2 (Structure). Let $\mathcal{L}$ be a first-order language. A *structure* for $\mathcal{L}$ is a pair

$$\mathcal{M} = \langle D, I \rangle$$

where D is a nonempty set and I assigns each constant symbol an element of D , each n -ary function symbol a function $D^n \rightarrow D$, and each n -ary predicate symbol a relation on D^n .

Remark (Standard quantified statement).

Let $\mathcal{L}$ be a first-order language.

$\mathcal{M} = \langle D, I \rangle$ is a structure for $\mathcal{L}$

$$\iff D \neq \emptyset, I(c) \in D, I(f) : D^n \rightarrow D, I(P) \subseteq D^n$$

for each $c \in \text{Const}_{\mathcal{L}}$, $f \in \text{Func}_{\mathcal{L}}^{(n)}$, and $P \in \text{Pred}_{\mathcal{L}}^{(n)}$.

Remark (Definition predicate reading). $\text{Structure}(M, L)$ means that M is a structure for the first-order language L .

Remark (Negated quantified statement).

$D = \emptyset$ or I fails to assign the required object, function, or relation to some symbol.

Remark (Negation predicate reading). $\neg \text{Structure}(M, L)$ means that M is not a well-formed structure for L .

Remark (Failure modes). A proposed structure fails if the domain is empty, if a symbol is left uninterpreted, or if the assigned object has the wrong arity or type.

Remark (Failure mode decomposition).

$$\underbrace{D = \emptyset}_{\text{empty domain}} \vee \underbrace{I(c) \notin D}_{\text{bad constant value}} \vee \underbrace{I(f) : D^n \not\rightarrow D}_{\text{bad function arity}} \vee \underbrace{I(P) \not\subseteq D^n}_{\text{bad predicate relation}} .$$

Remark (Interpretation). A structure is the minimal semantic object needed in Volume I. It gives meaning to the non-logical symbols of a language. Systematic topics such as substructures, expansions, reducts, and elementary classes belong to Volume VIII Model Theory.

Remark (Examples). The natural numbers with their usual interpretations of $0, S, +, \cdot, <$ form a structure for the arithmetic language.

Remark (Dependencies).

- First-Order Language

Definition (Variable Assignment)

Definition 2.4.3 (Variable Assignment). Let $\mathcal{M} = \langle D, I \rangle$ be a structure for $\mathcal{L}$. A *variable assignment* for $\mathcal{M}$ is a function

$$s : \text{Var}_{\mathcal{L}} \rightarrow D.$$

Remark (Standard quantified statement).

$$s \text{ is a variable assignment for } \mathcal{M} \iff \text{dom}(s) = \text{Var}_{\mathcal{L}} \text{ and } \text{ran}(s) \subseteq D.$$

Remark (Definition predicate reading). $\text{VariableAssignment}(s, M)$ means that s assigns a domain element of M to each variable of the language of M .

Remark (Negated quantified statement).

$$\text{dom}(s) \neq \text{Var}_{\mathcal{L}} \quad \text{or} \quad \exists x \in \text{Var}_{\mathcal{L}} (s(x) \notin D).$$

Remark (Negation predicate reading). $\neg \text{VariableAssignment}(s, M)$ means that s is not a function assigning each variable a domain element of M .

Remark (Failure modes). An assignment fails when it leaves a variable without a value or assigns a value outside the domain.

Remark (Failure mode decomposition).

$$\underbrace{\text{dom}(s) \neq \text{Var}_{\mathcal{L}}}_{\text{missing variable value}} \quad \vee \quad \underbrace{s(x) \notin D}_{\text{value outside domain}}.$$

Remark (Interpretation). Structures interpret non-logical symbols; assignments interpret variables. Open formulas require assignments, while sentences eventually do not depend on the particular assignment.

Remark (Dependencies).

- Structure

Definition (Modified Assignment)

Definition 2.4.4 (Modified Assignment). Let $s : \text{Var}_{\mathcal{L}} \rightarrow D$, let $x \in \text{Var}_{\mathcal{L}}$, and let $d \in D$. The *modified assignment* $s[x \mapsto d]$ is the assignment defined by

$$s[x \mapsto d](y) = \begin{cases} d, & y = x, \\ s(y), & y \neq x. \end{cases}$$

Remark (Standard quantified statement).

$$\forall y \in \text{Var}_{\mathcal{L}} \quad s[x \mapsto d](y) = d \iff y = x, \quad s[x \mapsto d](y) = s(y) \iff y \neq x.$$

Remark (Definition predicate reading). $\text{ModifiedAssignment}(s, x, d, s')$ means that s' is the assignment obtained from s by sending x to d and leaving every other variable unchanged.

Remark (Negated quantified statement).

$$s'(x) \neq d \quad \text{or} \quad \exists y \in \text{Var}_{\mathcal{L}} (y \neq x \wedge s'(y) \neq s(y)).$$

Remark (Negation predicate reading). $\neg \text{ModifiedAssignment}(s, x, d, s')$ means that s' is not the one-variable update of s at x with value d .

Remark (Failure modes). A proposed modified assignment fails if it does not change x to d , or if it changes some variable other than x .

Remark (Failure mode decomposition).

$$\underbrace{s'(x) \neq d}_{\text{target variable not updated}} \quad \vee \quad \underbrace{\exists y \neq x (s'(y) \neq s(y))}_{\text{unwanted extra change}}.$$

Remark (Interpretation). Modified assignments are the semantic mechanism behind quantifiers. To test a quantified formula, the assignment is varied at the bound variable while all other variable values remain fixed.

Remark (Dependencies).

- [Variable Assignment](#)

Definition (Term Evaluation)

Definition 2.4.5 (Term Evaluation). Let $\mathcal{M} = \langle D, I \rangle$ be a structure and s a variable assignment. The *value* of a term t , denoted $\llbracket t \rrbracket_{\mathcal{M}, s}$, is defined recursively by

$$\llbracket x \rrbracket_{\mathcal{M}, s} = s(x), \quad \llbracket c \rrbracket_{\mathcal{M}, s} = I(c),$$

and

$$\llbracket f(t_1, \dots, t_n) \rrbracket_{\mathcal{M}, s} = I(f)(\llbracket t_1 \rrbracket_{\mathcal{M}, s}, \dots, \llbracket t_n \rrbracket_{\mathcal{M}, s}).$$

Remark (Standard quantified statement).

$$\begin{aligned} \llbracket x \rrbracket_{\mathcal{M}, s} &= s(x), \\ \llbracket c \rrbracket_{\mathcal{M}, s} &= I(c), \\ \llbracket f(t_1, \dots, t_n) \rrbracket_{\mathcal{M}, s} &= I(f)(\llbracket t_1 \rrbracket_{\mathcal{M}, s}, \dots, \llbracket t_n \rrbracket_{\mathcal{M}, s}). \end{aligned}$$

Remark (Definition predicate reading). $\text{TermEvaluation}(M, s, t, a)$ means that the term t evaluates to the domain element a in M under s .

Remark (Negated quantified statement).

$$\llbracket t \rrbracket_{\mathcal{M}, s} \neq a.$$

Remark (Negation predicate reading). $\neg \text{TermEvaluation}(M, s, t, a)$ means that a is not the value of t in M under s .

Remark (Failure modes). Term evaluation fails to have the proposed value when a variable, constant, or function-application clause computes a different domain element.

Remark (Failure mode decomposition).

$$\underbrace{s(x) \neq a}_{\text{variable case}} \quad \vee \quad \underbrace{I(c) \neq a}_{\text{constant case}} \quad \vee \quad \underbrace{I(f)(a_1, \dots, a_n) \neq a}_{\text{function case}}.$$

Remark (Interpretation). Term evaluation is the semantic counterpart of term formation. It assigns a domain element to each grammatical term once a structure and assignment are fixed.

Remark (Dependencies).

- [Term](#)
- [Structure](#)
- [Variable Assignment](#)

2.4.2 Semantics: Satisfaction and Truth

Remark (Section toolkit: Satisfaction ledger). Satisfaction is the recursive semantic relation for formulas. Formulas with free variables are evaluated relative to an assignment. Sentences have no free variables, so their truth in a structure does not depend on which assignment is chosen.

Definition (Satisfaction)

Definition 2.4.6 (Satisfaction). Let $\mathcal{M} = \langle D, I \rangle$ be a structure, let s be a variable assignment, and let φ be a well-formed formula. The relation $\mathcal{M}, s \models \varphi$ is defined recursively by the usual clauses: atomic formulas are evaluated by term values and interpreted predicate relations; equality compares term values; connectives follow the truth conditions for $\neg, \wedge, \vee, \rightarrow, \leftrightarrow$; and

$$\mathcal{M}, s \models \forall x \psi \iff \forall d \in D (\mathcal{M}, s[x \mapsto d] \models \psi),$$

$$\mathcal{M}, s \models \exists x \psi \iff \exists d \in D (\mathcal{M}, s[x \mapsto d] \models \psi).$$

Remark (Standard quantified statement).

$$\mathcal{M}, s \models P(t_1, \dots, t_n) \iff ([t_1]_{\mathcal{M}, s}, \dots, [t_n]_{\mathcal{M}, s}) \in I(P),$$

$$\mathcal{M}, s \models t_1 = t_2 \iff [t_1]_{\mathcal{M}, s} = [t_2]_{\mathcal{M}, s},$$

$$\mathcal{M}, s \models \neg \psi \iff \mathcal{M}, s \not\models \psi,$$

$$\mathcal{M}, s \models (\psi \wedge \chi) \iff \mathcal{M}, s \models \psi \text{ and } \mathcal{M}, s \models \chi,$$

$$\mathcal{M}, s \models \forall x \psi \iff \forall d \in D (\mathcal{M}, s[x \mapsto d] \models \psi),$$

$$\mathcal{M}, s \models \exists x \psi \iff \exists d \in D (\mathcal{M}, s[x \mapsto d] \models \psi).$$

Remark (Definition predicate reading). $\text{Satisfaction}(M, s, \varphi)$ means $\mathcal{M}, s \models \varphi$.

Remark (Negated quantified statement).

$$\mathcal{M}, s \not\models \varphi.$$

Remark (Negation predicate reading). $\neg \text{Satisfaction}(M, s, \varphi)$ means that φ is not satisfied in M under s .

Remark (Failure modes). Satisfaction fails according to the outermost formation rule of the formula: an atomic tuple can miss the interpreted relation, equality can compare different term values, a connective can have the wrong truth pattern, or a quantifier can have a counterexample or lack a witness.

Remark (Failure mode decomposition).

$$\underbrace{(\llbracket t_i \rrbracket) \notin I(P)}_{\text{atomic failure}} \quad \underbrace{\llbracket t_1 \rrbracket \neq \llbracket t_2 \rrbracket}_{\text{equality failure}} \quad \underbrace{\exists d \in D (\mathcal{M}, s[x \mapsto d] \not\models \psi)}_{\text{universal failure}}.$$

Remark (Interpretation). Satisfaction is the bridge from grammar to semantic use. It is recursive because formulas are recursive. The assignment is essential exactly where free variables can affect the value of the formula.

Remark (Dependencies).

- [Structure](#)
- [Variable Assignment](#)
- [Modified Assignment](#)
- [Term Evaluation](#)
- [Well-Formed Formula](#)

Definition (Truth in a Structure)

Definition 2.4.7 (Truth in a Structure). Let φ be a sentence and let $\mathcal{M}$ be a structure. The sentence φ is *true in $\mathcal{M}$* , written $\mathcal{M} \models \varphi$, exactly when $\mathcal{M}, s \models \varphi$ for every variable assignment s for $\mathcal{M}$.

Remark (Standard quantified statement).

$$\mathcal{M} \models \varphi \iff \forall s : \text{Var}_{\mathcal{L}} \rightarrow D (\mathcal{M}, s \models \varphi), \quad \varphi \text{ a sentence.}$$

Remark (Definition predicate reading). $\text{TruthInStructure}(M, \varphi)$ means $\mathcal{M} \models \varphi$.

Remark (Negated quantified statement).

$$\mathcal{M} \not\models \varphi \iff \exists s : \text{Var}_{\mathcal{L}} \rightarrow D (\mathcal{M}, s \not\models \varphi).$$

Remark (Negation predicate reading). $\neg \text{TruthInStructure}(M, \varphi)$ means that φ is false in M .

Remark (Failure modes). Truth in a structure fails when some assignment makes the sentence fail. For sentences, this is independent of assignment, but the quantified form keeps the definition uniform with satisfaction.

Remark (Failure mode decomposition).

$$\underbrace{\exists s}_{\text{assignment witness}} \quad \underbrace{\mathcal{M}, s \not\models \varphi}_{\text{satisfaction failure}} .$$

Remark (Interpretation). Sentences have no free variables. Therefore the particular assignment does not carry mathematical information once the formula is a sentence; the notation $\mathcal{M} \models \varphi$ suppresses it.

Remark (Dependencies).

- [Satisfaction](#)

Definition (Validity)

Definition 2.4.8 (Validity). A formula φ is *valid*, or *logically true*, exactly when $\mathcal{M}, s \models \varphi$ for every structure $\mathcal{M}$ for the language of φ and every variable assignment s for $\mathcal{M}$.

Remark (Standard quantified statement).

$$\models \varphi \iff \forall \mathcal{M} \forall s (\mathcal{M}, s \models \varphi).$$

Remark (Definition predicate reading). $\text{ValidFormula}(\varphi)$ means that φ is satisfied in every structure under every assignment.

Remark (Negated quantified statement).

$$\not\models \varphi \iff \exists \mathcal{M} \exists s (\mathcal{M}, s \not\models \varphi).$$

Remark (Negation predicate reading). $\neg \text{ValidFormula}(\varphi)$ means that some structure and assignment make φ fail.

Remark (Failure modes). Validity fails by a counterexample structure together with an assignment.

Remark (Failure mode decomposition).

$$\underbrace{\mathcal{M}}_{\text{counterexample structure}} \quad \underbrace{s}_{\text{counterexample assignment}} \quad \underbrace{\mathcal{M}, s \not\models \varphi}_{\text{failure of satisfaction}} .$$

Remark (Interpretation). Validity is truth by logic alone. It does not depend on a special structure, special domain, or special interpretation of the non-logical symbols.

Remark (Dependencies).

- [Satisfaction](#)

Definition (Satisfiability)

Definition 2.4.9 (Satisfiability). A formula φ is *satisfiable* exactly when there are a structure $\mathcal{M}$ and a variable assignment s such that $\mathcal{M}, s \models \varphi$.

Remark (Standard quantified statement).

$$\varphi \text{ is satisfiable} \iff \exists \mathcal{M} \exists s (\mathcal{M}, s \models \varphi).$$

Remark (Definition predicate reading). $\text{SatisfiableFormula}(\varphi)$ means that φ is satisfied in at least one structure under at least one assignment.

Remark (Negated quantified statement).

$$\varphi \text{ is unsatisfiable} \iff \forall \mathcal{M} \forall s (\mathcal{M}, s \not\models \varphi).$$

Remark (Negation predicate reading). $\neg \text{SatisfiableFormula}(\varphi)$ means that no structure and assignment satisfy φ .

Remark (Failure modes). Satisfiability fails only globally: every attempted structure and assignment fails to satisfy the formula.

Remark (Failure mode decomposition).

$$\underbrace{\forall \mathcal{M}}_{\text{all structures}} \quad \underbrace{\forall s}_{\text{all assignments}} \quad \underbrace{\mathcal{M}, s \not\models \varphi}_{\text{no satisfying instance}} .$$

Remark (Interpretation). Satisfiability asks whether a formula can be made true somewhere. This is the semantic counterpart of consistency only in the minimal Volume I sense; deeper proof-theoretic distinctions are deferred.

Remark (Dependencies).

- [Satisfaction](#)

2.4.3 Semantics: Models, Theories, and Logical Consequence

Remark (Section toolkit: Minimal model notation). Volume I uses theories only as sets of sentences so that the notation $\mathcal{M} \models T$ and $T \models \varphi$ can be read. The systematic study of theories and their classes of models belongs to Volume VIII Model Theory.

Definition (Model of a Sentence)

Definition 2.4.10 (Model of a Sentence). Let φ be a sentence and let $\mathcal{M}$ be a structure for the language of φ . The structure $\mathcal{M}$ is a *model of* φ exactly when $\mathcal{M} \models \varphi$.

Remark (Standard quantified statement).

$$\mathcal{M} \text{ is a model of } \varphi \iff \mathcal{M} \models \varphi.$$

Remark (Definition predicate reading). $\text{ModelOfSentence}(M, \varphi)$ means that M is a model of the sentence φ .

Remark (Negated quantified statement).

$$\mathcal{M} \text{ is not a model of } \varphi \iff \mathcal{M} \not\models \varphi.$$

Remark (Negation predicate reading). $\neg \text{ModelOfSentence}(M, \varphi)$ means that φ is not true in M .

Remark (Failure modes). The only failure mode is semantic: the sentence is false in the proposed structure.

Remark (Failure mode decomposition).

$$\underbrace{\mathcal{M}}_{\text{proposed structure}} \quad \underbrace{\mathcal{M} \not\models \varphi}_{\text{sentence false in the structure}} .$$

Remark (Interpretation). A model is not an extra kind of object. It is a structure viewed relative to a sentence that it makes true.

Remark (Dependencies).

- [Truth in a Structure](#)

Definition (Model of a Set of Sentences)

Definition 2.4.11 (Model of a Set of Sentences). Let T be a set of sentences and let $\mathcal{M}$ be a structure for their common language. The structure $\mathcal{M}$ is a *model of* T , written $\mathcal{M} \models T$, exactly when $\mathcal{M} \models \theta$ for every $\theta \in T$.

Remark (Standard quantified statement).

$$\mathcal{M} \models T \iff \forall \theta \in T (\mathcal{M} \models \theta).$$

Remark (Definition predicate reading). $\text{ModelOfTheory}(M, T)$ means that M is a model of every sentence in T .

Remark (Negated quantified statement).

$$\mathcal{M} \not\models T \iff \exists \theta \in T (\mathcal{M} \not\models \theta).$$

Remark (Negation predicate reading). $\neg \text{ModelOfTheory}(M, T)$ means that at least one sentence of T is false in M .

Remark (Failure modes). A proposed model of a set of sentences fails by a single sentence of the set that is false in the structure.

Remark (Failure mode decomposition).

$$\underbrace{\exists \theta \in T}_{\text{failed sentence}} \quad \underbrace{\mathcal{M} \not\models \theta}_{\text{not true in the structure}} .$$

Remark (Interpretation). The notation $\mathcal{M} \models T$ abbreviates a universal check over the sentences in T . No additional theory of model classes is developed here.

Remark (Dependencies).

- [Model of a Sentence](#)

Definition (Theory)

Definition 2.4.12 (Theory). In Volume I, a *theory* is a set of sentences in a fixed first-order language.

Remark (Standard quantified statement).

$$T \text{ is a theory} \iff \forall \theta \in T \ (\theta \text{ is a sentence of the fixed language}).$$

Remark (Definition predicate reading). $\text{Theory}(T)$ means that T is a set of sentences in a fixed first-order language.

Remark (Negated quantified statement).

$$\exists \theta \in T \ (\theta \text{ is not a sentence of the fixed language}).$$

Remark (Negation predicate reading). $\neg \text{Theory}(T)$ means that T is not a set consisting only of sentences of the fixed language.

Remark (Failure modes). A proposed theory fails in this minimal sense when it contains something other than a sentence of the fixed language.

Remark (Failure mode decomposition).

$$\underbrace{\theta \in T}_{\text{member of the proposed theory}} \quad \underbrace{\theta \text{ is not a sentence}}_{\text{bad member}}.$$

Remark (Interpretation). This is intentionally modest. Complete theories, elementary classes, categoricity, saturation, types, diagrams, and elementary extensions are Volume VIII topics. A theory may be called satisfiable in Volume I when it has at least one model.

Remark (Dependencies).

- [Truth in a Structure](#)

Definition (Logical Consequence)

Definition 2.4.13 (Logical Consequence). Let T be a set of sentences and let φ be a sentence in the same language. The sentence φ is a *logical consequence* of T , written $T \models \varphi$, exactly when every model of T is a model of φ .

Remark (Standard quantified statement).

$$T \models \varphi \iff \forall \mathcal{M} \ (\mathcal{M} \models T \Rightarrow \mathcal{M} \models \varphi).$$

Remark (Definition predicate reading). $\text{LogicalConsequence}(T, \varphi)$ means that every model of T is a model of φ .

Remark (Negated quantified statement).

$$T \not\models \varphi \iff \exists \mathcal{M} (\mathcal{M} \models T \wedge \mathcal{M} \not\models \varphi).$$

Remark (Negation predicate reading). $\neg \text{LogicalConsequence}(T, \varphi)$ means that some structure models T while failing φ .

Remark (Failure modes). Logical consequence fails by a countermodel: a structure satisfying all sentences of T but not satisfying φ .

Remark (Failure mode decomposition).

$$\underbrace{\mathcal{M} \models T}_{\text{premises true}} \quad \underbrace{\mathcal{M} \not\models \varphi}_{\text{conclusion false}} .$$

Remark (Interpretation). Logical consequence is semantic entailment. The premises in T leave no room, across structures, for φ to fail.

Remark (Dependencies).

- [Model of a Set of Sentences](#)
- [Theory](#)

Definition (Logical Equivalence)

Definition 2.4.14 (Logical Equivalence). Two sentences φ and ψ are *logically equivalent*, written $\varphi \equiv \psi$, exactly when each is a logical consequence of the other:

$$\varphi \models \psi \quad \text{and} \quad \psi \models \varphi.$$

Remark (Standard quantified statement).

$$\varphi \equiv \psi \iff \forall \mathcal{M} (\mathcal{M} \models \varphi \iff \mathcal{M} \models \psi).$$

Remark (Definition predicate reading). $\text{LogicalEquivalence}(\varphi, \psi)$ means that φ and ψ have the same truth value in every structure.

Remark (Negated quantified statement).

$$\varphi \not\equiv \psi \iff \exists \mathcal{M} ((\mathcal{M} \models \varphi \wedge \mathcal{M} \not\models \psi) \vee (\mathcal{M} \models \psi \wedge \mathcal{M} \not\models \varphi)).$$

Remark (Negation predicate reading). $\neg \text{LogicalEquivalence}(\varphi, \psi)$ means that some structure separates the two sentences.

Remark (Failure modes). Logical equivalence fails when one sentence is true and the other false in the same structure.

Remark (Failure mode decomposition).

$$\underbrace{\mathcal{M} \models \varphi \wedge \mathcal{M} \not\models \psi}_{\text{first separation}} \quad \vee \quad \underbrace{\mathcal{M} \models \psi \wedge \mathcal{M} \not\models \varphi}_{\text{second separation}}.$$

Remark (Interpretation). Logical equivalence is semantic interchangeability at the sentence level. It records sameness of truth across all structures in the relevant language.

Remark (Dependencies).

- [Logical Consequence](#)

2.4.4 Semantics: Open Formulas, Definable Relations, and Substitution Lemmas

Remark (Section toolkit: Predicate vocabulary). This section separates three uses that are often blurred. A predicate symbol is object-language syntax from the signature. An open formula is a formula with free variables. A definable relation is the set-theoretic relation in a structure determined by an open formula.

Definition (Open Formula)

Definition 2.4.15 (Open Formula). An *open formula* is a well-formed formula with at least one free variable. When the free variables are among $x_1, \dots, x_n$, it may be displayed as $\varphi(x_1, \dots, x_n)$.

Remark (Standard quantified statement).

$$\varphi \text{ is open} \iff \varphi \in \text{Form}_{\mathcal{L}} \text{ and } \text{FV}(\varphi) \neq \emptyset.$$

Remark (Definition predicate reading). $\text{OpenFormula}(\varphi)$ means that φ is a well-formed formula with at least one free variable.

Remark (Negated quantified statement).

$$\varphi \notin \text{Form}_{\mathcal{L}} \quad \text{or} \quad \text{FV}(\varphi) = \emptyset.$$

Remark (Negation predicate reading). $\neg \text{OpenFormula}(\varphi)$ means that φ is either not well formed or is a sentence.

Remark (Failure modes). An expression fails to be an open formula when it is not a well-formed formula or when all of its variables are bound.

Remark (Failure mode decomposition).

$$\underbrace{\varphi \notin \text{Form}_{\mathcal{L}}}_{\text{not well formed}} \quad \vee \quad \underbrace{\text{FV}(\varphi) = \emptyset}_{\text{sentence, not open}}.$$

Remark (Interpretation). Open formulas are syntactic predicates in the lightest Volume I sense. They do not by themselves name a set-theoretic relation until a structure is fixed.

Remark (Examples). $P(x)$, $x < y$, and $\exists z R(x, z)$ are open formulas when the displayed variables remain free as indicated.

Remark (Non-Examples). $\forall x P(x)$ is a sentence, not an open formula. A predicate symbol P alone is a symbol, not a formula.

Remark (Dependencies).

- [Predicate Symbol](#)
- [Well-Formed Formula](#)

Definition (Definable Relation)

Definition 2.4.16 (Definable Relation). Let $\mathcal{M} = \langle D, I \rangle$ be a structure and let $\varphi(x_1, \dots, x_n)$ be an open formula. The *relation defined by φ* in $\mathcal{M}$ is the set

$$R_\varphi^\mathcal{M} = \{(a_1, \dots, a_n) \in D^n : \mathcal{M}, s[x_1 \mapsto a_1, \dots, x_n \mapsto a_n] \models \varphi\}.$$

Remark (Standard quantified statement).

$$(a_1, \dots, a_n) \in R_\varphi^\mathcal{M} \iff \mathcal{M}, s[x_1 \mapsto a_1, \dots, x_n \mapsto a_n] \models \varphi.$$

Remark (Definition predicate reading). $\text{DefinableRelation}(R, \varphi, M)$ means that R is the relation on the domain of M determined by φ in M .

Remark (Negated quantified statement).

$$R \neq R_\varphi^\mathcal{M}.$$

Remark (Negation predicate reading). $\neg \text{DefinableRelation}(R, \varphi, M)$ means that R is not the relation determined by φ in M .

Remark (Failure modes). A proposed definable relation fails when at least one tuple is included or excluded differently from the satisfaction condition imposed by the formula.

Remark (Failure mode decomposition).

$$\underbrace{(a_1, \dots, a_n) \in R \wedge \mathcal{M}, s[\vec{x} \mapsto \vec{a}] \not\models \varphi}_{\text{extra tuple}} \quad \vee \quad \underbrace{(a_1, \dots, a_n) \notin R \wedge \mathcal{M}, s[\vec{x} \mapsto \vec{a}] \models \varphi}_{\text{missing tuple}}.$$

Remark (Interpretation). A relation is a set-theoretic subset of D^n . A definable relation is one obtained from a formula after a structure supplies semantic meaning.

Remark (Dependencies).

- [Open Formula](#)
- [Structure](#)
- [Satisfaction](#)

Lemma (Substitution Lemma for Terms)

Lemma 2.4.17 (Substitution Lemma for Terms). *Let $\mathcal{M}$ be a structure, let s be a variable assignment, let x be a variable, and let t and u be terms. Then*

$$\llbracket t[u/x] \rrbracket_{\mathcal{M},s} = \llbracket t \rrbracket_{\mathcal{M},s[x \mapsto \llbracket u \rrbracket_{\mathcal{M},s}]}$$

Go to proof.

Remark (Standard quantified statement).

$$\forall t \forall u \quad \llbracket t[u/x] \rrbracket_{\mathcal{M},s} = \llbracket t \rrbracket_{\mathcal{M},s[x \mapsto \llbracket u \rrbracket_{\mathcal{M},s}]}$$

Remark (Predicate reading). Term substitution commutes with semantic term evaluation in a fixed structure and assignment.

Remark (Interpretation). The lemma says that syntactically substituting a term before evaluation gives the same domain element as first evaluating the substituting term and then updating the assignment.

Remark (Dependencies).

- [Substitution Notation](#)
- [Free for Substitution](#)
- [Term Evaluation](#)

Lemma (Substitution Lemma for Formulas)

Lemma 2.4.18 (Substitution Lemma for Formulas). *Let φ be a formula and let u be a term free for x in φ . For every structure $\mathcal{M}$ and assignment s ,*

$$\mathcal{M}, s \models \varphi[u/x] \iff \mathcal{M}, s[x \mapsto \llbracket u \rrbracket_{\mathcal{M},s}] \models \varphi.$$

Go to proof.

Remark (Standard quantified statement).

$$\forall \varphi \forall u \quad u \text{ free for } x \text{ in } \varphi \Rightarrow (\mathcal{M}, s \models \varphi[u/x] \iff \mathcal{M}, s[x \mapsto \llbracket u \rrbracket_{\mathcal{M},s}] \models \varphi).$$

Remark (Predicate reading). Formula substitution commutes with satisfaction when the substituted term is free for the variable being replaced.

Remark (Interpretation). This lemma connects the syntactic substitution operation from the syntax section with the semantic modified-assignment operation from the semantics section. The free-for condition prevents variable capture.

Remark (Dependencies).

- [Substitution Notation](#)

- [Free for Substitution](#)
- [Satisfaction](#)
- [Substitution Lemma for Terms](#)

2.5 Quantifiers

Toolkit: Quantifiers

Topic	Role
Basic syntax and semantics	universal, existential, bounded, sentence, open formula, scope
Quantifier laws	equivalence laws for negation, distribution, commutation, and renaming
Prenex normal form	syntactic normalization with quantifiers pulled forward
Logical strength	quantifier order, dependency, and non-equivalence examples

Remark (Exposition). Quantifiers extend propositional logic by allowing statements about all domain elements or about witnesses. The main new issue is dependency: later witnesses may depend on earlier universal choices.

Basic Syntax and Semantics

Remark (Section toolkit: Quantifier grammar). This section records the basic quantifier forms and the boundary between open formulas and sentences. Quantifiers bind variables. A formula with free variables requires an assignment for semantic evaluation; a sentence has no free variables and has a truth value in a structure.

Remark (Exposition). Sentences have no free variables and have truth values in structures. Open formulas may contain free variables and require assignments. Quantifiers turn some free occurrences into bound occurrences by placing them inside a scope.

Definition (Universal Formula)

Definition 2.5.1 (Universal Formula). A *universal formula* is a well-formed formula of the form

$$\forall x \varphi,$$

where x is a variable and φ is a well-formed formula.

Remark (Standard quantified statement).

$$\forall x \varphi \in \mathbf{Form}_{\mathcal{L}} \iff x \in \mathbf{Var}_{\mathcal{L}} \text{ and } \varphi \in \mathbf{Form}_{\mathcal{L}}.$$

Remark (Definition predicate reading). $\mathbf{UniversalFormula}(\Phi)$ means that Φ is a formula whose outermost constructor is a universal quantifier.

Remark (Negated quantified statement).

$$\Phi \text{ is not of the form } \forall x \varphi.$$

Remark (Interpretation). A universal formula asserts that its scope holds for every value assigned to the bound variable.

Remark (Examples). $\forall x P(x)$ and $\forall x \exists y R(x, y)$ are universal formulas.

Remark (Non-Examples). $P(x)$ and $\exists x P(x)$ are not universal formulas.

Remark (Dependencies).

- Variable

Definition (Existential Formula)

Definition 2.5.2 (Existential Formula). An *existential formula* is a well-formed formula of the form

$$\exists x \varphi,$$

where x is a variable and φ is a well-formed formula.

Remark (Standard quantified statement).

$$\exists x \varphi \in \text{Form}_{\mathcal{L}} \iff x \in \text{Var}_{\mathcal{L}} \text{ and } \varphi \in \text{Form}_{\mathcal{L}}.$$

Remark (Definition predicate reading). $\text{ExistentialFormula}(\Phi)$ means that Φ is a formula whose outermost constructor is an existential quantifier.

Remark (Negated quantified statement).

$$\Phi \text{ is not of the form } \exists x \varphi.$$

Remark (Interpretation). An existential formula asserts that its scope holds for at least one value of the bound variable.

Remark (Examples). $\exists x P(x)$ and $\exists x \forall y R(x, y)$ are existential formulas.

Remark (Non-Examples). $P(x)$ and $\forall x P(x)$ are not existential formulas.

Remark (Dependencies).

- Variable

Definition (Bounded Quantifier)

Definition 2.5.3 (Bounded Quantifier). A *bounded quantifier* is an abbreviation that restricts a quantifier to a specified set or predicate:

$$\forall x \in A \varphi \quad := \quad \forall x (x \in A \rightarrow \varphi),$$

$$\exists x \in A \varphi \quad := \quad \exists x (x \in A \wedge \varphi).$$

Remark (Standard quantified statement).

$$\forall x \in A \varphi \equiv \forall x (x \in A \rightarrow \varphi), \quad \exists x \in A \varphi \equiv \exists x (x \in A \wedge \varphi).$$

Remark (Definition predicate reading). $\text{BoundedQuantifier}(\Phi)$ means that Φ uses a restricted universal or existential quantifier.

Remark (Negated quantified statement).

Φ is not an abbreviation of either displayed bounded form.

Remark (Interpretation). The restricted universal uses implication, while the restricted existential uses conjunction. This preserves the usual behavior on empty sets.

Remark (Examples). $\forall x \in A P(x)$ and $\exists x \in A P(x)$ are bounded-quantifier formulas.

Remark (Non-Examples). $\forall x (x \in A \wedge P(x))$ is not the correct expansion of the bounded universal form.

Remark (Dependencies).

- [Universal Formula](#)
- [Existential Formula](#)

Definition (Sentence)

Definition 2.5.4 (Sentence). A *sentence* is a well-formed formula with no free variables.

Remark (Standard quantified statement).

$$\varphi \text{ is a sentence} \iff \varphi \in \text{Form}_{\mathcal{L}} \text{ and } \text{FV}(\varphi) = \emptyset.$$

Remark (Definition predicate reading). $\text{Sentence}(\varphi)$ means that φ is a well-formed formula with no free variables.

Remark (Negated quantified statement).

$$\varphi \notin \text{Form}_{\mathcal{L}} \quad \text{or} \quad \text{FV}(\varphi) \neq \emptyset.$$

Remark (Interpretation). Sentences have truth values in structures without reference to a particular assignment.

Remark (Examples). $\forall x P(x)$ and $\exists x \forall y R(x, y)$ are sentences when all variables shown are bound.

Remark (Non-Examples). $P(x)$ and $\exists y R(x, y)$ are not sentences when x remains free.

Remark (Dependencies).

- [Well-Formed Formula](#)

Definition (Open Formula)

Definition 2.5.5 (Open Formula). An *open formula* is a well-formed formula with at least one free variable.

Remark (Standard quantified statement).

$$\varphi \text{ is open} \iff \varphi \in \text{Form}_{\mathcal{L}} \text{ and } \text{FV}(\varphi) \neq \emptyset.$$

Remark (Definition predicate reading). $\text{OpenFormula}(\varphi)$ means that φ has at least one free variable.

Remark (Negated quantified statement).

$$\varphi \notin \text{Form}_{\mathcal{L}} \quad \text{or} \quad \text{FV}(\varphi) = \emptyset.$$

Remark (Interpretation). Open formulas may become true or false only after a structure and assignment are fixed.

Remark (Examples). $P(x)$ and $R(x, y)$ are open formulas.

Remark (Non-Examples). $\forall x P(x)$ is a sentence rather than an open formula.

Remark (Dependencies).

- [Well-Formed Formula](#)
- [Open Formula](#)

Definition (Quantifier Scope)

Definition 2.5.6 (Quantifier Scope). In a formula $Qx\varphi$, where $Q \in \{\forall, \exists\}$, the *scope* of the quantifier Qx is the formula φ . Occurrences of x inside that scope are bound by the quantifier unless an inner quantifier for x intervenes.

Remark (Standard quantified statement).

$$Qx\varphi \text{ has scope } \varphi, \quad Q \in \{\forall, \exists\}.$$

Remark (Definition predicate reading). $\text{Scope}(x, \varphi)$ means that φ is the scope governed by the quantifier binding x .

Remark (Negated quantified statement).

$$\varphi \text{ is not the formula governed by the displayed quantifier on } x.$$

Remark (Interpretation). Scope determines which variable occurrences a quantifier controls. Scope errors are the main source of incorrect translations from English into predicate logic.

Remark (Examples). In $\forall x (P(x) \rightarrow Q(x))$, the scope is $(P(x) \rightarrow Q(x))$. In $(\forall x P(x)) \rightarrow Q(x)$, the final occurrence of x is outside the scope of the quantifier.

Remark (Dependencies).

- [Universal Formula](#)
- [Existential Formula](#)

Theorem (Negation of Bounded Quantifiers)

Theorem 2.5.7 (Negation of Bounded Quantifiers). *Let A be a set and let φ be a formula. Then*

$$\neg(\forall x \in A \varphi) \equiv \exists x \in A \neg\varphi, \quad \neg(\exists x \in A \varphi) \equiv \forall x \in A \neg\varphi.$$

Go to proof.

Remark (Standard quantified statement).

$$\neg\forall x (x \in A \rightarrow \varphi) \equiv \exists x (x \in A \wedge \neg\varphi), \quad \neg\exists x (x \in A \wedge \varphi) \equiv \forall x (x \in A \rightarrow \neg\varphi).$$

Remark (Predicate reading). The theorem records the negation law for bounded universal and bounded existential formulas.

Remark (Interpretation). The domain restriction is preserved under negation. What changes is the quantifier and the inner assertion.

Remark (Dependencies).

- [Bounded Quantifier](#)
- [Quantifier Negation Laws](#)

Quantifier Laws

Remark (Section toolkit: Quantifier algebra). Quantifier algebra is the predicate-logic analogue of propositional equivalence laws. These laws justify rewriting quantified formulas while preserving logical equivalence.

Theorem (Quantifier Negation Laws)

Theorem 2.5.8 (Quantifier Negation Laws). *For every formula φ ,*

$$\neg\forall x \varphi \equiv \exists x \neg\varphi, \quad \neg\exists x \varphi \equiv \forall x \neg\varphi.$$

Go to proof.

Remark (Standard quantified statement).

$$\forall\varphi \in \mathbf{Form}_{\mathcal{L}} \quad \neg\forall x \varphi \equiv \exists x \neg\varphi \quad \text{and} \quad \neg\exists x \varphi \equiv \forall x \neg\varphi.$$

Remark (Predicate reading). $\text{LogicalEquivalence}(\neg\forall x \varphi, \exists x \neg\varphi)$ and $\text{LogicalEquivalence}(\neg\exists x \varphi, \forall x \neg\varphi)$ ■

Remark (Interpretation). Negating a quantified statement flips the quantifier and pushes the negation into the scope.

Remark (Dependencies).

- [Universal Formula](#)
- [Existential Formula](#)

- Logical Equivalence

Theorem (Double Negation and Quantifiers)

Theorem 2.5.9 (Double Negation and Quantifiers). *For every formula φ ,*

$$\neg\neg\forall x\varphi \equiv \forall x\varphi, \quad \neg\neg\exists x\varphi \equiv \exists x\varphi.$$

Go to proof.

Remark (Standard quantified statement).

$$\forall\varphi \in \mathbf{Form}_{\mathcal{L}} \quad \neg\neg\forall x\varphi \equiv \forall x\varphi \quad \text{and} \quad \neg\neg\exists x\varphi \equiv \exists x\varphi.$$

Remark (Predicate reading). $\text{LogicalEquivalence}(\neg\neg Qx\varphi, Qx\varphi)$ for $Q \in \{\forall, \exists\}$.

Remark (Interpretation). Double negation does not change the quantifier form once the two negations are cancelled.

Remark (Dependencies).

- Quantifier Negation Laws

Theorem (Same-Type Quantifier Commutation)

Theorem 2.5.10 (Same-Type Quantifier Commutation). *Quantifiers of the same type commute:*

$$\forall x\forall y\varphi \equiv \forall y\forall x\varphi, \quad \exists x\exists y\varphi \equiv \exists y\exists x\varphi.$$

Go to proof.

Remark (Standard quantified statement).

$$\forall\varphi \in \mathbf{Form}_{\mathcal{L}} \quad \forall x\forall y\varphi \equiv \forall y\forall x\varphi \quad \text{and} \quad \exists x\exists y\varphi \equiv \exists y\exists x\varphi.$$

Remark (Predicate reading). The theorem asserts logical equivalence after swapping adjacent quantifiers of the same type.

Remark (Interpretation). Two universal choices can be checked in either order, and two existential witnesses can be selected in either order.

Remark (Dependencies).

- Universal Formula
- Existential Formula
- Logical Equivalence

Theorem (Mixed Quantifiers Do Not Commute)

Theorem 2.5.11 (Mixed Quantifiers Do Not Commute). *In general,*

$$\forall x \exists y \varphi \not\equiv \exists y \forall x \varphi.$$

[Go to proof.](#)

Remark (Standard quantified statement).

$$\exists \varphi \in \mathbf{Form}_{\mathcal{L}} \quad \forall x \exists y \varphi \not\equiv \exists y \forall x \varphi.$$

Remark (Predicate reading). $\neg \text{LogicalEquivalence}(\forall x \exists y \varphi, \exists y \forall x \varphi)$ in general.

Remark (Interpretation). The first form permits the witness y to depend on x . The second form requires one uniform witness y that works for every x .

Remark (Dependencies).

- [Same-Type Quantifier Commutation](#)

Theorem (Valid Quantifier Distribution)

Theorem 2.5.12 (Valid Quantifier Distribution). *For all formulas φ, ψ ,*

$$\forall x (\varphi \wedge \psi) \equiv (\forall x \varphi) \wedge (\forall x \psi),$$

$$\exists x (\varphi \vee \psi) \equiv (\exists x \varphi) \vee (\exists x \psi).$$

[Go to proof.](#)

Remark (Standard quantified statement).

$$\forall \varphi, \psi \in \mathbf{Form}_{\mathcal{L}} \quad \forall x (\varphi \wedge \psi) \equiv (\forall x \varphi) \wedge (\forall x \psi)$$

and

$$\exists x (\varphi \vee \psi) \equiv (\exists x \varphi) \vee (\exists x \psi).$$

Remark (Predicate reading). The displayed universal-conjunction and existential-disjunction distributions are logical equivalences.

Remark (Interpretation). Universal quantification distributes over conjunction because both conjuncts must hold for every value. Existential quantification distributes over disjunction because a witness for either disjunct witnesses the disjunction.

Remark (Dependencies).

- [Logical Equivalence](#)
- [Universal Formula](#)
- [Existential Formula](#)

Theorem (Invalid Quantifier Distribution)

Theorem 2.5.13 (Invalid Quantifier Distribution). *In general,*

$$\forall x (\varphi \vee \psi) \not\equiv (\forall x \varphi) \vee (\forall x \psi),$$

$$\exists x (\varphi \wedge \psi) \not\equiv (\exists x \varphi) \wedge (\exists x \psi).$$

Go to proof.

Remark (Standard quantified statement).

$$\exists \varphi, \psi \in \mathbf{Form}_{\mathcal{L}} \quad \forall x (\varphi \vee \psi) \not\equiv (\forall x \varphi) \vee (\forall x \psi),$$

$$\exists \varphi, \psi \in \mathbf{Form}_{\mathcal{L}} \quad \exists x (\varphi \wedge \psi) \not\equiv (\exists x \varphi) \wedge (\exists x \psi).$$

Remark (Predicate reading). The displayed distribution patterns are not logical equivalences in general.

Remark (Interpretation). The invalid laws fail because witnesses or counterexamples may vary between the two subformulas.

Remark (Dependencies).

- [Valid Quantifier Distribution](#)

Theorem (Vacuous Quantification)

Theorem 2.5.14 (Vacuous Quantification). *If x does not occur free in φ , then*

$$\forall x \varphi \equiv \varphi, \quad \exists x \varphi \equiv \varphi.$$

Go to proof.

Remark (Standard quantified statement).

$$x \notin \mathbf{FV}(\varphi) \Rightarrow (\forall x \varphi \equiv \varphi) \wedge (\exists x \varphi \equiv \varphi).$$

Remark (Predicate reading). Vacuous quantification preserves logical equivalence when the quantified variable is not free in the scope.

Remark (Interpretation). A quantifier that binds no occurrence has no semantic effect.

Remark (Dependencies).

- [Quantifier Scope](#)

Theorem (Renaming Bound Variables)

Theorem 2.5.15 (Renaming Bound Variables). *If y is free for x in φ and no capture is introduced, then*

$$\forall x \varphi \equiv \forall y \varphi[y/x], \quad \exists x \varphi \equiv \exists y \varphi[y/x].$$

Go to proof.

Remark (Standard quantified statement).

$$y \text{ free for } x \text{ in } \varphi \Rightarrow (\forall x \varphi \equiv \forall y \varphi[y/x]) \wedge (\exists x \varphi \equiv \exists y \varphi[y/x]).$$

Remark (Predicate reading). Renaming bound variables preserves logical equivalence when the renaming is capture-avoiding.

Remark (Interpretation). Bound variable names are placeholders. Renaming them changes notation, not meaning, provided no free variable becomes captured.

Remark (Dependencies).

- [Free for Substitution](#)
- [Substitution Notation](#)

Prenex Normal Form

Remark (Section toolkit: Prenex normalization). Prenex normal form is the predicate-logic analogue of the normal-form procedures from propositional logic. It is a syntactic normalization procedure, not a semantic change: each step preserves logical equivalence.

Definition (Quantifier Prefix)

Definition 2.5.16 (Quantifier Prefix). A *quantifier prefix* is a finite string

$$Q_1 x_1 Q_2 x_2 \cdots Q_n x_n,$$

where each $Q_i \in \{\forall, \exists\}$ and each x_i is a variable.

Remark (Standard quantified statement).

$$\Pi = Q_1 x_1 \cdots Q_n x_n \iff \forall i \leq n \ (Q_i \in \{\forall, \exists\} \text{ and } x_i \in \text{Var}_{\mathcal{L}}).$$

Remark (Definition predicate reading). $\text{QuantifierPrefix}(\Pi)$ means that Π is a finite string of quantifier-variable pairs.

Remark (Interpretation). A prefix records all quantifier choices before the quantifier-free part of a prenex formula is read.

Remark (Dependencies).

- [Universal Formula](#)
- [Existential Formula](#)

Definition (Matrix)

Definition 2.5.17 (Matrix). In a formula $Q_1 x_1 \cdots Q_n x_n \psi$, the *matrix* is the trailing formula ψ . For prenex normal form, the matrix is required to be quantifier-free.

Remark (Standard quantified statement).

$Q_1x_1 \cdots Q_nx_n \psi$ has matrix ψ , ψ quantifier-free in prenex normal form.

Remark (Definition predicate reading). $\text{Matrix}(\psi, \Phi)$ means that ψ is the matrix of the formula Φ .

Remark (Interpretation). The matrix is the part of a prenex formula where the propositional connectives and atomic formulas remain after all quantifiers have been pulled forward.

Remark (Dependencies).

- [Well-Formed Formula](#)

Definition (Prenex Formula)

Definition 2.5.18 (Prenex Formula). A *prenex formula* is a formula of the form

$$Q_1x_1 Q_2x_2 \cdots Q_nx_n \psi,$$

where $Q_1x_1 \cdots Q_nx_n$ is a quantifier prefix and ψ is quantifier-free.

Remark (Standard quantified statement).

Φ is prenex $\iff \Phi = Q_1x_1 \cdots Q_nx_n \psi$ with ψ quantifier-free.

Remark (Definition predicate reading). $\text{PrenexFormula}(\Phi)$ means that all quantifiers of Φ occur in an initial prefix.

Remark (Negated quantified statement).

Φ is not of the form $Q_1x_1 \cdots Q_nx_n \psi$ with ψ quantifier-free.

Remark (Interpretation). Prenex formulas isolate quantifier order from the quantifier-free matrix.

Remark (Examples). $\forall x \exists y (P(x) \rightarrow R(x, y))$ is prenex.

Remark (Non-Examples). $\forall x (P(x) \rightarrow \exists y R(x, y))$ is not prenex because a quantifier remains inside the matrix.

Remark (Dependencies).

- [Quantifier Prefix](#)
- [Matrix](#)

Definition (Prenex Normal Form)

Definition 2.5.19 (Prenex Normal Form). A formula ψ is a *prenex normal form* of a formula φ exactly when ψ is prenex and $\varphi \equiv \psi$.

Remark (Standard quantified statement).

ψ is a prenex normal form of $\varphi \iff \psi$ is prenex and $\varphi \equiv \psi$.

Remark (Definition predicate reading). $\text{PrenexNormalForm}(\psi, \varphi)$ means that ψ is a prenex formula logically equivalent to φ .

Remark (Interpretation). Prenex normal form changes the placement of quantifiers but not the meaning of the formula.

Remark (Exposition). Prenex normal form is not unique. Different choices of bound-variable names and different orders of valid pulling steps can produce different but logically equivalent prenex formulas.

Remark (Exposition). A prenex conversion proceeds in stages: eliminate implications and biconditionals, push negations inward, rename bound variables as needed, pull quantifiers forward, and leave a quantifier-free matrix.

Remark (Examples). Starting with

$$\neg(\forall x P(x) \rightarrow \exists y Q(y)),$$

eliminate the implication, push the negation inward, and pull the quantifiers forward to obtain

$$\forall x \forall y (P(x) \wedge \neg Q(y)).$$

Remark (Dependencies).

- [Prenex Formula](#)
- [Logical Equivalence](#)

Theorem (Existence of Prenex Normal Form)

Theorem 2.5.20 (Existence of Prenex Normal Form). *Every first-order formula is logically equivalent to some formula in prenex normal form. [Go to proof](#).*

Remark (Standard quantified statement).

$$\forall \varphi \in \text{Form}_{\mathcal{L}} \exists \psi \in \text{Form}_{\mathcal{L}} (\psi \text{ is prenex} \wedge \varphi \equiv \psi).$$

Remark (Predicate reading). $\forall \varphi \exists \psi \text{PrenexNormalForm}(\psi, \varphi)$.

Remark (Interpretation). Every formula can be converted into an equivalent one with all quantifiers at the front and a quantifier-free matrix at the end.

Remark (Exposition). The proof proceeds by structural rewriting: remove implication and biconditional connectives, push negations inward, rename bound variables to avoid capture, and then pull quantifiers forward using equivalences whose side conditions have been made true by renaming.

Remark (Dependencies).

- [Prenex Normal Form](#)
- [Quantifier Negation Laws](#)
- [Renaming Bound Variables](#)
- [Valid Quantifier Distribution](#)

Logical Strength and Quantifier Order

Remark (Section toolkit: Strength and order). Quantifier order is one of the main new phenomena in predicate logic. In propositional logic, changing the order of independent connectives often keeps truth conditions recognizable. In predicate logic, moving $\forall$ and $\exists$ can change whether witnesses may depend on earlier choices.

Definition (Stronger Formula)

Definition 2.5.21 (Stronger Formula). A sentence A is *stronger than* a sentence B exactly when

$$A \models B \quad \text{and} \quad B \not\models A.$$

Remark (Standard quantified statement).

$$A \text{ is stronger than } B \iff (\forall \mathcal{M} (\mathcal{M} \models A \Rightarrow \mathcal{M} \models B)) \wedge (\exists \mathcal{N} (\mathcal{N} \models B \wedge \mathcal{N} \not\models A)).$$

Remark (Definition predicate reading). $\text{StrongerFormula}(A, B)$ means that A entails B , but B does not entail A .

Remark (Negated quantified statement).

$$A \not\models B \quad \text{or} \quad B \models A.$$

Remark (Interpretation). The stronger sentence has fewer possible structures in which it is true. It rules out more cases.

Remark (Examples). $\forall x P(x)$ is stronger than $\exists x P(x)$ over nonempty domains.

Remark (Dependencies).

- [Logical Consequence](#)

Definition (Weaker Formula)

Definition 2.5.22 (Weaker Formula). A sentence B is *weaker than* a sentence A exactly when A is stronger than B .

Remark (Standard quantified statement).

$$B \text{ is weaker than } A \iff A \models B \text{ and } B \not\models A.$$

Remark (Definition predicate reading). $\text{WeakerFormula}(B, A)$ means that B is entailed by A but does not entail A .

Remark (Interpretation). The weaker sentence permits more structures. It follows from the stronger sentence but carries less information.

Remark (Dependencies).

- [Stronger Formula](#)

Definition (Quantifier Order)

Definition 2.5.23 (Quantifier Order). The *quantifier order* of a prenex formula is the ordered list of quantifiers in its prefix. A change of order is significant when it changes which witnesses may depend on earlier variables.

Remark (Standard quantified statement).

$$Q_1x_1 \cdots Q_nx_n \psi \text{ has quantifier order } (Q_1, \dots, Q_n).$$

Remark (Definition predicate reading). $\text{QuantifierOrder}(\Phi, (Q_1, \dots, Q_n))$ records the order of the quantifiers in the prefix of Φ .

Remark (Interpretation). Quantifier order controls dependency. In $\forall x \exists y$, the witness y may depend on x . In $\exists y \forall x$, the same y must work for all x .

Remark (Dependencies).

- [Quantifier Prefix](#)
- [Prenex Formula](#)

Theorem (Universal Implies Existential)

Theorem 2.5.24 (Universal Implies Existential). *Over nonempty domains,*

$$\forall x \varphi(x) \models \exists x \varphi(x).$$

Go to proof.

Remark (Standard quantified statement).

$$\forall \mathcal{M} (\mathcal{M} \models \forall x \varphi(x) \Rightarrow \mathcal{M} \models \exists x \varphi(x)).$$

Remark (Predicate reading). $\text{LogicalConsequence}(\{\forall x \varphi(x)\}, \exists x \varphi(x))$.

Remark (Interpretation). If every domain element satisfies φ , then at least one does because first-order structures have nonempty domains.

Remark (Dependencies).

- [Structure](#)

- Logical Consequence

Theorem (Existential Does Not Imply Universal)

Theorem 2.5.25 (Existential Does Not Imply Universal). *In general,*

$$\exists x \varphi(x) \not\models \forall x \varphi(x).$$

Go to proof.

Remark (Standard quantified statement).

$$\exists \mathcal{M} (\mathcal{M} \models \exists x \varphi(x) \wedge \mathcal{M} \not\models \forall x \varphi(x)).$$

Remark (Predicate reading). $\neg \text{LogicalConsequence}(\{\exists x \varphi(x)\}, \forall x \varphi(x))$.

Remark (Interpretation). One witness does not make a universal claim true.

Remark (Exposition). In the real numbers, $\exists x (x = 0)$ is true, but $\forall x (x = 0)$ is false.

Remark (Dependencies).

- Universal Implies Existential

Theorem (Uniform Witness Implies Dependent Witness)

Theorem 2.5.26 (Uniform Witness Implies Dependent Witness). *For every formula* $\varphi(x, y)$,

$$\exists y \forall x \varphi(x, y) \models \forall x \exists y \varphi(x, y).$$

Go to proof.

Remark (Standard quantified statement).

$$\forall \mathcal{M} (\mathcal{M} \models \exists y \forall x \varphi(x, y) \Rightarrow \mathcal{M} \models \forall x \exists y \varphi(x, y)).$$

Remark (Predicate reading). $\text{LogicalConsequence}(\{\exists y \forall x \varphi(x, y)\}, \forall x \exists y \varphi(x, y))$.

Remark (Interpretation). A single witness y that works for every x can be reused as the witness required for each separate x .

Remark (Dependencies).

- Quantifier Order
- Logical Consequence

Theorem (Dependent Witness Need Not Be Uniform)

Theorem 2.5.27 (Dependent Witness Need Not Be Uniform). *In general,*

$$\forall x \exists y \varphi(x, y) \not\models \exists y \forall x \varphi(x, y).$$

Go to proof.

Remark (Standard quantified statement).

$$\exists \mathcal{M} (\mathcal{M} \models \forall x \exists y \varphi(x, y) \wedge \mathcal{M} \not\models \exists y \forall x \varphi(x, y)).$$

Remark (Predicate reading). $\neg \text{LogicalConsequence}(\{\forall x \exists y \varphi(x, y)\}, \exists y \forall x \varphi(x, y))$.

Remark (Interpretation). The dependent-witness statement allows y to vary with x . The uniform statement requires one y to handle all x at once.

Remark (Exposition). Over $\mathbb{R}$, let $\varphi(x, y)$ be $y > x$. Then $\forall x \exists y (y > x)$ is true, since $y = x + 1$ works for each x . But $\exists y \forall x (y > x)$ is false, since no real number is larger than every real number.

Remark (Exposition). Quantifier order matters because it records dependency. The phrase "for every x , there exists y " permits a different y after x is known. The phrase "there exists y such that for every x " chooses y before seeing x . This is a genuine expressive jump beyond propositional logic.

Remark (Dependencies).

- [Uniform Witness Implies Dependent Witness](#)

2.6 Proof Theory

Quantifier Inference Rules — Quick Reference

Rule	Schema	Key restriction	Detail
UI	$\forall x \varphi \Rightarrow \varphi[t/x]$	t free for x	↓ Def
UG	$\varphi \Rightarrow \forall x \varphi$	x not free in assumptions	↓ Def
EI	$\exists x \varphi \Rightarrow \varphi[c/x]$	c fresh witness	↓ Def
EG	$\varphi[t/x] \Rightarrow \exists x \varphi$	none	↓ Def

2.6.1 Proof Theory: Quantifier Inference Rules

Definition (Universal Instantiation — UI)

Definition 2.6.1 (Universal Instantiation — UI). From a universally quantified statement, infer any instance obtained by substituting a term for the bound variable:

$$\forall x \varphi \Rightarrow \varphi[t/x].$$

Remark (Dependencies).

- [Universal Quantifier](#)
- [Substitution Notation](#)
- [Free for Substitution](#)

Remark (Side condition). The term t must be free for x in φ . If t contains a variable that would become bound after substitution, the inference is invalid.

Definition (Universal Generalization — UG)

Definition 2.6.2 (Universal Generalization — UG). From a formula, infer a universally quantified statement:

$$\varphi \Rightarrow \forall x \varphi.$$

Remark (Dependencies).

- [Universal Quantifier](#)
- [Formula](#)
- [Bound and Free Occurrences](#)

Remark (Restriction on UG). The variable x must not occur free in any undischarged assumption on which φ depends. This restriction ensures that x is truly arbitrary — not tied to a specific hypothesis about x .

Remark (Arbitrary element argument). To prove $\forall x \varphi(x)$, fix an arbitrary element x (introducing no special assumptions about x), prove $\varphi(x)$, and then apply UG. The variable x must remain unconstrained throughout.

Definition (Existential Instantiation — EI)

Definition 2.6.3 (Existential Instantiation — EI). From an existentially quantified statement, infer an instance with a fresh constant (witness):

$$\exists x \varphi \Rightarrow \varphi[c/x].$$

Remark (Dependencies).

- [Existential Quantifier](#)
- [Constant Symbol](#)
- [Substitution Notation](#)
- [Free for Substitution](#)

Remark (Witness discipline for EI). The constant c must be fresh: it must not appear in φ , in any undischarged assumption, or in the final conclusion of the proof. The constant represents an arbitrary but fixed witness to the existential claim, not a specific known object.

Remark (Common error). Using a witness constant introduced by EI outside its allowed scope, or choosing c before establishing the existential premise, invalidates the proof.

Definition (Existential Generalization — EG)

Definition 2.6.4 (Existential Generalization — EG). From a formula containing a term, infer an existential statement:

$$\varphi[t/x] \Rightarrow \exists x \varphi.$$

Remark (Dependencies).

- [Existential Quantifier](#)
- [Term](#)
- [Substitution Notation](#)

Remark (No side conditions). EG has no side conditions: any term t may be replaced by an existentially quantified variable. To prove $\exists x \varphi(x)$, explicitly exhibit a term t such that $\varphi(t)$ holds, then apply EG.

Remark (Counterexample argument). To refute $\forall x \varphi(x)$: produce a single term t such that $\neg\varphi(t)$ holds. To refute $\exists x \varphi(x)$: show that $\varphi(t)$ fails for every term t in the domain.

Quantifier Proof Strategies — Quick Reference

Goal shape	Strategy	Key rule
Prove $\forall x \varphi(x)$	Fix an arbitrary x ; prove $\varphi(x)$ for that x	UG
Prove $\exists x \varphi(x)$	Produce a specific witness t ; verify $\varphi(t)$	EG
Use $\forall x \varphi(x)$	Instantiate at any term t to get $\varphi(t)$	UI
Use $\exists x \varphi(x)$	Introduce a fresh name c for the witness	EI
Negate $\forall x \varphi$	Becomes $\exists x \neg\varphi$	Neg. law
Negate $\exists x \varphi$	Becomes $\forall x \neg\varphi$	Neg. law
Prove $\forall x \exists y \varphi(x, y)$	Fix x ; then construct y depending on x	UG then EG
Prove $\exists y \forall x \varphi(x, y)$	Find y first; then verify for all x	EG then UG

2.6.2 Proof Strategies for Quantified Statements

The inference rules UI, UG, EI, and EG were defined in the previous section. That section answered the question: what does each rule license? This section answers a different question: when the goal of a proof has a particular quantifier structure, which rule should be used, and what does the proof skeleton look like? The two questions are distinct, and both must be understood clearly before reading analysis proofs.

The single most important organizing principle is this: *the shape of the goal determines the proof structure, and the shape of the hypothesis determines how to use it*. A $\forall$ goal calls for a different move than a $\exists$ goal; a $\forall$ hypothesis is used differently from a $\exists$ hypothesis. The four combinations are the four strategies below.

Strategy 1: Proving a Universal $\forall x \varphi(x)$

To prove $\forall x \varphi(x)$: introduce a fresh variable x_0 representing an *arbitrary, unspecified* element of the domain. Prove $\varphi(x_0)$ without making any assumption about x_0 beyond its being in the domain. Then apply Universal Generalization (UG) to conclude $\forall x \varphi(x)$.

Let x_0 be an arbitrary element of the domain.

[prove $\varphi(x_0)$ using only the hypotheses, not any special property of x_0]

Therefore: $\forall x \varphi(x)$. (by UG)

The critical constraint is that x_0 must be *arbitrary*: no hypothesis in the proof may impose a condition on x_0 that is not universally true. Violating this constraint is the UG fallacy (“illicit generalization”).

Remark (Why “let x be arbitrary” works). Fixing an arbitrary element x_0 is the formal counterpart of the English phrase “let x be any element.” The word “arbitrary” means: the proof uses no information about x_0 that is specific to x_0 — only information that applies to every element of the domain. If the argument goes through for such an unspecified x_0 , it goes through for every x , so the universal follows.

Remark (The UG side condition in practice). UG requires that x_0 not appear free in any undischarged assumption. In practice: do not use any hypothesis of the form “ x_0 has property P ” unless P holds of every domain element. If a hypothesis says “ $x_0 > 0$,” then x_0 is not arbitrary, and UG to $\forall x$ is invalid.

Strategy 2: Proving an Existential $\exists x \varphi(x)$

To prove $\exists x \varphi(x)$: exhibit a specific term t and verify that $\varphi(t)$ holds. Then apply Existential Generalization (EG) to conclude $\exists x \varphi(x)$.

Claim: $\exists x \varphi(x)$.

Take: $t :=$ [specific term].

Verify: $\varphi(t)$ holds. [proof that t works]

Therefore: $\exists x \varphi(x)$. (by EG)

The entire burden of an existential proof is finding the right t . Once t is identified and verified, the logic is trivial: one application of EG.

Remark (Where the difficulty lies). In existential proofs, the logical structure is simple but the mathematical insight is often deep. Finding the witness requires understanding the problem; verifying the witness is usually straightforward. This is why analysis proofs often say “take $\delta = \min(\varepsilon/2, 1)$ ” without explaining where that choice came from — the work happened before the formal proof was written.

Strategy 3: Using a Universal $\forall x \varphi(x)$

If a hypothesis or established fact has the form $\forall x \varphi(x)$, one can instantiate it at *any* specific term t to obtain $\varphi(t)$, by Universal Instantiation (UI). There are no side conditions beyond t being free for x in φ .

Available: $\forall x \varphi(x)$.

Choose any term t .

Obtain: $\varphi(t)$. (by UI)

UI can be applied repeatedly to the same universal statement with different choices of t .

Strategy 4: Using an Existential $\exists x \varphi(x)$

If a hypothesis has the form $\exists x \varphi(x)$, introduce a *fresh constant* c to name the (unknown, unspecified) witness, obtaining $\varphi(c)$ by Existential Instantiation (EI). The constant c must be new: it must not appear anywhere else in the proof.

Available: $\exists x \varphi(x)$.

Let c be a witness. (fresh constant, not used elsewhere)

Obtain: $\varphi(c)$. (by EI)

The freshness requirement is not a technicality. Using a constant that already appears in the proof — say, a constant a introduced under a different assumption — would illegally identify the witness with that specific element. The witness c is only known to satisfy $\varphi(c)$; nothing else about it is known, and it cannot be equated with anything specific.

Remark (The scope of a witness constant). Once c is introduced by EI, it names the witness for the duration of the argument. Conclusions derived using c depend on the existence of such a witness; they are valid (they do not depend on which specific element c actually names). However, c cannot be exported outside the scope in which the existential was instantiated, and no universal generalization may be applied to c .

The Central Asymmetry: Universal vs. Existential Goals

The following comparison is the most important thing to understand about quantifier proof structure. Universal and existential goals require fundamentally different strategies, and confusing them is one of the most common serious errors in mathematical writing.

Universal vs. Existential Goals: The Fundamental Difference		
	$\forall x \varphi(x)$	$\exists x \varphi(x)$
To prove:	Fix <i>arbitrary</i> x ; prove $\varphi(x)$	<i>Choose</i> specific t ; verify $\varphi(t)$
Who chooses x?	The adversary (you cannot choose)	You (the prover)
Main rule:	UG	EG
Burden:	Works for every x without assumptions	A single witness suffices
Error:	Assuming something special about x	Failing to exhibit a concrete t

Remark (Who controls the variable). For a universal goal, the variable x is chosen by the “opponent” of the proof: the proof must work no matter what x is. The prover has no control over x ; hence the term “arbitrary.” For an existential goal, the prover chooses the witness t ; the power is entirely on the prover’s side, but so is the obligation to produce something concrete and verifiable.

Nested Quantifiers: The $\forall\exists$ Pattern in Analysis

Every ε - δ proof in analysis is a proof of a statement with the pattern $\forall\varepsilon\exists\delta\cdots$. Understanding the proof structure of such statements is the direct payoff of this section.

Proof Skeleton: $\forall x\exists y\varphi(x,y)$

Step 1. Fix arbitrary x . (Opening move for the outer $\forall$; x is unspecified. This is Strategy 1.)

Step 2. Define y in terms of x . (The witness for $\exists y$ may, and typically does, depend on x . This is Strategy 2 — choosing a witness.)

Step 3. Verify $\varphi(x,y)$ using the specific y from Step 2 and the arbitrary x from Step 1.

Step 4. Conclude: $\exists y\varphi(x,y)$. (by EG)

Step 5. Conclude: $\forall x\exists y\varphi(x,y)$. (by UG, since x was arbitrary in Step 1)

The key insight: y is chosen *after* x is fixed, so y is allowed to depend on x .

Proof Skeleton: $\exists y\forall x\varphi(x,y)$

Step 1. Define y . (The witness for $\exists y$ must be chosen *before* x is introduced. This y must work for *every* x .)

Step 2. Fix arbitrary x . (Now x is introduced.)

Step 3. Verify $\varphi(x,y)$ for the specific y from Step 1 and arbitrary x from Step 2.

Step 4. Conclude: $\forall x\varphi(x,y)$. (by UG)

Step 5. Conclude: $\exists y\forall x\varphi(x,y)$. (by EG)

The key contrast: y is chosen *before* x , so y cannot depend on x . This is why $\exists y\forall x$ is a much stronger claim.

Remark (Why order determines strength). In the $\forall\exists$ skeleton, the witness y is constructed from x , so a different y is allowed for each x . In the $\exists\forall$ skeleton, a single y must work for all x simultaneously. The first pattern appears in continuity (δ may depend on ε and x); the second in uniform continuity (δ may depend on ε but not on x). The difference between continuity and uniform continuity is exactly the difference between these two proof skeletons.

A Complete Worked Example

The following proof traces every UI/UG/EI/EG step explicitly. In practice, proofs are written more concisely, but the logical structure is always this one.

Example (A worked multi-quantifier proof). **Claim:** If $\forall x \exists y P(x, y)$ and $\forall x \forall y (P(x, y) \rightarrow Q(x, y))$, then $\forall x \exists y Q(x, y)$.

Proof:

1. Assume $H_1 := \forall x \exists y P(x, y)$ and $H_2 := \forall x \forall y (P(x, y) \rightarrow Q(x, y))$. (hypotheses)
2. Let a be an arbitrary element of the domain. (introduce arbitrary variable for $\forall x$ in the goal)
3. From H_1 , instantiate at a : $\exists y P(a, y)$. (by UI applied to H_1 with $t = a$)
4. Let b be a witness: $P(a, b)$. (by EI applied to Step 3; b is fresh)
5. From H_2 , instantiate at a : $\forall y (P(a, y) \rightarrow Q(a, y))$. (by UI applied to H_2 with $t = a$)
6. From Step 5, instantiate at b : $P(a, b) \rightarrow Q(a, b)$. (by UI applied to Step 5 with $t = b$)
7. From Step 4 ($P(a, b)$) and Step 6 ($P(a, b) \rightarrow Q(a, b)$): obtain $Q(a, b)$. (by Modus Ponens)
8. From Step 7: $\exists y Q(a, y)$. (by EG: b witnesses the existential)
9. Since a was arbitrary: $\forall x \exists y Q(x, y)$. (by UG: a was not constrained)

Annotation: The proof follows the $\forall\exists$ skeleton exactly. Step 2 fixes the arbitrary x . Steps 3–4 use the first hypothesis to obtain a witness b depending on a . Steps 5–7 apply the second hypothesis to get the desired conclusion about b . Steps 8–9 wrap everything back up with EG and UG.

Remark (Reading analysis proofs). A proof that begins “Let $\varepsilon > 0$ ” is executing Step 2 of the $\forall\exists$ skeleton with domain $\mathbb{R}_{>0}$. A sentence like “take $\delta = \varepsilon/2$ ” is executing Step 2 of the inner existential proof: it is the witness for $\exists\delta$. Everything between “let $\varepsilon > 0$ ” and “take $\delta = \dots$ ” is scaffolding to find the right witness. Everything after “take $\delta = \dots$ ” is the verification that the witness works. Once this structure is seen, every ε - δ proof becomes readable by template.

Equality Rules — Quick Reference

Rule	Schema	Status	Detail
Reflexivity (EqI)	$t = t$	Primitive rule	↓ Def
Equality Elim (EqE)	$t_1 = t_2, \varphi[t_1/x] \Rightarrow \varphi[t_2/x]$	Primitive rule	↓ Def
Symmetry	$t_1 = t_2 \Rightarrow t_2 = t_1$	Derived	↓ Thm
Transitivity	$t_1 = t_2, t_2 = t_3 \Rightarrow t_1 = t_3$	Derived	↓ Thm
Term substitution	$f(\dots, t_1, \dots) = f(\dots, t_2, \dots)$	Derived	↓ Thm
Predicate substitution	$P(\dots, t_1, \dots) \Leftrightarrow P(\dots, t_2, \dots)$	Derived	↓ Thm

2.6.3 Proof Theory: Equality Rules

Definition (Equality Introduction — Reflexivity)

Definition 2.6.5 (Equality Introduction — Reflexivity). For any term t , one may infer $t = t$.

Remark (Dependencies).

- [Term](#)

Remark (English reading). Reflexivity requires no premises and holds for all terms under all interpretations. It is the foundational rule that allows equality reasoning to get off the ground.

Definition (Equality Elimination — Substitution of Equals)

Definition 2.6.6 (Equality Elimination — Substitution of Equals). From $t_1 = t_2$ and $\varphi[t_1/x]$, one may infer $\varphi[t_2/x]$.

Remark (Dependencies).

- [Term](#)
- [Formula](#)
- [Substitution Notation](#)
- [Free for Substitution](#)

Remark (English reading). Equality elimination permits replacing a term by an equal term in any formula position, provided the substitution is capture-avoiding. This formalizes the intuition that equal things can be substituted for each other.

Theorem (Symmetry of Equality)

Theorem 2.6.7 (Symmetry of Equality). *From $t_1 = t_2$, one may infer $t_2 = t_1$. [Go to proof](#).*

Remark (Standard quantified statement). $\forall t_1, t_2 : t_1 = t_2 \rightarrow t_2 = t_1$.

Remark (Dependencies).

- [Equality Introduction](#)
- [Equality Elimination](#)

Theorem (Transitivity of Equality)

Theorem 2.6.8 (Transitivity of Equality). *From $t_1 = t_2$ and $t_2 = t_3$, one may infer $t_1 = t_3$. [Go to proof](#).*

Remark (Standard quantified statement). $\forall t_1, t_2, t_3 : t_1 = t_2 \wedge t_2 = t_3 \rightarrow t_1 = t_3$.

Remark (Dependencies).

- [Equality Introduction](#)
- [Equality Elimination](#)

Theorem (Term Substitution under Equality)

Theorem 2.6.9 (Term Substitution under Equality). *If $t_1 = t_2$, then for any function symbol f , $f(\dots, t_1, \dots) = f(\dots, t_2, \dots)$. [Go to proof](#).*

Remark (Standard quantified statement). $\forall t_1, t_2 : t_1 = t_2 \rightarrow \forall \text{ function symbol } f: f(\dots, t_1, \dots) = f(\dots, t_2, \dots)$. ■

Remark (Dependencies).

- [Equality Elimination](#)

Theorem (Predicate Substitution under Equality)

Theorem 2.6.10 (Predicate Substitution under Equality). *If $t_1 = t_2$ and P is an n -ary predicate symbol, then $P(\dots, t_1, \dots) \Leftrightarrow P(\dots, t_2, \dots)$. [Go to proof](#).*

Remark (Standard quantified statement). $\forall t_1, t_2 : t_1 = t_2 \rightarrow \forall \text{ predicate symbol } P: P(\dots, t_1, \dots) \Leftrightarrow P(\dots, t_2, \dots)$.

Remark (Dependencies).

- [Equality Elimination](#)

Remark (Summary). These derived rules collectively express that functions and predicates *respect equality*: equal inputs produce equal outputs (for functions) or equivalent propositions (for predicates). Together they amount to the principle of Leibniz substitutivity.

Remark (Common error). When substituting equals for equals, the substitution must be made consistently. Replacing a term by an equal in one occurrence but not another in the same formula can produce incorrect conclusions.

Soundness and Completeness — Quick Reference

Property	Direction	Detail
Soundness	$\Gamma \vdash \varphi \Rightarrow \Gamma \models \varphi$	↓ Def
Completeness	$\Gamma \models \varphi \Rightarrow \Gamma \vdash \varphi$	↓ Def
Soundness Theorem (FOL)	All standard FOL rules are sound	↓ Thm
Gödel's Completeness Theorem	FOL is complete	↓ Thm

2.6.4 Proof Theory: Soundness and Completeness

Definition (Soundness)

Definition 2.6.11 (Soundness). A proof system is *sound* if every provable formula is valid:

$$\Gamma \vdash \varphi \implies \Gamma \models \varphi.$$

Remark (Dependencies).

- [Satisfaction](#)
- [Logical Consequence](#)

Definition (Completeness)

Definition 2.6.12 (Completeness). A proof system is *complete* if every valid formula is provable:

$$\Gamma \models \varphi \implies \Gamma \vdash \varphi.$$

Remark (Dependencies).

- [Satisfaction](#)
- [Logical Consequence](#)

Theorem (Soundness of First-Order Logic)

Theorem 2.6.13 (Soundness of First-Order Logic). *The standard inference rules for first-order logic (UI, UG, EI, EG, and the propositional rules) are sound: they preserve truth in all structures.*

If $\Gamma \vdash \varphi$, then $\Gamma \models \varphi$. [Go to proof](#).

Remark (Standard quantified statement). $\forall \Gamma, \varphi : \Gamma \vdash \varphi \rightarrow \forall \mathcal{M}, \forall s, (\forall \gamma \in \Gamma, \mathcal{M}, s \models \gamma) \rightarrow \mathcal{M}, s \models \varphi$.

Remark (Dependencies).

- [Soundness](#)
- [Satisfaction](#)
- [Logical Consequence](#)
- [Universal Instantiation](#)
- [Quantifier Distribution](#)

Theorem (Gödel's Completeness Theorem)

First-order logic is complete: every logically valid formula is provable.

$$\Gamma \models \varphi \implies \Gamma \vdash \varphi.$$

Equivalently: if a set of sentences Γ is consistent (has no proof of contradiction), then Γ has a model.

Remark (English reading). Soundness ensures proofs do not lead us astray: we cannot prove false statements from true premises. Completeness ensures proofs are powerful enough: every statement that is true in all models can be established by a formal proof.

Together, soundness and completeness show that syntactic provability ($\vdash$) and semantic entailment ($\models$) coincide for first-order logic.

Remark (Completeness vs. incompleteness). Gödel's completeness theorem (1930) should not be confused with his incompleteness theorems (1931). The completeness theorem concerns first-order logic as a proof system. The incompleteness theorems concern the limitations of formal theories capable of expressing arithmetic, and are a separate result.

2.7 Translation

Toolkit: Translation

Task	Question	Typical output
Translation key	What does each symbol mean?	Domain, constants, predicates, relations
Universal claim	Which objects are restricted?	$\forall x (A(x) \rightarrow B(x))$
Existential claim	Which properties are jointly required?	$\exists x (A(x) \wedge B(x))$
Scope analysis	Which quantifier is outermost?	$\forall x \exists y R(x, y)$ or $\exists y \forall x R(x, y)$

Remark (Exposition). This section records the applied translation layer for predicate logic: keys, domains, restricted quantifiers, scope ambiguity, and the modern first-order reading of categorical forms.

English to Logic and Scope Ambiguity

Definition (Translation Key)

Definition 2.7.1 (Translation Key). A *translation key* is a finite record that fixes a domain of discourse and assigns intended English readings to the constant symbols, predicate symbols, and relation symbols used in a translation.

Remark (Standard quantified statement).

K is a translation key

$\iff K$ specifies a domain and readings for each non-logical symbol used.

Remark (Definition predicate reading). $\text{TranslationKey}(K)$ means that K supplies the domain and symbol readings needed to parse a translated formula.

Remark (Interpretation). A translation key prevents hidden changes of meaning. The same symbol must keep the same reading throughout one exercise unless the key is explicitly replaced.

Remark (Examples). For the English sentence “Every applicant submitted some form,” a key may take the domain to be people and forms, with $A(x)$ for “ x is an applicant,” $F(y)$ for “ y is a form,” and $S(x, y)$ for “ x submitted y .”

Remark (Non-Examples). Using $P(x)$ once for “ x is a person” and later for “ x passed” is not a translation key; it is a change of vocabulary inside one translation.

Remark (Dependencies).

- [Constant Symbol](#)
- [Predicate Symbol](#)

Definition (Domain of Discourse)

Definition 2.7.2 (Domain of Discourse). The *domain of discourse* for a translation is the collection of objects over which the variables of the translated formulas range.

Remark (Standard quantified statement).

D is the domain of discourse $\iff$ each variable in the translation ranges over objects in D . ■

Remark (Definition predicate reading). $\text{DomainOfDiscourse}(D, K)$ means that D is the domain fixed by the translation key K .

Remark (Interpretation). The domain decides what the quantifiers are allowed to talk about. If the domain is people, then an exam must either be named by a separate sort-like predicate or represented by a different translation choice.

Remark (Examples). For “All cats are mammals,” one may use the domain of all animals and write $\forall x (C(x) \rightarrow M(x))$. With the smaller domain of cats, the same English claim may be written $\forall x M(x)$.

Remark (Non-Examples). Writing $\forall x M(x)$ while silently changing the domain from animals to cats halfway through the exercise is not a valid translation.

Remark (Dependencies).

- [Translation Key](#)
- [Variable](#)

Definition (Predicate and Relation Symbols in a Translation)

Definition 2.7.3 (Predicate and Relation Symbols in a Translation). In a translation key, a unary predicate symbol names a property of one object, and an n -ary relation symbol names a relation among n objects.

Remark (Standard quantified statement).

$$\begin{aligned} P \text{ is unary in } K &\iff P(x) \text{ has one argument,} \\ R \text{ is } n\text{-ary in } K &\iff R(x_1, \dots, x_n) \text{ has } n \text{ arguments.} \end{aligned}$$

Remark (Definition predicate reading). $\text{TranslationPredicateSymbol}(P, K)$ records that P has a fixed predicate reading in K , and $\text{TranslationRelationSymbol}(R, n, K)$ records that R is used with arity n in K .

Remark (Interpretation). Object-language predicate symbols such as P, Q, R are symbols inside the formal language. Metalinguistic predicate readings such as $\text{Term}(t)$ or $\text{AtomicFormula}(\varphi)$ are repository descriptions of syntax; they are not formulas being translated.

Remark (Examples). $A(x)$ may mean “ x is an athlete.” $L(x, y)$ may mean “ x likes y .” The arity is part of the key: $L(x)$ and $L(x, y)$ are not the same symbol use.

Remark (Non-Examples). Writing $L(x, y, z)$ after declaring $L(x, y)$ as “ x likes y ” is an arity error.

Remark (Dependencies).

- [Predicate Symbol](#)
- [Atomic Formula](#)

Definition (Constants and Variables in a Translation)

Definition 2.7.4 (Constants and Variables in a Translation). A *constant* names a fixed object from the translation key, while a *variable* marks a place bound by a quantifier or left open for later binding.

Remark (Standard quantified statement).

$$\begin{aligned} c \text{ is a translation constant} &\iff c \text{ names one fixed object,} \\ x \text{ is a translation variable} &\iff x \text{ is available for quantification or free occurrence.} \end{aligned}$$

Remark (Definition predicate reading). $\text{TranslationConstant}(c, K)$ means that c names a fixed object in K , and $\text{TranslationVariable}(x, K)$ means that x is used as a variable in translations governed by K .

Remark (Interpretation). Constants do not range. Variables do range when bound by quantifiers. Confusing the two usually leaves a formula with the wrong dependency pattern.

Remark (Examples). If a names Alice, then $P(a)$ says Alice is a participant. The formula $\forall x (S(x) \rightarrow P(x))$ uses x as a bound variable.

Remark (Non-Examples). The expression $\forall a S(a)$ is not appropriate if a has already been declared as a constant naming Alice.

Remark (Dependencies).

- [Constant Symbol](#)
- [Variable](#)

Proposition (Universal Translation Pattern)

Proposition 2.7.5 (Universal Translation Pattern). *In a broad domain, an English statement of the form “All A are B ” is translated by*

$$\forall x (A(x) \rightarrow B(x)).$$

Go to proof.

Remark (Standard quantified statement).

$$\forall x (A(x) \rightarrow B(x)).$$

Remark (Predicate reading). $\text{UniversalTranslationPattern}(A, B)$ records the implication schema for translating universal restricted claims.

Remark (Interpretation). The antecedent $A(x)$ restricts attention to the relevant objects. Objects outside A do not have to satisfy B .

Remark (Exposition). “All cats are mammals” becomes $\forall x (C(x) \rightarrow M(x))$. “No cats are reptiles” becomes $\forall x (C(x) \rightarrow \neg R(x))$. The form $\forall x (C(x) \wedge M(x))$ says every object in the domain is both a cat and a mammal, which is far stronger than the intended restricted claim. In a broad domain, “all,” “every,” and “any” usually translate restricted claims with implication.

Remark (Dependencies).

- [Universal Formula](#)
- [Molecular Formula](#)

Proposition (Existential Translation Pattern)

Proposition 2.7.6 (Existential Translation Pattern). *In a broad domain, an English statement of the form “Some A are B ” is translated by*

$$\exists x (A(x) \wedge B(x)).$$

Go to proof.

Remark (Standard quantified statement).

$$\exists x (A(x) \wedge B(x)).$$

Remark (Predicate reading). $\text{ExistentialTranslationPattern}(A, B)$ records the conjunction schema for translating existential restricted claims.

Remark (Interpretation). The witness must satisfy both restrictions at once. Existence is not merely a conditional promise about what would happen if an A existed.

Remark (Exposition). “Some cats are black” becomes $\exists x (C(x) \wedge B(x))$. “Some cats are not black” becomes $\exists x (C(x) \wedge \neg B(x))$. The form $\exists x (C(x) \rightarrow B(x))$ may be true because the witness is not a cat, so it does not translate “Some cats are black.” In a broad domain, “some,” “there is,” and “at least one” usually translate restricted claims with conjunction.

Remark (Dependencies).

- [Existential Formula](#)
- [Molecular Formula](#)

Proposition (Conditional Translation Pattern)

Proposition 2.7.7 (Conditional Translation Pattern). *An English statement of the form “If A , then B ” is translated by*

$$A \rightarrow B,$$

with quantifiers placed according to the variables occurring in A and B .

Go to proof.

Remark (Standard quantified statement).

$$A \rightarrow B.$$

Remark (Predicate reading). $\text{ConditionalTranslationPattern}(A, B)$ records the implication schema for conditional English.

Remark (Interpretation). Conditionals are especially common inside universal translations. The conditional separates the restricting condition from the asserted consequence.

Remark (Exposition). “Every applicant who is eligible is interviewed” becomes $\forall x ((A(x) \wedge E(x)) \rightarrow I(x))$. The form $\forall x (A(x) \wedge E(x) \wedge I(x))$ says every object is an eligible applicant who is interviewed, which is not the intended conditional claim.

Remark (Dependencies).

- [Universal Translation Pattern](#)

Proposition (Negation Translation Pattern)

Proposition 2.7.8 (Negation Translation Pattern). *The negation of a translated quantified statement is obtained by negating the whole formula and then pushing the negation inward using the quantifier negation laws.*

Go to proof.

Remark (Standard quantified statement).

$$\neg \forall x \varphi \iff \exists x \neg \varphi,$$

$$\neg \exists x \varphi \iff \forall x \neg \varphi.$$

Remark (Predicate reading). $\text{NegationTranslationPattern}(\varphi, \psi)$ records that ψ is obtained from $\neg\varphi$ by pushing negation through the quantifiers and connectives.

Remark (Interpretation). The negation of “all” is “some not.” The negation of “some” is “none.” For restricted universal claims, negating the implication produces a witness that satisfies the restriction and fails the consequent.

Remark (Exposition). The negation of $\forall x (A(x) \rightarrow B(x))$ is $\exists x (A(x) \wedge \neg B(x))$. The negation of $\exists x (A(x) \wedge B(x))$ is $\forall x (A(x) \rightarrow \neg B(x))$. The negation of $\forall x (A(x) \rightarrow B(x))$ is not $\forall x (A(x) \rightarrow \neg B(x))$; that latter formula says every A fails to be B , not merely that some counterexample exists.

Remark (Dependencies).

- [Quantifier Negation Laws](#)
- [Universal Translation Pattern](#)
- [Existential Translation Pattern](#)

Definition (Scope Ambiguity)

Definition 2.7.9 (Scope Ambiguity). A sentence has *scope ambiguity* when the same ordinary-language wording admits two or more translations with different quantifier nesting or different connective scope.

Remark (Standard quantified statement).

E has scope ambiguity

$$\iff \text{there exist distinct candidate translations } \varphi, \psi \text{ of } E \text{ with different scope.}$$

Remark (Definition predicate reading). $\text{ScopeAmbiguity}(E, \varphi, \psi)$ means that the English sentence E can reasonably be translated by φ or by ψ , and the difference is a scope difference.

Remark (Interpretation). Scope is not cosmetic. Changing the outer quantifier can change whether a single witness works for everyone or whether each object may have its own witness.

Remark (Exposition). The formulas $\forall x \exists y R(x, y)$ and $\exists y \forall x R(x, y)$ are not interchangeable. The first allows the witness y to depend on x ; the second requires one y that works for every x . Symbols such as $A(x)$, $B(x)$, and $R(x, y)$ are object-language formula patterns used in translations. Expressions such as $\text{TranslationKey}(K)$, $\text{Term}(t)$, and $\text{AtomicFormula}(\varphi)$ are metalinguistic predicate readings used by the project to describe mathematical objects.

All A are B	$\rightsquigarrow \forall x (A(x) \rightarrow B(x))$
Some A are B	$\rightsquigarrow \exists x (A(x) \wedge B(x))$
No A are B	$\rightsquigarrow \forall x (A(x) \rightarrow \neg B(x))$
Some A are not B	$\rightsquigarrow \exists x (A(x) \wedge \neg B(x))$
Every A has a B	$\rightsquigarrow \forall x (A(x) \rightarrow \exists y (B(y) \wedge R(x, y)))$
There is a B for every A	$\rightsquigarrow \exists y (B(y) \wedge \forall x (A(x) \rightarrow R(x, y)))$

Remark (Examples). “Every A has a B ” is usually $\forall x (A(x) \rightarrow \exists y (B(y) \wedge R(x, y)))$. “There is a B for every A ” is usually $\exists y (B(y) \wedge \forall x (A(x) \rightarrow R(x, y)))$. The bare patterns $\forall x \exists y R(x, y)$ and $\exists y \forall x R(x, y)$ make the same scope contrast visible.

Remark (Non-Examples). Renaming a bound variable from x to z does not create a scope ambiguity. The scope is unchanged.

Remark (Dependencies).

- [Quantifier Scope](#)
- [Quantifier Order](#)

Square of Opposition

Definition (Universal Affirmative Form)

Definition 2.7.10 (Universal Affirmative Form). The *universal affirmative* categorical form, called A , translates “All A are B ” as

$$\forall x (A(x) \rightarrow B(x)).$$

Remark (Standard quantified statement).

$$\forall x (A(x) \rightarrow B(x)).$$

Remark (Definition predicate reading). $\text{CategoricalAForm}(A, B, \varphi)$ means that φ is the universal affirmative translation from A to B .

Remark (Interpretation). The A -form says that every object satisfying the subject predicate also satisfies the predicate predicate. It does not by itself say that anything satisfies the subject predicate.

Remark (Dependencies).

- [Universal Translation Pattern](#)

Definition (Universal Negative Form)

Definition 2.7.11 (Universal Negative Form). The *universal negative* categorical form, called E , translates “No A are B ” as

$$\forall x (A(x) \rightarrow \neg B(x)).$$

Remark (Standard quantified statement).

$$\forall x (A(x) \rightarrow \neg B(x)).$$

Remark (Definition predicate reading). $\text{CategoricalEForm}(A, B, \varphi)$ means that φ is the universal negative translation from A to B .

Remark (Interpretation). The *E*-form says that anything satisfying *A* fails to satisfy *B*. It is still universal, so it can be true when no object satisfies *A*.

Remark (Dependencies).

- [Universal Translation Pattern](#)
- [Negation Translation Pattern](#)

Definition (Particular Affirmative Form)

Definition 2.7.12 (Particular Affirmative Form). The *particular affirmative* categorical form, called *I*, translates “Some *A* are *B*” as

$$\exists x (A(x) \wedge B(x)).$$

Remark (Standard quantified statement).

$$\exists x (A(x) \wedge B(x)).$$

Remark (Definition predicate reading). $\text{CategoricalIForm}(A, B, \varphi)$ means that φ is the particular affirmative translation from *A* to *B*.

Remark (Interpretation). The *I*-form requires a witness satisfying both predicates. It carries existential force.

Remark (Dependencies).

- [Existential Translation Pattern](#)

Definition (Particular Negative Form)

Definition 2.7.13 (Particular Negative Form). The *particular negative* categorical form, called *O*, translates “Some *A* are not *B*” as

$$\exists x (A(x) \wedge \neg B(x)).$$

Remark (Standard quantified statement).

$$\exists x (A(x) \wedge \neg B(x)).$$

Remark (Definition predicate reading). $\text{CategoricalOForm}(A, B, \varphi)$ means that φ is the particular negative translation from *A* to *B*.

Remark (Interpretation). The *O*-form requires a witness satisfying the subject predicate and failing the predicate predicate.

Remark (Dependencies).

- [Existential Translation Pattern](#)
- [Negation Translation Pattern](#)

Proposition (A-O Contradiction)

Proposition 2.7.14 (A-O Contradiction). *The A-form $\forall x (A(x) \rightarrow B(x))$ and the O-form $\exists x (A(x) \wedge \neg B(x))$ are contradictory: exactly one of them is true.*

Go to proof.

Remark (Standard quantified statement).

$$\neg \forall x (A(x) \rightarrow B(x)) \iff \exists x (A(x) \wedge \neg B(x)).$$

Remark (Predicate reading). ContradictoryPair(φ_A, φ_O) records that the A-form and O-form cannot share a truth value.

Remark (Interpretation). The O-form is exactly the counterexample to the A-form: an object that is A but not B.

Remark (Dependencies).

- Universal Affirmative Form
- Particular Negative Form
- Quantifier Negation Laws

Proposition (E-I Contradiction)

Proposition 2.7.15 (E-I Contradiction). *The E-form $\forall x (A(x) \rightarrow \neg B(x))$ and the I-form $\exists x (A(x) \wedge B(x))$ are contradictory: exactly one of them is true.*

Go to proof.

Remark (Standard quantified statement).

$$\neg \forall x (A(x) \rightarrow \neg B(x)) \iff \exists x (A(x) \wedge B(x)).$$

Remark (Predicate reading). ContradictoryPair(φ_E, φ_I) records that the E-form and I-form cannot share a truth value.

Remark (Interpretation). The I-form is exactly the counterexample to the E-form: an object that is both A and B.

Remark (Dependencies).

- Universal Negative Form
- Particular Affirmative Form
- Quantifier Negation Laws

Proposition (Contrariety Requires Existential Import)

Proposition 2.7.16 (Contrariety Requires Existential Import). *If $\exists x A(x)$, then the A-form and E-form cannot both be true.*

Go to proof.

Remark (Standard quantified statement).

$$\exists x A(x) \rightarrow \neg(\forall x (A(x) \rightarrow B(x)) \wedge \forall x (A(x) \rightarrow \neg B(x))).$$

Remark (Predicate reading). `ContraryWithExistentialImport( $\varphi_A, \varphi_E$ )` records that contrariety holds only after the subject predicate is known to have a witness.

Remark (Interpretation). With an A -object available, the two universal claims force both B and $\neg B$ of that object. Without such an object, both universals may be vacuously true. The traditional square of opposition assumes existential import; modern first-order logic does not automatically assume that a universal statement implies existence.

Remark (Dependencies).

- [Universal Affirmative Form](#)
- [Universal Negative Form](#)
- [Existential Formula](#)

2.8 Reference

Toolkit: Predicate Logic Reference

Reference	Use
Common errors	Diagnose translation, scope, and inference mistakes.
Summary tables	Compare translation patterns, quantifier laws, categorical forms, and proof cues.

Remark (Exposition). This section collects compact reference material for translation, quantifier negation, common inference errors, and proof strategy cues.

Common Errors and Fallacies

	Error	Incorrect form	Corrected form
	Confusing $\forall$ and $\exists$	$\exists x P(x)$ for “every x has P ”	$\forall x P(x)$
	Universal conjunction	$\forall x (A(x) \wedge B(x))$	$\forall x (A(x) \rightarrow B(x))$
	Existential implication	$\exists x (A(x) \rightarrow B(x))$	$\exists x (A(x) \wedge B(x))$
	Scope error	$\exists y \forall x R(x, y)$	$\forall x \exists y R(x, y)$, each x may have own y
<i>Remark</i> (Translation and proof errors).	Variable capture	$\varphi[t/x]$ without checking bound variables	Rename bound variables before substitution
	Free variable left in a sentence	$\forall x R(x, y)$ as a closed claim	$\forall x \forall y R(x, y)$, or as intended
	Affirming the consequent	$P \rightarrow Q, Q \therefore P$	Invalid; use a counterexample valuation structure
	Denying the antecedent	$P \rightarrow Q, \neg P \therefore \neg Q$	Invalid; use a counterexample valuation structure
	Invalid quantifier reversal	$\forall x \exists y R(x, y) \Rightarrow \exists y \forall x R(x, y)$	Invalid without hypotheses

Remark (Failure-mode checklist). Before accepting a translation or inference, check the domain, each symbol reading, every bound-variable scope, and whether the final formula is intended to be a sentence. Then test suspicious implications by trying to build one case where the premise is true and the conclusion false.

Summary Tables

	English phrase	Logical pattern
Remark (English phrase to logical pattern).	All A are B	$\forall x (A(x) \rightarrow B(x))$
	Some A are B	$\exists x (A(x) \wedge B(x))$
	No A are B	$\forall x (A(x) \rightarrow \neg B(x))$
	Some A are not B	$\exists x (A(x) \wedge \neg B(x))$
	Every A has a B	$\forall x (A(x) \rightarrow \exists y (B(y) \wedge R(x, y)))$
	There is a B for every A	$\exists y (B(y) \wedge \forall x (A(x) \rightarrow R(x, y)))$

Remark (Quantifier negation laws).

$$\neg \forall x \varphi \iff \exists x \neg \varphi,$$
$$\neg \exists x \varphi \iff \forall x \neg \varphi,$$
$$\neg \forall x \exists y \varphi \iff \exists x \forall y \neg \varphi,$$
$$\neg \exists x \forall y \varphi \iff \forall x \exists y \neg \varphi.$$

	Form	Name	Translation
Remark (Categorical form translations).	A	Universal affirmative	$\forall x (A(x) \rightarrow B(x))$
	E	Universal negative	$\forall x (A(x) \rightarrow \neg B(x))$
	I	Particular affirmative	$\exists x (A(x) \wedge B(x))$
	O	Particular negative	$\exists x (A(x) \wedge \neg B(x))$

	Goal or premise	Useful cue
Remark (Proof strategy cues).	Prove $\forall x \varphi(x)$	Let x be arbitrary, then prove $\varphi(x)$.
	Use $\forall x \varphi(x)$	Instantiate it with a term that is free for x .
	Prove $\exists x \varphi(x)$	Produce a witness and verify φ .
	Use $\exists x \varphi(x)$	Introduce a fresh witness and keep its scope controlled.
	Disprove $\forall x \varphi(x)$	Find a counterexample satisfying $\neg \varphi$.
	Disprove an implication	Make the hypothesis true and the conclusion false.

Proofs

Remark (Return). [Return to Theorem](#)

Lemma (Substitution Lemma for Terms). *Let $\mathcal{M}$ be a structure, let s be a variable assignment, let x be a variable, and let t and u be terms. Then*

$$\llbracket t[u/x] \rrbracket_{\mathcal{M},s} = \llbracket t \rrbracket_{\mathcal{M},s[x \mapsto \llbracket u \rrbracket_{\mathcal{M},s}]}$$

Professional Standard Proof.

TODO: professional standard proof for subst-terms. □

Detailed Learning Proof.

TODO: detailed learning proof for subst-terms. □

Remark (Proof structure).

Remark (Dependencies).

- [Substitution Notation](#)
- [Free for Substitution](#)
- [Term Evaluation](#)

Remark (Return). [Return to Theorem](#)

Lemma (Substitution Lemma for Formulas). *Let φ be a formula and let u be a term free for x in φ . For every structure $\mathcal{M}$ and assignment s ,*

$$\mathcal{M}, s \models \varphi[u/x] \iff \mathcal{M}, s[x \mapsto \llbracket u \rrbracket_{\mathcal{M}, s}] \models \varphi.$$

Professional Standard Proof.

TODO: professional standard proof for subst-formulas. □

Detailed Learning Proof.

TODO: detailed learning proof for subst-formulas. □

Remark (Proof structure).

Remark (Dependencies).

- [Substitution Notation](#)
- [Free for Substitution](#)
- [Satisfaction](#)
- [Substitution Lemma for Terms](#)

Remark (Return). [Return to Theorem](#)

Theorem (Negation of Bounded Quantifiers). *Let A be a set and let φ be a formula. Then*

$$\neg(\forall x \in A \varphi) \equiv \exists x \in A \neg\varphi, \quad \neg(\exists x \in A \varphi) \equiv \forall x \in A \neg\varphi.$$

Professional Standard Proof.

TODO: professional standard proof for neg-bounded. □

Detailed Learning Proof.

TODO: detailed learning proof for neg-bounded. □

Remark (Proof structure).

Remark (Dependencies).

- [Bounded Quantifier](#)
- [Quantifier Negation Laws](#)

Remark (Return). [Return to Theorem](#)

Theorem (Universal Implies Existential). *Over nonempty domains,*

$$\forall x \varphi(x) \models \exists x \varphi(x).$$

Professional Standard Proof.

TODO: professional standard proof for universal-implies-existential. □

Detailed Learning Proof.

TODO: detailed learning proof for universal-implies-existential. □

Remark (Proof structure).

Remark (Dependencies).

- [Structure](#)
- [Logical Consequence](#)

Remark (Return). [Return to Theorem](#)

Theorem (Existential Does Not Imply Universal). *In general,*

$$\exists x \varphi(x) \not\models \forall x \varphi(x).$$

Professional Standard Proof.

TODO: professional standard proof for existential-not-universal. □

Detailed Learning Proof.

TODO: detailed learning proof for existential-not-universal. □

Remark (Proof structure).

Remark (Dependencies).

- [Universal Implies Existential](#)

Remark (Return). [Return to Theorem](#)

Theorem (Uniform Witness Implies Dependent Witness). *For every formula $\varphi(x, y)$,*

$$\exists y \forall x \varphi(x, y) \models \forall x \exists y \varphi(x, y).$$

Professional Standard Proof.

TODO: professional standard proof for uniform-witness-implies-dependent-witness. □

Detailed Learning Proof.

TODO: detailed learning proof for uniform-witness-implies-dependent-witness. □

Remark (Proof structure).

Remark (Dependencies).

- [Quantifier Order](#)
- [Logical Consequence](#)

Remark (Return). [Return to Theorem](#)

Theorem (Dependent Witness Need Not Be Uniform). *In general,*

$$\forall x \exists y \varphi(x, y) \not\equiv \exists y \forall x \varphi(x, y).$$

Professional Standard Proof.

TODO: professional standard proof for dependent-witness-not-uniform. □

Detailed Learning Proof.

TODO: detailed learning proof for dependent-witness-not-uniform. □

Remark (Proof structure).

Remark (Dependencies).

- [Uniform Witness Implies Dependent Witness](#)

Remark (Return). [Return to Theorem](#)

Theorem (Existence of Prenex Normal Form). *Every first-order formula is logically equivalent to some formula in prenex normal form.*

Professional Standard Proof.

TODO: professional standard proof for pnf. □

Detailed Learning Proof.

TODO: detailed learning proof for pnf. □

Remark (Proof structure).

Remark (Dependencies).

- [Prenex Normal Form](#)
- [Quantifier Negation Laws](#)
- [Renaming Bound Variables](#)
- [Valid Quantifier Distribution](#)

Remark (Return). [Return to Theorem](#)

Theorem (Quantifier Negation Laws). *For every formula φ ,*

$$\neg\forall x \varphi \equiv \exists x \neg\varphi, \quad \neg\exists x \varphi \equiv \forall x \neg\varphi.$$

Professional Standard Proof.

TODO: professional standard proof for qneg. □

Detailed Learning Proof.

TODO: detailed learning proof for qneg. □

Remark (Proof structure).

Remark (Dependencies).

- [Universal Formula](#)
- [Existential Formula](#)
- [Logical Equivalence](#)

Remark (Return). [Return to Theorem](#)

Theorem (Double Negation and Quantifiers). *For every formula φ ,*

$$\neg\neg\forall x\varphi \equiv \forall x\varphi, \quad \neg\neg\exists x\varphi \equiv \exists x\varphi.$$

Professional Standard Proof.

TODO: professional standard proof for quantifier-double-negation. □

Detailed Learning Proof.

TODO: detailed learning proof for quantifier-double-negation. □

Remark (Proof structure).

Remark (Dependencies).

- [Quantifier Negation Laws](#)

Remark (Return). [Return to Theorem](#)

Theorem (Same-Type Quantifier Commutation). *Quantifiers of the same type commute:*

$$\forall x \forall y \varphi \equiv \forall y \forall x \varphi, \quad \exists x \exists y \varphi \equiv \exists y \exists x \varphi.$$

Professional Standard Proof.

TODO: professional standard proof for qcomm. □

Detailed Learning Proof.

TODO: detailed learning proof for qcomm. □

Remark (Proof structure).

Remark (Dependencies).

- [Universal Formula](#)
- [Existential Formula](#)

Remark (Return). [Return to Theorem](#)

Theorem (Mixed Quantifiers Do Not Commute). *In general,*

$$\forall x \exists y \varphi \not\equiv \exists y \forall x \varphi.$$

Professional Standard Proof.

TODO: professional standard proof for mixed-quantifiers-do-not-commute. □

Detailed Learning Proof.

TODO: detailed learning proof for mixed-quantifiers-do-not-commute. □

Remark (Proof structure).

Remark (Dependencies).

- [Same-Type Quantifier Commutation](#)

Remark (Return). [Return to Theorem](#)

Theorem (Valid Quantifier Distribution). *For all formulas φ, ψ ,*

$$\forall x (\varphi \wedge \psi) \equiv (\forall x \varphi) \wedge (\forall x \psi),$$

$$\exists x (\varphi \vee \psi) \equiv (\exists x \varphi) \vee (\exists x \psi).$$

Professional Standard Proof.

TODO: professional standard proof for qdist. □

Detailed Learning Proof.

TODO: detailed learning proof for qdist. □

Remark (Proof structure).

Remark (Dependencies).

- [Logical Equivalence](#)
- [Universal Formula](#)
- [Existential Formula](#)

Remark (Return). [Return to Theorem](#)

Theorem (Invalid Quantifier Distribution). *In general,*

$$\forall x (\varphi \vee \psi) \not\equiv (\forall x \varphi) \vee (\forall x \psi),$$

$$\exists x (\varphi \wedge \psi) \not\equiv (\exists x \varphi) \wedge (\exists x \psi).$$

Professional Standard Proof.

TODO: professional standard proof for invalid-quantifier-distribution. □

Detailed Learning Proof.

TODO: detailed learning proof for invalid-quantifier-distribution. □

Remark (Proof structure).

Remark (Dependencies).

- [Valid Quantifier Distribution](#)

Remark (Return). [Return to Theorem](#)

Theorem (Vacuous Quantification). *If x does not occur free in φ , then*

$$\forall x \varphi \equiv \varphi, \quad \exists x \varphi \equiv \varphi.$$

Professional Standard Proof.

TODO: professional standard proof for vacuous. □

Detailed Learning Proof.

TODO: detailed learning proof for vacuous. □

Remark (Proof structure).

Remark (Dependencies).

- [Quantifier Scope](#)

Remark (Return). [Return to Theorem](#)

Theorem (Renaming Bound Variables). *If y is free for x in φ and no capture is introduced, then*

$$\forall x \varphi \equiv \forall y \varphi[y/x], \quad \exists x \varphi \equiv \exists y \varphi[y/x].$$

Professional Standard Proof.

TODO: professional standard proof for rename. □

Detailed Learning Proof.

TODO: detailed learning proof for rename. □

Remark (Proof structure).

Remark (Dependencies).

- [Free for Substitution](#)
- [Substitution Notation](#)

Remark (Return). [Return to Theorem](#)

Theorem (Symmetry of Equality). *From $t_1 = t_2$, one may infer $t_2 = t_1$.*

Professional Standard Proof.

TODO: professional standard proof for eq-sym. □

Detailed Learning Proof.

TODO: detailed learning proof for eq-sym. □

Remark (Proof structure).

Remark (Dependencies).

- TODO: list mathematical dependencies.

Remark (Return). [Return to Theorem](#)

Theorem (Transitivity of Equality). *From $t_1 = t_2$ and $t_2 = t_3$, one may infer $t_1 = t_3$.*

Professional Standard Proof.

TODO: professional standard proof for eq-trans. □

Detailed Learning Proof.

TODO: detailed learning proof for eq-trans. □

Remark (Proof structure).

Remark (Dependencies).

- TODO: list mathematical dependencies.

Remark (Return). [Return to Theorem](#)

Theorem (Term Substitution under Equality). *If $t_1 = t_2$, then for any function symbol f , $f(\dots, t_1, \dots) = f(\dots, t_2, \dots)$.*

Professional Standard Proof.

TODO: professional standard proof for eq-term. □

Detailed Learning Proof.

TODO: detailed learning proof for eq-term. □

Remark (Proof structure).

Remark (Dependencies).

- TODO: list mathematical dependencies.

Remark (Return). [Return to Theorem](#)

Theorem (Predicate Substitution under Equality). *If $t_1 = t_2$ and P is an n -ary predicate symbol, then $P(\dots, t_1, \dots) \Leftrightarrow P(\dots, t_2, \dots)$.*

Professional Standard Proof.

TODO: professional standard proof for eq-pred. □

Detailed Learning Proof.

TODO: detailed learning proof for eq-pred. □

Remark (Proof structure).

Remark (Dependencies).

- TODO: list mathematical dependencies.

Remark (Return). [Return to Theorem](#)

Theorem (Soundness of First-Order Logic). *The standard inference rules for first-order logic (UI, UG, EI, EG, and the propositional rules) are sound: they preserve truth in all structures.*

If $\Gamma \vdash \varphi$, then $\Gamma \models \varphi$.

Professional Standard Proof.

TODO: professional standard proof for fol-sound. □

Detailed Learning Proof.

TODO: detailed learning proof for fol-sound. □

Remark (Proof structure).

Remark (Dependencies).

- TODO: list mathematical dependencies.

Remark (Return). [Return to Theorem](#)

Proposition (Universal Translation Pattern). *In a broad domain, an English statement of the form “All A are B” is translated by*

$$\forall x (A(x) \rightarrow B(x)).$$

Professional Standard Proof.

TODO: professional standard proof for universal-translation-pattern. □

Detailed Learning Proof.

TODO: detailed learning proof for universal-translation-pattern. □

Remark (Proof structure).

Remark (Dependencies).

- [Universal Formula](#)
- [Molecular Formula](#)

Remark (Return). [Return to Theorem](#)

Proposition (Existential Translation Pattern). *In a broad domain, an English statement of the form “Some A are B ” is translated by*

$$\exists x (A(x) \wedge B(x)).$$

Professional Standard Proof.

TODO: professional standard proof for existential-translation-pattern. □

Detailed Learning Proof.

TODO: detailed learning proof for existential-translation-pattern. □

Remark (Proof structure).

Remark (Dependencies).

- [Existential Formula](#)
- [Molecular Formula](#)

Remark (Return). [Return to Theorem](#)

Proposition (Conditional Translation Pattern). *An English statement of the form “If A , then B ” is translated by*

$$A \rightarrow B,$$

with quantifiers placed according to the variables occurring in A and B .

Professional Standard Proof.

TODO: professional standard proof for conditional-translation-pattern. □

Detailed Learning Proof.

TODO: detailed learning proof for conditional-translation-pattern. □

Remark (Proof structure).

Remark (Dependencies).

- [Universal Translation Pattern](#)

Remark (Return). [Return to Theorem](#)

Proposition (Negation Translation Pattern). *The negation of a translated quantified statement is obtained by negating the whole formula and then pushing the negation inward using the quantifier negation laws.*

Professional Standard Proof.

TODO: professional standard proof for negation-translation-pattern. □

Detailed Learning Proof.

TODO: detailed learning proof for negation-translation-pattern. □

Remark (Proof structure).

Remark (Dependencies).

- [Quantifier Negation Laws](#)
- [Universal Translation Pattern](#)
- [Existential Translation Pattern](#)

Remark (Return). [Return to Theorem](#)

Proposition (A-O Contradiction). *The A-form $\forall x (A(x) \rightarrow B(x))$ and the O-form $\exists x (A(x) \wedge \neg B(x))$ are contradictory: exactly one of them is true.*

Professional Standard Proof.

TODO: professional standard proof for a-o-contradictory-predicate-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for a-o-contradictory-predicate-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Universal Affirmative Form](#)
- [Particular Negative Form](#)
- [Quantifier Negation Laws](#)

Remark (Return). [Return to Theorem](#)

Proposition (E-I Contradiction). *The E-form $\forall x (A(x) \rightarrow \neg B(x))$ and the I-form $\exists x (A(x) \wedge B(x))$ are contradictory: exactly one of them is true.*

Professional Standard Proof.

TODO: professional standard proof for e-i-contradictory-predicate-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for e-i-contradictory-predicate-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Universal Negative Form](#)
- [Particular Affirmative Form](#)
- [Quantifier Negation Laws](#)

Remark (Return). [Return to Theorem](#)

Proposition (Contrariety Requires Existential Import). *If $\exists x A(x)$, then the A -form and E -form cannot both be true.*

Professional Standard Proof.

TODO: professional standard proof for existential-import-contrariety-predicate-logic. □

Detailed Learning Proof.

TODO: detailed learning proof for existential-import-contrariety-predicate-logic. □

Remark (Proof structure).

Remark (Dependencies).

- [Universal Affirmative Form](#)
- [Universal Negative Form](#)
- [Existential Formula](#)

Chapter 3

Many-Sorted Logic



3.1 Introduction

3.1.1 Examples

3.1.2 Reduction to and comparison with first-order logic

3.1.3 Uses of many-sorted logic

3.1.4 Many-sorted logic as a unifier logic

3.2 Structures

3.2.1 Definition (signature)

3.2.2 Definition (structure)

3.3 Formal many-sorted language

3.3.1 Alphabet

3.3.2 Expressions: formulas and terms

3.3.3 Remarks on notation

3.3.4 Abbreviations

3.3.5 Induction

3.3.6 Free and bound variables

3.4 Semantics

3.4.1 Definitions

3.4.2 Satisfiability, validity, consequence and logical equivalence

3.5 Substitution of a term for a variable

3.6 Semantic theorems

3.6.1 Coincidence lemma

3.6.2 Substitution lemma

3.6.3 Equals substitution lemma

3.6.4 Isomorphism theorem

3.7 The completeness of many-sorted logic

From Cantor to $\aleph_0$ > Logic, Sets, and Proof > Mathematical Logic and Proof > Many-Sorted Logic > Reduction to one-sorted logic > Conversion of structures

3.7.1 Deductive calculus

Chapter 4

Standard Second-Order Logic



4.1 Introduction

4.1.1 General idea

4.1.2 Expressive power

4.1.3 Model-theoretic counterparts of expressiveness

4.1.4 Incompleteness

4.2 Second-order grammar

4.2.1 Definition (signature and alphabet)

4.2.2 Expressions: terms, predicates and formulas

4.2.3 Remarks on notation

4.2.4 Induction

4.2.5 Free and bound variables

4.2.6 Substitution

4.3 Standard structures

4.3.1 Definition of standard structures

4.3.2 Relations between standard structures established without the formal language

4.4 Standard semantics

4.4.1 Assignment

4.4.2 Interpretation

4.4.3 Consequence and validity

4.4.4 Logical equivalence

4.4.5 Simplifying our language

4.4.6 Alternative presentation of standard semantics

4.4.7 Definable sets and relations in a given structure

4.4.8 More about the expressive power of standard SOL

4.4.9 Negative results

4.5 Semantic theorems

Chapter 5

Languages, Axioms, and Models



Languages, Axioms, and Models Toolkit - Planned

This section is a rebuild placeholder.

This section is planned for the governance rebuild. No mathematical content has been restored here yet.

5.1 Signatures

Signatures Toolkit — Quick Reference		
Concept	Role	Detail
Signature	non-logical vocabulary	Definition
Language	signature together with logical syntax	Definition
Constant symbol	names a distinguished object syntactically	Definition
Function symbol	names an operation syntactically	Definition
Relation symbol	names a relation syntactically	Definition
Arity	records number of input places	Definition

Signatures

Signature Presentation: A Simple Arithmetic Language	
Let	$\Sigma_{\text{arith}} = (\mathcal{C}_{\text{arith}}, \mathcal{F}_{\text{arith}}, \mathcal{R}_{\text{arith}}, \text{ar})$

where

$$\mathcal{C}_{\text{arith}} = \{0, 1\}, \quad \mathcal{F}_{\text{arith}} = \{+, \cdot, S\}, \quad \mathcal{R}_{\text{arith}} = \{<\}.$$

The arity function is specified by

$$\text{ar}(0) = \text{ar}(1) = 0, \quad \text{ar}(S) = 1, \quad \text{ar}(+) = \text{ar}(\cdot) = 2, \quad \text{ar}(<) = 2.$$

Symbol	Kind	Arity	Intended Reading
0, 1	constants	0	distinguished constant names
S	function sym- bol	1	successor operation symbol
$+, \cdot$	function sym- bols	2	binary operation symbols
$<$	relation sym- bol	2	binary order relation symbol

The signature records only the available non-logical symbols and their arities. It does not assert any axioms about those symbols.

Definitional Root (First-Order Signature)

Definition 5.1.1 (First-Order Signature). A *first-order signature* is a tuple

$$\Sigma = (\mathcal{C}, \mathcal{F}, \mathcal{R}, \text{ar}),$$

where $\mathcal{C}$ is a set of constant symbols, $\mathcal{F}$ is a set of function symbols, $\mathcal{R}$ is a set of relation symbols, and

$$\text{ar} : \mathcal{F} \cup \mathcal{R} \rightarrow \mathbb{Z}_{>0}$$

assigns to each function or relation symbol its number of arguments.

Remark (Standard quantified statement). For every $s \in \mathcal{F} \cup \mathcal{R}$, the value $\text{ar}(s)$ is a positive integer. If $s \in \mathcal{F}$, then s forms terms with $\text{ar}(s)$ inputs; if $s \in \mathcal{R}$, then s forms atomic formulas with $\text{ar}(s)$ inputs.

Remark (Interpretation). A signature is the formal vocabulary available before any axioms are chosen. It says which symbols may occur and how many input places each symbol has.

Definition (Arity)

Definition 5.1.2 (Arity). Let $\Sigma = (\mathcal{C}, \mathcal{F}, \mathcal{R}, \text{ar})$ be a first-order signature. The *arity function* is the map

$$\text{ar} : \mathcal{F} \cup \mathcal{R} \rightarrow \mathbb{Z}_{>0}$$

that assigns to each function or relation symbol the number of arguments it requires. When constants are treated as 0-ary function symbols, the codomain is enlarged to include 0.

Remark (Standard quantified statement). For every $s \in \mathcal{F} \cup \mathcal{R}$, there is a unique positive integer n such that $\text{ar}(s) = n$. If $f \in \mathcal{F}$ and $\text{ar}(f) = n$, then an expression $f(t_1, \dots, t_k)$ is a well-formed term exactly when $k = n$. If $R \in \mathcal{R}$ and $\text{ar}(R) = n$, then an expression $R(t_1, \dots, t_k)$ is a well-formed atomic formula exactly when $k = n$.

Remark (Interpretation). Arity is bookkeeping for grammatical well-formedness. It determines whether a symbol has been supplied with the correct number of arguments.

Remark (Dependencies).

- [Signature](#)

Definitional Framework (Language)

Definition 5.1.3 (Language). A *first-order language* has two standard readings. As vocabulary, it is the same data as a signature,

$$\mathcal{L} = (\mathcal{C}, \mathcal{F}, \mathcal{R}, \text{ar}).$$

As a formal language generated by a signature Σ , it is the set of well-formed strings built from the alphabet

$$A = \Sigma \cup V \cup \Lambda,$$

where V is a countable set of variables and Λ is the fixed stock of logical symbols and punctuation. In this second reading,

$$\mathcal{L}(\Sigma) = \{s \in A^* \mid s \in \text{Terms}(\Sigma) \text{ or } s \in \text{WFF}(\Sigma)\}.$$

Remark (Standard quantified statement). The vocabulary reading records which non-logical symbols may occur. The generated-language reading then selects from all finite strings over A only the terms and well-formed formulas admitted by the formation rules determined by Σ .

Remark (Interpretation). The signature supplies the subject-specific vocabulary. The language adds the logical grammar needed to form expressions from that vocabulary.

Remark (Dependencies).

- [Signature](#)

Definition (Constant Symbol)

Definition 5.1.4 (Constant Symbol). A *constant symbol* is a non-logical symbol that behaves syntactically as a 0-ary function symbol. In the streamlined convention where constants are included among function symbols, this is the condition

$$\text{Constant}(c) \iff c \in \mathcal{F} \text{ and } \text{ar}(c) = 0.$$

Because its arity is 0, the symbol c is already a well-formed term and takes no input terms.

Remark (Standard quantified statement). If $c \in \mathcal{F}$ and $\text{ar}(c) = 0$, then $c \in \text{Terms}(\mathcal{L})$. In a structure $\mathfrak{M} = (M, \mathcal{I})$, the interpretation of a constant is a unique element of the domain:

$$\forall c \in \mathcal{C}, \exists! e \in M, \mathcal{I}(c) = e.$$

Remark (Interpretation). A constant symbol is syntactically rigid: unlike a variable, it does not vary with an assignment. In the arithmetic signature, the symbol 0 is a piece of formal syntax; under the standard interpretation, it denotes the number zero.

Remark (Dependencies).

- [Signature](#)
- [Arity](#)

Definition (Function Symbol)

Definition 5.1.5 (Function Symbol). A *function symbol* is a non-logical symbol $f \in \mathcal{F}$ whose assigned arity determines how many terms it must take as inputs. If $\text{ar}(f) = n$, then f is an n -ary term constructor: it takes exactly n terms and produces a new term, not a truth value.

Remark (Standard quantified statement). For every $f \in \mathcal{F}$, if $\text{ar}(f) = n$, then

$$f(t_1, \dots, t_k) \in \text{Terms}(\mathcal{L}) \iff k = n$$

whenever $t_1, \dots, t_k$ are terms. In a structure $\mathfrak{M} = (M, \mathcal{I})$, the interpretation of f is a total operation closed on the domain:

$$\mathcal{I}(f) : M^n \rightarrow M.$$

Remark (Interpretation). A function symbol is operation-forming syntax. In the arithmetic signature, S is unary, while $+$ and $\cdot$ are binary. Under an interpretation, each becomes an actual operation on the chosen domain.

Remark (Dependencies).

- [Signature](#)
- [Arity](#)

Definition (Relation Symbol)

Definition 5.1.6 (Relation Symbol). A *relation symbol*, or predicate symbol, is a non-logical symbol $R \in \mathcal{R}$ whose assigned arity determines how many terms it must take as inputs. If $\text{ar}(R) = n$, then R is an n -ary formula constructor: it takes exactly n terms and produces an atomic formula, hence something with a truth value rather than an object.

Remark (Standard quantified statement). For every $R \in \mathcal{R}$, if $\text{ar}(R) = n$, then

$$R(t_1, \dots, t_k) \in \text{WFF}(\mathcal{L}) \iff k = n$$

whenever $t_1, \dots, t_k$ are terms. In a structure $\mathfrak{M} = (M, \mathcal{I})$, the interpretation of R is a subset of n -tuples from the domain:

$$\mathcal{I}(R) \subseteq M^n.$$

Thus $R(t_1, \dots, t_n)$ is true exactly when the tuple of interpreted terms lies in $\mathcal{I}(R)$.

Remark (Interpretation). A relation symbol is a statement-forming symbol once it is applied to the right number of terms. In the arithmetic signature, $+$ is a binary function symbol because it returns a number, while $<$ is a binary relation symbol because it returns a truth value. Under the standard interpretation, $<$ denotes the set of ordered pairs (a, b) such that a is less than b .

Remark (Dependencies).

- [Signature](#)
- [Arity](#)

Remark (Structural remarks). The same signature may support different choices of axioms later in the chapter. For example, a single arithmetic vocabulary can be used with stronger or weaker axiom sets.

The same signature may also be read over different mathematical universes once interpretations are introduced. At this stage, the signature itself records only the common vocabulary; it does not choose any particular interpretation.

5.2 Axioms

Axioms Toolkit — Quick Reference

Concept	Role	Detail
Axiom	formal assertion adopted without proof	Definition
Axiom system	collection of assertions in one language	Definition
Assumption	temporary assertion for reasoning	Definition
Consistency	absence of contradiction	forward reference
Theory	deductive closure of axioms	forward reference

Axioms

Axiom Presentation: A Simple Arithmetic Axiom System

Reuse the arithmetic signature

$$\Sigma_{\text{arith}} = (\{0, 1\}, \{+, \cdot, S\}, \{<\}, \text{ar})$$

from the Signatures section. The signature supplies the symbols. An axiom system supplies assertions formed with those symbols.

For example, the following are familiar arithmetic-style axioms:

$$\forall x (x + 0 = x),$$

$$\forall x (S(x) \neq 0),$$


$$\forall x \forall y (S(x) = S(y) \rightarrow x = y).$$

These examples are illustrative. The signature says that 0, +, and S are available symbols. The axioms assert formal relationships involving those symbols.

Remark (Structural remarks). **Vocabulary vs assertion.** A signature is vocabulary: it specifies what may be said. An axiom is an assertion: it specifies what is adopted as true within that vocabulary. The signature supplies symbols; the axioms supply assertions involving those symbols.

Same signature, different axiom systems. A single signature may support multiple collections of axioms. For example, geometric languages can be used for Euclidean or non-Euclidean axiom systems. The usual group signature can be used for group theory, while adding the commutativity axiom gives the stronger axiom system for abelian groups. The vocabulary can remain fixed while the assertions change.

Forward conceptual roadmap. The chapter proceeds from collections of adopted assertions to their deductive and semantic roles:



The present section introduces the assertion layer. Later sections formalize the theory generated by axioms and the models in which those assertions hold.

Definition (Axiom)

Definition 5.2.1 (Axiom). Let $\mathcal{L}$ be a first-order language, and let $\text{Sent}(\mathcal{L})$ denote the set of sentences of $\mathcal{L}$. If $T \subseteq \text{Sent}(\mathcal{L})$ is a theory, then an *axiom* of T is an element $\alpha \in T$.

Remark (Standard quantified statement). For every first-order language $\mathcal{L}$ and every theory $T \subseteq \text{Sent}(\mathcal{L})$, a sentence α is an axiom of T exactly when $\alpha \in T$.

Remark (Interpretation). An axiom is not part of the vocabulary itself. It is an assertion made using the vocabulary of a language. The signature determines which symbols may appear; the axiom states something with those symbols.

Remark (Proof-theoretic reading). In a deductive presentation, an axiom may be used as a derivation with no undischarged premises:

$$\overline{\vdash \alpha}.$$

Thus axioms are the starting assertions of the proof system.

Remark (Dependencies).

- [Language](#)

Definition (Axiom System)

Definition 5.2.2 (Axiom System). An *axiom system* is a collection of axioms expressed in a common language.

Remark (Interpretation). An axiom system records the assertions chosen for a mathematical setting. Two axiom systems may use the same language while adopting different assertions. The shared language fixes the vocabulary; the axiom system fixes the adopted formal claims.

Remark (Dependencies).

- [Axiom](#)
- [Language](#)

Definition (Assumption)

Definition 5.2.3 (Assumption). An *assumption* is a statement temporarily accepted for purposes of reasoning.

Remark (Interpretation). An axiom is adopted as part of the formal background of a system. An assumption is local to an argument: it may be introduced to prove a conditional, to reason within a case, or to derive a contradiction. Axioms belong to the system; assumptions belong to the proof context.

Remark (Dependencies).

- [Axiom](#)

5.3 Theories

Theories Toolkit — Quick Reference

Concept	Role	Detail
Theory	all consequences generated by axioms	Definition
Theorem	statement derivable from axioms	Definition
Consequence	statement following from a theory	Definition
Derivation	chain of justified steps	forward reference
Deductive closure	all derivable statements	Definition

Theories

Theory Presentation: Arithmetic Consequences

Start with the arithmetic-style axiom system from the previous section. It uses the arithmetic signature and includes assertions such as

$$\begin{aligned}\forall x (x + 0 = x), \\ \forall x (S(x) \neq 0), \\ \forall x \forall y (S(x) = S(y) \rightarrow x = y).\end{aligned}$$


Those axioms are the starting assertions. From them, together with other arithmetic axioms and ordinary logical reasoning, additional statements may be established. For instance, one may later prove new equations, cancellation facts, uniqueness facts, and order facts that were not listed as axioms.

A theory contains the original axioms. A theory also contains the statements derivable from those axioms. Thus the axioms are the generators, while the theory is the full collection of what those generators imply.

Remark (Structural remarks). **Axioms vs theory.** Axioms are starting assertions. A theory includes all logical consequences of those assertions. The distinction is the next step after the vocabulary and assertion distinction: a signature supplies vocabulary, axioms supply adopted assertions, and a theory contains everything derivable from those assertions.

Finite axioms, infinite theory. A small axiom system can generate an enormous collection of consequences. The listed axioms may be finite, but the statements derivable from them need not be. This is why a theory is usually larger than the axiom system that presents it.

Forward roadmap. The next conceptual step is semantic:



A model will later be introduced as a mathematical structure in which the statements of a theory hold.

Definition (Theory)

Definition 5.3.1 (Theory). A *theory* over a first-order language $\mathcal{L}$ is a collection of closed sentences in that language:

$$T \subseteq \text{Sentences}(\mathcal{L}).$$

If Γ is a chosen set of axioms, the theory generated by Γ is the deductive closure

$$T = \{\varphi \in \text{Sentences}(\mathcal{L}) \mid \Gamma \vdash \varphi\}.$$

Remark (Standard quantified statement). Syntactically, a sentence φ belongs to the theory generated by Γ exactly when φ is derivable from Γ . Semantically, for an $\mathcal{L}$ -structure $\mathfrak{M}$, the complete theory of $\mathfrak{M}$ is

$$\text{Th}(\mathfrak{M}) = \{\varphi \in \text{Sentences}(\mathcal{L}) \mid \mathfrak{M} \models \varphi\}.$$

For every sentence φ , either $\mathfrak{M} \models \varphi$ or $\mathfrak{M} \models \neg\varphi$, so $\text{Th}(\mathfrak{M})$ decides every sentence of the language.

Remark (Interpretation). A theory is not merely the list of axioms. It is the closure of those axioms under derivability: every statement that follows from the axioms belongs to the theory. The axioms start the system; the theory records everything the system proves.

Remark (Dependencies).

- Language
- Axiom System

Definition (Theorem)

Definition 5.3.2 (Theorem). A *theorem* of a theory T is a sentence φ for which there is a finite formal derivation from T , written

$$T \vdash \varphi.$$

Equivalently, in proof-theoretic terms, φ is a theorem of T exactly when some derivation has leaves drawn from logical axioms or sentences of T , uses valid inference rules, and has φ as its root.

Remark (Standard quantified statement). Syntactically,

$$\text{Theorem}(T, \varphi) \iff \exists d (d : T \vdash \varphi).$$

Semantically, φ is entailed by T when it is true in every model of T :

$$T \models \varphi \iff \forall \mathfrak{M} (\mathfrak{M} \models T \implies \mathfrak{M} \models \varphi).$$

For first-order logic, the completeness theorem connects these readings: $T \vdash \varphi$ exactly when $T \models \varphi$.

Remark (Interpretation). Within an axiom system, a theorem is not an additional starting assumption. It is a statement reached from the adopted axioms by reasoning. Axioms are given; theorems are obtained.

Remark (Dependencies).

- [Theory](#)

Definition (Consequence)

Definition 5.3.3 (Consequence). A sentence φ is a *semantic consequence* of a set of premises Γ , written $\Gamma \models \varphi$, if every model of Γ is also a model of φ . Equivalently, there is no structure in which all sentences of Γ are true while φ is false.

Remark (Standard quantified statement). Semantic consequence is the universal condition

$$\Gamma \models \varphi \iff \forall \mathfrak{M} \left((\forall \gamma \in \Gamma, \mathfrak{M} \models \gamma) \implies \mathfrak{M} \models \varphi \right).$$

Syntactic consequence, written $\Gamma \vdash \varphi$, means that there exists a finite valid deduction of φ from Γ . For first-order logic, the completeness theorem says that $\Gamma \models \varphi$ exactly when $\Gamma \vdash \varphi$.

Remark (Interpretation). Consequence is the relation that connects a theory to what it implies. If the axioms generate a theory, then consequences are the statements carried along by those axioms and by the statements already obtained from them.

Remark (Dependencies).

- [Theory](#)

Definition (Deductive Closure)

Definition 5.3.4 (Deductive Closure). Let $\Gamma \subseteq \text{Sentences}(\mathcal{L})$ be a set of premises. The *deductive closure* of Γ , denoted $\text{Cn}(\Gamma)$, is the set of all sentences derivable from Γ :

$$\text{Cn}(\Gamma) = \{\varphi \in \text{Sentences}(\mathcal{L}) \mid \Gamma \vdash \varphi\}.$$

Remark (Standard quantified statement). A set of sentences T is deductively closed exactly when

$$T = \text{Cn}(T),$$

or equivalently, for every sentence φ ,

$$T \vdash \varphi \implies \varphi \in T.$$

The closure operator satisfies the standard Tarskian closure laws:

$$\Gamma \subseteq \text{Cn}(\Gamma), \quad \Gamma \subseteq \Delta \implies \text{Cn}(\Gamma) \subseteq \text{Cn}(\Delta), \quad \text{Cn}(\text{Cn}(\Gamma)) = \text{Cn}(\Gamma).$$

By completeness for first-order logic, this syntactic closure agrees with the semantic closure

$$\{\varphi \in \text{Sentences}(\mathcal{L}) \mid \Gamma \models \varphi\}.$$

Remark (Interpretation). Deductive closure is the operation that turns an axiom system into the full theory it generates. Starting with the axioms, close under derivability; the result is the theory determined by those starting assertions.

Remark (Dependencies).

- [Axiom System](#)

5.4 Models

Models Toolkit — Quick Reference

Concept	Role	Detail
Interpretation	assigns meanings to symbols	Definition
Structure	domain with interpreted symbols	Definition
Model	structure satisfying the theory	Definition
Satisfaction	truth of a statement in a structure	Definition
Countermodel	model where a statement fails	Definition

Free Σ -Algebra and Evaluation

Depends on: Signature; inductively generated set; unique readability

Parameter

Shared bridge machinery. Parameter: a signature Σ . This card is instantiated by connective evaluation, term evaluation, parsing, and later by initial-algebra presentations such as $\mathbb{N}$.

Structure

Σ is a set of operation symbols, $\text{ar} : \Sigma \rightarrow \mathbb{N}$.

A Σ -algebra is a carrier $|\mathcal{A}|$ with operations

$$f^{\mathcal{A}} : |\mathcal{A}|^{\text{ar}(f)} \rightarrow |\mathcal{A}| \quad (f \in \Sigma).$$

Seeds land in the carrier; homomorphisms are maps of algebras.

Structure

$$T_{\Sigma}(X), \quad f^T(t_1, \dots, t_n) := f(t_1, \dots, t_n), \quad \eta : X \rightarrow T_{\Sigma}(X).$$

Syntax–Semantics Bridge

$$\text{Hom}(h, \mathcal{A}, \mathcal{B}) \quad :\Longleftrightarrow \quad h(f^{\mathcal{A}}(\bar{a})) = f^{\mathcal{B}}(h(a_1), \dots, h(a_n))$$

for every $f \in \Sigma$ and $\bar{a} \in |\mathcal{A}|^n$.

Axioms and Laws

No junk.

$$t \in T_{\Sigma}(X) \implies t \in X \vee \exists f \in \Sigma \exists \bar{t} (t = f(\bar{t})).$$

No confusion.

$$x \neq f(\bar{t}), \quad f(\bar{s}) = g(\bar{t}) \implies f = g \wedge \bar{s} = \bar{t}.$$

Theorems and Consequences

1. **Universal property.**

$$\forall \mathcal{A} \forall \sigma : X \rightarrow |\mathcal{A}| \exists ! \widehat{\sigma} : T_{\Sigma}(X) \rightarrow |\mathcal{A}|$$

$$\text{Hom}(\widehat{\sigma}, T_{\Sigma}(X), \mathcal{A}) \wedge \widehat{\sigma} \circ \eta = \sigma.$$

2.

$$\text{eval}(\mathcal{A})(\sigma) := \widehat{\sigma}.$$

Instances

use	Σ	X	target $\mathcal{A}$	seed σ
formula eval	Ω	atoms	2	atom truth values
parse	Ω	X	$T_{\Omega}(X)$	η
term eval	Σ_{term}	Var	$\mathcal{A}_{\text{term}}$	assignment s
$\mathbb{N}$ preview	$\{0^{(0)}, S^{(1)}\}$	$\emptyset$	(C, c_0, succ)	none

Instances

$$\Omega = \{\neg^{(1)}, \wedge^{(2)}, \vee^{(2)}, \rightarrow^{(2)}, \leftrightarrow^{(2)}\},$$

$$\mathbf{2} = (\{0, 1\}, \neg^{\mathbf{2}}, \wedge^{\mathbf{2}}, \vee^{\mathbf{2}}, \rightarrow^{\mathbf{2}}, \leftrightarrow^{\mathbf{2}}).$$

Boundary

The machine fixes one seed. Connective and term evaluation are exact instances. FOL quantifiers range over the assignment-indexed family $(\sigma_s)_s$:

$$\mathcal{A}, s \models \exists x \varphi \iff \exists a \in A, \mathcal{A}, s[x \mapsto a] \models \varphi.$$

That is the downstream cylindric/polyadic layer. The absolutely free $T_{\Sigma}(X)$ is also distinct from the Lindenbaum–Tarski quotient by $\vdash$ -equivalence.

Consequence

Depends on: Satisfaction relation $\models \subseteq \text{Mod} \times \text{Form}$

Parameter

A class of models **Mod** and a satisfaction relation

$$m \models \varphi \quad (m \in \mathbf{Mod}).$$

Syntax–Semantics Bridge

$$\Gamma \models \varphi \iff \forall m \in \mathbf{Mod} \left((\forall \gamma \in \Gamma, m \models \gamma) \rightarrow m \models \varphi \right).$$

$$\text{Cn}_{\models}(\Gamma) := \{\varphi : \Gamma \models \varphi\}, \quad \models \varphi \iff \emptyset \models \varphi.$$

$$\text{Th}(m) := \{\varphi : m \models \varphi\}.$$

Binding

logic	Mod	$m \models \varphi$
prop	valuations v	$\widehat{v}(\varphi) = 1$
FOL open	pairs $(\mathcal{A}, s)$	$\mathcal{A}, s \models \varphi$
FOL sentences	structures $\mathcal{A}$	$\mathcal{A} \models \sigma$

Models

Model Presentation: Arithmetic as a Model

Reuse the arithmetic signature and arithmetic-style axioms from the previous sections. A model begins by interpreting the symbols of that signature in an actual mathematical structure.

$$\begin{aligned} \text{Domain} &= \text{the natural numbers,} \\ 0 &\mapsto \text{the number zero,} \\ S &\mapsto \text{the successor operation,} \\ + &\mapsto \text{addition.} \end{aligned}$$

In this structure, the statement

$$\forall x (x + 0 = x)$$

holds because adding zero to any natural number gives back that same natural number. The formal symbol 0 is only a symbol until it is interpreted as the number zero. The formal symbol + is only a symbol until it is interpreted as addition. The symbols acquire meaning only after interpretation.


Remark (Structural remarks). **Syntax vs meaning.** Signatures, axioms, and theories are formal objects. They belong to syntax: they specify vocabulary, adopted assertions, and consequences. Models provide semantic meaning by assigning mathematical content to the symbols and by determining which statements hold.

One theory, many models. The same theory may have multiple models. Euclidean

geometry may be realized in different coordinate systems. The group axioms have many models, including different concrete groups. The theory fixes the assertions; a model is one mathematical realization in which those assertions hold.

Countermodels. A statement fails to follow from a theory if there is a model of the theory in which that statement is false. Countermodels are therefore evidence that a claim is not forced by the axioms.

Forward roadmap. The next sections use models to explain consistency and independence:



Definition (Interpretation)

Definition 5.4.1 (Interpretation). Let $\Sigma = (\mathcal{C}, \mathcal{F}, \mathcal{R}, \text{ar})$ be a first-order signature, and let M be a nonempty set. An *interpretation of Σ on M* is an assignment $\mathcal{I}$ that maps each symbol of Σ to concrete data over M : constants are assigned elements of M , function symbols are assigned operations on M , and relation symbols are assigned relations on M .

Remark (Standard quantified statement). For every $c \in \mathcal{C}$, $\mathcal{I}(c) \in M$. For every $f \in \mathcal{F}$, if $\text{ar}(f) = n$, then

$$\mathcal{I}(f) : M^n \rightarrow M.$$

For every $R \in \mathcal{R}$, if $\text{ar}(R) = n$, then

$$\mathcal{I}(R) \subseteq M^n.$$

Remark (Interpretation). An interpretation turns formal vocabulary into mathematical content. It tells what each constant, function symbol, and relation symbol means in a particular setting.

Remark (Dependencies).

- [Signature](#)

Definition ($\mathcal{L}$ -Structure)

Definition 5.4.2 ($\mathcal{L}$ -Structure). Let $\mathcal{L}$ be a first-order signature. An $\mathcal{L}$ -*structure* is a pair

$$\mathfrak{M} = (M, \mathcal{I}),$$

where M is a nonempty domain and $\mathcal{I}$ is an interpretation of the symbols of $\mathcal{L}$ on M .

Remark (Standard quantified statement). For every first-order signature $\mathcal{L}$, an $\mathcal{L}$ -structure consists of a nonempty domain M and an interpretation $\mathcal{I}$ such that every constant symbol is assigned an element of M , every n -ary function symbol is assigned a function $M^n \rightarrow M$, and every n -ary relation symbol is assigned a relation on M^n .

Remark (Interpretation). A structure is the environment in which formal symbols receive meaning. The domain supplies the objects, and the interpretation explains how the symbols refer to objects, operations, and relations on that domain.

Remark (Type-theoretic reading). In dependent type theory, this bundled data can be viewed schematically as

$$\sum_{M:\text{Type}} \left(\prod_{c \in \mathcal{C}} M \right) \times \left(\prod_{f \in \mathcal{F}} (M^{\text{ar}(f)} \rightarrow M) \right) \times \left(\prod_{R \in \mathcal{R}} (M^{\text{ar}(R)} \rightarrow \text{Prop}) \right).$$

This is the same semantic package represented by a Lean structure carrying a carrier type, interpretations of constants and functions, and predicates for relations.

Remark (Dependencies).

- [Signature](#)
- [Interpretation](#)

Definition (Model)

Definition 5.4.3 (Model). Let $\mathcal{L}$ be a first-order signature, let T be a theory over $\mathcal{L}$, and let $\mathfrak{M} = (M, \mathcal{I})$ be an $\mathcal{L}$ -structure. The structure $\mathfrak{M}$ is a *model* of T , written $\mathfrak{M} \models T$, if every sentence in T is true in $\mathfrak{M}$.

Remark (Standard quantified statement). For every theory T over $\mathcal{L}$ and every $\mathcal{L}$ -structure $\mathfrak{M}$,

$$\mathfrak{M} \models T \iff \forall \varphi \in T, \mathfrak{M} \models \varphi.$$

Remark (Interpretation). A model is a structure that makes the theory true. It is not just an interpretation of the vocabulary; it is an interpretation in which the adopted assertions and their consequences hold.

Remark (Dependencies).

- [Structure](#)
- [Theory](#)

Definition (Satisfaction)

Definition 5.4.4 (Satisfaction). Let $\mathfrak{M} = (M, \mathcal{I})$ be an $\mathcal{L}$ -structure. A *variable assignment* is a function $s : \text{Var} \rightarrow M$. The assignment extends recursively to a term-evaluation map $\bar{s}$ by

$$\bar{s}(x) = s(x), \quad \bar{s}(c) = \mathcal{I}(c),$$

and

$$\bar{s}(f(t_1, \dots, t_n)) = \mathcal{I}(f)(\bar{s}(t_1), \dots, \bar{s}(t_n)).$$

The satisfaction relation $\mathfrak{M} \models \varphi[s]$ is then defined by induction on formulas: atomic relations are tested inside the interpreted relation, equality is interpreted as equality in M , Boolean connectives are interpreted by the corresponding truth operations, and quantifiers range over all elements of M .

Remark (Standard quantified statement). For terms $t_1, \dots, t_n$ and an n -ary relation symbol R ,

$$\mathfrak{M} \models R(t_1, \dots, t_n)[s] \iff (\bar{s}(t_1), \dots, \bar{s}(t_n)) \in \mathcal{I}(R).$$

For equality,

$$\mathfrak{M} \models (t_1 = t_2)[s] \iff \bar{s}(t_1) = \bar{s}(t_2).$$

For quantifiers,

$$\mathfrak{M} \models (\forall x \varphi)[s] \iff \forall a \in M, \mathfrak{M} \models \varphi[s[x \mapsto a]],$$

and

$$\mathfrak{M} \models (\exists x \varphi)[s] \iff \exists a \in M, \mathfrak{M} \models \varphi[s[x \mapsto a]].$$

Remark (Interpretation). Satisfaction is the semantic test for a statement. Once the symbols have been interpreted in a structure, the statement can be checked as true or false in that setting.

Remark (Sentences). If φ is a sentence, then it has no free variables, so its truth does not depend on the initial assignment s . In that case the notation is shortened from $\mathfrak{M} \models \varphi[s]$ to $\mathfrak{M} \models \varphi$. This is the bridge from satisfaction of a single sentence to the definition of a model of a theory.

Remark (Dependencies).

- [Structure](#)

Definition (Countermodel)

Definition 5.4.5 (Countermodel). Let $\Gamma \subseteq \text{Sent}(\mathcal{L})$ be a set of premises, let $\varphi \in \text{Sent}(\mathcal{L})$, and let $\mathfrak{M}$ be an $\mathcal{L}$ -structure. A *countermodel to the entailment* $\Gamma \models \varphi$ is a structure $\mathfrak{M}$ that satisfies every sentence in Γ but does not satisfy φ .

Remark (Standard quantified statement). For $\Gamma \subseteq \text{Sent}(\mathcal{L})$ and $\varphi \in \text{Sent}(\mathcal{L})$,

$$\text{CounterModel}(\mathfrak{M}, \Gamma, \varphi) \iff (\forall \gamma \in \Gamma, \mathfrak{M} \models \gamma) \wedge (\mathfrak{M} \not\models \varphi).$$

Equivalently, for classical closed sentences,

$$\text{CounterModel}(\mathfrak{M}, \Gamma, \varphi) \iff (\forall \gamma \in \Gamma, \mathfrak{M} \models \gamma) \wedge (\mathfrak{M} \models \neg\varphi).$$

Remark (Interpretation). A countermodel shows that the theory does not force the statement. It keeps the axioms true while making the proposed statement false.

Remark (Special cases). If $\Gamma = \emptyset$, then a countermodel to validity of φ is a structure $\mathfrak{M}$ such that $\mathfrak{M} \models \neg\varphi$. For a theory T , models of T satisfying φ and models of T satisfying $\neg\varphi$ witness the independence pattern: the theory alone does not settle φ .

Remark (Lean reading). In a mechanized setting, invalidity is witnessed by constructing semantic data:

$$\exists \mathfrak{M} ((\forall \gamma \in \Gamma, \mathfrak{M} \models \gamma) \wedge \mathfrak{M} \models \neg\varphi).$$

The constructed structure and satisfaction proofs are the certificate that the entailment cannot be valid.

Remark (Dependencies).

- [Model](#)
- [Satisfaction](#)

5.5 Consistency

Consistency Toolkit — Quick Reference

Concept	Role	Detail
Contradiction	assertion that cannot be true in an interpretation	Definition
Consistency	absence of contradiction	Definition
Inconsistency	contradiction in or from axioms	Definition
Model existence	evidence that axioms fit together	Definition
Relative consistency	consistency transferred from another theory	Definition

Consistency

Consistency Presentation: A Simple Example

Consider two informal axiom systems.

Example A.

- All objects are red.
- Some object is not red.

These assertions cannot simultaneously hold. The first assertion says every object has the property; the second says at least one object lacks it.

Example B.

- All objects are red.
- Object a is red.

These assertions can hold simultaneously. The second assertion agrees with what the first assertion already requires.

These examples are only for intuition. A consistent axiom system is one whose assertions fit together without contradiction. An inconsistent axiom system is one whose assertions cannot be held together coherently.

Remark (Structural remarks). **Why contradictions matter.** Contradictory systems are unusable because their assertions do not fit together. If a system both requires and forbids the same situation, then it no longer gives a coherent basis for reasoning.

Models as evidence. If a model exists, the axioms hold together coherently in at least one interpretation. A model is therefore evidence that the axioms are mutually compatible.

Absolute vs relative consistency. Most consistency results in mathematics are relative consistency results. They show that one theory is consistent provided some other background theory is consistent. This section records the idea only; the technical development belongs elsewhere.

Forward roadmap. The next section uses models and consistency to introduce independence:

$$\begin{array}{c} \text{Consistency} \\ \Downarrow \\ \text{Independence} \end{array}$$

Definition (Contradiction)

Definition 5.5.1 (Contradiction). A *contradiction* is a statement that cannot be true under a given interpretation.

Remark (Interpretation). A contradiction marks a breakdown in compatibility. It identifies an assertion that cannot be made true in the interpretation under consideration.

Remark (Dependencies).

- [Satisfaction](#)

Definition (Consistent Axiom System)

Definition 5.5.2 (Consistent Axiom System). A *consistent axiom system* is an axiom system that does not lead to contradiction.

Remark (Interpretation). Consistency says that the adopted assertions fit together. A consistent axiom system avoids forcing an impossible situation.

Remark (Dependencies).

- [Axiom System](#)
- [Contradiction](#)

Definition (Inconsistent Axiom System)

Definition 5.5.3 (Inconsistent Axiom System). An *inconsistent axiom system* is an axiom system containing or producing contradictory assertions.

Remark (Interpretation). Inconsistency means that the adopted assertions cannot all be maintained coherently. The system asks for incompatible requirements at once.

Remark (Dependencies).

- [Axiom System](#)
- [Contradiction](#)

Definition (Model Existence Criterion (Informal))

Definition 5.5.4 (Model Existence Criterion (Informal)). Informally, if an axiom system has a model, then the axioms are mutually compatible.

Remark (Interpretation). This is an informal criterion in this section, not a formal theorem. The idea is that a model provides a setting in which all the axioms hold together, so the axioms have at least one coherent realization.

Remark (Dependencies).

- [Model](#)

Definition (Relative Consistency)

Definition 5.5.5 (Relative Consistency). Let T_0 and T_1 be theories. The theory T_1 is *consistent relative to* T_0 if

$$\text{Con}(T_0) \implies \text{Con}(T_1).$$

Equivalently, every contradiction in T_1 would imply a contradiction in T_0 .

Remark (Standard quantified statement). For theories T_0 and T_1 ,

$$\text{RelCon}(T_1, T_0) \iff (\neg \exists d_0 (d_0 : T_0 \vdash \perp)) \implies (\neg \exists d_1 (d_1 : T_1 \vdash \perp)).$$

Equivalently, in contrapositive form,

$$\exists d_1 (d_1 : T_1 \vdash \perp) \implies \exists d_0 (d_0 : T_0 \vdash \perp).$$

Remark (Interpretation). Relative consistency does not establish consistency from nothing. It says that the target theory introduces no new contradiction unless the base theory was already inconsistent. In practice, a relative consistency proof often gives a translation that turns any contradiction derived in T_1 into a contradiction derived in T_0 .

Remark (Dependencies).

- [Consistent Axiom System](#)

5.6 Independence

Independence Toolkit - Planned

This section is a rebuild placeholder.

This section is planned for the governance rebuild. No mathematical content has been restored here yet.

5.7 Comparing Theories

Comparing Theories Toolkit - Planned

This section is a rebuild placeholder.

This section is planned for the governance rebuild. No mathematical content has been restored here yet.

5.8 Examples And Previews

Examples And Previews Toolkit - Planned

This section is a rebuild placeholder.

This section is planned for the governance rebuild. No mathematical content has been restored here yet.

5.9 Summary

Summary Toolkit - Planned

This section is a rebuild placeholder.

This section is planned for the governance rebuild. No mathematical content has been restored here yet.

Proofs

Chapter 6

Proof Techniques



Proofs

Remark (Return). Return to Proposition

Proposition (Induction and Well-Ordering Are Equivalent). *Over the axioms of $\mathbb{N}$ without P5, the weak induction principle, the well-ordering principle, and the strong induction principle are logically equivalent.*

Professional Standard Proof.

TODO: professional standard proof for induction-well-ordering-equivalent. □

Detailed Learning Proof.

TODO: detailed learning proof for induction-well-ordering-equivalent. □

Remark (Proof structure).

Remark (Dependencies).

- Natural-number order.
- Weak induction principle.
- Strong induction principle.
- Well-ordering principle.

Bibliography