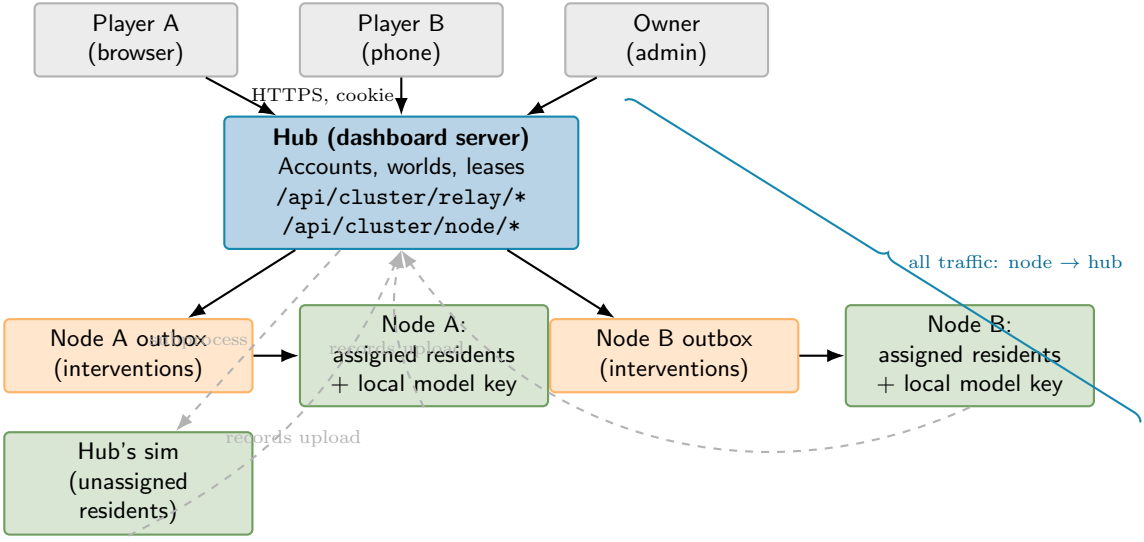
Player A
(browser)
Player B
(phone)
Owner
(admin)
HTTPS, cookie
Hub (dashboard server)
Accounts, worlds, leases
/api/cluster/relay/*
/api/cluster/node/*
all traffic: node → hub
Node A outbox
(interventions)
Node A:
assigned residents
+ local model key
Node B outbox
(interventions)
Node B:
assigned residents
+ local model key
Hub's sim
(unassigned
residents)
records upload