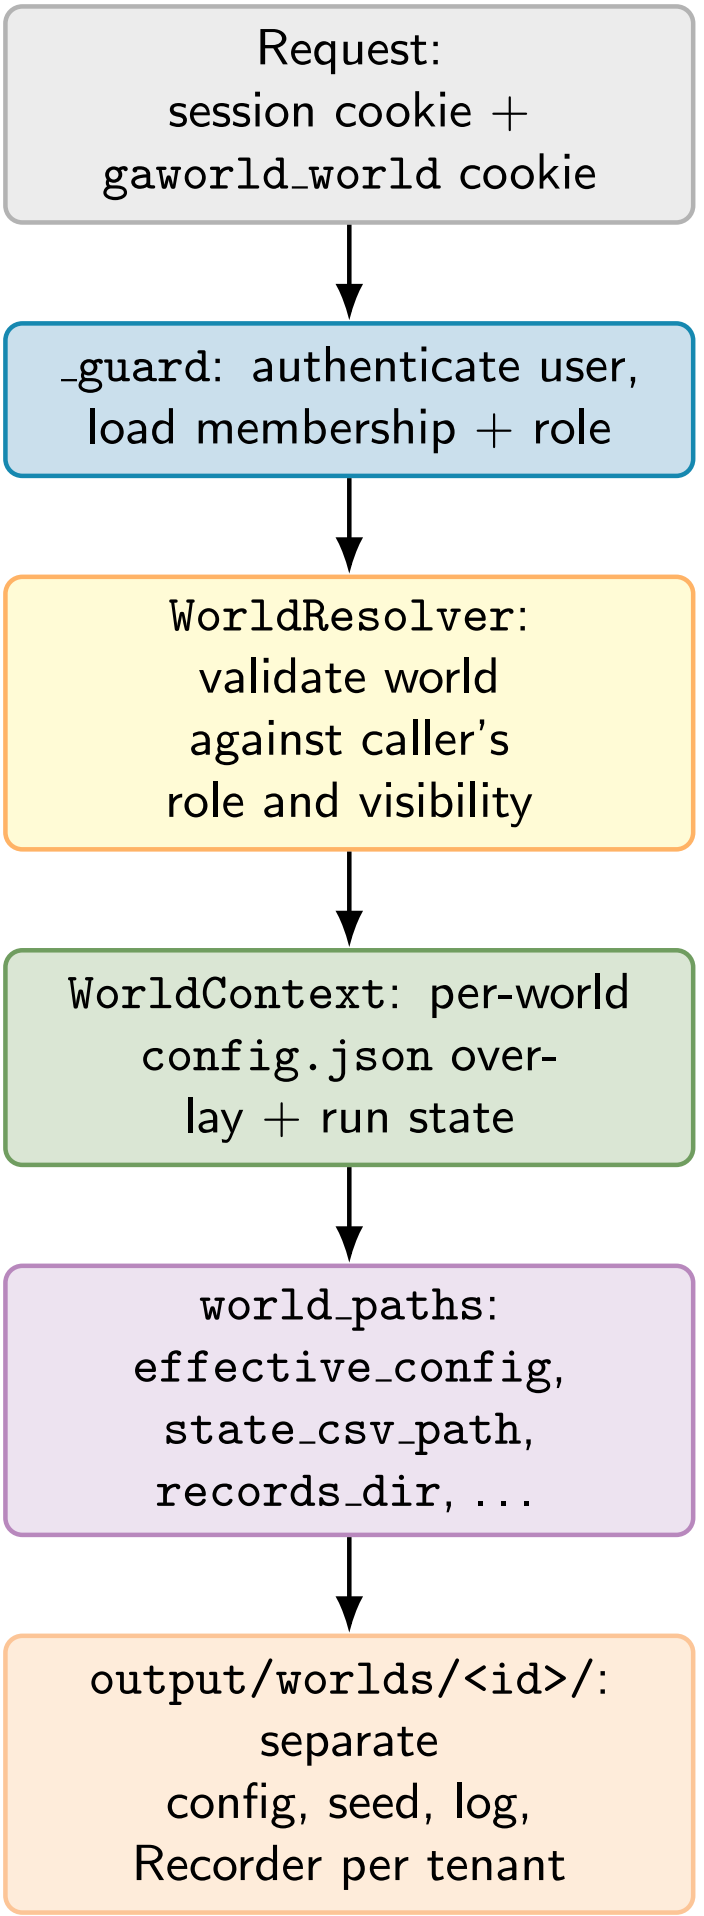
Request:
session cookie +
gaworld_world cookie
_guard: authenticate user,
load membership + role
Bearer
GAWORLD_DASHBOARD_TOKEN
still works (admin / scripts).
WorldResolver:
validate world
against caller's
role and visibility
If cookie world is forbidden,
fall back to default world.
If none, fail closed.
WorldContext: per-world
config.json over-
lay + run state
world_paths:
effective_config,
state_csv_path,
records_dir, ...
Module constants stay valid
for the
default world; multi-tenant
mode
rewrites via world_paths.
output/worlds/<id>/:
separate
config, seed, log,
Recorder per tenant