

E05 Family Problem (Prolog)

姓名	学号	日期
张天祯	18340215	2020.10.9

1 About Cousin and Removed

What Is a First Cousin, Twice Removed?

If someone walked up to you and said, “Howdy, I’m your third cousin, twice removed,” would you have any idea what they meant? Most people have a good understanding of basic relationship words such as “mother,” “father,” “aunt,” “uncle,” “brother,” and “sister.” But what about the relationship terms that we don’t use in everyday speech? Terms like “second cousin” and “first cousin, once removed”? We don’t tend to speak about our relationships in such exact terms (“cousin” seems good enough when you are introducing one person to another), so most of us aren’t familiar with what these words mean.

Relationship Terms

Sometimes, especially when working on your family history, it’s handy to know how to describe your family relationships more exactly. The definitions below should help you out. Cousin (a.k.a. “first cousin”) Your first cousins are the people in your family who have two of the same grandparents as you. In other words, they are the children of your aunts and uncles.

Second Cousin

Your second cousins are the people in your family who have the same great-grandparents as you., but not the same grandparents.

Third, Fourth, and Fifth Cousins

Your third cousins have the same great great grandparents, fourth cousins have the same great-great-great-grandparents, and so on.

Removed

When the word “removed” is used to describe a relationship, it indicates that the two people are from different generations. You and your first cousins are in the same generation (two generations younger than your grandparents), so the word “removed” is not used to describe your relationship. The words “once removed” mean that there is a difference of one generation. For example, your mother’s first cousin is your first cousin, once removed. This is because your mother’s first cousin is one generation younger than your grandparents and you are two generations younger than your grandparents. This one-generation difference equals “once removed.” Twice removed means that there is a two-generation difference. You are two generations younger than a first cousin of your grandmother, so you and your grandmother’s first cousin are first cousins, twice removed.

2 Problem Description

Please fulfill the following tasks by using Prolog:

1. Using the predicates `male`, `female`, `child`, and `spouse`, write facts and rules describing the family tree in Figure 2, and add the fact that William has a daughter Charlotte. Please do not write redundant facts that can be defined with rules.
2. Write rules describing the predicates `Grandchild`, `Greatgrandparent`, `Ancestor`, `Sibling`, `Brother`, `Sister`, `Daughter`, `Son`, `FirstCousin`, `BrotherInLaw`, `SisterInLaw`, `Aunt`, and `Uncle`.
3. Find out the proper definition of `nth` cousin `n` times removed, and write rules to define the predicate `nthCousinNremoved(X,Y,M,N)`. Hint: You'd better define a helper predicate `distance(X,Y,N)` meaning that there are `N` generations between `X` and `Y` by recursion (please refer to `hanoi.pl`).
4. ASK who are Elizabeth's grandchildren, Diana's brothers-in-law, Zara's great-grandparents, Eugenie's ancestors, and Charlotte's first cousin once removed.

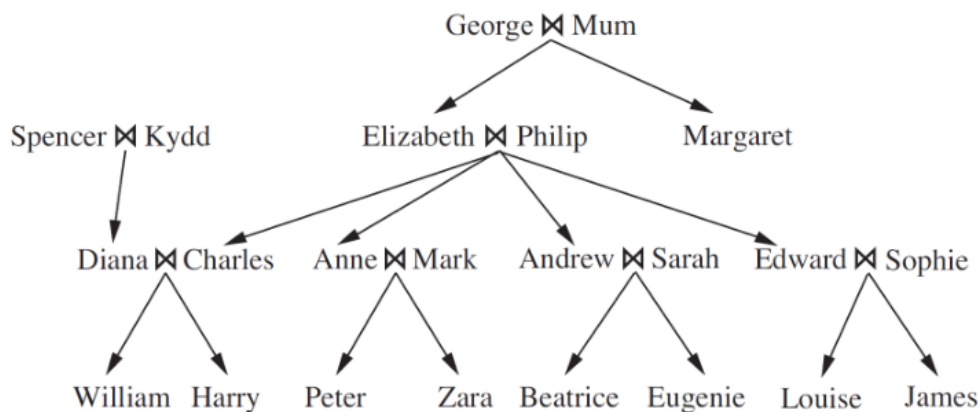


Figure 1: A typical family tree. The symbol ♂ connects spouses and arrows point to children.

3 Tasks

1. Please complete the Prolog codes. There are several tutorials in the folder and I will explain the usage of Prolog in class.
2. Write the related codes and take a screenshot of the running results in the file named `E05_YourNumber.pdf`, and send it to ai_2020@foxmail.com.

4 Codes

```
male('george').
male('philip').
male('kydd').
male('charles').
male('mark').
male('andrew').
male('edward').
male('william').
male('harry').
male('peter').
male('james').

female('mum').
female('elizabeth').
female('margaret').
female('spencer').
```

```

female('diana').
female('anne').
female('sarah').
female('sophie').
female('zara').
female('beatrice').
female('eugenie').
female('louise').
female('charlotte').

child1('elizabeth','george').
child1('margaret','george').
child1('diana','kydd').
child1('charles','philip').
child1('anne','philip').
child1('andrew','philip').
child1('edward','philip').
child1('william','charles').
child1('harry','charles').
child1('peter','mark').
child1('zara','mark').
child1('beatrice','andrew').
child1('eugenie','andrew').
child1('louise','edward').
child1('james','edward').
child1('charlotte','william').

spouse1('george','mum').
spouse1('philip','elizabeth').
spouse1('kydd','spencer').
spouse1('charles','diana').
spouse1('mark','anne').
spouse1('andrew','sarah').
spouse1('edward','sophie').

spouse2(X,Y):- spouse1(Y,X).
spouse(X,Y):- spouse1(X,Y);spouse2(X,Y).
child(X,Y):- child1(X,Y);(child1(X,Z),spouse(Z,Y)).

grandchild(X,Y):- child(X,Z),child(Z,Y).
greatgrandparent(X,Y):- child(Y,Z),grandchild(Z,X).
ancestor(X,Y):- child(Y,X);(child(Z,X),ancestor(Z,Y)).
sibling(X,Y):- child(X,Z),child(Y,Z),X\=Y.
brother(X,Y):- sibling(X,Y),male(X).
sister(X,Y):- sibling(X,Y),female(X).
daughter(X,Y):- female(X),child(X,Y).
son(X,Y):- male(X),child(X,Y).
brotherinlaw1(X,Y):- brother(X,Y);(sister(Z,Y),spouse(X,Z)).
brotherinlaw(X,Y):- brotherinlaw1(X,Y);spouse(Y,Z),brotherinlaw1(X,Z).
sisterinlaw1(X,Y):- sister(X,Y);(brother(Z,Y),spouse(X,Z)).
sisterinlaw(X,Y):- sisterinlaw1(X,Y);spouse(Y,Z),sisterinlaw1(X,Z).
%此处distance只能找到同一个祖先情况下的distance. 没必要使用
%distance1(X,Y,N):- child(Z,Y),N1 is N-1,distance1(X,Z,N1).
%distance1(X,Y,0):- X=Y;sisterinlaw(X,Y);brotherinlaw(X,Y);spouse(X,Y).
%distance(X,Y,N):- distance1(X,Y,N);distance1(Y,X,N).
mthCousinNremoved(X,Y,0,0):- sibling(X,Y).
mthCousinNremoved(X,Y,M,0):- child(X,I),child(Y,J),M1 is M-1,mthCousinNremoved(I,J,M1,0).

```

```
mthCousinNremoved(X,Y,M,N):- child(Y,Z),N1 is N-1,mthCousinNremoved(X,Z,M,N1).
firstcousin(X,Y):- mthCousinNremoved(X,Y,1,0).
aunt(X,Y):- female(X),child(Z,X),firstcousin(Z,Y).
uncle(X,Y):- male(X),child(Z,X),firstcousin(Z,Y).
```

5 Results

```
?- setof(X,grandchild(X,'elizabeth'),Ans).
Ans = [beatrice, eugenie, harry, james, louise, peter, william, zara].

?- setof(X,brotherinlaw(X,'diana'),Ans).
Ans = [andrew, edward, mark].

?- setof(X,greatgrandparent(X,'zara'),Ans).
Ans = [george, mum].

?- setof(X,ancestor(X,'eugenie'),Ans).
Ans = [andrew, elizabeth, george, mum, philip, sarah].

?- setof(X,mthCousinNremoved(X,'charlotte',1,1),Ans).
Ans = [beatrice, eugenie, james, louise, peter, zara].
```

一些经验：注意常量要小写，或者直接定义为字符串；防止无穷递归可以用 (spouse1,spouse)对的办法；有些查询会重复是合理的结果，只要用setof就能得到合适的结果。