Compression placement: quality-computation trade-off

Nine selected systems | 2,620 utterances | FP32, batch 1, beam 20

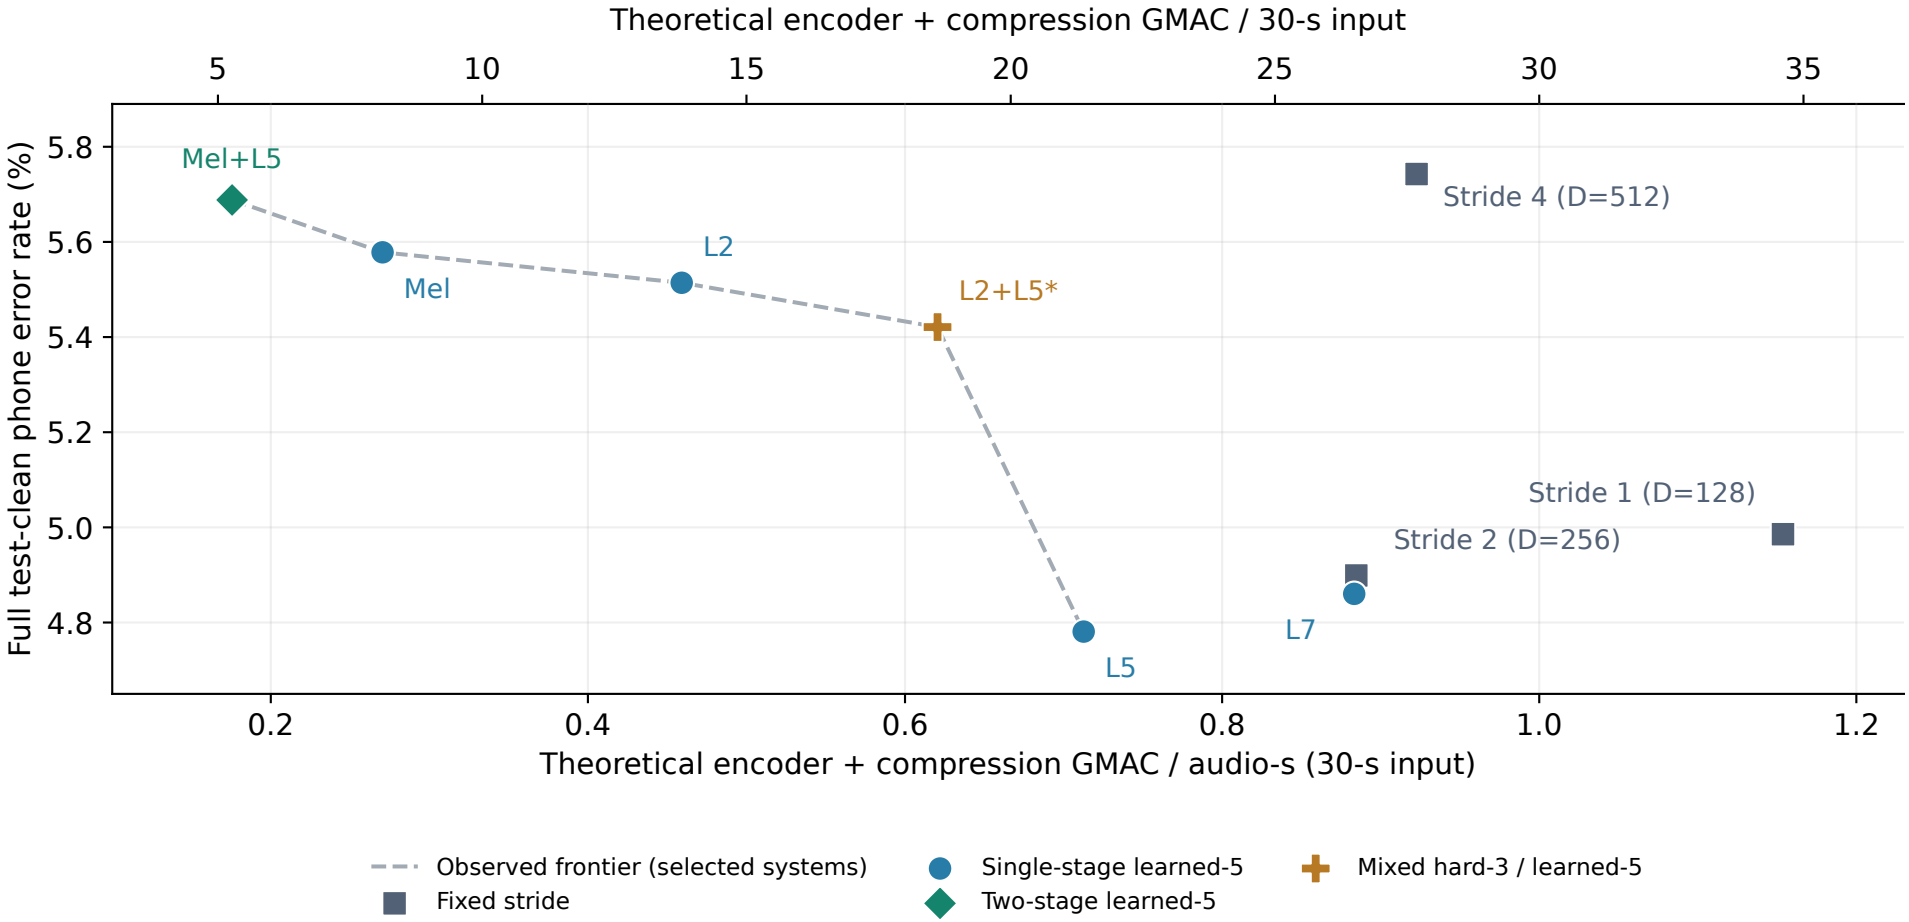

* L2+L5 uses hard three-frame neighborhoods at L2 and learned five-frame fusion at L5.

Lines connect observed points only; they do not interpolate unmeasured PER. Decoder MACs are separate.