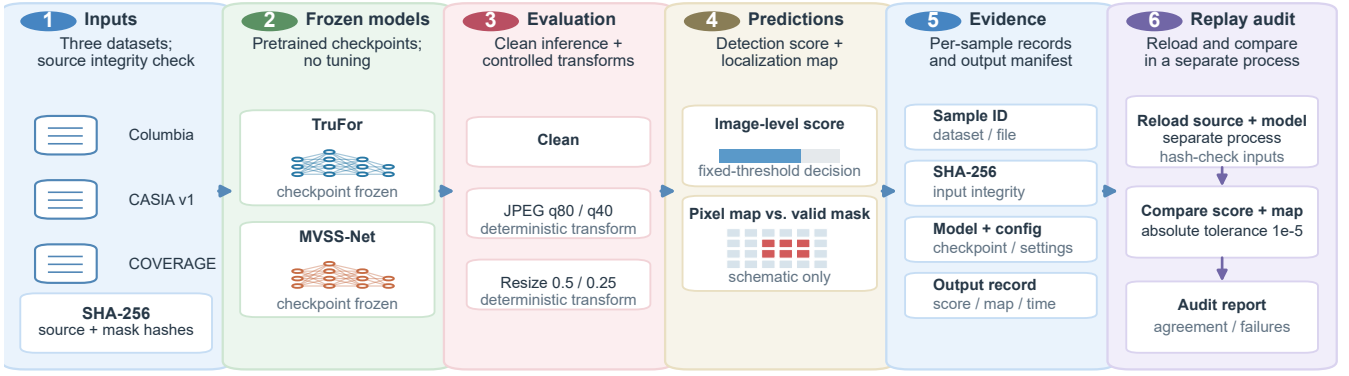

1
Inputs
Three datasets; source integrity check
Columbia
CASIA v1
COVERAGE
SHA-256
source + mask hashes
2
Frozen models
Pretrained checkpoints; no tuning
TruFor
checkpoint frozen
MVSS-Net
checkpoint frozen
3
Evaluation
Clean inference + controlled transforms
Clean
JPEG q80 / q40
deterministic transform
Resize 0.5 / 0.25
deterministic transform
4
Predictions
Detection score + localization map
Image-level score
fixed-threshold decision
Pixel map vs. valid mask
schematic only
5
Evidence
Per-sample records and output manifest
Sample ID
dataset / file
SHA-256
input integrity
Model + config
checkpoint / settings
Output record
score / map / time
6
Replay audit
Reload and compare in a separate process
Reload source + model
separate process
hash-check inputs
Compare score + map
absolute tolerance 1e-5
Audit report
agreement / failures
Audit scope
Fixed checkpoints + threshold 0.5
Valid masks only for localization
No dataset / weight redistribution