

TRACE: Trajectory-robust Admission with Evidence Ordering for Efficient GUI Agents

Yuhao Wang¹, Mu Qiao¹, Xindong Zhang², Yunzhi Zhuge¹, Lei Zhang^{2,3}, Huchuan Lu¹

¹Dalian University of Technology, ²OPPO Research Institute, ³The Hong Kong Polytechnic University

ABSTRACT

GUI agents accumulate high-resolution screenshots as the trajectory unfolds, increasing inference latency and memory usage. Training-free visual token pruning can reduce this cost, but cache reuse introduces a fundamental constraint. Once tokens are discarded, the corresponding visual evidence cannot be recovered without re-encoding. Pruning therefore becomes an *irreversible admission decision* that must remain useful for unknown future targets while preserving coverage of operable regions under tight budgets. To address these challenges, we propose **TRACE**, a training-free framework for *Trajectory-robust Admission and Coverage-aware Evidence ordering*. Specifically, we combine a query-independent layout-derived interaction prior with instruction relevance and feature novelty to rank visual evidence according to both potential future utility and diversity. Then, we reserve part of the budget for native visual tokens distributed across the screen, repairing missing spatial coverage without breaking the ordering. Together, these mechanisms produce a nested token order, allowing retained visual evidence to shrink monotonically across budgets while remaining reusable throughout the trajectory. Finally, our monotone KV contraction incrementally contracts retired frames into compact session state, avoiding repeated visual encoding or pruning. Extensive experiments across six GUI benchmarks and diverse models verify the effectiveness of our proposed TRACE under tight budgets. The source code will be released.

1 Introduction

Multimodal large language models (MLLMs) are increasingly deployed as agents that complete multi-step tasks by perceiving and acting on graphical user interfaces (GUIs) (Cheng et al., 2024; Xu et al., 2026a). At each step, a GUI agent processes the high-resolution screenshot together with context accumulated from earlier interactions (Tian et al., 2025). As the trajectory unfolds, visual computation grows to dominate the inference cost. Each historical screenshot carries a large number of visual tokens and recurs across successive steps, inflating both computation and memory (Xie et al., 2024). As shown in Fig. 1 (a), cache reuse mitigates the temporal redundancy across frames by limiting past computation (Zheng et al., 2024). However, this mechanism operates at frame granularity and leaves substantial spatial redundancy within each retained screenshot. The core problem therefore becomes deciding which visual tokens enter the reusable state of each frame.

Training-free visual token pruning has emerged as an effective way to reduce this redundancy. For example, FastV (Chen et al., 2024) prunes tokens by attention distribution. DivPrune (Alvar et al., 2025) and CDPruner (Zhang et al., 2025b) select for feature diversity or instruction relevance. Besides, PruMerge (Shang et al., 2025) merges redundancy into synthetic summaries. These approaches are effective because the selection can be recomputed whenever the query changes. Multi-step GUI serving breaks this premise once visual state becomes reusable, because each screenshot is encoded and written into the session cache only at its first prefill. Later steps read history from that cache rather than pixels, so tokens dropped at the single write are absent for every future query and can only be recovered by re-encoding the frame. **Visual token pruning thus shifts from revisable selection to irreversible write-time commitment of visual evidence.** Under this commitment, each frame should be admitted once before prefill, reused while current, and contracted when it becomes history. Contraction can only drop tokens from the committed state, so the historical keep sets should nest inside the current one. Pruning therefore must output a nested order whose prefixes realize every budget. As shown in Fig. 1 (b), re-selection demands re-encoding on most frames, whereas

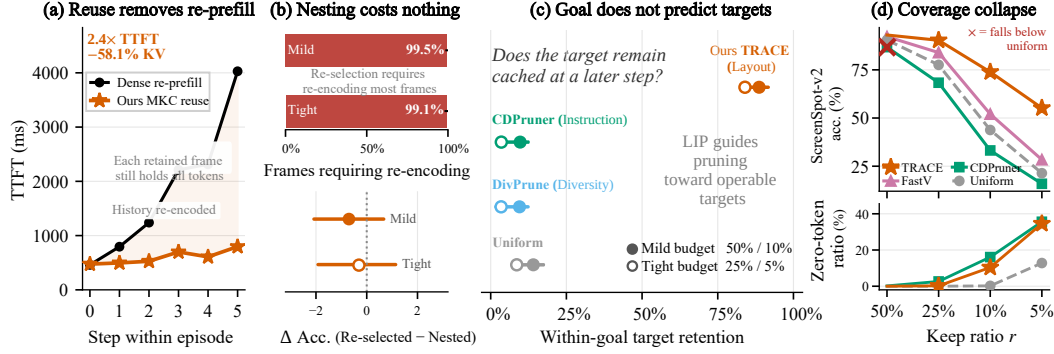


Figure 1: **Motivation of our proposed TRACE.** (a) Reusing the cache removes repeated prefill and lowers latency. (b) Independent re-selection demands re-encoding on most frames, while the nested order costs no accuracy. (c) Instruction-based pruning misses the target in later steps while layout-based pruning retains it. (d) Concentrating the budget on salient regions loses spatial coverage.

enforcing the nested order costs no accuracy. We term this regime *lifecycle-aware visual pruning* and formulate its decision as *write-time visual evidence commitment under trajectory uncertainty*.

This formulation exposes two distinct challenges. The first is trajectory uncertainty. The task goal is known at admission, yet the fine-grained targets along the trajectory remain unknown. Write-time admission must therefore commit evidence before those later targets appear. Among the signals available at that moment, feature diversity is query-independent yet does not separate operable regions from background. By contrast, the interface layout offers operable regions before any demand is observed. As shown in Fig. 1 (c), when a screen recurs under the same goal, instruction-selected tokens miss the later target, whereas layout-selected tokens still cover it. Beyond present-step cues, trajectory-robust admission should therefore also incorporate this layout prior. Independently, the second challenge is spatial coverage under tight budgets. Biased token pruning concentrates on a few salient regions, leaving other operable regions with zero support and thus unavailable to the agent. As shown in Fig. 1 (d), such biased keeps leave a growing uncovered area and eventually fall below uniform sampling as the budget tightens (Deng et al., 2025; Xu et al., 2026b). Beyond importance concentration, tight-budget admission must therefore also preserve spatial coverage.

Motivated by these observations, we propose **TRACE**, a *Trajectory-robust Admission and Coverage-aware Evidence ordering* framework for efficient GUI agents. Specifically, TRACE comprises four key components: **Layout-derived Interaction Prior (LIP)**, **Nested Evidence Ordering (NEO)**, **Native-token Coverage Repair (NCR)**, and **Monotone KV Contraction (MKC)**. First, LIP maps layout detections into an interaction prior, enabling admission to favor operable regions before later targets appear. Second, NEO fuses this prior with instruction relevance and feature novelty into one nested order, so every tighter budget is realized as a prefix rather than by re-selection. Third, NCR restores spatial coverage with native tokens while preserving that nested order. Finally, MKC contracts each retiring frame to its history prefix and replays the retained native rows in the next prefill. Together, these components commit visual evidence once at admission and contract it monotonically thereafter. In this way, TRACE realizes lifecycle-aware visual pruning under trajectory uncertainty for efficient GUI agents. Extensive experiments across six GUI benchmarks covering single-step and multi-step settings, including multiple model scales and a cross-family backbone, verify the effectiveness of TRACE. Overall, our contributions can be summarized as follows.

- We formulate *lifecycle-aware visual pruning* as *write-time visual evidence commitment under trajectory uncertainty*. Once visual state is reusable, pruning becomes an irreversible admission with nested keep sets across budgets, exposing two challenges of committing evidence before later targets appear and preserving spatial coverage under tight budgets.
- We propose TRACE, a training-free framework that commits visual evidence once and contracts it monotonically thereafter. LIP injects a query-independent layout prior, NEO builds one nested evidence order, NCR restores native-token spatial coverage, and MKC turns the admitted order into reusable session state without re-encoding historical frames.
- Extensive experiments across six GUI benchmarks verify the effectiveness of TRACE under single-step and multi-step settings, multiple model scales, and a cross-family backbone.

2 Related Work

2.1 Efficient GUI Agents

GUI agents ground actions in an accumulating stream of high-resolution screenshots (Hong et al., 2024; Xu et al., 2026a), inflating both computation and memory. Existing methods fall into *training-based designs* and *training-free designs*. **Training-based Designs.** This paradigm learns cheaper perception by retraining the architecture or the history policy. For example, CogAgent (Hong et al., 2024) couples a low-resolution backbone with a high-resolution cross-attention module. ReVision (Abaskohi et al., 2026) learns to cut temporal visual redundancy along the trajectory. While effective, these designs demand extra training compute, and the learned efficiency cannot transfer across architectures. These costs motivate training-free designs on frozen models. **Training-free Designs.** Training-free methods cut cost on a frozen model via *input-side* pruning or *cache-side* compression. On the *input side*, AQuaUI (Li et al., 2026b) partitions screenshots with adaptive quadrees, and related methods prune high-resolution screens or historical frames by spatio-temporal cues (Xu et al., 2026c; Li et al., 2026a). On the *cache side*, GUI-KV (Huang et al., 2025) combines spatial saliency with temporal redundancy scoring. ST-Lite (Zhou et al., 2026) couples component-centric saliency with trajectory-aware gating. Despite these improvements, keeps are re-scored at every step, so adjacent keeps need not nest and a retired frame must be re-encoded or re-ranked. In contrast, TRACE admits a nested keep once and contracts it as monotone session state efficiently.

2.2 Visual Token Pruning

Visual token pruning accelerates MLLM inference by removing redundant visual tokens, and existing methods either discard native tokens directly or aggregate them into synthetic ones. **Pruning-based Methods.** FastV (Chen et al., 2024) ranks visual tokens by attention statistics inside the language model. DivPrune (Alvar et al., 2025) emphasizes feature dispersion to reduce redundancy. CDPruner (Zhang et al., 2025b) selects tokens that are both diverse and relevant to the instruction. Nevertheless, selection discards tokens irreversibly, which motivates token merging as an alternative paradigm. **Merging-based Methods.** This paradigm aggregates discarded patches into compact synthetic summaries. VisionZip (Yang et al., 2025b) merges visual tokens to extend the effective context length. PruMerge+ (Shang et al., 2025) combines pruning with merging to adapt the visual token count. Although effective, the selections of both paradigms drift across steps and demand rows that a contracted cache no longer holds. Moreover, neither is tailored to GUI streams, where score-driven keeps collapse onto a few salient regions and sacrifice the spatial coverage that dense interfaces require. In contrast, TRACE injects an interaction prior before prefill, repairs the spatial collapse at admission, and contracts the admitted keep into monotone session state for efficient serving.

3 Method

3.1 Problem Formulation

In multi-step GUI interaction, an agent observes a growing sequence of screenshots as an episode unfolds. At step t , the agent’s visual encoder maps screenshot x_t into N raster-ordered tokens $\mathbf{E}_t \in \mathbb{R}^{N \times D}$, where D is the feature dimension. Under the stateless serving paradigm (Li et al., 2026b), the model repeatedly prefills the current frame together with up to H historical frames, which inflates both latency and memory. To avoid this cost, we propose a reusable visual-state lifecycle in which each frame is encoded once and only contracts thereafter, so the retained positions must be decided before the first LLM prefill. At this stage, the selector operates on the non-visual prefix T_t , the current visual tokens $\mathbf{E}_t$, and the admitted history, denoted collectively by $\mathcal{A}_t$. For each frame t , let S_t^{cur} denote the positions retained while the frame is current, and let S_t^{hist} denote the smaller subset retained after retirement. Formally, the reusable lifecycle imposes three constraints:

$$(i) S_t^{\text{cur}} = \sigma(\mathcal{A}_t), \quad (ii) S_t^{\text{hist}} \subseteq S_t^{\text{cur}}, \quad (iii) S_t^{\text{cur}}, S_t^{\text{hist}} \subseteq \{1, \dots, N\}. \quad (1)$$

Here, σ denotes the selector used before prefill. Condition (i) confines pruning to information available at this stage, condition (ii) enforces monotone retirement, and condition (iii) preserves original tokens to avoid synthetic merges that cannot later be dropped as cache rows. These constraints make reuse realizable, yet leave open which tokens to admit while future utility remains unknown. We therefore ground the evidence in the interface layout, whose operable regions are already visible.

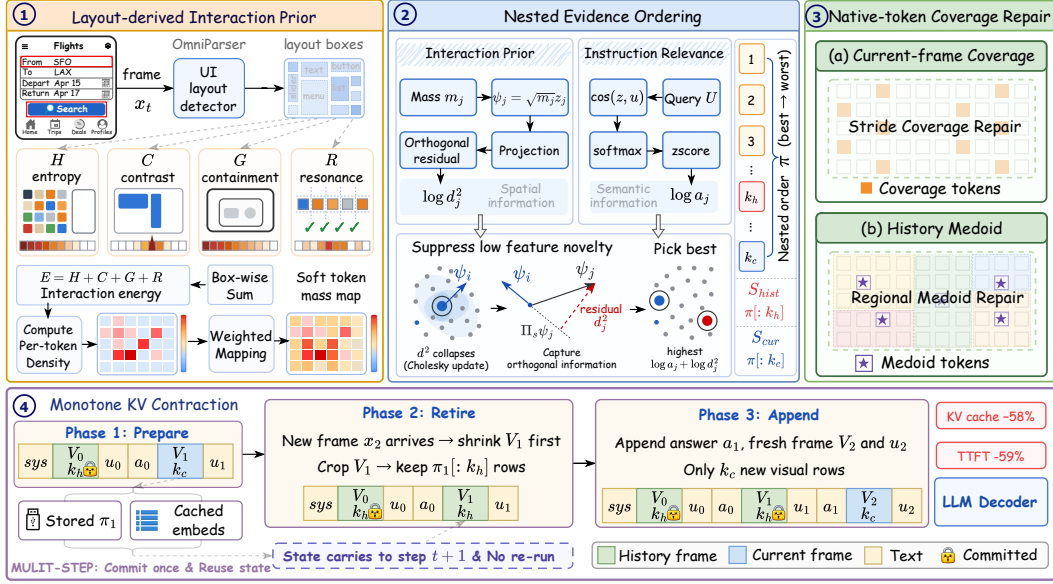


Figure 2: **Overview of the proposed TRACE framework.** (a) **Layout-derived Interaction Prior** maps UI detections into an interaction prior. (b) **Nested Evidence Ordering** fuses this prior with instruction relevance and feature novelty into one nested order. (c) **Native-token Coverage Repair** refills the spatial gaps with native coverage and medoid tokens. (d) **Monotone KV Contraction** crops each retiring frame to its history prefix and restores retained rows in the next prefill. Together, they enable trajectory-robust admission with evidence ordering for efficient GUI agents.

3.2 Layout-derived Interaction Prior

Relying solely on instruction relevance (Zhang et al., 2025b) cannot anticipate later step demands, while uniform geometry (Deng et al., 2025) does not separate operable regions from background. To address this issue, we introduce the Layout-derived Interaction Prior (LIP), which maps layout detections such as buttons and text fields into an interaction prior for the subsequent token pruning.

From Detections to Interaction Density. Specifically, to strengthen understanding of dense GUI screens, we detect layout boxes with OmniParser (Lu et al., 2024). As illustrated by step ① in Fig. 2, we compute entropy H , contrast C , containment G and resonance R for each box and form the interaction energy $E = H + C + G + R$. Dividing by the number n of active UI tokens covered by the box yields a per-token density $\rho = E/n$. We then scatter ρ onto the visual-token grid and max-normalize overlaps into a field P . Then, we set $p = P/\|P\|_1$ so that only relative spatial shares enter the mapping below. **From Density to Interaction Prior.** The density p marks where layout structure lies, but layout alone cannot decide admission under later steps. A keep ranking from p would over-commit to detections and shut out tokens that later relevance or coverage may still need. We therefore turn p into a soft token mass $m_j = 1 + \alpha N p_j$, which biases the subsequent ordering toward layout regions while keeping every token eligible. Here, $\alpha \geq 0$ controls the strength of the bias, and this mass is the interaction prior passed downstream. In this way, LIP can inject the layout preference for the next stage to balance against instruction relevance and feature novelty.

3.3 Nested Evidence Ordering

Pure relevance concentrates the budget on the strongest instruction matches (Zhang et al., 2025b), whereas diversity alone overlooks structurally important regions. We therefore introduce Nested Evidence Ordering (NEO), which fuses the interaction prior with instruction relevance and feature novelty into a nested order. Then, every later budget can be extracted from the order’s prefixes.

Relevance and Prior-weighted Features. Specifically, for each visual token e_j , we define the normalized feature $\mathbf{z}_j = e_j/\|e_j\|_2$. Besides, we normalize the instruction’s token embeddings and prepend their mean to form the query matrix U . Then, we compute the relevance weight as follows:

$$a_j = \text{softmax}_j \left(\text{zscore} \left(\max_{\mathbf{u} \in U} \cos(\mathbf{z}_j, \mathbf{u}) \right) \right). \quad (2)$$

Here, the max keeps the strongest local match and the prepended mean anchors the score globally. Besides the z-score, we also apply softmax to turn similarities into positive relative weights. With the relevance in place, we next reweight each normalized feature with the interaction prior as $\psi_j = \sqrt{m_j} \mathbf{z}_j$. Here, layout-dense tokens matter more in the residual geometry, while the unit baseline in m_j keeps every token eligible. **Greedy Residual Ordering.** To form a nested keep order, we apply the greedy relevance-weighted orthogonal residual selection with the above relevance and prior-weighted features. To be specific, given a selected set S , it chooses the next token as follows:

$$j^* = \arg \max_{j \notin S} (\log a_j + \log d_j^2(S)), \quad d_j^2(S) = \|\psi_j - \Pi_S \psi_j\|_2^2. \quad (3)$$

Here, Π_S is the orthogonal projector onto the features already in S . With $\Psi_S = [\psi_i]_{i \in S}$, we set $\Pi_S = \Psi_S(\Psi_S^\top \Psi_S)^{-1} \Psi_S^\top$ when S is nonempty and $\Pi_\emptyset = \mathbf{0}$. The residual $d_j^2(S)$ then measures how much of ψ_j remains novel. Adding $\log a_j$ balances that novelty against instruction relevance. As illustrated by step ② in Fig. 2, repeating this update produces a nested order $\pi = (\pi_1, \dots, \pi_k)$:

$$S^{(k')} = \{\pi_1, \dots, \pi_{k'}\} \subset S^{(k)} \quad \text{for } k' < k. \quad (4)$$

Retirement can therefore delete a suffix of π rather than reselect the frame. However, this order still leaves spatial placement uncontrolled. A tight prefix may leave an entire region without any kept token. Thus, the next stage restores the spatial coverage while preserving nesting and native tokens.

3.4 Native-token Coverage Repair

Biased token pruning concentrates on a few strong regions and leaves other areas empty, whereas a sparse uniform lattice only partially restores the coverage (Xu et al., 2026b). We therefore introduce Native-token Coverage Repair (NCR), which restores the spatial coverage with native tokens. As shown by step ③ in Fig. 2, NCR selects different types of tokens for the current frame and history. **Current-frame Coverage Tokens.** Specifically, the current frame uses the larger budget k_c , so repair can spread a few positions across the screen while keeping the strongest ordered evidence. Concretely, with current dose $\rho_{\text{cur}} \in [0, 1]$, NCR selects $g_c = \lceil \rho_{\text{cur}} k_c \rceil$ coverage tokens, protects the prefix $P_c = \{\pi_1, \dots, \pi_{k_c - g_c}\}$, and takes the raster-ordered complement $U_c = (u_{(1)}, \dots, u_{(|U_c|)})$. It then draws those coverage tokens from the complement by stride sampling with stride $s = \lceil |U_c| / g_c \rceil$. These coverage tokens replace the unprotected tail and update π . Retirement later shrinks the same frame to k_h , so history coverage is restored with medoid tokens rather than another stride sample. **History Medoid Tokens.** For history, with history dose $\rho_{\text{hist}} \in [0, 1]$, NCR sets $g_h = \lceil \rho_{\text{hist}} k_h \rceil$ and protects a prefix of length $k_h - g_h$. It then partitions the remaining space into g_h near-equal regions. From each region R_b , NCR keeps the medoid token μ_b , which is the native token that minimizes the sum of squared feature distances to the other tokens in R_b . The protected prefix and these medoid tokens jointly define the history subset, which stays nested inside the current keep. In this way, NCR effectively restores spatial coverage while leaving the reusable cache realization to the next stage.

3.5 Monotone KV Contraction

Admission yields its advantage only if serving contracts a retired frame into the next prefill without a second visual encoding. We therefore introduce Monotone KV Contraction (MKC), which realizes the reusable visual-state lifecycle. As illustrated by step ④ in Fig. 2, each step advances this state through three phases, shown here from past frame V_0 and current frame V_1 . **Phase 1. Prepare.** The session holds the system prompt, past frame V_0 at budget k_h , the preceding text and answer u_0 and a_0 , current frame V_1 at budget k_c , and instruction u_1 . Admission has already stored the nested order π_1 of V_1 and its native visual embeddings. **Phase 2. Retire.** When a new screenshot x_2 arrives, MKC first shrinks V_1 before any append. It truncates the cache at the boundary of V_1 and crops the stored embeddings to the first k_h entries of π_1 . The operation is indexing alone and incurs no extra computation. **Phase 3. Append.** MKC then restores those cropped rows with answer a_1 , fresh frame V_2 and instruction u_2 in one merged LLM forward pass. The restored rows reuse embeddings encoded when V_1 arrived, whereas only V_2 is newly encoded at budget k_c . The resulting state leaves V_0 unchanged, places V_1 at history budget k_h , and makes V_2 the new current frame. In this way, MKC turns the admitted order into monotone session state. It keeps the evidence native and encodes only the fresh frame at each step. Overall, these components ensure efficient and robust GUI agents.

Table 1: Performance comparison with **GUI-Owl-1.5** series. **Avg. (%)** denotes performance relative to the upper bound. Best and second-best results are shown in **bold** and underlined, respectively.

Method	Single-step (Accuracy)			Multi-step (Step SR)			Avg. (%)
	SS-v2	SS-Pro	MMBench-GUI	OmniGUI	Mind2Web	AndroidControl	
GUI-OWL-1.5-8B: UPPER BOUND (100% TOKENS)							
GUI-Owl-1.5-8B	93.79	70.34	82.64	52.45	52.90	60.41	100.0%
MILD BUDGET (SINGLE-STEP: $r=10\%$ MULTI-STEP: $c=50\%$, $h=10\%$)							
Random	33.81	6.14	18.53	43.16	35.13	58.82	52.2%
Uniform	43.79	10.69	28.27	46.11	39.65	59.08	59.5%
DivPrune _(CVPR25) Alvar et al. (2025)	51.97	13.98	31.61	45.76	40.70	58.83	62.5%
CDPruner _(NeurIPS25) Zhang et al. (2025b)	33.18	11.26	12.21	41.45	27.88	54.57	48.0%
VisPruner _(ICCV25) Zhang et al. (2025a)	51.73	34.41	42.35	46.11	44.45	59.25	70.9%
PruMerge ₊ (ICCV25)Shang et al. (2025)	40.49	19.80	30.47	46.50	41.53	59.28	62.2%
TRIM _(COLING25) Song et al. (2025)	36.24	3.29	25.24	45.84	41.20	56.86	55.5%
FastV _(ECCV24) Chen et al. (2024)	52.04	28.53	40.21	46.89	43.12	59.11	68.9%
VisionTrim _(ICLR26) Yu et al. (2026)	58.65	38.52	40.71	45.72	43.91	59.10	72.4%
ZOO-Prune _(CVPR26) Kim et al. (2026)	56.29	9.55	35.98	48.17	44.98	59.30	65.4%
PruneSID _(ICLR26) Fang et al. (2026)	58.96	15.69	40.65	47.40	43.28	59.52	67.5%
TRACE	73.90	37.63	50.47	48.91	45.52	60.20	78.7%
TIGHT BUDGET (SINGLE-STEP: $r=5\%$ MULTI-STEP: $c=25\%$, $h=5\%$)							
Random	15.49	1.27	9.29	34.25	18.43	52.07	36.0%
Uniform	21.38	3.04	12.24	38.96	20.61	56.13	41.3%
DivPrune _(CVPR25) Alvar et al. (2025)	25.71	3.86	14.11	37.17	24.29	54.75	42.9%
CDPruner _(NeurIPS25) Zhang et al. (2025b)	15.88	3.48	4.76	27.76	10.86	40.90	28.1%
VisPruner _(ICCV25) Zhang et al. (2025a)	20.68	12.21	16.75	39.54	30.67	54.93	47.3%
PruMerge ₊ (ICCV25)Shang et al. (2025)	17.85	5.88	12.19	36.98	23.45	54.01	41.1%
TRIM _(COLING25) Song et al. (2025)	15.88	0.44	9.85	34.37	23.01	47.17	36.1%
FastV _(ECCV24) Chen et al. (2024)	28.38	11.83	20.51	39.39	29.33	54.61	48.8%
VisionTrim _(ICLR26) Yu et al. (2026)	25.86	18.22	16.86	38.26	30.20	55.16	49.2%
ZOO-Prune _(CVPR26) Kim et al. (2026)	28.46	3.48	15.33	40.01	27.90	55.76	45.9%
PruneSID _(ICLR26) Fang et al. (2026)	34.20	4.55	19.48	40.09	27.57	55.46	47.8%
TRACE	55.19	20.30	30.88	43.08	34.20	57.06	61.1%
GUI-OWL-1.5-2B: UPPER BOUND (100% TOKENS)							
GUI-Owl-1.5-2B	90.49	57.94	71.84	39.70	44.23	57.93	100.0%
TIGHT BUDGET (SINGLE-STEP: $r=5\%$ MULTI-STEP: $c=25\%$, $h=5\%$)							
Random	14.54	1.71	8.35	24.77	16.21	47.43	35.3%
Uniform	13.52	2.59	8.07	25.66	15.92	52.38	36.9%
DivPrune _(CVPR25) Alvar et al. (2025)	18.00	2.28	8.57	26.52	20.52	50.30	39.3%
CDPruner _(NeurIPS25) Zhang et al. (2025b)	22.17	2.66	13.05	27.10	18.20	50.19	40.6%
VisPruner _(ICCV25) Zhang et al. (2025a)	12.81	2.34	6.68	22.55	18.85	48.59	35.1%
PruMerge ₊ (ICCV25)Shang et al. (2025)	12.03	2.34	6.98	23.17	14.68	47.35	33.4%
TRIM _(COLING25) Song et al. (2025)	17.37	1.58	9.63	25.35	23.58	51.28	40.2%
FastV _(ECCV24) Chen et al. (2024)	10.46	6.58	7.57	25.51	27.62	51.71	41.6%
VisionTrim _(ICLR26) Yu et al. (2026)	17.30	4.43	9.43	23.72	17.80	49.43	37.5%
ZOO-Prune _(CVPR26) Kim et al. (2026)	19.50	1.58	10.35	26.17	22.78	53.06	41.3%
PruneSID _(ICLR26) Fang et al. (2026)	19.97	1.83	10.66	27.53	25.68	54.13	43.5%
TRACE	38.29	6.83	21.93	31.88	26.52	53.72	52.9%

4 Experiments

4.1 Experimental Setup

Models and Evaluation Scope. We evaluate on native GUI agent models that ground natural-language instructions on raw screenshots and emit executable actions. The *GUI-Owl-1.5* series (Xu et al., 2026a) serves as the primary backbone for grounding and multi-step control, and *UI-TARS-1.5-7B* (Qin et al., 2025) tests generalization under a different model family and action grammar. **Benchmarks and Metrics.** We evaluate under both single-step and multi-step settings across six public benchmarks. The single-step setting measures grounding and general GUI understanding on ScreenSpot-v2 (SS-v2) (Wu et al., 2024), ScreenSpot-Pro (SS-Pro) (Li et al., 2025), and MMBench-GUI L2 (Wang et al., 2025), using their official accuracy metrics. The multi-step setting evaluates action prediction on OmniGUI (Henry et al., 2026), Mind2Web (Deng et al., 2023), and AndroidControl (Li et al., 2024), and reports Step SR, which credits a step only when both the action type and its target or argument are correct. All methods are compared at matched visual-token budgets. The single-step setting retains a fraction r of the visual tokens, and the multi-step setting independently controls the current and historical budgets with c and h . More details are in the appendix.

4.2 Main Results

As shown in Tab. 1, TRACE has the best performance among existing methods, retaining 78.7% and 61.1% of dense performance on GUI-Owl-1.5-8B at the mild and tight budgets. **Single-step**

Table 2: Module ablation with **GUI-Owl-1.5-8B**. Rows without NEO select by top- k over the prior.

LIP	NEO	NCR	SS-v2	SS-Pro	OmniGUI	Mind2Web
MILD BUDGETS (50%/10%, SS-v2 $r=10\%$, SS-Pro $r=25\%$)						
✓			32.63	41.94	40.94	41.75
	✓		36.48	42.19	45.88	34.31
✓	✓		56.45	56.29	47.43	43.92
✓	✓	✓	73.90	58.25	48.91	45.52
TIGHT BUDGETS (25%/5%, SS-v2 $r=5\%$, SS-Pro $r=10\%$)						
✓			17.06	14.55	30.33	25.43
	✓		18.32	13.73	36.39	14.31
✓	✓		38.36	28.15	39.46	27.79
✓	✓	✓	55.19	37.63	43.08	34.20

Table 5: Evaluation on **UI-TARS-1.5-7B**.

Method	SS-v2	SS-Pro	OmniGUI	Mind2Web
UI-TARS-1.5-7B	89.86	42.19	49.77	42.94
MILD ($r=25\%$, $c=50\%$, $h=10\%$)				
Random	50.08	7.15	38.00	27.69
Uniform	48.74	4.49	40.24	25.98
DivPrune	<u>69.89</u>	<u>14.86</u>	<u>42.47</u>	<u>32.33</u>
CDPruner	59.43	12.90	35.83	27.16
PruneSID	68.87	13.41	41.55	31.21
TRACE	70.28	16.76	43.52	35.13
TIGHT ($r=10\%$, $c=25\%$, $h=5\%$)				
Random	16.59	1.83	21.83	8.55
Uniform	18.00	1.71	23.14	6.51
DivPrune	<u>36.79</u>	<u>3.67</u>	<u>28.60</u>	<u>13.00</u>
CDPruner	30.03	3.35	23.80	12.13
PruneSID	33.88	2.78	24.65	10.88
TRACE	37.58	6.20	29.78	17.92

Table 3: Factor ablation inside NEO.

Removed	SS-v2	SS-Pro	OmniGUI	Mind2Web
– prior	–23.74	–16.50	–5.64	–15.50
– diversity	–5.35	–4.74	–2.64	–1.98
– instruction	–15.57	–14.16	–4.12	–1.39

Table 4: Ordering ablation inside NEO.

Substituted rule	SS-v2	SS-Pro
$2 \log a_j + \log d_j^2$	–10.53	–3.61
log-mean-exp pooling	–8.49	–6.45
mean query row only	–8.81	–5.63

Table 6: Attribute ablation inside LIP.

Removed	SS-v2	SS-Pro
– containment	–2.91	–1.45
– resonance	–2.28	–1.01
– contrast	–1.89	–1.20
– entropy	–0.08	–0.57

Table 7: Repair ablation inside NCR.

Rule	Current frame		History frame	
	SS-v2	SS-Pro	OmniGUI	Mind2Web
Medoid	58.65	30.11	43.08	34.20
Stride	67.92	37.63	41.68	34.18

Evaluation. Specifically, at the mild budget, TRACE leads PruneSID by **14.94%** on SS-v2 and VisPruner by **8.12%** on MMBench-GUI. Meanwhile, VisionTrim stays ahead by 0.89% on the 4K icon-dense SS-Pro. At $r = 5\%$, TRACE leads on all three benchmarks. In particular, its margin over PruneSID on SS-v2 grows to **20.99%**, and the comparison with VisionTrim on SS-Pro turns to +2.08%. The advantage therefore widens as the budget tightens. As shown in Fig. 4, in this regime the instruction-conditioned keep contracts onto its highest-scoring region and falls from four covered targets to one, whereas the repaired keep still retains three of four at $r=5\%$. **Multi-step Evaluation.** Meanwhile, TRACE achieves impressive performance on multi-step benchmarks. Margins over the best existing method grow from 0.54%–0.74% at the mild budget to 1.30%–3.53% at the tight budget. The largest gap appears on Mind2Web, where TRACE reaches 34.20% and VisPruner reaches 30.67%. **Cross-scale Evaluation.** We further evaluate TRACE on GUI-Owl-1.5-2B. Under the tight budget, TRACE retains 52.9% of dense performance on average, while the best existing method, PruneSID, retains only 43.5%. Moreover, TRACE ranks first on four of the six benchmarks and second on Mind2Web and AndroidControl, behind FastV and PruneSID. Since the prior and coverage signals are computed before prefix and do not depend on the checkpoint, the advantages survive the scale change. These results fully demonstrate the effectiveness of our proposed TRACE.

4.3 Ablation Studies

Analysis of Key Modules. As shown in Tab. 2, we analyze the contribution of each module in TRACE. On SS-v2 at $r=10\%$, the prior scored by top- k reaches 32.63% and NEO alone reaches 36.48%. In contrast, combining the two stages reaches 56.45%, which is **19.97%** higher than either stage alone. Adding NCR then raises SS-v2 accuracy from 56.45% to 73.90% and lifts tight Mind2Web from 27.79% to 34.20%. The prior thus locates operable regions, and the residual ordering keeps redundant tokens from consuming the budget. Finally, NCR restores the spatial coverage lost to importance concentration. These results fully verify the effectiveness of each module.

Module Design Choices. We further evaluate the design choices inside each module. (1) *Scoring factors inside NEO.* As shown in Tab. 3, removing any one scoring factor degrades accuracy on all four benchmarks. Specifically, removing the prior costs the most, up to –23.74% on SS-v2. These results verify the complementarity of the three factors. (2) *Ordering form inside NEO.* As shown

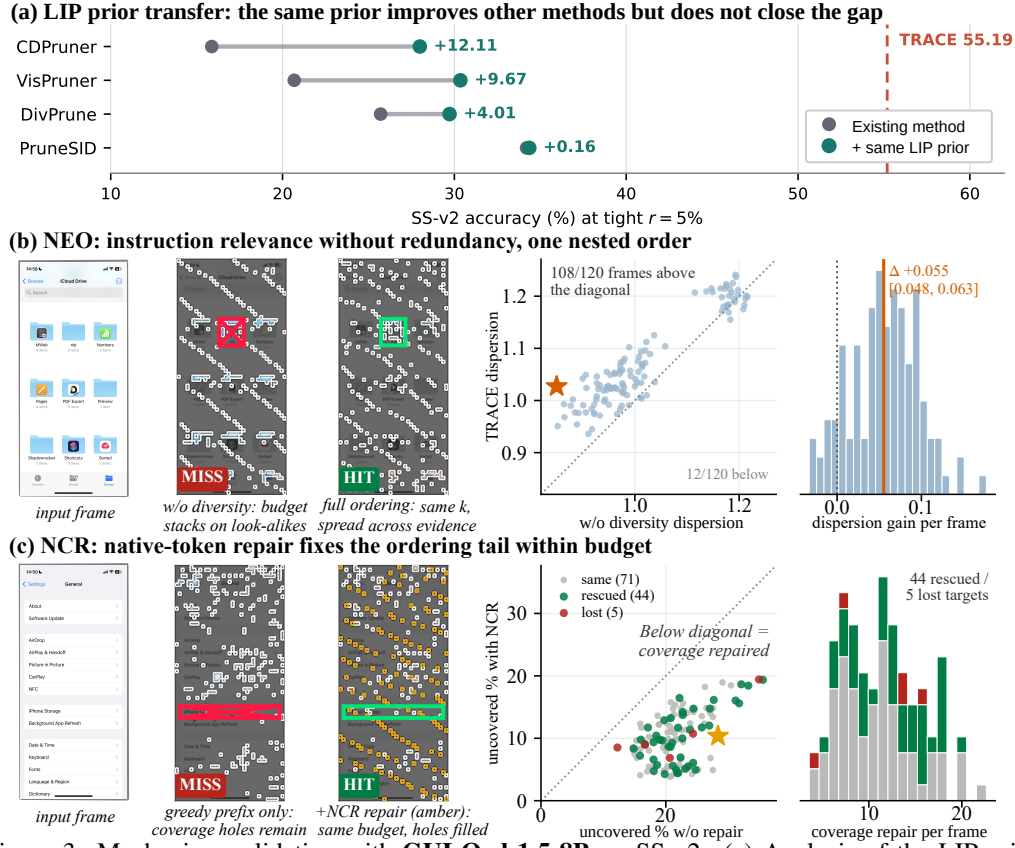


Figure 3: Mechanism validation with **GUI-Owl-1.5-8B** on SS-v2. (a) Analysis of the LIP prior. (b) Analysis of the NEO diversity term. (c) Analysis of the NCR coverage and target retention.

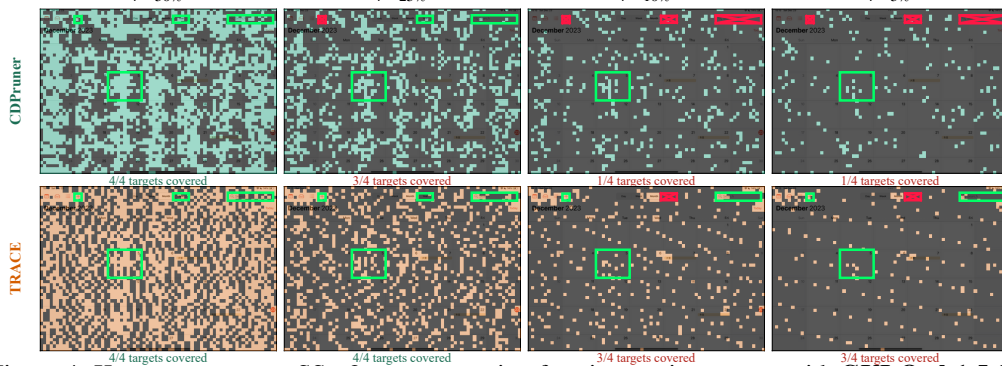


Figure 4: Keep maps on one SS-v2 screen carrying four instruction targets with **GUI-Owl-1.5-8B**.

in Tab. 4, doubling the likelihood weight, pooling the query by log-mean-exp or collapsing it to the mean row costs 3.61%–10.53% on the two grounding benchmarks. These results verify the importance of each choice in the ordering rule. (3) *Energy attributes inside LIP*. As shown in Tab. 6, removing any single energy attribute lowers accuracy on both benchmarks. Among the attributes, containment and resonance contribute the most, while contrast and entropy contribute less. (4) *Repair rules inside NCR*. As shown in Tab. 7, stride tokens outperform feature medoids on the current frame, reaching 67.92% on SS-v2 and 37.63% on SS-Pro while the medoids reach 58.65% and 30.11%. The preference reverses on the history frame, where stride tokens cost 1.40% on OmniGUI. Thus, we adopt the stride rule on the current frame and the medoid rule on the history frame.

Mechanism Validation. (1) *Prior transfer across methods*. We graft the same interaction prior onto four existing methods at the tight budget. As shown in Fig. 3 (a), every method improves, by +0.16% to +12.11%. However, the best reaches only 34.36%, still far below TRACE’s 55.19%. Moreover, the prior selected alone scores just 17.06%. The margin therefore comes from converting the layout signal into a nested and coverage-aware order rather than from the detector itself. (2)

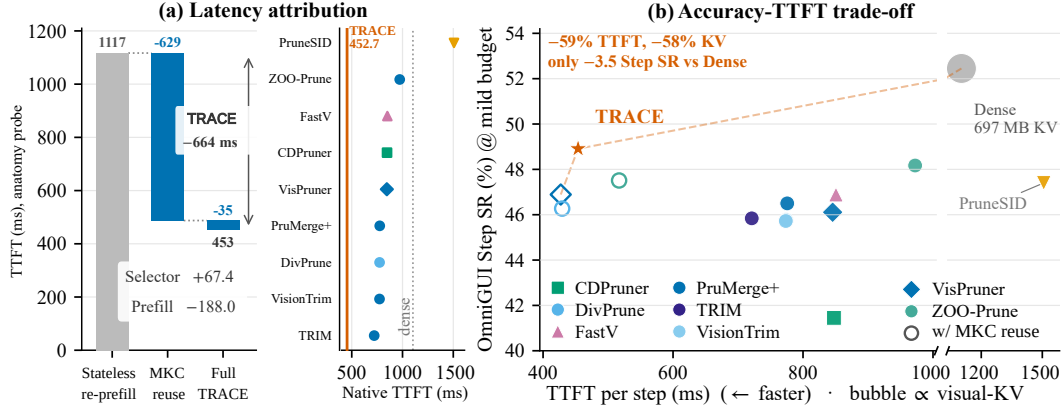


Figure 5: Serving efficiency analysis with **GUI-Owl-1.5-8B** on OmniGUI. (a) Latency attribution of the TTFT budget. (b) Accuracy–TTFT trade-off, where hollow markers denote existing methods ported onto the MKC path and bubble area encodes the visual KV cache.

Dispersion under the diversity term. As shown in Fig. 3 (b), without the NEO diversity term, the order spends its budget on repeated glyphs. By comparison, the full ordering spreads the keep more widely on GUI screenshots. (3) *Target rescue under coverage repair.* As shown in Fig. 3 (c), NCR reduces the uncovered targets on most frames at the same budget. In turn, this repair rescues the target on 44 frames while losing it on only 5. These results verify the mechanism of each module.

Generalization across Backbones. We evaluate TRACE on UI-TARS-1.5-7B for generalization across model families. As shown in Tab. 5, TRACE achieves the best performance at both budgets. Moreover, its margins over DivPrune grow from 0.39%–2.80% at the mild budget to 0.79%–4.92% at the tight budget. The gap is again widest on tight Mind2Web, where TRACE reaches 17.92% and DivPrune reaches 13.00%. These gains fully demonstrate the generalization ability of TRACE.

Efficiency Analysis. (1) *End-to-end serving result.* We analyze the serving efficiency of TRACE with one CUDA-synchronized GPU. As shown in Fig. 5 (a), TRACE reduces TTFT from 1116.8 ms to 452.7 ms and the visual KV cache from 697 MB to 292 MB. The pixel-input detector runs concurrently with the vision encode, so this measurement already charges the full critical-path selection cost. Overall, TRACE is $2.4\times$ faster than dense re-prefill and attains the highest Step SR among existing pruning methods. (2) *Attribution of the gain.* Fig. 5 (a) further attributes this gain, where applying MKC alone lowers TTFT from 1116.8 ms to 487.4 ms at unchanged accuracy. Adding the complete selector then lowers TTFT further, to 452.7 ms at the mild budget and 397.8 ms at the tight budget. Specifically, pruning cuts the remaining LLM prefill from 328.6 to 140.6 and 101.9 ms, which repays the 67.4/47.0 ms selection cost several times over. As shown in Fig. 5 (b), porting DivPrune, VisPruner and ZOO-Prune onto the same MKC path improves their TTFT by 1.8–2.0 $\times$. Even after this acceleration, all three methods still lag behind TRACE. The MKC path therefore supplies the largest saving, whereas the admitted order adds a second saving and the accuracy margin. (3) *Window truncation as an alternative.* Keeping fewer dense frames is the non-selective alternative. However, three recent frames still spend 90% of the dense budget, and one frame still costs $1.66\times$ ours. Thus, window truncation still leaves latency and memory usage high without accuracy gain.

5 Conclusion

In this paper, we study visual token pruning for efficient GUI agents under a reusable lifecycle. We show that cache reuse turns pruning into an irreversible write-time commitment, so a selector must admit a nested order that remains useful before future grounding demands are known and that preserves spatial coverage under tight budgets. To this end, we propose **TRACE**, a training-free framework for efficient GUI agents. Specifically, we leverage Layout-derived Interaction Prior (LIP) to derive a query-independent interaction prior from the interface layout. Then, we employ Nested Evidence Ordering (NEO) to couple that prior with instruction and feature novelty into one nested order. Building upon this, we adopt Native-token Coverage Repair (NCR) to restore spatial coverage with native tokens while preserving nesting. Finally, we propose Monotone KV Contraction (MKC), which contracts retired frames into reusable session state without re-encoding. Extensive experiments across diverse settings demonstrate the effectiveness and efficiency of TRACE.

References

- Amirhossein Abaskohi, Yuhang He, Peter West, Giuseppe Carenini, Pranit Chawla, and Vibhav Vineet. ReVision: Scaling computer-use agents via temporal visual redundancy reduction. *arXiv preprint arXiv:2605.11212*, 2026.
- Saeed Ranjbar Alvar, Gursimran Singh, Mohammad Akbari, and Yong Zhang. Divprune: Diversity-based visual token pruning for large multimodal models. In *CVPR*, 2025.
- Mu Cai, Jianwei Yang, Jianfeng Gao, and Yong Jae Lee. Matryoshka multimodal models. In *ICLR*, 2025.
- Liang Chen, Haozhe Zhao, Tianyu Liu, Shuai Bai, Junyang Lin, Chang Zhou, and Baobao Chang. An image is worth 1/2 tokens after layer 2: Plug-and-play inference acceleration for large vision-language models. In *ECCV*, 2024.
- Kanzhi Cheng, Qiushi Sun, Yougang Chu, Fangzhi Xu, Yantao Li, Jianbing Zhang, and Zhiyong Wu. SeeClick: Harnessing gui grounding for advanced visual gui agents. In *ACL*, 2024.
- Jinhong Deng, Wen Li, Joey Tianyi Zhou, and Yang He. SCOPE: Saliency-coverage oriented token pruning for efficient multimodal LLMs. In *NeurIPS*, volume 38, pp. 161527–161552, 2025.
- Xiang Deng, Yu Gu, Boyuan Zheng, Shijie Chen, Samuel Stevens, Boshi Wang, Huan Sun, and Yu Su. Mind2web: Towards a generalist agent for the web. In *NeurIPS*, 2023.
- Mark Endo, Xiaohan Wang, and Serena Yeung-Levy. Feather the throttle: Revisiting visual token pruning for vision-language model acceleration. In *ICCV*, 2025.
- Zhengyao Fang, Pengyuan Lyu, Chengquan Zhang, Guangming Lu, Jun Yu, and Wenjie Pei. Prune redundancy, preserve essence: Vision token compression in VLMs via synergistic importance-diversity. In *ICLR*, 2026.
- Yuhang Han, Wenzheng Yang, Yujie Chen, Xiangqi Jin, Yaojie Zhang, Siteng Huang, and Linfeng Zhang. Star-kv: Spatio-temporal adaptive re-weighting for kv cache compression in gui vision-language models. *arXiv preprint arXiv:2606.01790*, 2026.
- Felix Henry, Xiaochen Lin, Jiangyou Zhu, Bingqian Zhang, Min Chen, Shiyu Huang, et al. Omnigui: Benchmarking gui agents in omni-modal smartphone environments. *arXiv preprint arXiv:2605.18758*, 2026.
- Wenyi Hong, Weihang Wang, Qingsong Lv, Jiazheng Xu, Wenmeng Yu, Junhui Ji, Yan Wang, Zihan Wang, Yuxiao Dong, Ming Ding, and Jie Tang. Cogagent: A visual language model for gui agents. *CVPR*, 2024.
- Kung-Hsiang Huang, Haoyi Qiu, Yutong Dai, Caiming Xiong, and Chien-Sheng Wu. Gui-kv: Efficient gui agents via kv cache with spatio-temporal awareness. *arXiv preprint arXiv:2510.00536*, 2025.
- Samir Khaki, Junxian Guo, Jiaming Tang, Shang Yang, Yukang Chen, Konstantinos N. Plataniotis, Yao Lu, Song Han, and Zhijian Liu. SparseVILA: Decoupling visual sparsity for efficient VLM inference. In *ICCV*, 2025.
- Youngeun Kim, Youjia Zhang, Huiling Liu, Aecheon Jung, Sunwoo Lee, and Sungeun Hong. ZOO-prune: Training-free token pruning via zeroth-order gradient estimation in vision-language models. In *CVPR*, pp. 39572–39582, 2026.
- Daiqiang Li, Zihao Pan, Zeyu Zhang, Ronghao Chen, Huacan Wang, Honggang Chen, and Haiyun Jiang. Rethinking token pruning for historical screenshots in gui visual agents: Semantic, spatial, and temporal perspectives. *arXiv preprint arXiv:2603.26041*, 2026a.
- Kaixin Li, Ziyang Meng, Hongzhan Lin, Ziyang Luo, Yuchen Tian, Jing Ma, Zhiyong Huang, and Tat-Seng Chua. Screenspot-pro: Gui grounding for professional high-resolution computer use. In *Workshop on Reasoning and Planning for Large Language Models*, 2025.

- Wei Li, William Bishop, Alice Li, Christopher Rawles, Folawiyo Campbell-Ajala, Divya Tyamagundlu, and Oriana Riva. On the effects of data scale on ui control agents. *NeurIPS*, 2024.
- Yuankai Li, Tinghui Zhu, Ha Min Son, Zhe Zhao, Xin Liu, and Muhao Chen. Aquau: Visual token reduction for gui agents with adaptive quadrees. *arXiv preprint arXiv:2605.19260*, 2026b.
- Zikang Liu, Junyi Li, Wayne Xin Zhao, Dawei Gao, Yaliang Li, and Ji-Rong Wen. PAL-UI: Planning with active look-back for vision-based GUI agents. *arXiv preprint arXiv:2510.00413*, 2025.
- Yadong Lu, Jianwei Yang, Yelong Shen, and Ahmed Awadallah. Omniparser for pure vision based gui agent. *arXiv preprint arXiv:2408.00203*, 2024.
- Yujia Qin, Yining Ye, Junjie Fang, Haoming Wang, Shihao Liang, Shizuo Tian, Junda Zhang, Jiahao Li, Yunxin Li, Shijue Huang, Wanjuan Zhong, Kuanye Li, Jiale Yang, Yu Miao, Woyu Lin, Longxiang Liu, Xu Jiang, Qianli Ma, Jingyu Li, Xiaojun Xiao, Kai Cai, Chuang Li, Yaowei Zheng, Chaolin Jin, Chen Li, Xiao Zhou, Minchao Wang, Haoli Chen, Zhaojian Li, Haihua Yang, Haifeng Liu, Feng Lin, Tao Peng, Xin Liu, and Guang Shi. Ui-tars: Pioneering automated gui interaction with native agents. *arXiv preprint arXiv:2501.12326*, 2025.
- Yuzhang Shang, Mu Cai, Bingxin Xu, Yong Jae Lee, and Yan Yan. Llava-prumerge: Adaptive token reduction for efficient large multimodal models. In *ICCV*, 2025.
- Dingjie Song, Wenjun Wang, Shunian Chen, Xidong Wang, Michael Guan, and Benyou Wang. Less is more: A simple yet effective token reduction method for efficient multi-modal llms. In *COLING*, 2025.
- Zhichao Sun, Yidong Ma, Gang Liu, Yibo Chen, Xu Tang, Yao Hu, and Yongchao Xu. IVC-prune: Revealing the implicit visual coordinates in LVLMS for vision token pruning. In *ICLR*, 2026.
- Shulin Tian, Ziniu Zhang, Liang-Yu Chen, and Ziwei Liu. Mmina: Benchmarking multihop multimodal internet agents. In *ACL Findings*, pp. 13682–13697, 2025.
- Xuehui Wang, Zhenyu Wu, JingJing Xie, Zichen Ding, Bowen Yang, Zehao Li, Zhaoyang Liu, Qingyun Li, Xuan Dong, Zhe Chen, Weiyun Wang, Xiangyu Zhao, Jixuan Chen, Haodong Duan, Tianbao Xie, Chenyu Yang, Shiqian Su, Yue Yu, Yanting Zhang, Xiangyu Yue, Weijie Su, Xizhou Zhu, Wei Shen, Jifeng Dai, and Wenhai Wang. Mmbench-gui: Hierarchical multi-platform evaluation framework for gui agents. *arXiv preprint arXiv:2507.19478*, 2025.
- Zhiyong Wu, Zhenyu Wu, Fangzhi Xu, Yian Wang, Qiushi Sun, Chengyou Jia, Kanzhi Cheng, Zichen Ding, Liheng Chen, Paul Pu Liang, and Yu Qiao. Os-atlas: A foundation action model for generalist gui agents. *arXiv preprint arXiv:2410.23218*, 2024.
- Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Toh J Hua, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, et al. Osworld: Benchmarking multimodal agents for open-ended tasks in real computer environments. *NeurIPS*, 37:52040–52094, 2024.
- Long Xing, Qidong Huang, Xiaoyi Dong, Jiajie Lu, Pan Zhang, Yuhang Zang, Yuhang Cao, Conghui He, Jiaqi Wang, Feng Wu, and Dahua Lin. Pyramiddrop: Accelerating your large vision-language models via pyramid visual redundancy reduction. In *CVPR*, 2025.
- Haiyang Xu, Xi Zhang, Haowei Liu, Junyang Wang, Zhaoqing Zhu, Shengjie Zhou, Xuhao Hu, Feiyu Gao, Junjie Cao, Zihua Wang, Zhiyuan Chen, Jitong Liao, Qi Zheng, Jiahui Zeng, Ze Xu, Shuai Bai, Junyang Lin, Jingren Zhou, and Ming Yan. Mobile-agent-v3.5: Multi-platform fundamental gui agents. *arXiv preprint arXiv:2602.16855*, 2026a.
- Tong Xu, Hailong Shi, and Xingyu Gao. SCoRe: Saliency-coverage reduction for vision token pruning in vision-language models. In *CVPR*, 2026b.
- Zhou Xu, Bowen Zhou, Qi Wang, Shuwen Feng, and Jingyu Xiao. Spatio-temporal token pruning for efficient high-resolution gui agents. *arXiv preprint arXiv:2602.23235*, 2026c.
- Cheng Yang, Yang Sui, Jinqi Xiao, Lingyi Huang, Yu Gong, Chendi Li, Jinghua Yan, Yu Bai, Ponuswamy Sadayappan, Xia Hu, and Bo Yuan. TopV: Compatible token pruning with inference time optimization for fast and low-memory multimodal vision language model. In *CVPR*, 2025a.

- Senqiao Yang, Yukang Chen, Zhuotao Tian, Chengyao Wang, Jingyao Li, Bei Yu, and Jiaya Jia. Visionzip: Longer is better but not necessary in vision language models. In *CVPR*, 2025b.
- Hanxun Yu, Wentong Li, Xuan Qu, Song Wang, Junbo Chen, and Jianke Zhu. Visiontrim: Unified vision token compression for training-free MLLM acceleration. In *ICLR*, 2026.
- Qizhe Zhang, Aosong Cheng, Ming Lu, Zhiyong Zhuo, Minqi Wang, Jiajun Cao, Shaobo Guo, Qi She, and Shanghang Zhang. Beyond text-visual attention: Exploiting visual cues for effective token pruning in vlms. In *ICCV*, 2025a.
- Qizhe Zhang, Mengzhen Liu, Lichen Li, Ming Lu, Yuan Zhang, Junwen Pan, Qi She, and Shanghang Zhang. Beyond attention or similarity: Maximizing conditional diversity for token pruning in mllms. In *NeurIPS*, 2025b.
- Lianmin Zheng, Liangsheng Yin, Zhiqiang Xie, Chuyue Sun, Jeff Huang, Cody Hao Yu, Shiyi Cao, Christos Kozyrakis, Ion Stoica, Joseph E. Gonzalez, et al. SGLang: Efficient execution of structured language model programs. In *NeurIPS*, 2024.
- Bowen Zhou, Zhou Xu, Wanli Li, Jingyu Xiao, and Haoqian Wang. Efficient long-horizon gui agents via training-free kv cache compression. *arXiv preprint arXiv:2603.00188*, 2026.

APPENDIX

This appendix presents implementation details, the evaluation protocol, and additional experimental evidence that complements the main paper. Section A specifies the lifecycle contract, the method implementation, the comparison protocol, and the configuration choices. Section B presents additional experiments, covering lifecycle behavior, benchmark breakdowns, ablations, and serving efficiency. Section C examines transfer to other backbones and states the scope and limitations of the evidence. Together, these analyses provide a comprehensive understanding of our proposed TRACE.

A Method, Protocol, and Configuration

A.1 Lifecycle Contract and Method Space

Tab. 8 compares the nine existing methods of §4 against the three constraints of Eq. 1. We score each method from its official selection rule. Since the constraints describe our deletion-only serving path, a mark records compatibility with this path rather than a universal judgment on the method. Under condition (ii), ✓ denotes a rank or greedy-prefix rule that nests by construction, △ denotes a quota, merge, or de-duplication rule that nests only after a specified modification, and ✗ denotes per-step re-scoring, which cannot nest. Condition (i) requires that the keep be decided from information available before the first LLM prefill. The last column lists the tensor that the official rule must observe to produce that keep. When this tensor is the LLM self-attention of the live prompt, as in FastV, it is available only during prefill, so condition (i) fails. A superscript asterisk marks methods that consult the episode instruction, which precedes prefill and is therefore admitted by condition (i). For detailed compliance, FastV fails conditions (i) and (ii), because its score is the LLM self-attention of the live prompt. Merge-family methods (PruMerge+, TRIM, and VisionTrim) fail condition (iii), because synthetic tokens cannot later be dropped as cache rows on this path. VisPruner and PruneSID receive △ under condition (ii), because quota or de-duplication nests only after a specified modification. In contrast, DivPrune, CDPruener, ZOO-Prune, and TRACE satisfy all three conditions under their official rules, which enables a fair comparison on the same lifecycle.

Table 8: Existing methods evaluated against rules of lifecycle-aware visual pruning.

Method	(i) pre-prefill	(ii) nested	(iii) index-level	Query-dependent tensor (layer)
FastV	✗	✗	✓	LLM self-attention of the live prompt (layer 2)
PruMerge+	✓	△	✗	none (synthetic merged embeddings)
TRIM	✓	△	✗	none* (discarded set fused into one token)
VisionTrim	✓	△	✗	none* (synthetic TGVC merge rounds)
VisPruner	✓	△	✓	none (ViT final-block attention)
PruneSID	✓	△	✓	none (encoder-side PCA grouping)
DivPrune	✓	✓	✓	none (feature geometry only)
CDPruner	✓	✓	✓	none* (instruction-conditioned DPP)
ZOO-Prune	✓	✓	✓	none (projector-input sensitivity)
TRACE (ours)	✓	✓	✓	none* (prior + repair anchored)

Feature Matrix of Prior Families. Tab. 9 compares representative prior families along the six axes of our setting. The columns record six properties. They cover multi-step reuse of visual state, GUI-screen design, decisions made before language-model processing, native token rows at their original positions, a nested order that serves two budgets, and no re-encoding of historical frames. TopV’s no-re-encoding mark ^(a) holds within a single generation rather than across frames. The multi-step mark of VisionZip and PruMerge ^(b) denotes text-agnostic compression for multi-turn use. SparseVILA’s pre-admission mark ^(c) is conservative prefill pruning followed by decode-time retrieval. Matryoshka’s nested-budget mark ^(d) encodes nested granularity in the representation rather than ordering native rows at admission. Existing visual-token pruners cover pre-admission or native rows, but not GUI multi-step reuse. In contrast, GUI input-side methods cover multi-step screens and a decision before the language model, yet they do not keep native rows or a nested order. GUI cache-side methods keep native rows without re-encoding, but they re-score at every step, so they miss pre-admission and nested budgets. Different from the prior families, TRACE covers all six axes with our proposed lifecycle contract, providing a unified framework for GUI agents.

Table 9: Comparison of representative prior families over the six axes of our setting.

Method family	Multi-step	GUI	Pre-admission	Native rows	Nested budgets	No re-encoding
FastV / PyramidDrop / IVC-Prune (Chen et al., 2024; Xing et al., 2025; Sun et al., 2026)	—	—	—	✓	—	—
TopV (Yang et al., 2025a)	—	—	✓	✓	—	✓ ^a
DivPrune / CDPruner / VisPruner (Alvar et al., 2025; Zhang et al., 2025b;a)	—	—	✓	✓	—	—
VisionZip / PruMerge (Yang et al., 2025b; Shang et al., 2025)	✓ ^b	—	✓	—	—	—
SparseVILA (Khaki et al., 2025)	✓	—	✓ ^c	✓	—	✓
SCOPE / SCoRe / FEATHER (Deng et al., 2025; Xu et al., 2026b; Endo et al., 2025)	—	—	✓	✓	—	—
Matryoshka (M ³) (Cai et al., 2025)	✓	—	✓	—	✓ ^d	—
GUIPruner / AquaUI / ReVision (Xu et al., 2026; Li et al., 2026b; Abaskohi et al., 2026)	✓	✓	✓	—	—	—
GUI-KV / ST-Lite / STaR-KV (Huang et al., 2025; Zhou et al., 2026; Han et al., 2026)	✓	✓	—	✓	—	✓
HistPrune-GUI (Li et al., 2026a)	✓	✓	—	✓	—	—
PAL-UI (Liu et al., 2025)	✓	✓	—	—	—	—
TRACE (ours)	✓	✓	✓	✓	✓	✓

A.2 Method Specification

This subsection formalizes the complete decision path during inference, from detector-derived interaction priors and evidence ordering to native-token repair and monotone cache contraction. We present these components in pipeline order for easy understanding. The details are as follows.

Layout-derived Interaction Prior. A generic detector that was not trained on GUI screens readily misses dense operable widgets. Thus, we use the `icon_detect` branch of OmniParser-v2 (Lu et al., 2024) which is fine-tuned on interactable web and desktop elements. We load this branch alone to get axis-aligned boxes. Specifically, we detect widgets at a confidence of 0.05 with non-maximum suppression at an intersection-over-union of 0.1. Besides, we resize the longer image edge to 768 pixels before snapping to the network stride. The detector reads screenshot pixels rather than encoder features, so it can run at admission. After admission, retirement operates solely on the shrinking order, so historical frames require neither bounding boxes nor rerunning the detector.

① *Energy Definitions.* For each detection b , we compute entropy H_b , contrast C_b , containment G_b and resonance R_b . Then we generate the interaction energy with the following equation:

$$E_b = H_b + C_b + G_b + R_b.$$

All four attributes lie in $[0, 1]$ under our definition. Specifically, H_b is the base-2 entropy of a 256-bin Sobel-magnitude histogram on a 32×32 grayscale crop, divided by eight and clipped to the unit interval. C_b is the ascending rank of the euclidean difference between the mean CIELAB values on the three-pixel inner and outer boundary rings. $G_b = 1/(1 + n_b)$, where n_b counts strictly smaller boxes contained by b . R_b is the min to max normalized resonance score. It is the larger of the row and column peer counts within half the median box height or width. Each attribute is computed from the box alone, so the prior is query-independent and concentrates on operable regions.

② *Energy Attributes.* Tab. 10 shows that removing any single attribute from E_b lowers accuracy on both grounding benchmarks. Containment G_b is the costliest removal (-2.91% and -1.45%), and resonance R_b follows it on ScreenSpot-v2 (-2.28%). Contrast and entropy contribute less but are still significant. These results fully demonstrate that the prior captures operable regions.

 Table 10: Energy attributes inside LIP. Δ is accuracy minus the full energy.

Energy	Attribute	ScreenSpot-v2 ($r=5\%$)		ScreenSpot-Pro ($r=10\%$)	
		Acc	Δ	Acc	Δ
$H+C+G+R$	retained	55.19	—	37.63	—
$-G_b$	containment	52.28	-2.91	36.18	-1.45
$-R_b$	resonance	52.91	-2.28	36.62	-1.01
$-C_b$	boundary contrast	53.30	-1.89	36.43	-1.20
$-H_b$	texture entropy	55.11	-0.08	37.07	-0.57

Nested Evidence Ordering. With the interaction prior defined, Nested Evidence Ordering (NEO) determines how visual evidence is admitted and how the resulting order can be reused under different budgets. It combines within-frame instruction relevance with prior-weighted novelty and residual coverage to produce a single nested sequence of native visual tokens. In this subsection, we clarify three points before presenting the final ordering. They concern degenerate cosine scores, the role of m_j in the residual, and the exact scoring and pooling form. These points correspond to the following three implementation details and lead directly to the admission procedure summarized in Alg. 1.

① *Degenerate Relevance.* The z-score in Eq. 2 is taken over the N visual tokens of the current frame, so a_j is a within-frame ranking rather than an absolute cosine. If that variance is zero, a_j falls back to the uniform distribution. Then $\log a_j$ becomes a constant in Eq. 3. Under this degenerate case, the order reduces to prior-weighted residual selection rather than failing, ensuring robust token pruning.

Algorithm 1 Admission-time Nested Selection for One Frame

-
- 1: **Input:** tokens $\mathbf{E} \in \mathbb{R}^{N \times D}$, instruction matrix $\mathbf{U}$, detections, budgets $k_h \leq k_c$, doses ρ_{cur} and ρ_{hist}
 - 2: **Output:** admitted sets $S_t^{\text{hist}} \subseteq S_t^{\text{cur}}$
 - 3: Rasterize detections into $\mathbf{p}$, compute α_t^* , and set $m_j \leftarrow 1 + \alpha_t^* N p_j$ (Eq. 9)
 - 4: Normalize features to $\mathbf{z}_j$, compute a_j , and set $\psi_j \leftarrow \sqrt{m_j} \mathbf{z}_j$ (Eq. 2)
 - 5: Apply greedy matching pursuit to obtain a length- k_c sequence π (Eq. 3)
 - 6: Set $g_c \leftarrow \lceil \rho_{\text{cur}} k_c \rceil$ and replace the g_c -tail of π with stride representatives
 - 7: Set $g_h \leftarrow \lceil \rho_{\text{hist}} k_h \rceil$ and protect $\pi[1:k_h - g_h]$
 - 8: Partition the remaining full-frame complement and select medoids $\{\mu_b\}_{b=1}^{g_h}$ (Eq. 6)
 - 9: Remove medoids from $\pi[k_h - g_h:]$ and insert them after the protected prefix
 - 10: Evict the lowest-ranked eligible tail tokens needed to keep length k_c
 - 11: **return** $S_t^{\text{cur}} = \text{set}(\pi[1:k_c])$ and $S_t^{\text{hist}} = \text{set}(\pi[1:k_h])$
-

② *Equivalent Residual.* The mass m_j enters Eq. 3 through $\psi_j = \sqrt{m_j} \mathbf{z}_j$. Because $m_j = 1 + \alpha N p_j \geq 1$, the selected features $\{\psi_i\}_{i \in S}$ and $\{\mathbf{z}_i\}_{i \in S}$ span the same subspace. The projector Π_S is therefore the euclidean projector onto $\text{span}(\mathbf{z}_S)$. We compute the residual $d_j^2(S)$ as follows.

$$d_j^2(S) = m_j \|\mathbf{z}_j - \Pi_{\text{span}(\mathbf{z}_S)} \mathbf{z}_j\|_2^2. \quad (5)$$

Thus, m_j scales only the candidate’s novelty, and it does not reweight a direction already in S .

Ordering Form. Eq. 2 and Eq. 3 determine several design choices that might otherwise appear arbitrary. To be specific, the coefficient on $\log a_j$ is fixed to one. The query rows are combined by max-pooling. The query matrix $\mathbf{U}$ includes the instruction-token rows. Tab. 11 reports the ablation results at $r=10\%$. Doubling the coefficient of $\log a_j$ is the costliest substitution on ScreenSpot-v2 (-10.53%). In contrast, replacing max-pooling with log-mean-exp is the costliest on ScreenSpot-Pro (-6.45%). Collapsing $\mathbf{U}$ to its mean row costs 8.81% and 5.63% on the two suites. These results show that the adopted scoring form is not interchangeable. Alg. 1 then commits the resulting prefixes before prefill. The next stage repairs spatial coverage while preserving the nested sets.

Table 11: Scoring-form ablation inside NEO at $r=10\%$. Δ is accuracy minus the adopted form.

Substitution	Replaces	ScreenSpot-v2		ScreenSpot-Pro	
		Acc	Δ	Acc	Δ
adopted rule	—	73.90	—	37.63	—
$2 \log a_j + \log d_j^2$	unit likelihood coefficient	63.36	-10.53	34.03	-3.61
log-mean-exp pooling	max over query rows	65.41	-8.49	31.18	-6.45
mean row only	instruction-token rows in $\mathbf{U}$	65.09	-8.81	32.01	-5.63

Native-token Coverage Repair. Condition (iii) of Eq. 1 keeps every repaired token as an original cache row. Condition (ii) keeps the history set nested in the current set. The current-frame stride on U_c is specified in §3.4. We next turn to the history pass, explaining the detailed partition process.

① *History Representative.* When a frame is retired, we keep only k_h native rows instead of k_c , where $k_h < k_c$. Each retained token should therefore represent a local region that may be relevant to future queries. A centroid of that neighborhood would be synthetic and would violate condition (iii). Thus, we choose the native token that minimizes within-region squared feature distance as the medoid. Specifically, NCR-H protects a prefix of length $k_h - g_h$ and partitions the raster-ordered complement into g_h contiguous regions. From each region R_b it keeps the medoid as defined below.

$$\mu_b = \arg \min_{j \in R_b} \sum_{l \in R_b} \|\mathbf{h}_j - \mathbf{h}_l\|_2^2 \quad (6)$$

where $\mathbf{h}_j$ is a renormalized stride slice of at most 256 channels of $\mathbf{z}_j$. Inserting these medoids after the protected prefix yields the nested history subset with the following equation:

$$S_t^{\text{hist}} = \{\pi_1, \dots, \pi_{k_h - g_h}\} \cup \{\mu_1, \dots, \mu_{g_h}\} \subseteq S_t^{\text{cur}}, \quad (7)$$

so every element of S_t^{hist} already corresponds to an existing row in S_t^{cur} . The subset relation makes retirement a deletion-only operation that removes $S_t^{\text{cur}} \setminus S_t^{\text{hist}}$. This preserves the exact encoder features and avoids synthetic features or new KV rows that need to be reconstructed from scratch.

Algorithm 2 History Medoid Partition (NCR-H)

-
- 1: **Input:** normalized frame features $\{\mathbf{z}_j\}_{j=1}^N$, protected prefix $P_h = \pi[1:k_h - g_h]$, region count g_h
 - 2: **Output:** real-token medoids $\{\mu_b\}_{b=1}^{g_h}$
 - 3: Form the raster-ordered complement $L = [N] \setminus P_h$
 - 4: For each $j \in L$, take a deterministic stride slice of at most 256 channels of $\mathbf{z}_j$ and renormalize it to $\mathbf{h}_j$
 - 5: Precompute prefix sums of $\mathbf{h}_j$ and $\|\mathbf{h}_j\|^2$ along L
 - 6: The dynamic program uses contiguous boundaries with region sizes in $\{\lfloor L/g_h \rfloor, \lceil L/g_h \rceil\}$. It minimizes the maximum within-region sum of squared distances to the region mean
 - 7: **return** the medoid μ_b of each region B_b under Eq. 6
-

② *History Partition.* The regions are not an arbitrary split of the complement. Restricting region sizes to $\{\lfloor L/g_h \rfloor, \lceil L/g_h \rceil\}$ over an L -token complement turns boundary placement into choosing which $r = L \bmod g_h$ regions receive the extra token. A dynamic program places those boundaries to minimize the maximum within-region sum of squared distances to the region mean. It has $\mathcal{O}(g_h r)$ states and transitions, each evaluated in $\mathcal{O}(1)$ from prefix sums of $\mathbf{h}_j$ and $\|\mathbf{h}_j\|^2$. Preparing the sums and extracting medoids costs $\mathcal{O}(L\tilde{d})$ with $\tilde{d} \leq 256$. Alg. 2 specifies this partition in detail.

③ *Repair Rules.* The current-frame repair could use the same medoid rule, and the history repair could use stride instead. Tab. 7 in the main text compares the representative rules at each pass. On the current frame, stride reaches 67.92% on ScreenSpot-v2 and 37.63% on ScreenSpot-Pro, while medoids reach 58.65% and 30.11%. In contrast, the preference reverses on the history frame. Medoids reach 24.04% on OmniGUI against 23.20% for stride, and Mind2Web differs by 0.02%. The current budget is large enough that the binding risk is a residual spatial gap, and equally spaced stride positions close such gaps at the lowest cost per token. The history budget is far tighter, so each surviving representative must summarize an entire region. In that case, the native token closest to its region in feature space is a better single prototype than a position fixed by geometry alone. Thus, the larger current budget is better spent on spatial stride, whereas the tighter history budget is better spent on native region prototypes. These results show that the two repairs should use different representative rules. Alg. 1 then commits both repaired prefixes for effective spatial coverage.

Monotone KV Contraction. §3.5 already specifies how a retiring frame is cropped to the first k_h positions of π and how those native rows are replayed with the incoming step. We next explain how contraction preserves the original positions of native tokens and reduces the serving cost.

① *Cache Contraction.* Each frame occupies one contiguous visual span in the cache, and the admitted order fixes S_t^{hist} as row indices within that span. Specifically, text and action rows are untouched. Positional indices are never re-derived from the compacted sequence. Before the first LLM prefill, MKC assigns multimodal RoPE indices on the unpruned sequence and records the original-position of every admitted row. Since contraction only removes rows, the remaining rows keep their original positions. Besides, rotary offsets for subsequent text are recomputed from the surviving position.

② *Serving Cost.* The serving cost has three parts, namely visual encoding, LLM prefill, and persistent visual-cache storage. After initialization, each transition encodes one new screenshot and retires the previous current frame. Retirement only removes rows from the stored order of that frame. The merged LLM forward therefore receives the non-visual prefix, followed by the k_h retained historical tokens and the k_c tokens admitted from the current screenshot. The resulting lengths are as follows:

$$L_t^{\text{enc}} = k_c, \quad L_t^{\text{KV}} = T_t + k_h + k_c, \quad |\text{KV}_{\text{visual}}| = \mathcal{O}(k_c + Hk_h). \quad (8)$$

Here, T_t is the prefix length at step t , and H is the number of retained historical frames. The first equality counts the visual tokens supplied by the new screenshot. The second equality counts the tokens processed by the merged LLM forward. The last equality counts only visual KV rows and excludes the non-visual history. The replayed k_h rows reuse features encoded when their frame first arrived. They add only the retained k_h visual tokens to the LLM prefill. Because prefill processes these tokens in parallel rather than autoregressively, their additional latency is small, while reusing the original encoded features preserves feature fidelity. This replaces the repeated $\mathcal{O}(HN)$ visual encoding of dense historical frames. Each retained historical frame occupies k_h visual rows instead of N , while the visual cache grows as $\mathcal{O}(k_c + Hk_h)$. Under our multi-step evaluation protocol on OmniGUI, one contraction costs 6.4 ms per transition, compared with 90.8 ms for encoding one screenshot. Thus, restoring a retired frame is much cheaper than encoding it again. Meanwhile, the replayed set is the history prefix returned by Alg. 1, which satisfies condition (ii) of Eq. 1. However,

the above feature reuse guarantees nesting but not downstream context consistency after contraction.

③ *Context-consistent replay*. The central issue is the interaction between visual-token deletion and the downstream text and action states already stored in the cache. In a deletion-only update, these downstream rows may have been computed while the retiring frame still contained visual rows that will later be removed. Keeping those rows after deletion creates a mixed context. New queries then attend to visual rows from the shortened context while also attending to text or action rows computed from the original context. Such stale cross-modal states can make the evidence inconsistent and may contribute to confusion or hallucination in later steps. Our contraction removes this mismatch by truncating the cache at the retiring frame boundary before appending the next step. It keeps only the selected k_h visual rows, so the merged forward adds only a small number of visual tokens. These rows are processed in parallel with the downstream text and action rows during prefill. The extra computation and latency therefore remain small, while the downstream states are aligned with the contracted context. Every downstream state is therefore computed against the same visual context that will remain available during subsequent decoding. At the same time, the retained visual features are reused exactly, and no synthetic visual representation is introduced. The resulting design provides *context-consistent replay* and *exact feature reuse*. It does not claim exact equivalence to a dense recomputation after visual rows are removed, because the dense computation includes those removed rows in the context. At the 100% budget, no visual rows are removed. With this condition, the byte-exact no-op test in Appendix A.3 verifies equivalence with the dense computation. At pruned budgets, we evaluate the lifecycle and report its accuracy consequences in Appendix B.

A.3 Evaluation Protocol and Baseline Reproduction

§4.1 already names the backbones, the six evaluated benchmarks, and the matched visual-token budgets. This subsection specifies the scoring rules and method adaptations that are reproducible.

Baseline Setting. We evaluate nine leading training-free methods against random and uniform pruning. These methods span diversity, relevance, saliency, merging, posterior attention, sensitivity, and semantic grouping. Every method follows its official selection settings and target budget.

Scoring Protocol. §4.1 counts a step as correct only when both the action type and its target or argument are correct. We adopt the reference protocol’s click threshold for every reported result. For click and long-press actions, the predicted point must lie within a normalized euclidean distance of 0.04 from the gold coordinate after both points are normalized by the screen dimensions. Text and scroll arguments follow the reference protocol’s string and direction rules.

Implementation Fidelity. Each existing method is re-implemented from its official repository. VisPruner, PruMerge+, and the global term of VisionTrim use true final-block ViT attention. FastV is implemented inline in the LLM according to its official protocol. Merge methods use the declared real-token representative rule, and every method is held to an exact keep budget. Five checks establish mechanical correctness. (1) *No-op test*. A byte-exact no-op test verifies that every pruning run at a 100% budget reproduces the unpruned responses across probe documents. (2) *Unit tests*. Unit tests cover selector invariants, index and RoPE consistency, and per-method oracle validation against the official selection blocks. (3) *Exact-budget check*. An exact-budget check verifies $|kept - \lceil rN \rceil| \leq 1$ on every probe document. (4) *Position consistency check*. A position consistency check confirms that all methods preserve the same original-position convention. (5) *Multi-step ledger check*. A multi-step ledger check reconstructs each realized (c, h) from its per-step kept-token ledger and compares it with the nominal budget. Every experiment in the main table passes the above checks.

Excluded Methods. PyramidDrop (Xing et al., 2025) was evaluated but excluded from the comparison tables. Its pyramid schedule leaves shallow layers unpruned, so its effective pruning is approximately zero at our nominal budgets. The latency of PyramidDrop is nearly identical to the unpruned model. This is not a comparable setting. IVC-Prune (Sun et al., 2026) is excluded for the same reason. It prunes at layer 22 of the LLM, so the vision encoder, all shallow layers, and most prefill FLOPs and KV rows still operate at dense length. Because these nominal ratios are not comparable with other methods’ budgets, we exclude both methods for fair comparisons.

Baseline Sensitivity. Official hyperparameters of the compared methods may not be optimal for GUI screens. Thus, we separately test one hyperparameter for four representative baselines on ScreenSpot-v2 at $r = 10\%$. Specifically, VisPruner improves from 46.07% to 58.81% as its importance ratio increases over $\{0.25, 0.50(\text{Official}), 0.75, 0.90\}$. The official equal importance and diversity split is therefore not optimal on this GUI suite. This supports the main-text observation that generic diversity is weaker than attention importance on these screens. VisionTrim also improves as its DVTS share increases from 0.5 to the official 0.7 and then to 0.9, reaching

44.26% $\rightarrow$ 58.65% $\rightarrow$ 61.24%. PruneSID gives 61.01% $\rightarrow$ 58.96% $\rightarrow$ 58.49% as its NMS threshold scale changes over $\{0.7, 1.0(\text{Official}), 1.3\}$. ZOO-Prune remains within a narrow range of 57.47% $\rightarrow$ 56.29% $\rightarrow$ 55.90% as its direction count changes over $\{16, 64(\text{Official}), 256\}$. The lowest direction count gives the best score among these settings, while larger counts mildly reduce accuracy. Among the tuned baselines, VisionTrim at a DVTS share of 0.9 is strongest, reaching 61.24%. Despite this improvement, VisPruner remains 12.66% below TRACE at 73.90%. These results further demonstrate the robustness of our proposed TRACE under diverse comparisons.

A.4 Configuration Validation

This section first defines the configuration variables and then evaluates their effect across tasks and budgets. We begin with the prior rule and selected scalar grids. The following subsections test whether these choices remain useful when the task or budget changes. *Prior strength and support calibration.* For each benchmark and budget, we select the prior cap $\bar{\alpha}$ from the public grid $\{1, 2, 4, 6\}$. An adopted run either uses this cap or applies the effective-support rule in Eq. 9. Tab. 13 reports the results across this grid. The setting with $\alpha = 0$ appears in the row without the prior in Tab. 3. For a normalized prior $\mathbf{p}$ over the N frame tokens, define $m_j(\alpha) = 1 + \alpha N p_j$ and $N_{\text{eff}}(\alpha) = (\sum_j m_j(\alpha))^2 / \sum_j m_j^2(\alpha)$. The quantity N_{eff} acts as an effective token count. If r tokens have equal mass c and all other tokens have zero mass, then the numerator is $(rc)^2$ and the denominator is rc^2 . The ratio is therefore r . The squared sum in the numerator makes the quantity independent of the overall mass scale. The squared masses in the denominator increase when the mass concentrates on a few tokens. Uniform mass over N tokens gives $N_{\text{eff}} = N$. Concentration on one token gives $N_{\text{eff}} \approx 1$. The unit term in $m_j(\alpha)$ keeps every token eligible. The term $\alpha N p_j$ increases the mass of tokens in regions indicated by the interaction prior. This bias favors operable regions. An excessive value of α can concentrate the order too narrowly and remove context that later actions may require. For a given cap, α_t^* is the largest strength defined as follows:

$$\alpha_t^* = \max \left\{ 0 \leq \alpha \leq \bar{\alpha} \mid \frac{(\sum_j m_j(\alpha))^2}{\sum_j m_j^2(\alpha)} \geq \zeta k \right\}, \quad \zeta = 1. \quad (9)$$

The applied strength is $\min(\bar{\alpha}, \alpha^*)$. Frames without detector support use no prior. *Selected scalars.* With the prior rule fixed, each result of TRACE in the main tables uses one configuration for its dataset and budget. The declared grid selects the prior cap, the calibration mode, and the current dose. Multi-step runs also select one history dose. The current frame pass uses ρ_{cur} for both single-step and multi-step tasks. The history pass uses the independent dose ρ_{hist} only when $k_h < k_c$. The doses are selected from fixed public grids $\rho_{\text{hist}} \in \{0.05, 0.10, 0.20\}$ and $\rho_{\text{cur}} \in \{0, 0.2, 0.3, 0.5\}$.

A.4.1 Fixed-Configuration Check

We first evaluate whether each benchmark and budget needs its own configuration. Specifically, we evaluate one global configuration with $\alpha = 2$ and the default applicable dose at 16 benchmark-budget combinations across all six benchmarks. The six single-step results at the mild budget in Tab. 12 use the corresponding $\alpha = 2$ sensitivity estimates. The gap between the two configurations stays within 1.9%. The selected configuration improves the median result by +1.0% and improves 14 of the 16 combinations by less than +2%. The fixed configuration is ahead by 0.3% on MMBench at $r = 5\%$. The small aggregate gap shows that one fixed setting is often sufficient, while the larger differences identify where benchmark-specific selection matters. The Mind2Web Cross-Website split gains 3.0% at $c = 25\%$, where the strongest prior is most useful. AndroidControl gains 4.1% at the tight budget, where the heavier current dose supplies the main improvement. The fixed setting omits the heavy current dose required by this sparse-UI domain. Its α response is flat in Tab. 13. The result is therefore dose-specific. Besides this dose-specific result, we rely on Tab. 12 for the broader comparison with existing methods. Against the strongest existing methods, the fixed setting remains close on five of the six benchmarks. Separate selection improves the result on most benchmarks, while AndroidControl remains sensitive to the current dose. The comparison therefore supports per-benchmark configuration without implying that one prior strength is best for every task.

Table 12: One global configuration compared with the per-benchmark-budget configuration. Fixed uses $\alpha=2$ and the default current dose. Selected uses the adopted cap, calibration mode and doses.

Benchmark (metric)	Budget	Fixed	Selected	Δ
SINGLE-STEP (GROUNDING / CHOICE ACCURACY)				
ScreenSpot-v2 (Acc)	$r=50\%$	92.85	93.08	+0.23
ScreenSpot-v2 (Acc)	$r=10\%$	73.66	73.90	+0.24
ScreenSpot-Pro (Acc)	$r=10\%$	35.80	37.63	+1.83
MMBench-GUI L2 (Acc)	$r=25\%$	71.09	72.45	+1.36
MMBench-GUI L2 (Acc)	$r=10\%$	48.86	50.47	+1.61
MMBench-GUI L2 (Acc)	$r=5\%$	31.19	30.88	-0.31
MULTI-STEP (STEP SR)				
OmniGUI (Step SR)	$c=50\%$	48.25	48.91	+0.66
OmniGUI (Step SR)	$c=25\%$	42.65	43.08	+0.43
Mind2Web Cross-Task (Step SR)	$c=50\%$	45.72	46.86	+1.14
Mind2Web Cross-Task (Step SR)	$c=25\%$	32.22	33.96	+1.74
Mind2Web Cross-Domain (Step SR)	$c=50\%$	44.28	45.22	+0.94
Mind2Web Cross-Domain (Step SR)	$c=25\%$	32.86	34.59	+1.73
Mind2Web Cross-Website (Step SR)	$c=50\%$	43.93	44.75	+0.82
Mind2Web Cross-Website (Step SR)	$c=25\%$	30.01	32.99	+2.98
AndroidControl (Step SR)	$c=50\%$	59.60	60.20	+0.60
AndroidControl (Step SR)	$c=25\%$	52.97	57.06	+4.09

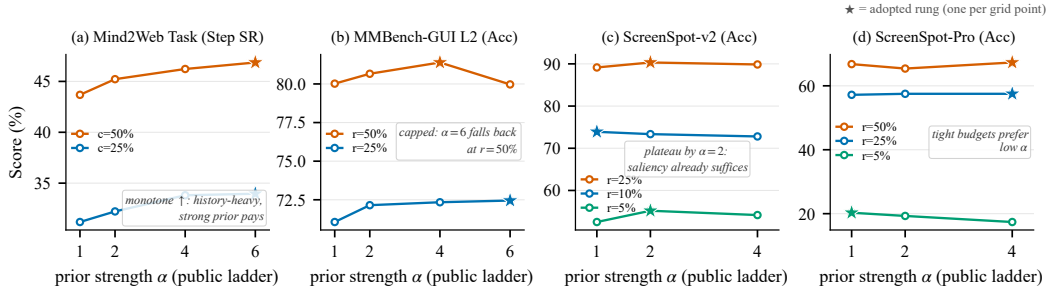


Figure 6: Prior strength analysis with GUI-Owl-1.5-8B. The filled marker is the adopted $\bar{\alpha}$.

A.4.2 Benchmark and Budget Dependence

① *Task-level pattern.* We investigate the task-level pattern of the preferred prior strength. To be specific, candidate-based selection chooses from a finite set of candidate elements or answers. Coordinate grounding predicts a location on the screenshot, while structured action prediction emits an action and its required arguments. In this comparison, Mind2Web Task uses candidate-based selection. MMBench-GUI L2, ScreenSpot-v2, and ScreenSpot-Pro form the coordinate-grounding family. OmniGUI and AndroidControl form the structured-action family. The preferred prior cap follows the task type and then varies with the budget. Candidate-based selection favors strong caps in $\{4, 6\}$, while coordinate grounding and structured action prediction favor milder caps because location and action prediction need surrounding context. Further analyses are presented below.

② *Configured-strength analysis.* Tab. 13 shows that the useful cap depends on both the task and the budget. On candidate-based selection, a stronger prior cap improves accuracy. For example, Mind2Web Cross-Task Step SR rises from 43.68% to 46.86% across the public grid, so the strongest cap is selected there. MMBench-GUI instead peaks at an intermediate cap at $r = 50\%$ and declines at the strongest setting, showing that stronger concentration is not uniformly better even within candidate-based selection. Within coordinate grounding, ScreenSpot-v2 favors mild caps and gains up to +2.7% at the tightest budget. Meanwhile, ScreenSpot-Pro tolerates a stronger cap only when enough budget remains for context. Within structured action prediction, OmniGUI changes little across caps. Meanwhile, AndroidControl stays within $\pm 0.4\%$ under the official protocol. The selected configurations therefore follow task structure rather than a single global prior strength.

Table 13: Prior strength sensitivity with **GUI-Owl-1.5-8B**. Rows are grouped by task family. Candidate-based selection and coordinate grounding use the public grid $\bar{\alpha} \in \{1, 2, 4, 6\}$ where available, while structured action prediction uses $\bar{\alpha} \in \{1, 2, 4\}$. Bold denotes the adopted settings.

Benchmark (metric)	Budget	$\bar{\alpha}=1$	$\bar{\alpha}=2$	$\bar{\alpha}=4$	$\bar{\alpha}=6$
CANDIDATE-BASED SELECTION					
Mind2Web Task (Step SR)	$c=50\%$	43.68	45.22	46.22	46.86
Mind2Web Task (Step SR)	$c=25\%$	31.18	32.22	33.81	33.96
Benchmark (metric)	Budget	$\bar{\alpha}=1$	$\bar{\alpha}=2$	$\bar{\alpha}=4$	$\bar{\alpha}=6$
COORDINATE GROUNDING					
MMBench-GUI L2 (Acc)	$r=50\%$	80.02	80.66	81.39	79.97
MMBench-GUI L2 (Acc)	$r=25\%$	71.06	72.15	72.34	72.45
ScreenSpot-v2 (Acc)	$r=50\%$	93.00	93.08	92.77	N/A
ScreenSpot-v2 (Acc)	$r=25\%$	89.15	90.33	89.86	N/A
ScreenSpot-v2 (Acc)	$r=10\%$	73.90	73.35	72.80	N/A
ScreenSpot-v2 (Acc)	$r=5\%$	52.52	55.19	54.17	N/A
ScreenSpot-Pro (Acc)	$r=50\%$	66.79	65.40	67.30	N/A
ScreenSpot-Pro (Acc)	$r=25\%$	57.18	57.50	57.50	N/A
ScreenSpot-Pro (Acc)	$r=10\%$	36.37	36.18	37.63	N/A
ScreenSpot-Pro (Acc)	$r=5\%$	20.30	19.29	17.39	N/A
Benchmark (metric)	Budget	$\bar{\alpha}=1$	$\bar{\alpha}=2$	$\bar{\alpha}=4$	
STRUCTURED ACTION PREDICTION					
OmniGUI (Step SR)	$c=50\%$	48.91	48.44	47.71	
OmniGUI (Step SR)	$c=25\%$	42.11	42.65	42.38	
AndroidControl (Step SR)	$c=50\%$	60.20	60.00	59.89	
AndroidControl (Step SR)	$c=25\%$	56.58	56.62	56.23	

Table 14: Interaction of prior strength $\bar{\alpha}$ and current dose ρ_{cur} on Mind2Web Cross-Task Step SR.

	$c=50\%$			$c=25\%$		
	$\rho_{\text{cur}}=0$	$\rho_{\text{cur}}=0.3$	$\rho_{\text{cur}}=0.5$	$\rho_{\text{cur}}=0$	$\rho_{\text{cur}}=0.3$	$\rho_{\text{cur}}=0.5$
$\bar{\alpha}=1$	43.23	43.43	43.68	28.04	29.23	31.18
$\bar{\alpha}=2$	45.37	45.72	45.22	32.27	32.22	30.18
$\bar{\alpha}=4$	45.42	45.32	46.22	33.81	32.27	32.57

A.4.3 Prior and Coverage Interaction

The prior choice remains stable when the coverage dose changes. Tab. 14 shows that strong caps are usually preferred, but their interaction with coverage depends on the budget. At tight budgets, the prior can already cover the interactive surface and extra repair competes for the same tokens. At milder budgets, the selected configuration combines a strong cap with a larger current dose because additional tokens remain available for coverage repair. The prior identifies likely interactive regions, while repair protects regions that the concentrated order leaves exposed. Details are as follows.

① *Prior value and damage.* Figs. 6 and 7 show that the prior improves spatial grounding, but its benefit depends on the task and the available context. The effective-support rule limits the applied strength when concentration would remove too much context. The interaction prior contributes little over uniform on AndroidControl but produces a much larger gain on ScreenSpot-Pro. On Mind2Web, the remaining variation appears mainly in element grounding. Thus, the prior mainly helps the model locate the target. When later actions need more context, a milder prior is preferred.

② *Sensitivity curves.* Fig. 8 summarizes the two parameters over their tested ranges. The curves show that the current dose repairs coverage gaps left by greedy selection, but excessive repair approaches uniform sampling. The prior and dose therefore address different failure modes. The prior changes where evidence is concentrated, while the dose restores regions that concentration would otherwise discard. These complementary effects demonstrate the robustness of our TRACE.

③ *Calibration diagnostics.* In the 1,000-frame OmniGUI dump, Eq. 9 is active mainly at the mild budget and reaches the configured cap on 18.4% of frames, compared with 70.3% at the tight budget. AndroidControl shows the same shift, with cap saturation increasing from 11.7% to 70.6%. The support rule therefore permits stronger priors only when the retained context remains sufficient.

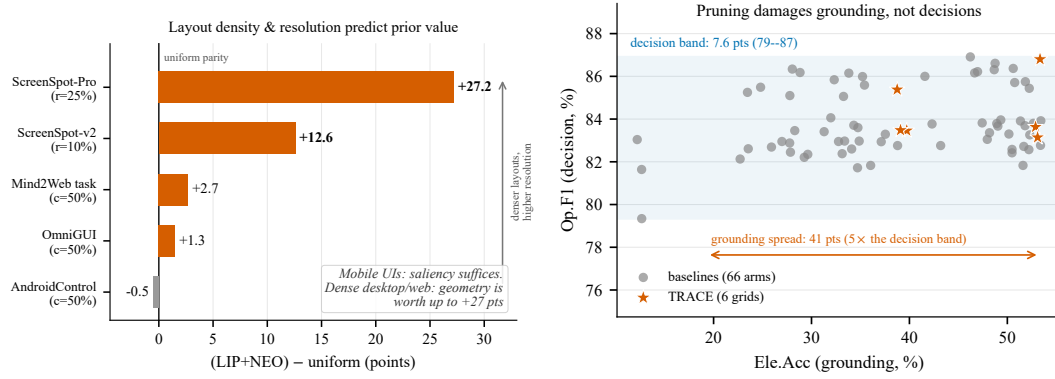


Figure 7: Prior value and damage localization with **GUI-Owl-1.5-8B**. The left panel shows the gain over uniform. The right panel shows Mind2Web Op.F1 versus Element-Accuracy.

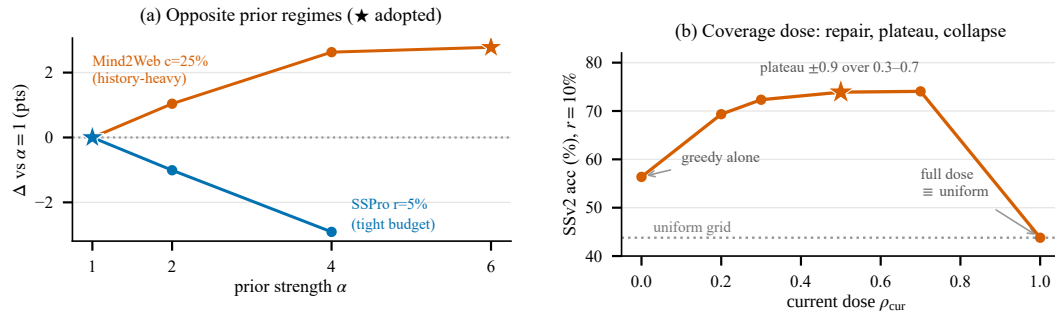


Figure 8: Sensitivity analysis with **GUI-Owl-1.5-8B**. (a) Prior strength. (b) Current dose.

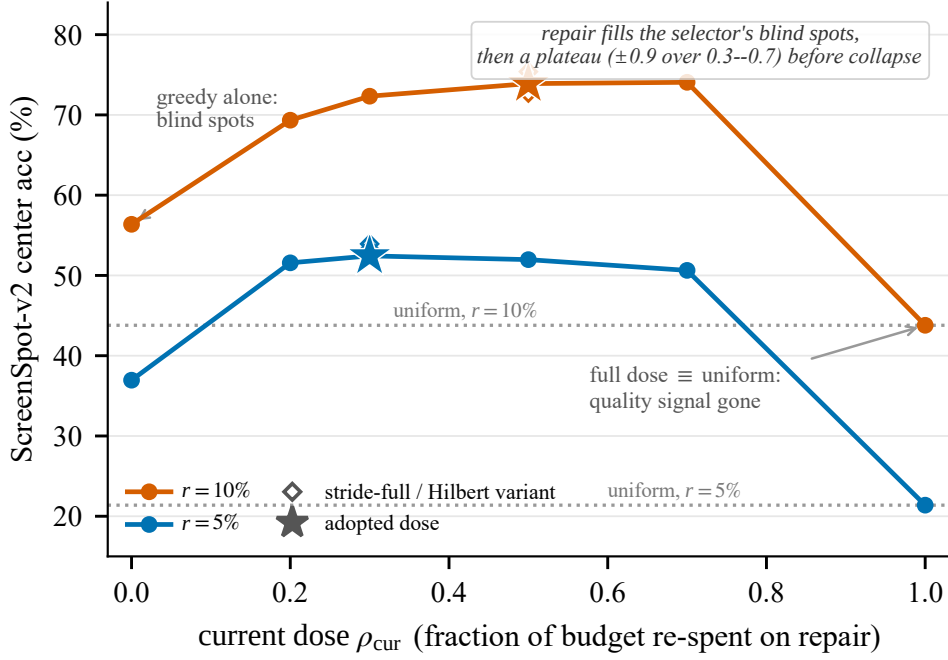
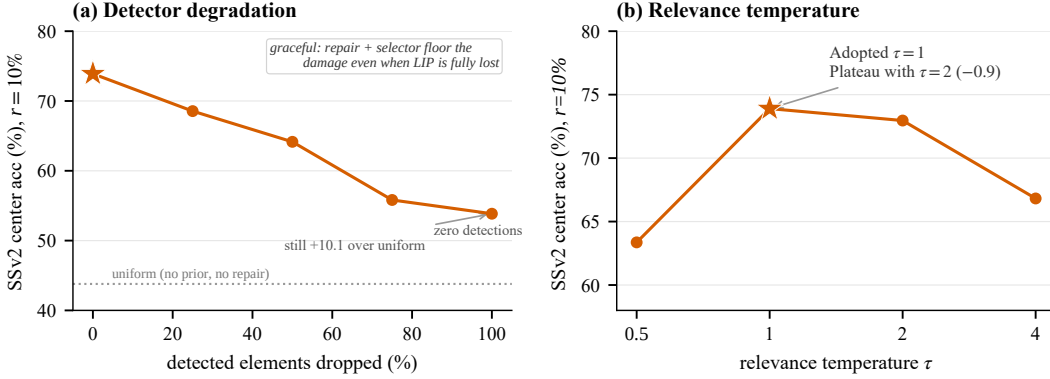
A.4.4 Budget and Dose Sensitivity

We next turn from prior strength to the split between current and history evidence. On OmniGUI we hold the dose fixed and compare the two budgets in a 2×2 test. Halving the current budget costs 5.29%, while halving the history budget costs 0.74%. The current frame therefore carries most of the useful evidence, and the adopted setting keeps a larger current budget with a smaller history budget. After this split is fixed, the dose spends part of each budget on covering tokens that greedy selection would drop. Most multi-step benchmarks use a light dose. Sparse AndroidControl is the exception and needs heavier repair on the current frame. On the adopted OmniGUI tight setting, the history-dose grid changes Step SR only slightly. In contrast, the AndroidControl current-dose curve moves across the uniform baseline. History retirement can therefore stay light, while the current dose must follow the domain. Fig. 9 then shows how large that current dose should be on ScreenSpot-v2. A moderate number of stride representatives improves the greedy keep. A full dose removes the importance order and reduces the selector to uniform sampling. Alternative scan rules stay within 1.5% of the adopted dose. The gain therefore comes from coverage repair itself rather than from a particular scan. The adopted setting uses a larger current budget, a light history dose, and a current dose that repairs coverage gaps without collapsing to uniform sampling.

A.4.5 Calibration and Robustness

The previous paragraphs fix the prior, the budgets, and the doses. We now test whether those choices remain usable when two inputs are imperfect. Both tests use ScreenSpot-v2 at $r = 10\%$.

① *Detector degradation*. The first test removes detections at random. Fig. 10 (a) drops 25%, 50%, 75%, and 100% of the boxes. Accuracy falls from 73.90% to 68.55%, 64.15%, 55.82%, and 53.85%. The decrease is gradual rather than sudden. When every detection is removed, the prior becomes flat and selection uses only instruction likelihood, feature diversity, and coverage repair. That endpoint stays 10.1% above uniform sampling. The remaining channels therefore bound the damage, and the method does not collapse when the detector fails. ② *Instruction-likelihood temperature*. The second test changes the temperature τ that scales the instruction-likelihood scores. As shown in Fig. 10 (b), the adopted $\tau = 1$ lies on a plateau with $\tau = 2$ and changes accuracy by only 0.9%. Sharpening


 Figure 9: Dose response analysis on ScreenSpot-v2 with **GUI-Owl-1.5-8B**.

 Figure 10: Robustness analysis of selector components with **GUI-Owl-1.5-8B** on ScreenSpot-v2 at $r = 10\%$. (a) Detector degradation. (b) Instruction-likelihood temperature.

to $\tau = 0.5$ concentrates relevance on too few tokens and loses 10.5%. Flattening to $\tau = 4$ dilutes the instruction signal and loses 7.1%. We therefore keep the default $\tau = 1$ in every experiment and do not tune it. The selector remains usable when detections are incomplete and when the relevance scale is left at its default. These analyses show that our TRACE is robust to imperfect inputs.

B Additional Experimental Evidence

The previous section fixes the method, comparison protocol, and operating points. We now examine what is preserved when a visual frame is selected once and reused at a smaller history budget. We follow four evidence chains. Lifecycle traces test later-target retention and nested retirement. Benchmark tables locate gains across budgets, metrics, categories, and model scales. Ablations connect those gains to selector components. Serving measurements separate cache reuse from selection cost. Section B.1 examines admission and retirement, while Section B.2 expands the benchmark results. Section B.3 combines component ablations with keep visualizations, and Section B.4 separates cache reuse from token-selection cost. Each diagnostic answers a different question. Keep visualizations show spatial allocation on the displayed frame. Paired ablations measure score changes. Serving measurements report the evaluated execution path. Detailed descriptions are as follows.



Figure 11: Comparison of nested retirement against an unconstrained re-selection with **GUI-Owl-1.5-8B**. A fresh selection of 65 tokens would add 12 and drop 12 that the committed prefix keeps. Over 1000 steps the same re-selection moves 23.5% of the surviving set.

B.1 Lifecycle Behavior

This subsection tests the two premises of Fig. 1 on instrumented trajectories. The first is that a keep written at first admission should contain later targets. The second is that the history keep should be a prefix of the current keep to avoid re-encoding. We first measure later-target retention. Then, we compare nested retirement with independent re-selection. Finally, we inspect the cache states.

① *Admission Retention*. Same-screen recurrences are identified by an exact content hash or a 64-bit dhash within Hamming distance 4 at the same resolution. At the mild and tight budgets, TRACE retains 96.09% and 91.41% of the later targets, while existing methods perform near chance. The relevant quantity is later-target retention rather than success on the instruction available at admission. A keep can serve the present action yet omit another widget on the same screen. The layout prior reserves evidence beyond the action used at admission on these recurrences. It does not guarantee recovery of every later action. Retirement poses the same question after the keep is contracted. Admission error is the rate at which the contracted history loses the patch needed by a later action. It is 12.37% and 20.23% for TRACE at the two budgets, against about 72% for uniform. The comparison uses the same retirement budgets, so token count alone does not explain the difference. The retained prefix contains the later target more often, demonstrating the effectiveness of the layout prior.

② *Nested Reuse*. Independent re-selection then asks whether that prefix is forced by serving. On OmniGUI it requests tokens outside the admitted cache on 99.5% and 99.1% of frames. Those requests can be satisfied only by encoding the retired frame again. Forcing the independent choice onto the surviving rows changes Step SR by only -0.7% and -0.4% . Fig. 11 shows that restriction on one frame. The first panel is the nested prefix of 65 tokens. The second panel is an independent re-selection of 65 tokens scored from scratch. The last two panels show the two sides of the symmetric difference: tokens selected only by the fresh selection and tokens selected only by the committed prefix. Independent selection would add 12 tokens that the prefix does not contain and would drop 12 tokens that the prefix keeps. Over the same 1000 steps, fresh re-selection changes 23.5% of the surviving set. The nested order is therefore a serving constraint rather than a relabeling of independent selection. In particular, equal token counts do not imply equal cache contents. The independent selection changes token identities, whereas contraction must use the order already committed.

③ *Committed Cache*. The remaining figures follow one path. They show the committed prefix, what one episode keeps after retirement, and how a single frame is contracted. Selected patches keep the original pixels. Discarded patches are desaturated so the dropped content stays visible. Specifically, Fig. 12 (a) records one OmniGUI episode. The light keep is current at about 50%. The dark keep

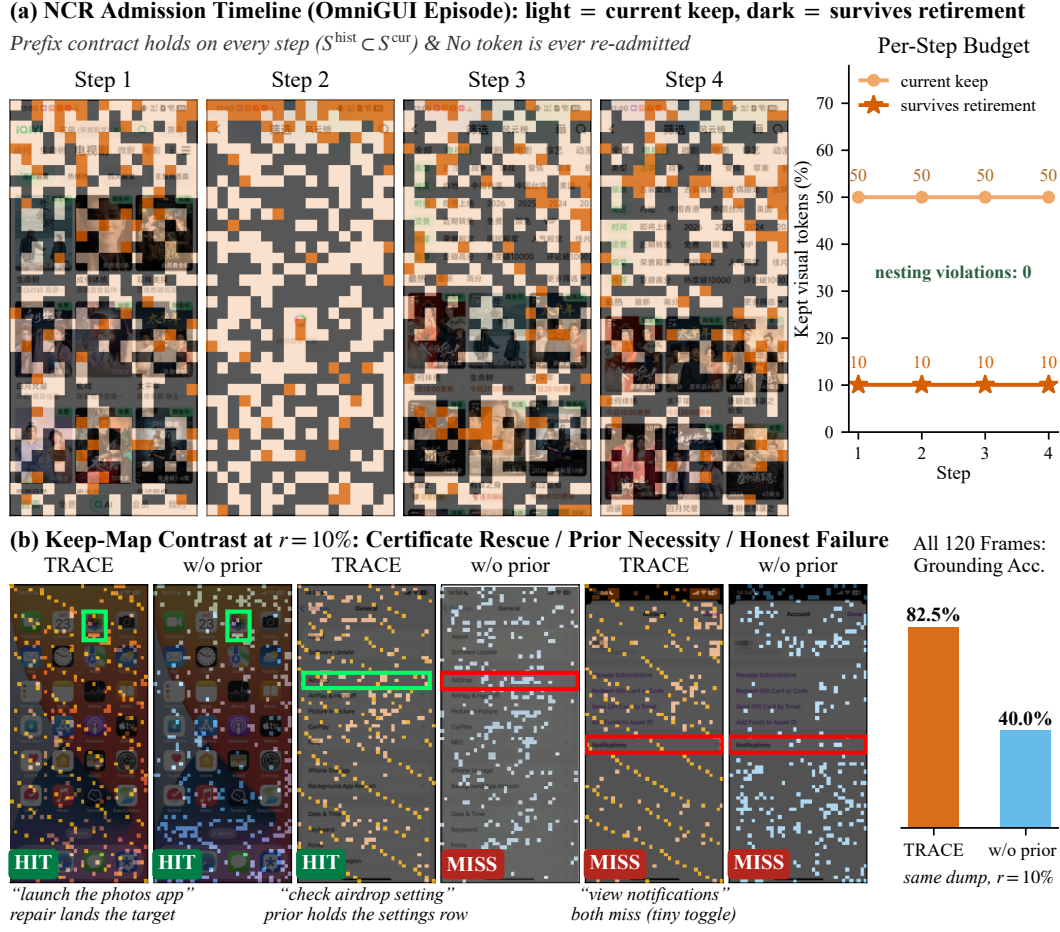


Figure 12: Committed lifecycle with **GUI-Owl-1.5-8B**. (a) An OmniGUI episode admits at about 50% and retires to a 10% prefix with zero nesting violations. (b) On ScreenSpot-v2 at $r = 10\%$, the keep of TRACE grounds 82.5% of frames against 40.0% without the prior.

is the 10% prefix that survives retirement. The bars stay at those two levels on every step, and the figure records zero nesting violations. No token is re-admitted after the frame is written, which is the prefix cut of Eq. 7. Fig. 12 (b) compares TRACE with the no-prior keep on ScreenSpot-v2 at $r = 10\%$. When the instruction is to launch the photos app, both keeps hit. When the instruction is to check the AirDrop setting, the prior holds the settings row and TRACE hits, while the keep without the prior misses. When the instruction is to view notifications, both keeps miss a tiny toggle. Over the 120 frames, TRACE reaches 82.5% grounding accuracy against 40.0% without the prior. The two keeps differ by the prior rather than by a second admission. Besides the above visual evidence, we read OmniGUI Alipay episode T0039 frame by step as shown in Fig. 13. The left column is the input and the action on that screen. The upper triangle is the cache. On the diagonal the frame is admitted at $c = 50\%$ and split into tokens that will survive and tokens that will be evicted. Every frame to the right of the diagonal is held after contraction to $h = 10\%$. A row does not change after admission because history is write-once. The episode opens Yu'eobao from Me and then completes the red-packet flow. The six actions are tap Me, tap Yu'eobao, tap Open, tap Participate, tap Accept, and tap Claim reward. The acted-on widget on each current-frame keep remains in the contracted keep of that row. The cache keeps the acted-on evidence of each page rather than only the latest screenshot. Fig. 14 then dissects four frames. Each row shows the input, the admitted keep, the survivors, and the complement that retirement frees. The surviving prefix is a subset of the admitted keep, while the released tokens form the complement of that prefix within the admitted set. Thus, the survivor and released panels are disjoint, and together they reconstruct the admitted keep. Only the survivor is nested within the original selection. The marked target remains in the survivor panel on the displayed frames. This illustrates what contraction preserves and frees without implying that

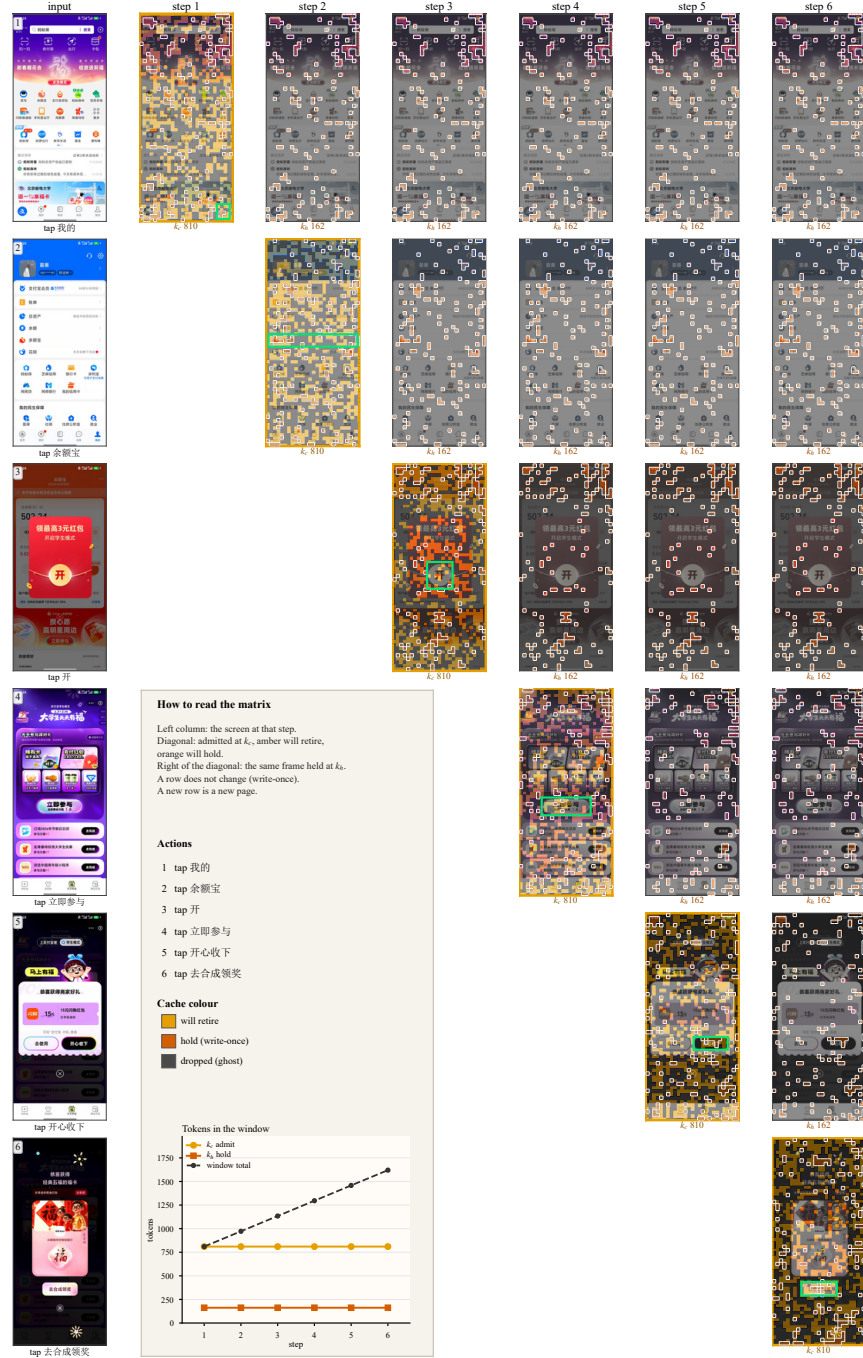


Figure 13: Cache state of OmniGUI Alipay episode T0039 with **GUI-Owl-1.5-8B** at $(c, h) = (50\%, 10\%)$. The left column is the input. The upper triangle is that frame’s cache. The diagonal is admission. The same frame to the right of the diagonal is the contracted history.

every removed patch is irrelevant to all possible future actions. The committed cache retains the displayed later-usable evidence after retirement. The nested prefix is not rebuilt. These visualizations provide additional evidence to demonstrate the robustness of our proposed TRACE.

B.2 Benchmark Breakdowns

We unpack Tab. 1 along four axes. The tables separate target categories from action metrics. The budget curves show where margins change. The 2B tables test the same comparisons at another

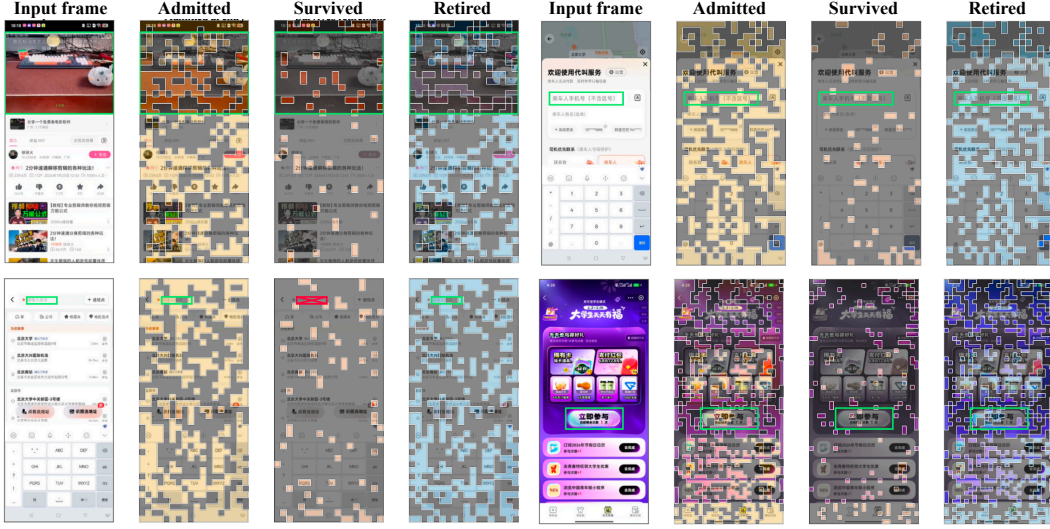


Figure 14: Retirement dissected on four frames with GUI-Owl-1.5-8B. Each row is the input, the admitted keep, the surviving prefix, and the tokens retirement frees.

scale. Throughout this subsection, benchmark averages report accuracy, while the Avg. (%) column reports average retained performance relative to the dense model. Details are as follows.

Single-step Breakdown. (1) *Tight-budget grounding.* As shown in Tab. 15, TRACE reaches 73.90%, 37.63%, and 50.47% on ScreenSpot-v2, ScreenSpot-Pro, and MMBench-GUI at $r = 10\%$. These scores retain 64.5% of dense performance on average. Specifically, TRACE leads PruneSID by 14.94% on ScreenSpot-v2 and VisPruner by 8.12% on MMBench-GUI, while VisionTrim remains ahead by 0.89% on ScreenSpot-Pro. At $r = 5\%$, the corresponding scores fall to 55.19%, 20.30%, and 30.88%, but TRACE ranks first on all three benchmark averages. Its margin over PruneSID on ScreenSpot-v2 grows to 20.99 points, and the comparison with VisionTrim on ScreenSpot-Pro turns to +2.08 points. Thus, the larger relative advantage at the tight budget does not mean that pruning preserves absolute accuracy. It means that TRACE loses less task performance than the compared selectors at the same budget. (2) *Higher-retention budgets.* Tab. 17 extends the comparison to $r = 50\%$ and 25%. On the 8B model at $r = 50\%$, TRACE reaches 93.08% on ScreenSpot-v2 and 81.39% on MMBench-GUI, compared with dense scores of 93.79% and 82.64% in Tab. 15. However, its 67.30% on ScreenSpot-Pro trails VisPruner’s 69.20%. At $r = 25\%$, TRACE reaches 90.33%, 58.25%, and 72.45% on the three benchmarks, while VisionTrim leads ScreenSpot-Pro at 60.09%. The upper panels of Fig. 15 summarize this distinction. The margins widen on ScreenSpot-v2 and MMBench-GUI as the budget tightens, whereas ScreenSpot-Pro shows a crossover rather than a consistent lead. The blue curve selects the best published baseline separately at each budget, so it need not represent the same method throughout the sweep.

Multi-step Breakdown. (1) *Joint action success.* Tab. 16 separates Step SR from action type, element accuracy, operation F1, and grounding. Step SR requires the action type and its target or argument to be correct together, so a strong auxiliary score does not by itself imply a successful step. At $(c, h) = (50\%, 10\%)$, TRACE reaches 48.91%, 45.52%, and 60.20% Step SR on OmniGUI, Mind2Web, and AndroidControl. At $(c, h) = (25\%, 5\%)$, these scores become 43.08%, 34.20%, and 57.06%. The average retained performance decreases from 93.0% to 80.4%, while the lead over the best published baseline grows from 0.74 to 2.99 points on OmniGUI and from 0.54 to 3.53 points on Mind2Web. The lower panels of Fig. 15 show these budget-dependent comparisons alongside the dense and uniform references. On tight-budget AndroidControl, the distinction between references matters. TRACE leads the best published baseline, ZOO-Prune, by 1.30 points, but its margin over the stronger uniform control is 0.93 points. (2) *Auxiliary metrics.* The AndroidControl columns also show why the native metrics should be read separately. At the tight budget, VisionTrim reaches 67.76% grounding accuracy, above TRACE’s 65.50%, yet its Step SR is lower at 55.16% versus 57.06%. Meanwhile, TRACE reaches 82.06% action-type accuracy, compared with 81.26% for VisionTrim. These results demonstrate the advantage of our proposed TRACE in different metrics.

Mind2Web Metric Breakdown. The pooled Mind2Web columns in Tab. 16 distinguish target selection from operation prediction. At the mild budget, TRACE reaches 53.02% element accuracy

Table 15: Per-metric breakdown of single-step grounding with **GUI-Owl-1.5-8B** at $r=10\%$ and 5% . **Avg. (%)** denotes retained performance relative to the full-token upper bound.

Method	ScreenSpot-v2			ScreenSpot-Pro			MMBench-GUI L2			
	Text	Icon	Avg.	Text	Icon	Avg.	Basic	Adv.	Avg.	Avg. (%)
GUI-OWL-1.5-8B: UPPER BOUND (100% TOKENS)										
GUI-Owl-1.5-8B	97.91	88.45	93.79	81.68	51.99	70.34	90.54	74.82	82.64	100.0%
RETAIN 10% TOKENS ($\downarrow 90\%$)										
Random	35.38	31.77	33.81	8.19	2.81	6.14	21.88	15.22	18.53	22.4%
Uniform	44.29	43.14	43.79	13.10	6.79	10.69	35.70	20.92	28.27	32.0%
DivPrune(CVPR25)Alvar et al. (2025)	51.81	52.17	51.97	17.30	8.61	13.98	37.05	26.23	31.61	37.8%
CDPruner(NeurIPS25)Zhang et al. (2025b)	38.72	25.99	33.18	14.53	5.96	11.26	17.07	7.42	12.21	22.1%
VisPruner(ICCV25)Zhang et al. (2025a)	46.38	58.66	51.73	39.30	26.49	34.41	50.08	34.70	42.35	51.8%
PruMerge+(ICCV25)Shang et al. (2025)	36.35	45.85	40.49	21.80	16.56	19.80	37.83	23.19	30.47	36.1%
TRIM(COLING25)Song et al. (2025)	29.39	45.13	36.24	4.20	1.82	3.29	32.12	18.43	25.24	24.6%
FastV(ECCV24)Chen et al. (2024)	50.00	54.69	52.04	31.93	23.01	28.53	47.23	33.26	40.21	48.2%
VisionTrim(ICLR26)Yu et al. (2026)	58.50	58.84	58.65	44.11	29.47	38.52	48.29	33.20	40.71	55.5%
ZOO-Prune(CVPR26)Kim et al. (2026)	54.18	59.03	56.29	11.77	5.96	9.55	43.54	28.50	35.98	39.0%
PruneSID(ICLR26)Fang et al. (2026)	57.66	60.65	58.96	19.24	9.93	15.69	47.12	34.26	40.65	44.8%
TRACE	78.27	68.23	73.90	45.14	25.50	37.63	60.49	40.56	50.47	64.5%
RETAIN 5% TOKENS ($\downarrow 95\%$)										
Random	14.76	16.43	15.49	1.33	1.16	1.27	11.30	7.30	9.29	9.9%
Uniform	20.61	22.38	21.38	3.48	2.32	3.04	15.50	9.02	12.24	14.0%
DivPrune(CVPR25)Alvar et al. (2025)	23.40	28.70	25.71	4.30	3.15	3.86	17.63	10.63	14.11	16.7%
CDPruner(NeurIPS25)Zhang et al. (2025b)	18.38	12.64	15.88	4.50	1.82	3.48	7.39	2.16	4.76	9.2%
VisPruner(ICCV25)Zhang et al. (2025a)	15.04	27.98	20.68	13.20	10.60	12.21	20.09	13.45	16.75	19.9%
PruMerge+(ICCV25)Shang et al. (2025)	14.62	22.02	17.85	6.96	4.14	5.88	14.77	9.63	12.19	14.0%
TRIM(COLING25)Song et al. (2025)	12.12	20.76	15.88	0.41	0.50	0.44	13.43	6.31	9.85	9.8%
FastV(ECCV24)Chen et al. (2024)	26.74	30.51	28.38	12.69	10.43	11.83	25.46	15.61	20.51	24.0%
VisionTrim(ICLR26)Yu et al. (2026)	22.14	30.69	25.86	<u>20.98</u>	13.74	18.22	20.15	13.61	16.86	<u>24.6%</u>
ZOO-Prune(CVPR26)Kim et al. (2026)	24.23	33.94	28.46	3.89	2.81	3.48	19.14	11.57	15.33	17.9%
PruneSID(ICLR26)Fang et al. (2026)	29.67	40.07	34.20	5.02	3.81	4.55	23.89	15.11	19.48	22.2%
TRACE	58.22	51.26	55.19	25.90	<u>11.26</u>	20.30	40.51	21.36	30.88	41.7%

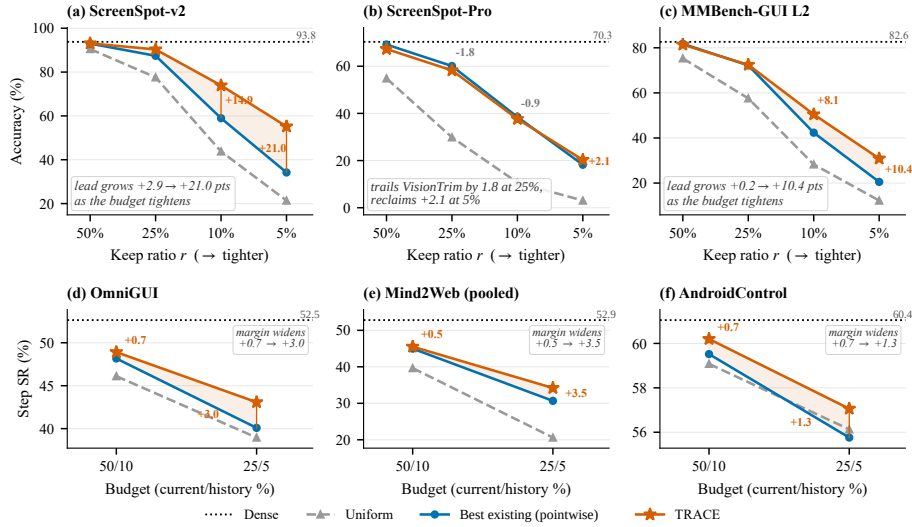


Figure 15: Accuracy versus keep ratio with **GUI-Owl-1.5-8B**. The top row shows single-step grounding. The bottom row shows multi-step Step SR. The blue curve uses the best published baseline at each budget, while uniform is shown separately for reference.

and 45.52% Step SR, compared with 47.48% and 39.65% for uniform. At the tight budget, the corresponding scores are 39.41% and 34.20% for TRACE, against 26.32% and 20.61% for uniform. In contrast, operation F1 stays close between the two methods, at 84.28% versus 84.35% under the mild budget and 83.90% versus 83.49% under the tight budget. The larger differences therefore occur in element accuracy and joint step success, rather than operation F1. Detailed breakdowns can help us understand the robustness of our proposed TRACE under specific scenarios.

Cross-scale Evaluation. We next compare the same benchmark metrics on GUI-Owl-1.5-2B. (1) *Single-step transfer.* As shown in Tab. 18, TRACE reaches 55.11%, 17.33%, and 38.17% on ScreenSpot-v2, ScreenSpot-Pro, and MMBench-GUI at $r = 10\%$. At $r = 5\%$, it reaches 38.29%, 6.83%, and 21.93%. It ranks first on all three benchmark averages at both budgets, retaining 48.0% and 28.2% of dense performance on average. However, the category columns show a narrower ad-

Table 16: Per-metric breakdown of multi-step agents with **GUI-Owl-1.5-8B** under the mild ($c=50\%$, $h=10\%$) and tight ($c=25\%$, $h=5\%$) budgets. The dataset-specific columns retain each benchmark’s native auxiliary metrics, including action type, element accuracy, operation F1, and grounding.

Method	OmniGUI		Mind2Web			AndroidControl			Avg. (%)
	Type	Step SR	Ele.Acc	Op.F1	Step SR	Type	Ground.	Step SR	
GUI-Owl-1.5-8B	GUI-Owl-1.5-8B: UPPER BOUND (100% TOKENS)								
	70.65	52.45	61.80	83.82	52.90	83.57	74.41	60.41	100.0%
	RETAIN 50% CURRENT + 10% HISTORY TOKENS								
Random	66.37	43.16	42.28	84.13	35.13	82.65	70.02	58.82	82.0%
Uniform	66.87	46.11	47.48	84.35	39.65	82.82	69.50	59.08	86.9%
DivPrune(CVPR25)Alvar et al. (2025)	66.91	45.76	48.44	84.54	40.70	82.40	70.80	58.83	87.2%
CDPruner(NeurIPS25)Zhang et al. (2025b)	63.96	41.45	33.02	83.13	27.88	80.65	66.42	54.57	74.0%
VisPruner(ICCV25)Zhang et al. (2025a)	66.45	46.11	52.58	84.09	44.45	83.04	73.06	59.25	90.0%
PruMerge+(ICCV25)Shang et al. (2025)	66.17	46.50	49.48	83.95	41.53	83.18	73.22	59.28	88.4%
TRIM(COLING25)Song et al. (2025)	65.40	45.84	48.78	84.06	41.20	82.18	70.18	56.86	86.5%
FastV(ECCV24)Chen et al. (2024)	66.91	46.89	50.62	84.32	43.12	83.10	<u>73.13</u>	59.11	89.6%
VisionTrim(ICLR26)Yu et al. (2026)	65.47	45.72	51.83	83.60	43.91	83.50	72.45	59.10	89.3%
ZOO-Prune(CVPR26)Kim et al. (2026)	<u>67.34</u>	<u>48.17</u>	<u>52.96</u>	84.06	44.98	83.12	72.72	59.30	<u>91.7%</u>
PruneSID(ICLR26)Fang et al. (2026)	<u>67.34</u>	47.40	51.51	84.15	43.28	83.47	72.61	<u>59.52</u>	90.2%
TRACE	68.62	48.91	53.02	84.28	45.52	83.44	72.74	60.20	93.0%
RETAIN 25% CURRENT + 5% HISTORY TOKENS									
Random	62.44	34.25	23.39	83.14	18.43	79.93	58.86	52.07	62.1%
Uniform	<u>64.66</u>	38.96	26.32	83.49	20.61	81.38	63.77	<u>56.13</u>	68.7%
DivPrune(CVPR25)Alvar et al. (2025)	63.72	37.17	29.95	83.72	24.29	80.92	63.53	54.75	69.1%
CDPruner(NeurIPS25)Zhang et al. (2025b)	57.50	27.76	12.55	81.61	10.86	72.42	41.98	40.90	47.1%
VisPruner(ICCV25)Zhang et al. (2025a)	62.99	39.54	<u>37.20</u>	83.83	<u>30.67</u>	81.55	<u>67.36</u>	54.93	<u>74.8%</u>
PruMerge+(ICCV25)Shang et al. (2025)	62.52	36.98	29.38	83.20	23.45	81.44	66.21	54.01	68.1%
TRIM(COLING25)Song et al. (2025)	60.61	34.37	28.17	83.96	23.01	78.67	53.74	47.17	62.4%
FastV(ECCV24)Chen et al. (2024)	61.47	39.39	34.48	83.26	29.33	<u>81.58</u>	66.81	54.61	73.6%
VisionTrim(ICLR26)Yu et al. (2026)	61.78	38.26	36.56	83.38	30.20	81.26	67.76	55.16	73.8%
ZOO-Prune(CVPR26)Kim et al. (2026)	64.19	40.01	34.17	84.10	27.90	81.34	67.05	55.76	73.8%
PruneSID(ICLR26)Fang et al. (2026)	64.27	40.09	33.88	84.01	27.57	81.44	66.45	55.46	73.5%
TRACE	66.52	43.08	39.41	83.90	34.20	82.06	65.50	57.06	80.4%

vantage than the benchmark ranks alone suggest. On ScreenSpot-Pro at $r = 5\%$, TRACE leads FastV on text targets at 6.86% versus 5.53%, but trails on icon targets at 6.79% versus 8.28%. Its overall lead is only 0.25 points, from 6.83% versus 6.58%. Thus, ranking first on the smaller model does not imply either high absolute accuracy or a lead on every target category. (2) *Multi-step transfer*. Tab. 19 reports 36.08%, 37.92%, and 56.53% Step SR for TRACE on OmniGUI, Mind2Web, and AndroidControl at the mild budget. The tight-budget scores are 31.88%, 26.52%, and 53.72%. These retain 91.4% and 77.7% of dense performance on average across the three benchmarks. TRACE leads OmniGUI at both budgets, but FastV remains ahead on Mind2Web at 38.98% and 27.62%, while PruneSID remains ahead on AndroidControl at 57.03% and 54.13%. The cross-scale result therefore preserves competitiveness without preserving the 8B lead on every multi-step benchmark. (3) *Rank stability*. Fig. 16 separates the rank of TRACE from changes in the overall method ordering. In the plotted comparisons, TRACE remains first on ScreenSpot-v2, MMBench-GUI, and OmniGUI, and moves from second to first on ScreenSpot-Pro. It moves from first to fourth on pooled Mind2Web and AndroidControl. Tab. 20 provides the complementary budget-level view with twelve methods, rather than the ten plotted in the figure, and lists the three Mind2Web splits separately. In that table, TRACE remains first on ScreenSpot-v2 and MMBench-GUI at all four keep ratios and on OmniGUI at both current/history budgets. However, its 2B rank is fourth on each mild-budget Mind2Web split and ranges from second to third at the tight budget. The full ordering can change even when the top-ranked method does not. For example, the table reports Spearman $\rho = 0.109$ and 0.091 on MMBench-GUI at $r = 10\%$ and 5%, while TRACE remains first. These results distinguish stability of the leading method from agreement among all selectors.

Target-category Breakdown. Finally, the category columns in Tabs. 17 and 15 show which targets contribute to the benchmark averages. On 8B ScreenSpot-Pro at $r = 25\%$, TRACE leads VisionTrim on text targets at 68.88% versus 67.76%, but trails on icon targets at 41.06% versus 47.68%. This text–icon contrast accompanies the lower overall score of 58.25% versus 60.09%. At $r = 5\%$, TRACE still trails VisionTrim on icons at 11.26% versus 13.74%, but its text accuracy of 25.90% versus 20.98% is accompanied by a higher benchmark average. The crossover in Fig. 15(b) therefore does not indicate that TRACE overtakes VisionTrim on both target types. On MMBench-GUI at the same tight budget, the advantage is present in both reported categories. TRACE reaches 40.51% on Basic and 21.36% on Adv., compared with FastV’s 25.46% and 15.61%. Together, these breakdowns locate the gains in the reported categories and metrics for comprehensive understanding.

Table 17: Single-step grounding evaluation with GUI-Owl-1.5-8B and GUI-Owl-1.5-2B.

Method	ScreenSpot-v2			ScreenSpot-Pro			MMBench-GUI L2			
	Text	Icon	Avg.	Text	Icon	Avg.	Basic	Adv.	Avg.	Avg. (%)
GUI-Owl-1.5-2B: UPPER BOUND (100% TOKENS)										
GUI-Owl-1.5-2B	93.31	86.82	90.49	67.66	42.22	57.94	83.10	60.71	71.84	100.0%
RETAIN 50% TOKENS ($\downarrow$ 50%)										
Random	84.68	78.88	82.15	44.93	26.49	37.89	71.91	50.08	60.93	80.3%
Uniform	87.19	80.32	84.20	46.57	32.62	41.24	75.66	51.96	63.75	84.3%
DivPrune _(CVPR25) Alvar et al. (2025)	87.74	82.31	85.38	51.38	27.81	42.38	75.55	54.29	64.86	85.9%
CDPruner _(NeurIPS25) Zhang et al. (2025b)	87.05	83.57	85.53	45.55	24.50	37.51	77.34	52.63	64.91	83.2%
VisPruner _(ICCV25) Zhang et al. (2025a)	86.07	83.57	84.98	61.00	37.09	51.87	78.90	55.51	67.14	92.3%
PruMerge _(ICCV25) Shang et al. (2025)	84.40	79.42	82.23	54.15	35.10	46.87	76.27	50.42	63.27	86.6%
TRIM _(COLING25) Song et al. (2025)	87.60	81.41	84.91	44.63	21.69	35.86	73.53	49.53	61.46	80.4%
FastV _(ECCV24) Chen et al. (2024)	89.69	83.39	86.95	61.51	40.56	53.51	80.19	55.95	68.00	94.4%
VisionTrim _(ICLR26) Yu et al. (2026)	88.30	83.94	86.40	62.85	40.73	54.40	79.80	55.23	67.45	94.4%
ZOO-Prune _(CVPR26) Kim et al. (2026)	<u>90.25</u>	83.57	87.34	52.20	27.48	42.76	78.18	56.23	67.14	87.9%
PruneSID _(ICLR26) Fang et al. (2026)	90.11	<u>84.12</u>	<u>87.50</u>	56.50	36.92	49.02	<u>80.30</u>	<u>56.34</u>	<u>68.25</u>	92.1%
TRACE	90.95	86.10	88.84	59.47	38.41	51.42	80.92	56.45	68.61	94.1%
RETAIN 25% TOKENS ($\downarrow$ 75%)										
Random	63.23	59.39	61.56	22.42	13.74	19.10	49.69	30.55	40.07	52.3%
Uniform	64.62	62.82	63.84	25.38	17.55	22.39	52.77	33.43	43.04	56.4%
DivPrune _(CVPR25) Alvar et al. (2025)	69.50	71.48	70.36	27.23	16.72	23.21	57.53	39.51	48.47	61.8%
CDPruner _(NeurIPS25) Zhang et al. (2025b)	65.88	71.48	68.32	28.25	16.56	23.78	61.89	37.41	49.58	61.9%
VisPruner _(ICCV25) Zhang et al. (2025a)	57.10	68.41	62.03	42.58	23.84	35.42	56.13	33.87	44.94	64.1%
PruMerge _(ICCV25) Shang et al. (2025)	59.75	61.01	60.30	27.64	18.87	24.29	50.76	29.44	40.04	54.8%
TRIM _(COLING25) Song et al. (2025)	62.26	66.61	64.15	18.32	9.93	15.12	51.76	30.66	41.15	51.4%
FastV _(ECCV24) Chen et al. (2024)	<u>77.58</u>	65.52	72.33	46.57	31.62	40.86	<u>64.19</u>	<u>42.39</u>	<u>53.23</u>	<u>74.8%</u>
VisionTrim _(ICLR26) Yu et al. (2026)	63.65	70.76	66.75	49.23	29.80	41.81	62.79	38.35	50.50	72.1%
ZOO-Prune _(CVPR26) Kim et al. (2026)	73.12	72.92	73.03	24.26	11.92	19.54	57.19	39.18	48.14	60.5%
PruneSID _(ICLR26) Fang et al. (2026)	74.51	<u>75.09</u>	<u>74.76</u>	31.12	22.85	27.96	63.23	41.56	52.34	67.9%
TRACE	80.36	80.87	80.58	45.55	28.64	39.09	72.92	46.82	59.79	79.9%
GUI-Owl-1.5-8B: UPPER BOUND (100% TOKENS)										
GUI-Owl-1.5-8B	97.91	88.45	93.79	81.68	51.99	70.34	90.54	74.82	82.64	100.0%
RETAIN 50% TOKENS ($\downarrow$ 50%)										
Random	91.36	80.51	86.64	57.52	33.11	48.20	78.96	61.15	70.01	81.9%
Uniform	96.10	83.21	90.49	67.14	34.93	54.84	84.00	66.74	75.32	88.5%
DivPrune _(CVPR25) Alvar et al. (2025)	93.87	84.84	89.94	74.51	41.89	62.05	84.78	68.29	76.49	92.2%
CDPruner _(NeurIPS25) Zhang et al. (2025b)	91.78	80.32	86.79	70.42	40.89	59.14	75.27	57.78	66.47	85.7%
VisPruner _(ICCV25) Zhang et al. (2025a)	95.82	86.28	91.67	80.66	50.66	69.20	90.15	73.49	81.78	98.4%
PruMerge _(ICCV25) Shang et al. (2025)	96.10	86.28	91.82	74.21	47.35	63.95	87.63	70.95	79.24	94.9%
TRIM _(COLING25) Song et al. (2025)	93.73	86.46	90.57	76.46	43.21	63.76	88.75	69.89	79.27	94.4%
FastV _(ECCV24) Chen et al. (2024)	95.68	87.73	92.22	77.99	51.82	67.99	89.03	73.88	81.41	97.8%
VisionTrim _(ICLR26) Yu et al. (2026)	97.08	87.73	<u>93.00</u>	77.79	50.66	67.43	89.54	74.10	81.78	98.0%
ZOO-Prune _(CVPR26) Kim et al. (2026)	96.80	<u>88.09</u>	<u>93.00</u>	79.12	46.85	66.79	88.81	73.10	80.91	97.3%
PruneSID _(ICLR26) Fang et al. (2026)	96.52	85.74	91.82	77.69	49.67	66.98	89.03	73.05	81.00	97.0%
TRACE	96.66	88.45	93.08	78.61	49.01	67.30	<u>89.70</u>	73.16	81.39	97.8%
RETAIN 25% TOKENS ($\downarrow$ 75%)										
Random	72.42	63.90	68.71	28.66	14.07	23.09	51.82	37.96	44.85	53.5%
Uniform	82.87	70.76	77.59	36.13	19.70	29.85	66.59	48.64	57.57	64.9%
DivPrune _(CVPR25) Alvar et al. (2025)	84.96	75.99	81.05	55.58	29.30	45.54	70.73	55.40	63.02	75.8%
CDPruner _(NeurIPS25) Zhang et al. (2025b)	75.77	58.66	68.32	49.85	21.36	38.96	46.00	29.00	37.45	57.8%
VisPruner _(ICCV25) Zhang et al. (2025a)	88.02	83.03	85.85	67.76	45.20	59.14	81.48	63.03	<u>72.20</u>	87.7%
PruMerge _(ICCV25) Shang et al. (2025)	82.03	77.98	80.27	52.81	37.25	46.87	75.55	54.29	64.86	76.9%
TRIM _(COLING25) Song et al. (2025)	71.17	74.01	72.41	35.72	19.70	29.60	67.99	44.00	55.93	62.3%
FastV _(ECCV24) Chen et al. (2024)	86.35	80.87	83.96	61.31	41.72	53.83	77.34	59.71	68.48	83.0%
VisionTrim _(ICLR26) Yu et al. (2026)	91.23	82.49	87.42	67.76	47.68	60.09	81.03	61.54	71.23	88.3%
ZOO-Prune _(CVPR26) Kim et al. (2026)	89.28	80.87	85.61	55.58	26.16	44.34	78.46	60.10	69.23	79.4%
PruneSID _(ICLR26) Fang et al. (2026)	91.64	80.69	86.87	54.76	26.82	44.09	78.18	61.04	69.56	79.8%
TRACE	94.15	85.38	90.33	68.88	41.06	58.25	82.65	<u>62.37</u>	72.45	88.9%

B.3 Ablations and Visual Evidence

The benchmark breakdowns identify the settings where TRACE gains or loses accuracy. We next examine how the selection changes under component removal and how those changes appear in the retained patches. The ablations compare task scores, while the visualizations expose target coverage and the spatial distribution of the keep. Detailed analysis is provided as follows.

Keep Maps. Fig. 17 compares three token selections on the same frame at $r = 10\%$. The first two panels establish the visual reference. Panel (a) shows the original screen and its target. Panel (b) shows the query-independent LIP field over that screen. The remaining panels show the tokens retained by TRACE and the two controls. This arrangement connects the layout prior to the resulting selection. The target remains covered by TRACE and is marked HIT. Both the no-prior arm and uniform sampling are marked MISS. The example therefore shows a target-coverage difference at a matched budget. We next examine how this spatial allocation changes with the budget. Fig. 4 in the main text introduces a second screen. Fig. 21 extends that comparison across four selectors on the same screen. The two views serve complementary purposes. The first identifies which selection

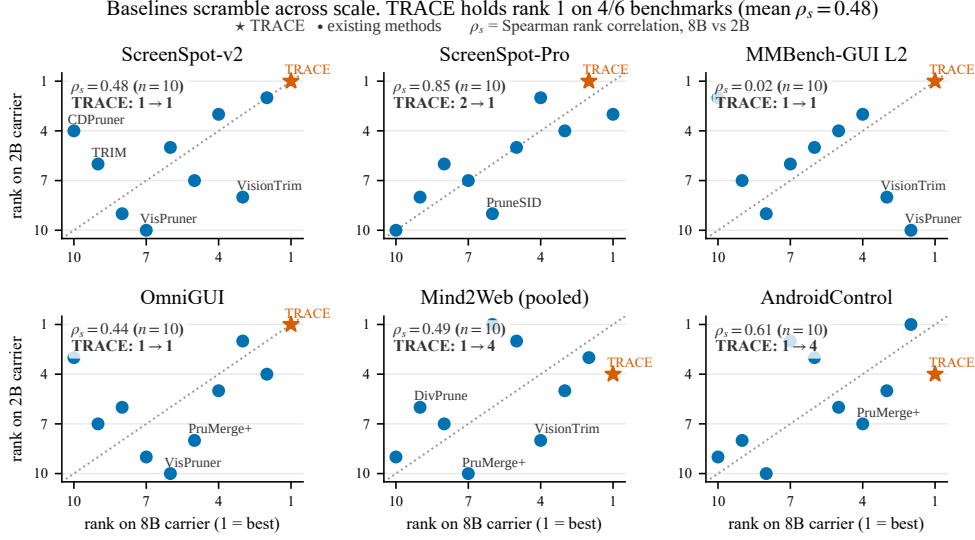


Figure 16: Cross-scale rank comparison between **GUI-Owl-1.5-8B** and **GUI-Owl-1.5-2B**. Each panel shows the ten-method comparison plotted for one benchmark. Stars mark TRACE, dots mark existing methods, and the dotted diagonal denotes equal ranks.

Table 18: Single-step grounding with **GUI-Owl-1.5-2B** at $r=10\%$ and 5% .

Method	ScreenSpot-v2			ScreenSpot-Pro			MMBench-GUI L2			
	Text	Icon	Avg.	Text	Icon	Avg.	Basic	Adv.	Avg.	Avg. (%)
GUI-OWL-1.5-2B: UPPER BOUND (100% TOKENS)										
GUI-Owl-1.5-2B	93.31	86.82	90.49	67.66	42.22	57.94	83.10	60.71	71.84	100.0%
RETAIN 10% TOKENS ($\downarrow 90\%$)										
Random	27.30	29.78	28.38	7.78	5.13	6.77	22.55	13.06	17.78	22.6%
Uniform	25.35	33.03	28.69	9.72	4.64	7.78	23.67	11.57	17.58	23.2%
DivPrune(CVPR25)Alvar et al. (2025)	32.31	43.86	37.34	7.06	5.30	6.39	23.39	16.16	19.76	26.6%
CDPruner(NeurIPS25)Zhang et al. (2025b)	32.03	44.95	37.66	7.57	4.64	6.45	<u>33.86</u>	<u>18.59</u>	<u>26.18</u>	29.7%
VisPruner(ICCV25)Zhang et al. (2025a)	18.66	30.69	23.90	8.80	6.79	8.03	18.47	10.24	14.33	20.1%
PruMerge+(ICCV25)Shang et al. (2025)	24.51	28.52	26.26	7.37	5.63	6.70	19.75	12.17	15.94	20.9%
TRIM(COLING25)Song et al. (2025)	26.46	40.25	32.47	3.79	4.30	3.98	25.35	14.22	19.76	23.4%
FastV(ECCV24)Chen et al. (2024)	27.16	33.39	29.87	15.46	16.06	<u>15.69</u>	26.69	16.10	21.37	<u>29.9%</u>
VisionTrim(ICLR26)Yu et al. (2026)	24.65	36.46	29.80	<u>16.27</u>	12.42	14.80	25.80	12.12	18.92	28.3%
ZOO-Prune(CVPR26)Kim et al. (2026)	34.82	<u>45.13</u>	39.31	6.04	5.30	5.76	25.52	16.60	21.04	27.6%
PruneSID(ICLR26)Fang et al. (2026)	<u>40.53</u>	44.58	42.30	6.04	3.64	5.12	26.52	16.60	21.54	28.5%
TRACE	50.97	60.47	55.11	19.34	<u>14.07</u>	17.33	48.18	28.28	38.17	48.0%
RETAIN 5% TOKENS ($\downarrow 95\%$)										
Random	12.26	17.51	14.54	1.94	1.32	1.71	10.63	6.09	8.35	10.2%
Uniform	12.40	14.98	13.52	2.87	2.15	2.59	10.41	5.76	8.07	10.2%
DivPrune(CVPR25)Alvar et al. (2025)	15.32	21.48	18.00	2.76	1.49	2.28	10.18	6.97	8.57	11.9%
CDPruner(NeurIPS25)Zhang et al. (2025b)	<u>17.13</u>	<u>28.70</u>	<u>22.17</u>	2.87	2.32	2.66	<u>16.79</u>	<u>9.35</u>	<u>13.05</u>	<u>15.8%</u>
VisPruner(ICCV25)Zhang et al. (2025a)	10.17	16.25	12.81	2.56	1.99	2.34	8.23	5.15	6.68	9.2%
PruMerge+(ICCV25)Shang et al. (2025)	9.33	15.52	12.03	2.66	1.82	2.34	9.01	4.98	6.98	9.0%
TRIM(COLING25)Song et al. (2025)	12.95	23.10	17.37	0.92	2.65	1.58	12.37	6.92	9.63	11.8%
FastV(ECCV24)Chen et al. (2024)	6.96	14.98	10.46	<u>5.53</u>	8.28	<u>6.58</u>	10.07	5.09	7.57	11.2%
VisionTrim(ICLR26)Yu et al. (2026)	14.76	20.58	17.30	<u>5.53</u>	2.65	4.43	13.21	5.70	9.43	13.3%
ZOO-Prune(CVPR26)Kim et al. (2026)	15.04	25.27	19.50	1.43	1.82	1.58	11.53	9.19	10.35	12.9%
PruneSID(ICLR26)Fang et al. (2026)	15.32	25.99	19.97	1.64	2.15	1.83	12.98	8.36	10.66	13.4%
TRACE	33.43	44.58	38.29	6.86	<u>6.79</u>	6.83	28.93	15.00	21.93	28.2%

covers a given target. The second tracks the retained spatial structure as the budget contracts.

Coverage Recall. Area coverage does not distinguish background patches from operable elements. The recall diagnostic behind Fig. 3 instead asks whether an element retains at least one token. The reported recall of TRACE is 90.06% on the 120-frame dump. The detector defines the elements used in this diagnostic. The recall therefore measures coverage of its proposals rather than coverage of every true interface element. A surviving token also need not contain enough detail to identify the element correctly. We therefore use this statistic to interpret the spatial footprint of the keep. Task accuracy remains a separate measure of whether the retained evidence supports a correct prediction.

Coverage Coupling. The paired repair comparison associated with Fig. 3 records 44 rescued targets and 5 lost targets. Repair reallocates a fixed token budget. It can therefore recover one target at the expense of another. The paired counts expose both outcomes instead of reducing them to an average

Table 19: Multi-step agents with **GUI-Owl-1.5-2B**. The table reports native auxiliary metrics and Step SR for each multi-step benchmark under the matched current and history budgets.

Method	OmniGUI		Mind2Web			AndroidControl			Avg. (%)
	Type	Step SR	Ele.Acc	Op.F1	Step SR	Type	Ground.	Step SR	
GUI-Owl-1.5-2B	GUI-OWL-1.5-2B: UPPER BOUND (100% TOKENS)								
	57.97	39.70	52.74	84.34	44.23	83.62	72.61	57.93	100.0%
	RETAIN 50% CURRENT + 10% HISTORY TOKENS								
Random	54.74	32.31	36.68	84.03	29.60	81.94	68.13	54.88	81.0%
Uniform	56.49	33.51	39.49	84.17	32.44	82.43	69.13	55.54	84.5%
DivPrune(CVPR25)Alvar et al. (2025)	56.26	33.71	43.97	84.11	35.99	79.48	69.57	54.62	86.9%
CDPruner(NeurIPS25)Zhang et al. (2025b)	53.58	33.83	40.13	84.19	32.51	81.77	69.26	54.88	84.5%
VisPruner(ICCV25)Zhang et al. (2025a)	52.64	31.34	44.93	84.17	36.90	82.85	69.22	55.93	86.3%
PruMerge+(ICCV25)Shang et al. (2025)	53.62	32.81	38.55	84.18	31.18	83.62	68.37	55.91	83.2%
TRIM(COLING25)Song et al. (2025)	52.14	31.57	43.14	83.95	35.83	82.50	68.63	55.73	85.6%
FastV(ECCV24)Chen et al. (2024)	53.50	33.79	<u>46.45</u>	84.11	38.98	<u>83.53</u>	70.59	56.71	<u>90.4%</u>
VisionTrim(ICLR26)Yu et al. (2026)	53.54	33.13	42.30	84.25	34.83	83.28	70.16	<u>56.77</u>	86.7%
ZOO-Prune(CVPR26)Kim et al. (2026)	55.05	33.83	46.41	84.04	38.47	82.34	71.11	56.42	89.9%
PruneSID(ICLR26)Fang et al. (2026)	54.20	<u>34.95</u>	46.80	83.97	<u>38.81</u>	83.22	<u>71.01</u>	57.03	91.4%
TRACE	<u>56.42</u>	36.08	45.48	84.21	37.92	82.44	70.90	56.53	91.4%
	RETAIN 25% CURRENT + 5% HISTORY TOKENS								
Random	51.79	24.77	20.74	84.00	16.21	79.52	56.50	47.43	60.3%
Uniform	53.54	25.66	20.34	83.58	15.92	81.61	63.28	52.38	63.7%
DivPrune(CVPR25)Alvar et al. (2025)	<u>54.16</u>	26.52	26.66	84.22	20.52	78.24	62.31	50.30	66.7%
CDPruner(NeurIPS25)Zhang et al. (2025b)	51.48	27.10	24.31	84.01	18.20	79.88	62.81	50.19	65.3%
VisPruner(ICCV25)Zhang et al. (2025a)	50.16	22.55	25.04	83.99	18.85	81.36	56.68	48.59	61.1%
PruMerge+(ICCV25)Shang et al. (2025)	50.82	23.17	19.12	83.77	14.68	81.28	54.41	47.35	57.8%
TRIM(COLING25)Song et al. (2025)	50.12	25.35	28.78	83.83	23.58	80.51	60.86	51.28	68.6%
FastV(ECCV24)Chen et al. (2024)	49.88	25.51	32.63	84.12	27.62	81.94	63.54	51.71	72.0%
VisionTrim(ICLR26)Yu et al. (2026)	49.11	23.72	23.90	83.56	17.80	<u>82.13</u>	58.29	49.43	61.8%
ZOO-Prune(CVPR26)Kim et al. (2026)	52.60	26.17	29.25	84.02	22.78	<u>80.53</u>	<u>65.90</u>	53.06	69.7%
PruneSID(ICLR26)Fang et al. (2026)	51.59	27.53	32.00	84.09	25.68	82.50	65.64	54.13	73.6%
TRACE	54.98	31.88	<u>32.44</u>	84.18	<u>26.52</u>	80.66	66.53	<u>53.72</u>	77.7%

Table 20: Cross-scale replication with **GUI-Owl-1.5-2B**. Spearman ρ between the 8B and 2B method orderings on each grid, with the rank of TRACE at both scales.

Benchmark	Budget	#Methods	Spearman ρ	Rank@8B	Rank@2B
ScreenSpot-v2	$r=50\%$	12	0.698	1	1
ScreenSpot-v2	$r=25\%$	12	0.545	1	1
ScreenSpot-v2	$r=10\%$	12	0.503	1	1
ScreenSpot-v2	$r=5\%$	12	0.329	1	1
ScreenSpot-Pro	$r=50\%$	12	0.874	4	4
ScreenSpot-Pro	$r=25\%$	12	0.867	3	3
ScreenSpot-Pro	$r=10\%$	12	0.706	2	1
ScreenSpot-Pro	$r=5\%$	12	0.701	1	1
MMBench-GUI L2	$r=50\%$	12	0.689	4	1
MMBench-GUI L2	$r=25\%$	12	0.524	1	1
MMBench-GUI L2	$r=10\%$	12	0.109	1	1
MMBench-GUI L2	$r=5\%$	12	0.091	1	1
OmniGUI	$c=50\%, h=10\%$	12	0.488	1	1
OmniGUI	$c=25\%, h=5\%$	12	0.336	1	1
Mind2Web Cross-Task	$c=50\%, h=10\%$	12	0.559	1	4
Mind2Web Cross-Task	$c=25\%, h=5\%$	12	0.399	1	2
Mind2Web Cross-Domain	$c=50\%, h=10\%$	12	0.664	2	4
Mind2Web Cross-Domain	$c=25\%, h=5\%$	12	0.594	1	2
Mind2Web Cross-Website	$c=50\%, h=10\%$	12	0.694	1	4
Mind2Web Cross-Website	$c=25\%, h=5\%$	12	0.308	1	3
AndroidControl	$c=50\%, h=10\%$	12	0.716	1	4
AndroidControl	$c=25\%, h=5\%$	12	0.445	4	2

coverage change. Recoveries outnumber losses on these frames. The five losses nevertheless show that repair does not benefit every image. Tab. 2 supplies the corresponding task-level comparison with the prior and ordering enabled. Adding repair raises tight-budget ScreenSpot-v2 accuracy from 38.36% to 55.19%. The same addition raises tight-budget ScreenSpot-Pro accuracy from 28.15% to 37.63%. Thus, spatial repair recovers more targets on dense GUI screens, and the same addition raises accuracy on both grounding benchmarks under the prior and ordering.

Ablation Summary. Fig. 18 collects the component-removal comparisons. Positive Δ denotes the accuracy lost when the named component is removed. The prior-removal deltas on ScreenSpot-v2

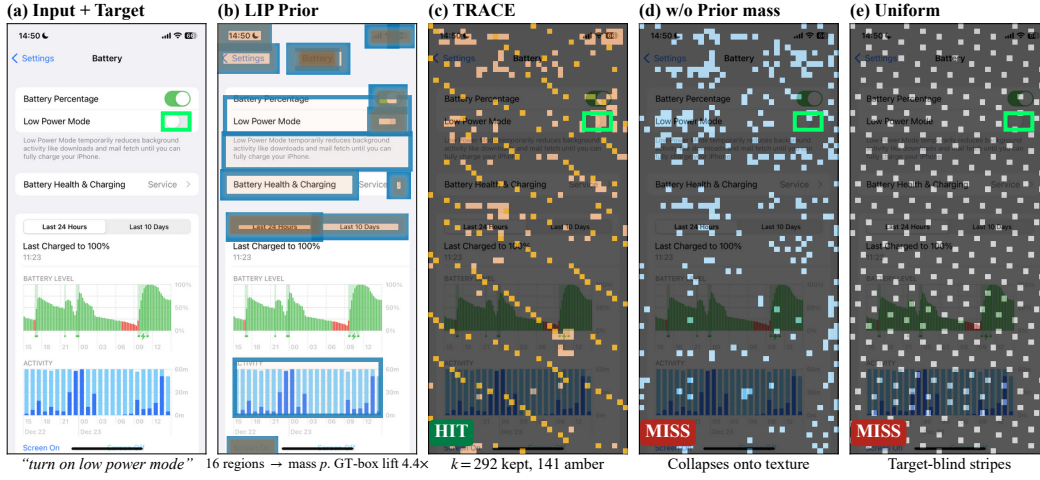


Figure 17: Selection outcomes with **GUI-Owl-1.5-8B** at $r = 10\%$. Panels (a) through (e) show the input, the LIP field, and the keeps of TRACE, no-prior, and uniform.

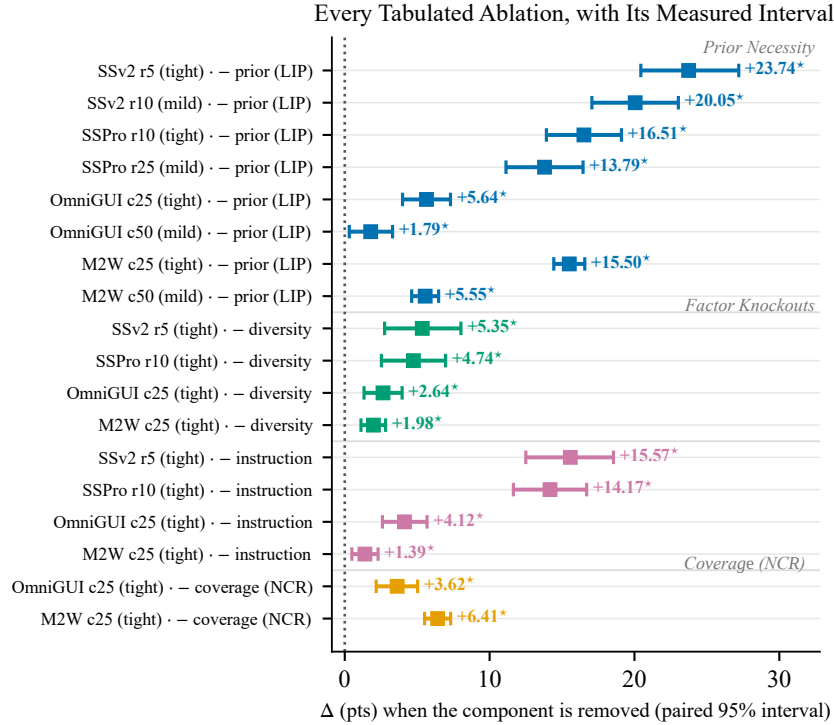


Figure 18: Ablation forest of different components in TRACE with **GUI-Owl-1.5-8B**.

grow from 20.05 points at $r = 10\%$ to 23.74 points at $r = 5\%$. On ScreenSpot-Pro, they grow from 13.79 points at $r = 25\%$ to 16.51 points at $r = 10\%$. The factor knockouts then separate the instruction term from the diversity term. Removing the instruction term costs 15.57 points on tight ScreenSpot-v2. Removing diversity costs 5.35 points under the same setting. The corresponding ScreenSpot-Pro losses are 14.17 and 4.74 points. Both terms contribute to the reported score. The larger instruction-term losses show that their contributions are not interchangeable. The figure also reports a 6.41-point Mind2Web delta for the removed NCR, demonstrating the contribution of the spatial coverage repair under the multi-step setting. Together, these results fully demonstrate the effectiveness of each component on the overall performance of our proposed TRACE.

MMBench Prior-strength Interaction. Tab. 13 reports the prior-strength sweep for MMBench-GUI at $r = 25\%$. The scores are 71.06%, 72.15%, 72.34%, and 72.45% across the four displayed strengths. The largest improvement occurs before the strongest setting. Increasing $\bar{\alpha}$ from 4 to

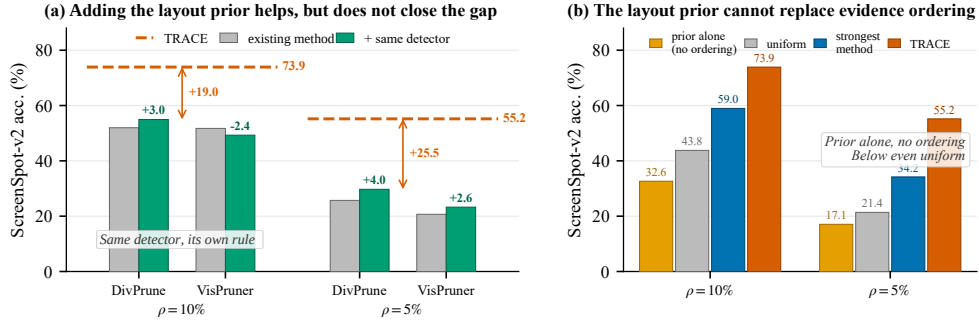


Figure 19: Layout-prior transfer and ordering ablation with **GUI-Owl-1.5-8B** on ScreenSpot-v2. (a) Layout-prior transfer analysis under matched budgets. Dashed lines mark TRACE, and arrows indicate the gap between TRACE and the best prior-augmented selector. (b) Comparison of prior-only top- k , uniform sampling, the strongest existing selector, and TRACE under the same budgets.

6 adds only 0.11 points. The score increases throughout this sweep. Most of the gain is already present before the final increase in prior strength. This experiment varies prior weighting rather than coverage repair. It therefore does not isolate the contribution of spatial coverage repair.

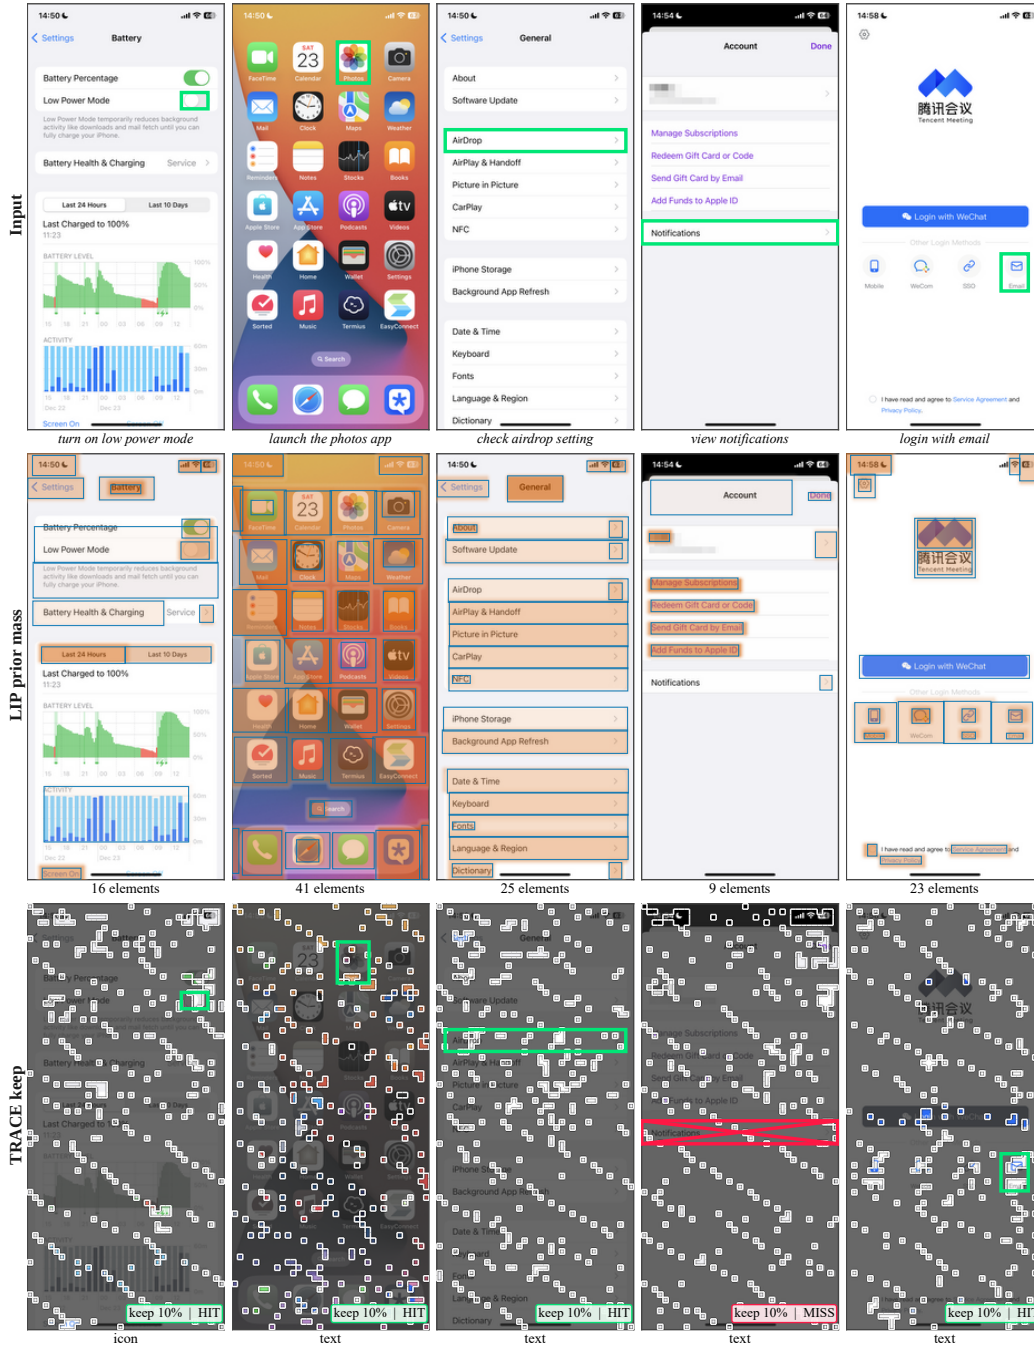
Layout Prior Comparison. Only TRACE uses an external detector in the main tables. This creates an information asymmetry between selectors. The layout prior comparison tests whether giving each selector the same layout prior closes the accuracy gap. To remove this information asymmetry, we graft the same OmniParser interaction-density field into the official scoring rule of each compatible baseline at its best prior strength. Each compatible baseline receives its own best prior strength. This gives the baseline a favorable use of the shared signal. An empty detection set reduces each arm to its official rule. Fig. 19 summarizes the layout prior results on ScreenSpot-v2. Tab. 21 reports the corresponding accuracies under Own rule and + prior. Best α records the selected strength for each baseline. Transfer measures the change from Own rule to + prior. Gap to TRACE measures how far the + prior score falls below TRACE. Both differences are reported in percentage points (pp).

Table 21: Layout prior comparison with **GUI-Owl-1.5-8B** on ScreenSpot-v2.

Selector	Budget	Own rule	+ prior	Best α	Transfer (pp)	Gap to TRACE (pp)
PruneSID	10%	58.96%	60.53%	8	+1.57	13.37
PruneSID	5%	34.20%	34.36%	8	+0.16	20.83
DivPrune	10%	51.97%	54.95%	2	+2.98	18.95
DivPrune	5%	25.71%	29.72%	2	+4.01	25.47
VisPruner	10%	51.73%	49.29%	2	-2.44	24.61
VisPruner	5%	20.68%	30.35%	16	+9.67	24.84
CDPruner	10%	33.18%	47.09%	2	+13.91	26.81
CDPruner	5%	15.88%	27.99%	2	+12.11	27.20
Prior-only top- k	10%	N/A	32.63%	N/A	N/A	41.27
Prior-only top- k	5%	N/A	17.06%	N/A	N/A	38.13

Specifically, Tab. 21 shows that the layout prior improves most baselines. The best compatible result nevertheless trails TRACE by 13.37 points at the mild budget and 20.83 points at the tight budget. The different responses also show that the detector prior cannot be treated as a universal replacement for each selector’s scoring rule. The prior-only top- k rows in Tab. 21 provide another perspective on the layout prior comparison. These rows select tokens directly from the prior without evidence ordering. They reach 32.63% at the mild budget and 17.06% at the tight budget. These scores fall below the complete method by 41.27 and 38.13 points. The shared prior improves several selectors, but the remaining gaps show that it does not replace evidence ordering.

Keep Gallery. Fig. 20 presents a five-column by three-row gallery at $r = 10\%$. From left to right, the columns correspond to Battery Low Power Mode, the home screen target “launch the photos app,” General AirDrop, Account Notifications, and Tencent Meeting email login. The top row shows the input screens, the middle row visualizes the detector and its layout prior, and the bottom row shows the retained token field. The detector identifies 16, 41, 25, 9, and 23 elements in the five examples, respectively. Four examples are marked as HIT and one as MISS. The Battery example retains the low-power-mode control, while the home-screen example preserves the Photos target. The AirDrop example retains the relevant settings row, and the Tencent Meeting example preserves the

Figure 20: Keep gallery with GUI-Owl-1.5-8B at $r = 10\%$.

email-login region. The Notifications example is the only MISS because the tiny notification control is not sufficiently represented in the retained tokens. This gallery therefore illustrates both the intended behavior and a concrete failure case for small targets rather than suggesting that the layout prior succeeds uniformly. Across the five examples, the middle row concentrates mass on detected interface regions, while the bottom row distributes native token marks over these regions and their nearby context. The reported element counts refer to detector proposals rather than retained-token counts, and the green boxes indicate the requested targets rather than dataset-level accuracy. These visualizations show how layout evidence guides token allocation while also exposing an important limitation. A detected element may still be too small to support reliable grounding.

Budget Tightening. Fig. 21 holds one screen fixed while the budget tightens from 50% to 5%. The

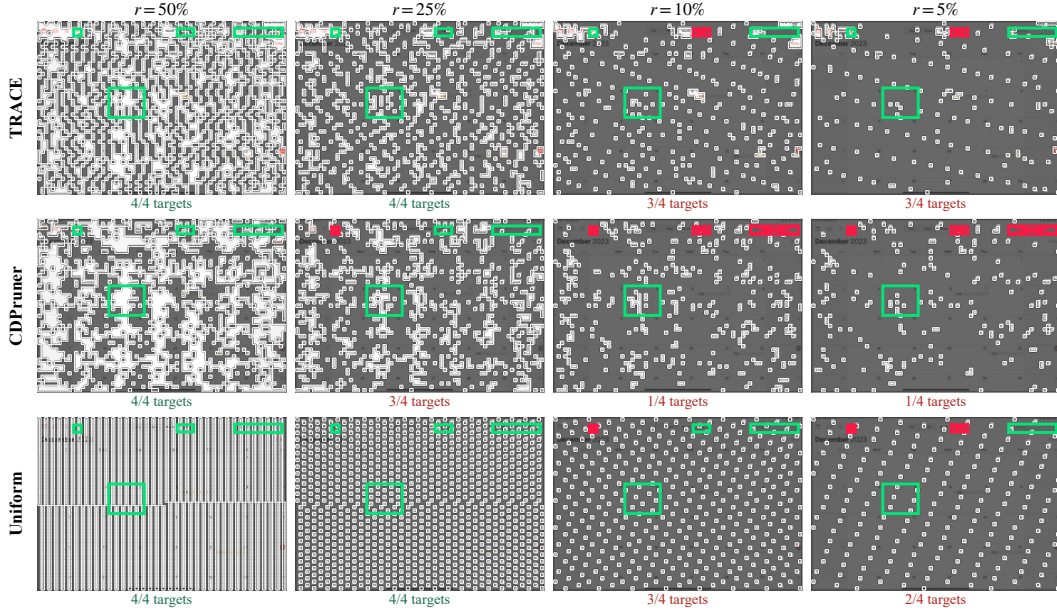


Figure 21: Budget tightening on one screen with **GUI-Owl-1.5-8B**.

coverage-repaired keep retains a wider spatial skeleton than instruction-conditioned scoring at the same budget. The target-count annotations make the comparison more specific than the total colored area. At the tightest budget TRACE retains three of the four marked targets. The instruction-conditioned comparison retains one. The screen and marked targets remain fixed throughout the comparison. The change therefore reflects the allocation of a limited token set rather than a change in screen difficulty. The target counts describe this screen alone and are not dataset-wide accuracy rates. The comparison shows how spatial coverage changes under matched budgets. The selectors also differ in other components, so the paired ablations provide the task-level evidence for repair.

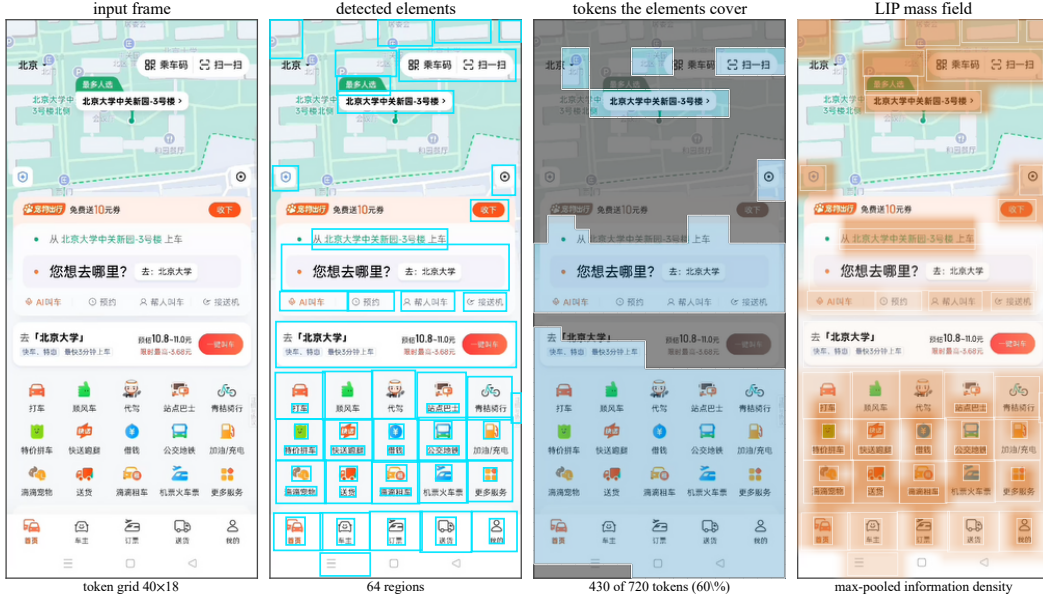
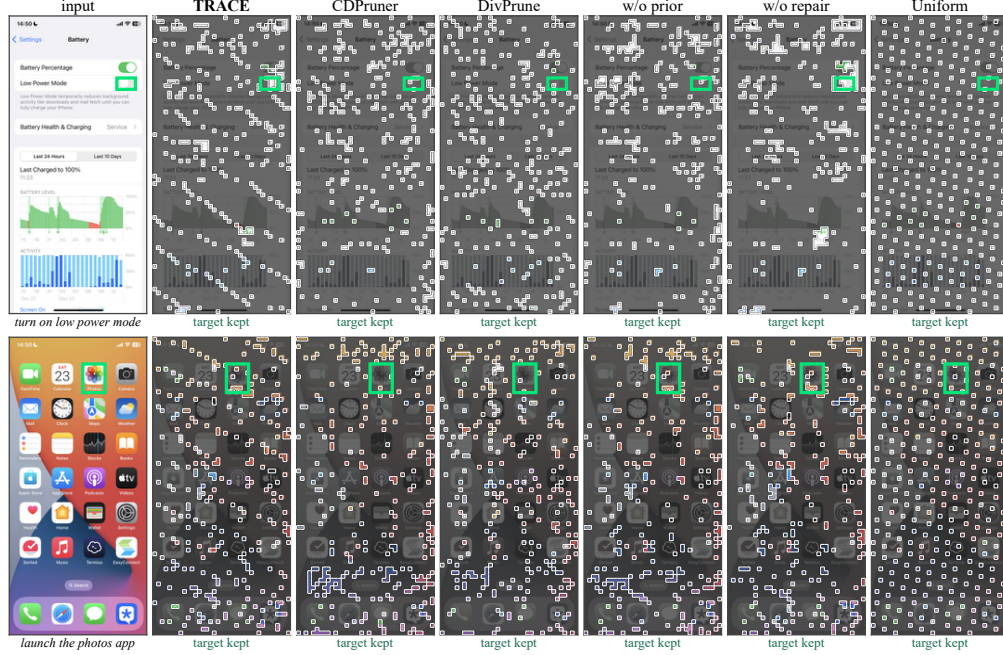
Detector to Prior. Fig. 22 maps detected boxes onto the token grid before constructing the prior field. The displayed frame contains 64 regions on a 40×18 grid. Their union covers 430 of the 720 tokens, or about 60% of this frame. The final panel shows a mass field rather than a binary keep mask. Detection assigns spatial weights to the candidate tokens. The ordering and coverage rules then use these weights to select native tokens under the budget. This distinction matters because detected regions can occupy more tokens than the keep permits. The detector alone does not specify how to allocate the remaining capacity among those regions.

Selector Comparison. Fig. 23 compares selectors at $r = 10\%$ on identical frames and matched token counts. The columns show TRACE, CDPruner, DivPrune, the no-prior and no-repair arms, and uniform. Every displayed selection is annotated as target kept. The comparison therefore concerns the surrounding spatial footprint rather than a target-retention advantage. It shows how the rules distribute their remaining capacity after retaining the target. The component-removal columns expose changes in the distribution of retained patches. Their task-level consequences must be read from the ablation results rather than inferred from the appearance of the keep alone. Fig. 19 complements this visual comparison by holding the detector output fixed. Its remaining accuracy gaps show that access to the same layout field does not make the selection rules equivalent.

B.4 Serving Efficiency

This subsection measures the serving benefit of lifecycle reuse and separates it from selector cost.

① *End-to-end Serving Result.* Tab. 22 compares the complete serving path on OmniGUI under the mild budget. The dense baseline processes 4,892 visual tokens and 73,385 GFLOPs, resulting in 1,102.6 ms TTFT and 2,958.2 ms end-to-end latency with a Step SR of 52.45. The pruned methods reduce the reported input to about 2,011 tokens and 30,170 GFLOPs while reducing the visual KV cache from 697 MB to 292 MB. Here, In.Tok denotes the input-token count reported by the table and should not be interpreted as the number of visual tokens alone. The latency ranking reflects the trade-off between selection overhead and the resulting reduction in prefill cost. FastV reports no sep-

Figure 22: From detected elements to a token-level prior with **GUI-Owl-1.5-8B**.Figure 23: Every selector at $r = 10\%$ on identical frames with **GUI-Owl-1.5-8B**.

arate selection cost, yet still uses 38,731 GFLOPs and an In.Tok value of 4,892. Its TTFT is 850.7 ms and its end-to-end latency is 2,723.2 ms. Thus, Sel.=0 indicates that no separate selector cost is charged in the table rather than that FastV performs no internal scoring or computation. Among methods that retain 2,011 tokens, TRIM incurs only 10.0 ms of selection time and achieves 721.1 ms TTFT. In contrast, PruneSID spends 740.0 ms on selection, which raises its TTFT to 1,506.9 ms and its end-to-end latency to 3,542.4 ms. ZOO-Prune also incurs 69.5 ms of selection time and reaches 3,015.7 ms end-to-end latency despite achieving a Step SR of 48.17. Our method combines a 67.1 ms selection cost with the lowest TTFT of 453.9 ms and the lowest end-to-end latency of 2,295.8 ms. Compared with dense serving, it reduces TTFT by 648.7 ms and end-to-end latency by 662.4 ms while achieving a Step SR of 48.91, which retains 93.3% of the dense score. This result

shows that the serving benefit does not come from pruning alone. The method reduces the prefill workload while keeping selection overhead on the critical path substantially below the cost incurred by methods such as PruneSID. More broadly, the results indicate that end-to-end serving latency depends on both the cost of selection and the amount of visual state that can be reused after pruning. Once the selection cost is higher than the prefill benefit, the serving cost instead increases.

Table 22: Efficiency comparison with **GUI-Owl-1.5-8B** on OmniGUI at the mild budget.

Method	In.Tok	GFLOPs	Sel. (ms)	TTFT (ms)	E2E (ms)	KV (MB)	Step SR	Ret. (%)
Baseline (full)	4892	73385	0	1102.6	2958.2	697	52.45	100.0%
DivPrune _(CVPR25) Alvar et al. (2025)	2011	30170	67.0	774.1	2847.7	292	45.76	87.2%
CDPruner _(NeurIPS25) Zhang et al. (2025b)	2011	30170	149.2	847.6	2954.7	292	41.45	79.0%
VisPruner _(ICCV25) Zhang et al. (2025a)	2011	30170	83.0	845.6	2954.2	292	46.11	87.9%
PruMerge _(ICCV25) Shang et al. (2025)	2011	30170	15.8	775.7	2833.4	292	46.50	88.7%
TRIM _(COLING25) Song et al. (2025)	2011	30170	10.0	721.1	2853.6	292	45.84	87.4%
FastV _(ECCV24) Chen et al. (2024)	4892	38731	0	850.7	2723.2	315	46.89	89.4%
VisionTrim _(ICLR26) Yu et al. (2026)	2011	30170	10.7	773.5	2892.6	292	45.72	87.2%
ZOO-Prune _(CVPR26) Kim et al. (2026)	2011	30170	69.5	972.5	3015.7	292	48.17	91.8%
PruneSID _(ICLR26) Fang et al. (2026)	1939	30170	740.0	1506.9	3542.4	292	47.40	90.4%
TRACE	2011	30170	67.1	453.9	2295.8	292	48.91	93.3%

② *Attribution of the Gain.* Tab. 23 separates cache reuse from token selection in a second and strictly serial measurement round on the same serving path. The dense and complete-method TTFT values are 1116.8 and 452.7 ms, respectively, rather than the 1102.6 and 453.9 ms reported in Tab. 22. We therefore make all comparisons within the same measurement round. Applying MKC alone reduces TTFT to 487.4 ms without pruning the visual cache, so the visual KV entry remains at 100%. Adding the complete selector further reduces TTFT to 452.7 ms at the mild budget and 397.8 ms at the tight budget. At the same time, visual KV usage decreases by 58.1% and 68.1%, respectively. The LLM prefill time decreases from 328.6 ms with reuse alone to 140.6 and 101.9 ms after selection. The corresponding selector-plus-prior costs are 67.4 and 47.0 ms. These measurements expose the two sides of the selection trade-off. Selection introduces additional computation before language-model processing, but it also shortens the visual sequence processed by the language model. Because some component operations overlap on the serving path, their timings cannot be directly summed to predict the final latency. The realized benefit is therefore best evaluated from the measured end-to-end latency. The prior-plus-ordering arm provides a reference for the incremental cost of repair. Adding repair changes the mild-budget TTFT from 451.7 to 452.7 ms, while the tight-budget TTFT changes from 399.1 to 397.8 ms. These differences indicate that repair introduces negligible TTFT overhead.

③ *Accuracy and latency are separate outcomes.* Tab. 23 also shows why TTFT and total latency must be distinguished. Tightening the budget reduces full-method TTFT from 452.7 to 397.8 ms. End-to-end latency changes much less from 2298.9 to 2291.5 ms. The decode totals differ as well, at 1711.0 and 1765.6 ms. A smaller prefill therefore does not imply the same proportional saving in total response time. Together with the accuracy breakdowns, these measurements characterize a budget trade-off rather than an unqualified preference for the tightest setting.

Table 23: Per-step latency breakdown with **GUI-Owl-1.5-8B** on OmniGUI, in milliseconds. This breakdown is measured in a separate strictly serial round on the same serving path.

Component	Baseline (full)	MKC	Mild ($c=50/h=10\%$)		Tight ($c=25/h=5\%$)	
			LIP+NEO	TRACE full	LIP+NEO	TRACE full
Vision encode + prefill	649.6	263.6	324.8	329.5	305.5	305.1
Pruning (selector + prior)	0.0	0.0	60.7	67.4	40.5	47.0
LLM prefill	452.6	328.6	141.9	140.6	102.6	101.9
TTFT	1116.8	487.4	451.7	452.7	399.1	397.8
Decode (total)	1794.3	1810.4	1715.8	1711.0	1846.0	1765.6
End-to-end	3014.7	2399.8	2304.7	2298.9	2374.9	2291.5
Visual KV cache	100%	100%	-58.1%	-58.1%	-68.1%	-68.1%

Dose and Within-episode Cost. The two panels of Fig. 24 report separate measurements on separate benchmarks. The left panel plots AndroidControl Step SR against the current-frame dose. The mild-budget scores rise from 59.84% through 59.91% to 60.20%. The tight-budget curve reaches 55.45% at dose 0.3 and 56.58% at dose 0.5. The star additionally enables the nested history rung and should not be read as another point on the current-dose-only curve. This separates the current-frame dose response from the adopted joint setting. The right panel follows OmniGUI TTFT across successive steps within one episode. It does not vary the history-window length independently. Both paths

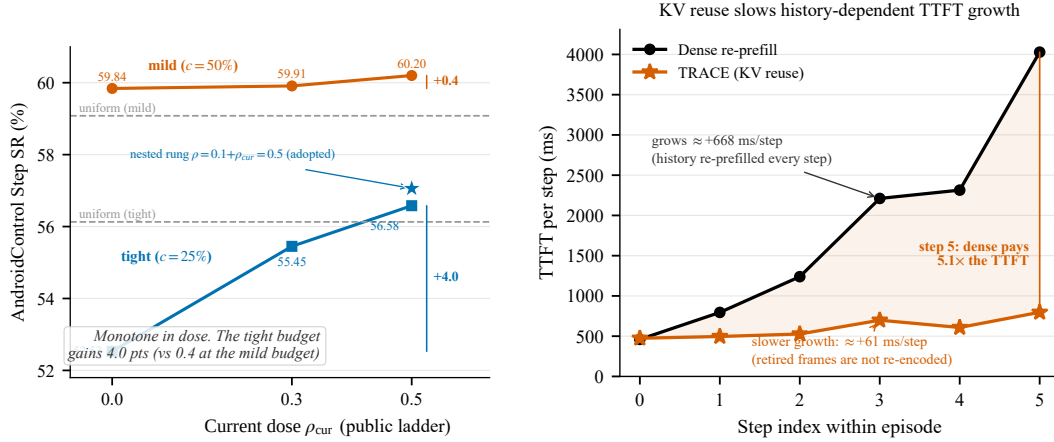


Figure 24: Current dose and within-episode TTFT with **GUI-Owl-1.5-8B**. The left panel shows the evaluation on AndroidControl. The right panel shows the evaluation on OmniGUI.

start near the same latency. The dense curve then rises much more sharply as steps accumulate. Its TTFT reaches $5.1\times$ that of TRACE at step 5. The widening gap is consistent with avoiding repeated encoding of retired frames. Reuse does not make latency constant. Its curve also rises overall and fluctuates between individual steps. This visualization demonstrates the importance of cache reuse.

C Transfer and Scope

In this appendix, we provide the final evidence containing two transfer experiments followed by an analysis of scope and failure modes. Specifically, we first place existing selectors on the nested MKC path to match their serving state. We then transfer TRACE to UI-TARS-1.5-7B with its native prompt and action grammar, without retuning the 8B configuration. Details are provided below.

Nested-path Transfer. Tab. 24 places DivPrune, VisPruner, and ZOO-Prune on the same nested MKC path at matched budgets. TRACE remains ahead by 0.88–9.62 points across the reported settings. All methods now use the same reusable cache path. The differences therefore reflect the visual evidence admitted by their selection rules under matched serving conditions. These results fully demonstrate the effectiveness and efficiency of TRACE on the nested MKC path.

Table 24: Paradigm-transfer comparison with **GUI-Owl-1.5-8B**.

Selector	Serving path	OmniGUI (Step SR)		Mind2Web (Step SR)	
		mild	tight	mild	tight
TRACE	MKC (ours)	48.91	43.08	45.52	34.20
DivPrune	native re-prefill	45.76	37.17	40.69	24.28
	MKC (ported)	46.27	35.58	40.51	24.58
	margin of TRACE	+2.64	+7.50	+5.01	+9.62
VisPruner	native re-prefill	46.11	39.54	44.45	30.67
	MKC (ported)	46.89	39.85	44.57	30.66
	margin of TRACE	+2.02	+3.23	+0.95	+3.54
ZOO-Prune	native re-prefill	48.17	40.01	44.98	27.90
	MKC (ported)	47.51	39.42	44.64	28.31
	margin of TRACE	+1.40	+3.66	+0.88	+5.89

Transfer to UI-TARS. Tab. 25 evaluates TRACE with UI-TARS’s native prompt and action grammar. At the reported retention settings, TRACE leads ScreenSpot-Pro at 25% and 5% with average accuracies of 16.76% and 3.04%. It also leads ScreenSpot-v2 at 25% and 10%. The ranking is not uniform across benchmarks. DivPrune remains ahead on MMBench-GUI, while PruneSID leads several higher-retention settings. The transfer advantage is clearest at tighter budgets.

Configuration Check. Tab. 26 checks the transferred configuration with the 8B protocol. The scores change by 0.13–0.63 points, and the method rankings remain unchanged. The comparison is therefore stable without retuning the full configuration, which demonstrates the transferability.

Table 25: Complete single-step results with **UI-TARS-1.5-7B**.

Method	ScreenSpot-v2			ScreenSpot-Pro			MMBench-GUI L2			
	Text	Icon	Avg.	Text	Icon	Avg.	Basic	Adv.	Avg.	Ret. (%)
UI-TARS-1.5-7B: UPPER BOUND (100% TOKENS)										
UI-TARS-1.5-7B	93.73	84.84	89.86	57.42	17.55	42.19	85.06	62.59	73.76	100.0%
RETAIN 50% TOKENS ($\downarrow 50\%$)										
Random	81.34	73.10	77.75	31.53	9.44	23.09	66.87	45.82	56.29	72.5%
Uniform	83.84	73.65	79.40	34.39	8.77	24.60	68.33	46.43	57.32	74.8%
DivPrune(CVPR25)Alvar et al. (2025)	90.11	81.23	86.24	44.93	14.40	33.27	75.49	53.46	64.41	87.4%
CDPruner(NeurIPS25)Zhang et al. (2025b)	85.65	74.37	80.74	34.49	11.42	25.68	64.35	45.88	55.06	75.1%
TRIM(COLING25)Song et al. (2025)	77.58	74.01	76.02	29.17	10.60	22.07	66.70	40.18	53.37	69.8%
PruneSID(ICLR26)Fang et al. (2026)	89.00	83.03	86.40	46.06	15.07	34.22	78.12	53.79	65.89	88.9%
TRACE	90.11	82.67	86.87	42.89	14.57	32.07	73.64	53.51	63.52	86.3%
RETAIN 25% TOKENS ($\downarrow 75\%$)										
Random	52.51	46.93	50.08	9.01	4.14	7.15	33.74	22.58	28.13	36.9%
Uniform	53.06	43.14	48.74	5.53	2.81	4.49	29.55	21.42	25.46	33.1%
DivPrune(CVPR25)Alvar et al. (2025)	72.28	66.79	69.89	18.53	8.94	14.86	50.64	34.31	42.43	56.8%
CDPruner(NeurIPS25)Zhang et al. (2025b)	64.35	53.07	59.43	16.68	6.79	12.90	36.54	25.51	31.00	46.2%
TRIM(COLING25)Song et al. (2025)	47.35	51.08	48.98	8.70	4.64	7.15	38.11	19.76	28.88	36.9%
PruneSID(ICLR26)Fang et al. (2026)	69.08	68.59	68.87	16.68	8.11	13.41	49.52	31.60	40.51	54.4%
TRACE	72.28	67.69	70.28	21.70	8.77	16.76	46.84	35.81	41.29	58.0%
RETAIN 10% TOKENS ($\downarrow 90\%$)										
Random	17.41	15.52	16.59	2.05	1.49	1.83	10.02	6.53	8.26	11.3%
Uniform	19.50	16.06	18.00	1.94	1.32	1.71	10.52	6.14	8.32	11.8%
DivPrune(CVPR25)Alvar et al. (2025)	36.07	37.73	36.79	4.71	1.99	3.67	19.19	12.51	15.83	23.7%
CDPruner(NeurIPS25)Zhang et al. (2025b)	31.20	28.52	30.03	4.30	1.82	3.35	13.21	8.58	10.88	18.7%
TRIM(COLING25)Song et al. (2025)	12.67	21.84	16.67	2.56	1.16	2.02	12.53	5.15	8.82	11.8%
PruneSID(ICLR26)Fang et al. (2026)	32.73	35.38	33.88	3.58	1.49	2.78	19.03	12.23	15.61	21.8%
TRACE	37.47	37.73	37.58	8.39	2.65	6.20	16.40	12.45	14.41	25.4%
RETAIN 5% TOKENS ($\downarrow 95\%$)										
Random	7.38	6.86	7.15	0.72	0.33	0.57	4.70	3.10	3.90	4.9%
Uniform	7.52	7.40	7.47	0.92	0.33	0.70	5.04	2.88	3.95	5.1%
DivPrune(CVPR25)Alvar et al. (2025)	15.88	20.40	17.85	2.35	0.99	1.83	7.83	5.20	6.51	11.0%
CDPruner(NeurIPS25)Zhang et al. (2025b)	15.18	15.34	15.25	1.23	0.83	1.08	6.44	4.48	5.45	9.0%
TRIM(COLING25)Song et al. (2025)	5.99	9.75	7.63	0.82	0.33	0.63	5.20	1.66	3.42	4.9%
PruneSID(ICLR26)Fang et al. (2026)	11.00	19.13	14.54	1.64	0.66	1.27	7.39	3.87	5.62	8.9%
TRACE	16.57	18.23	17.30	3.99	1.49	3.04	6.10	5.81	5.95	11.5%

Table 26: Configuration selection with **UI-TARS-1.5-7B** over the declared grid $\bar{\alpha} \in \{2, 4\}$ and current dose $\rho_{\text{cur}} \in \{.10, .30, .50\}$, with the selected setting in **bold**.

Benchmark	Budget	$\bar{\alpha}=2, \rho_{\text{cur}}=.10$	$\bar{\alpha}=2, \rho_{\text{cur}}=.30$	$\bar{\alpha}=2, \rho_{\text{cur}}=.50$	$\bar{\alpha}=4, \rho_{\text{cur}}=.10$	Selected
MMB-L2	5%	5.95	5.73	5.70	5.29	$\bar{\alpha}=2, \rho_{\text{cur}}=.10$
MMB-L2	10%	14.41	13.80	13.61	13.97	$\bar{\alpha}=2, \rho_{\text{cur}}=.10$
MMB-L2	25%	41.04	41.04	38.81	41.29	$\bar{\alpha}=4, \rho_{\text{cur}}=.10$
MMB-L2	50%	63.27	63.47	63.52	63.05	$\bar{\alpha}=2, \rho_{\text{cur}}=.50$
SS-Pro	50%	31.94	32.07	31.69	31.94	$\bar{\alpha}=2, \rho_{\text{cur}}=.30$
SS-v2	5%	16.67	17.06	13.84	17.30	$\bar{\alpha}=4, \rho_{\text{cur}}=.10$

Multi-step Transfer. Every arm uses UI-TARS’s native action grammar on the adopted MKC path. On the 1521 of 2572 OmniGUI steps with target locations, TRACE gains 1.05 and 1.18 points over the strongest baseline across the two budgets. On pooled Mind2Web, the margins are 2.80 and 4.92 points. The gains appear on both the mobile OmniGUI actions and the web Mind2Web actions. All methods receive the same visual-context scope, while TRACE reuses cached rows from prior frames instead of re-encoding them. The transfer therefore preserves the same evidence-selection and cache-reuse comparison under a different backbone and action grammar.

C.1 Limitations and Failure Modes

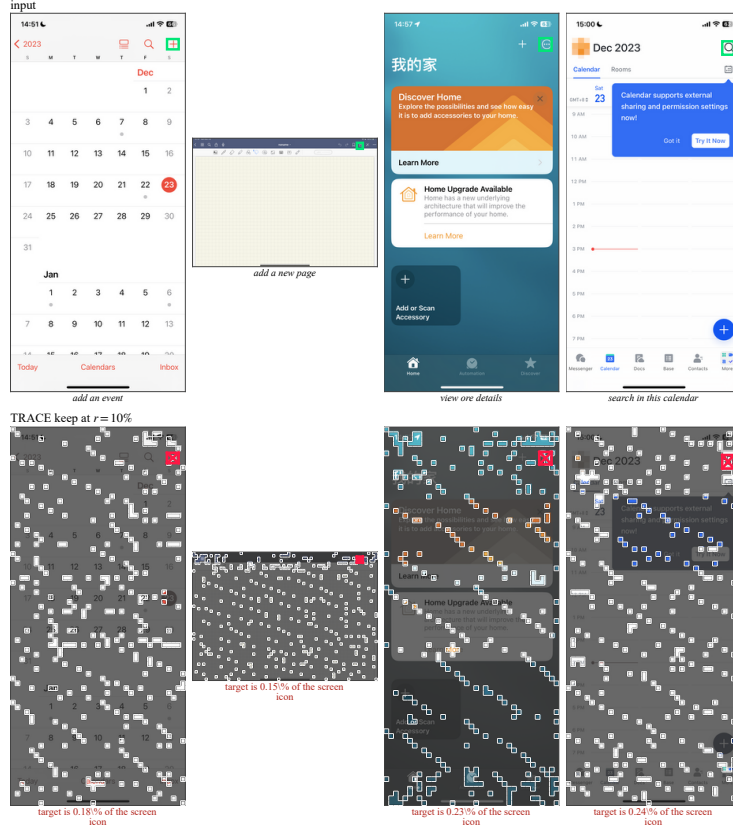
In this section, we discuss the trajectory horizon and failure modes of our proposed TRACE.

Trajectory Horizon. The evaluated episodes are short relative to the history horizon supported by our method. Most existing GUI benchmarks retain at most two or three historical frames, whereas we extend this horizon to five or six frames. As H grows, the benefit of compact historical evidence reuse becomes increasingly pronounced, as reflected by the serving-cost expression $\mathcal{O}(k_c + Hk_h)$. However, existing benchmarks rarely require evidence retrieval across long frame intervals. Most tasks can be solved from recent screens, which limits their ability to expose the advantage of longer history reuse. Evaluating this regime requires trajectories with larger temporal gaps between evidence and query screens. We leave this systematic evaluation on longer trajectories to future work.

Failure Modes. On the recorded ScreenSpot-v2 run at $r = 5\%$, TRACE misses 503 examples

Table 27: Complete multi-step transfer with **UI-TARS-1.5-7B**.

Method	OmniGUI			Mind2Web		Ret. (%)
	Type	Ground.	Step SR	Ele. Acc	Step SR	
UI-TARS-1.5-7B: UPPER BOUND (100% TOKENS)						
UI-TARS-1.5-7B	79.22	62.82	49.77	53.23	42.94	100.0%
	MILD ($c=50\%$, $h=10\%$)					
Random	77.38	49.11	38.00	35.89	27.69	70.4%
Uniform	78.90	51.00	40.24	33.60	25.98	70.7%
DivPrune _(CVPR25) Alvar et al. (2025)	77.32	<u>54.93</u>	<u>42.47</u>	<u>41.66</u>	<u>32.33</u>	<u>80.3%</u>
CDPruner _(NeurIPS25) Zhang et al. (2025b)	76.13	47.06	35.83	35.59	27.16	67.6%
PruneSID _(ICLR26) Fang et al. (2026)	76.59	54.25	41.55	39.99	31.21	78.1%
TRACE	<u>78.44</u>	55.49	43.52	44.11	35.13	84.6%
	TIGHT ($c=25\%$, $h=5\%$)					
Random	74.10	29.46	21.83	11.40	8.55	31.9%
Uniform	76.00	30.45	23.14	8.46	6.51	30.8%
DivPrune _(CVPR25) Alvar et al. (2025)	<u>77.12</u>	<u>37.08</u>	<u>28.60</u>	<u>17.53</u>	<u>13.00</u>	<u>43.9%</u>
CDPruner _(NeurIPS25) Zhang et al. (2025b)	72.78	32.70	23.80	16.42	12.13	38.0%
PruneSID _(ICLR26) Fang et al. (2026)	74.36	33.16	24.65	14.68	10.88	37.4%
TRACE	78.90	37.75	29.78	22.32	17.92	50.8%

Figure 25: Remaining failure cases with **GUI-Owl-1.5-8B**.

that the unpruned model solves. In 93.0% of these failures, a retained token overlaps the target. Removing the target’s spatial evidence accounts for only 0.8% of the gap to dense. The remaining errors occur mainly when the selector retains the target neighborhood but not enough detail for precise localization. The failure is therefore a precision problem under aggressive context reduction rather than a simple failure to reach the target region. Besides the aforementioned precision problem, Fig. 25 shows thin or low-contrast widgets whose extent fits within a single patch. These widgets remain difficult to separate from the background after the budget is reduced. For this subset, increasing patch detail or improving the visual representation is more direct than token pruning.