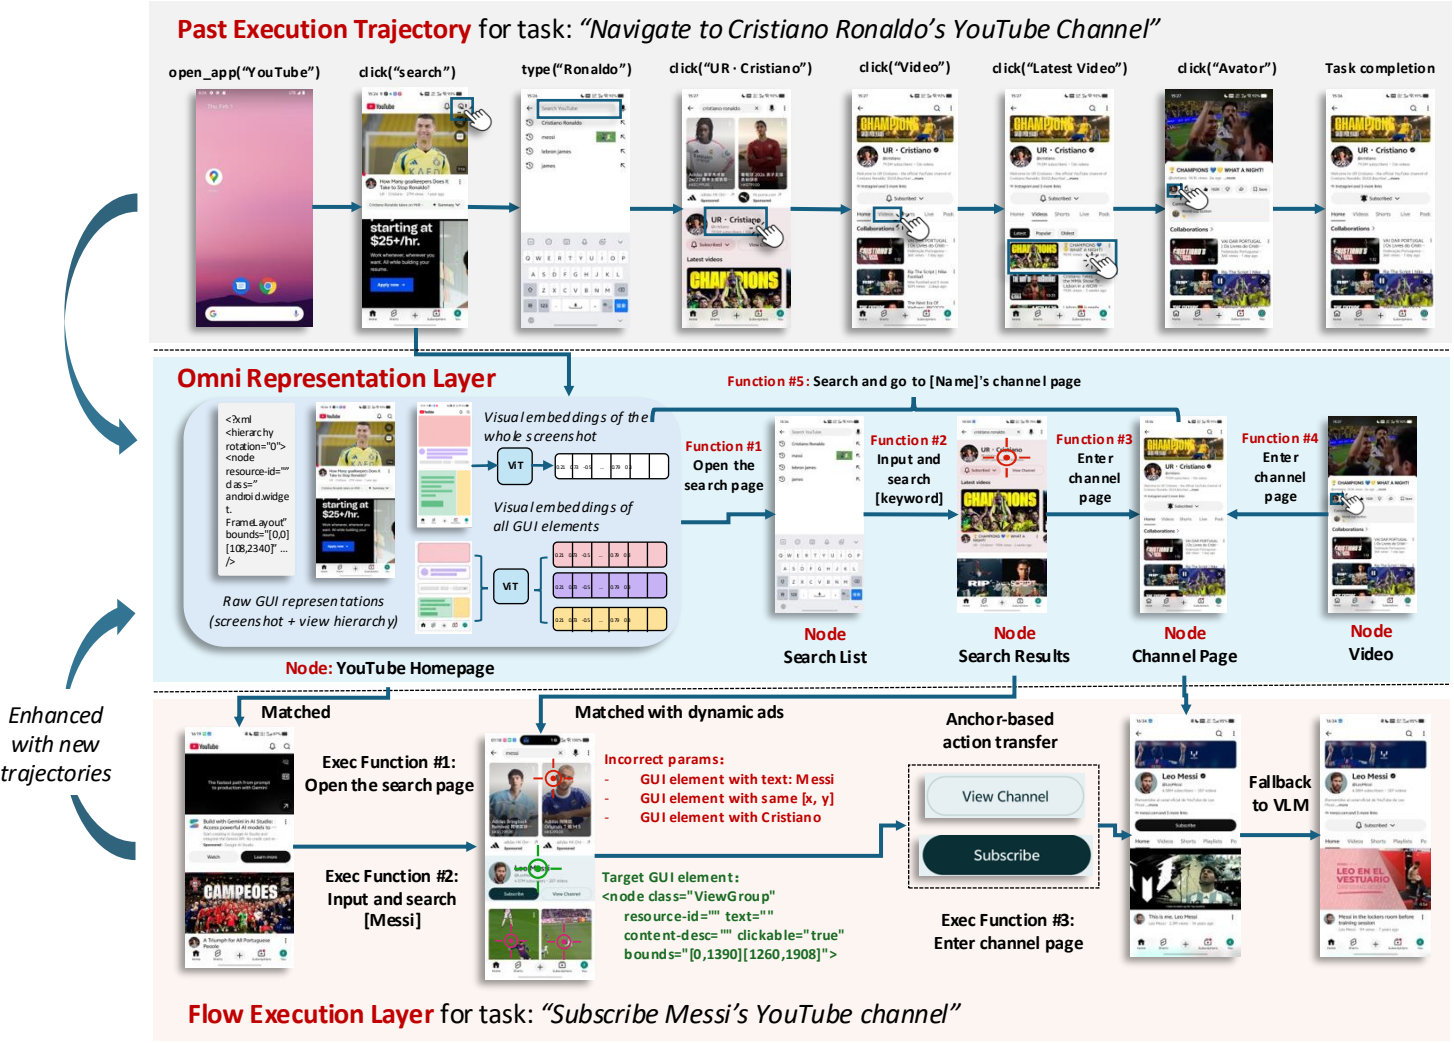

Past Execution Trajectory for task: "Navigate to Cristiano Ronaldo's YouTube Channel"
open_app("YouTube")
click("search")
type("Ronaldo")
click("UR · Cristiano")
click("Video")
click("Latest Video")
click("Avator")
Task completion
Omni Representation Layer
Function #5: Search and go to [Name]'s channel page
Visual embeddings of the whole screenshot
Visual embeddings of all GUI elements
ViT
Raw GUI representations (screenshot + view hierarchy)
Function #1 Open the search page
Function #2 Input and search [keyword]
Function #3 Enter channel page
Function #4 Enter channel page
Node: YouTube Homepage
Node Search List
Node Search Results
Node Channel Page
Node Video
Enhanced with new trajectories
Matched
Matched with dynamic ads
Exec Function #1: Open the search page
Exec Function #2: Input and search [Messi]
Incorrect params:
- GUI element with text: Messi
- GUI element with same [x, y]
- GUI element with Cristiano
Target GUI element:
<node class="ViewGroup" resource-id="" text="" content-desc="" clickable="true" bounds="[0,1390][1260,1908]">
Anchor-based action transfer
View Channel
Subscribe
Exec Function #3: Enter channel page
Fallback to VLM
Flow Execution Layer for task: "Subscribe Messi's YouTube channel"