

## Leiden Grid Infrastructure

Dr. M.F. Somers

26 Nov 2008.

### Table of content:

Introduction.....	3
Rationale.....	3
General design.....	4
Database structure.....	6
job_queue.....	6
running_locks.....	7
active_resources.....	7
running_sessions.....	8
users_allowed.....	8
groups_allowed.....	9
users_denied.....	9
groups_denied.....	10
updates.....	10
Resource interfacing with the project's web-server.....	10
resource_signup_resource.....	11
resource_signoff_resource.....	12
resource_request_work.....	12
resource_request_job_details.....	14
resource_lock_job.....	14
resource_unlock_job.....	15
resource_update_job.....	15
resource_submit_job.....	16
resource_job_state.....	17
resource_request_resource_data.....	17
Job locking mechanism.....	18
Application interfacing with the project's web-server.....	19
interface_submit_job.....	19
interface_job_state.....	21
interface_delete_job.....	22
interface_project_server_list.....	23
interface_project_resource_list.....	24

Project servers communication API.....	24
server_get_update.....	25
server_run_update.....	26
Certificates.....	27
Resource Daemon.....	28
job_check_running_script.....	30
job_check_finished_script.....	30
job_abort_script.....	30
job_prologue_script.....	30
job_run_script.....	30
job_epilogue_script.....	30
check_system_limits_script.....	31
job_check_limits_script.....	31
hello_world.....	31
check_system_limits_script.....	31
job_abort_script.....	32
job_check_finished_script.....	32
job_check_limits_script.....	32
job_check_running_script.....	32
job_epilogue_script.....	33
job_prologue_script.....	33
job_run_script.....	33
Basic interface.....	34
Repositories.....	34
Example user session.....	36

### Introduction:

“The Leiden Grid Infrastructure (LGI) is a framework that allows scientists to perform computational tasks and store data with a common interface without needing to know the details of the underlying systems. Moreover the infrastructure allows for a work and load balancing of the underlying systems; The calculation will run on a machine, being a resource within the grid, that can actually do the calculation. Data will be stored again on a resource within the grid in whatever format the resource can handle wherever there is place. Furthermore, with the LGI a scalable infrastructure is built that can grow whenever the demand increases for more resources.”

The above stated general goal of the LGI can be implemented according to the infrastructural design, made clear in this document. The design is based on well-known and proven technologies.

### Rationale:

Researchers and students of today cannot be expected to understand all the technicalities involved in using a computer or storage device efficiently; each system behaves differently in its details and because the technologies involved in the computational field are growing in such a rapid rate, keeping up with that knowledge, together with keeping up with the scientific knowledge, is hard to do.

Past experiences on supercomputers and clusters has shown that on average such a system is made redundant within 6 years. Often, when continuing present work on newly made available systems, a lot of porting is involved and a detailed knowledge of the technicalities of the new hardware is needed. Keeping current software running in such a dynamic surrounding can be a rather time consuming job. Just think about the new technologies like having your programs run in parallel, either using OpenMP or MPI, or perhaps even both is the system allows for this... Also think about which compiler and with what setting to use for your new hardware...


A general scientist should not be bothered with all of this, especially if it is known that most of the software run on computers is usually compiled and set up by others, and all this is often restricted to only a few general applications. The same rationale applies to your own desktop system. You are probably using Windows, or perhaps Linux. What software was installed and why do you use it? Count the number of

applications you use on a daily basis and see for how many of them you actually compiled the application from sources yourself!

Nowadays, computers can be used far more efficiently, both from a user, and from a management perspective, if the computers are part of a low-cost, perhaps application specific, but a very scalable grid infrastructure based on proven technologies.

### General design:

The general LGI design is given by the following figure;

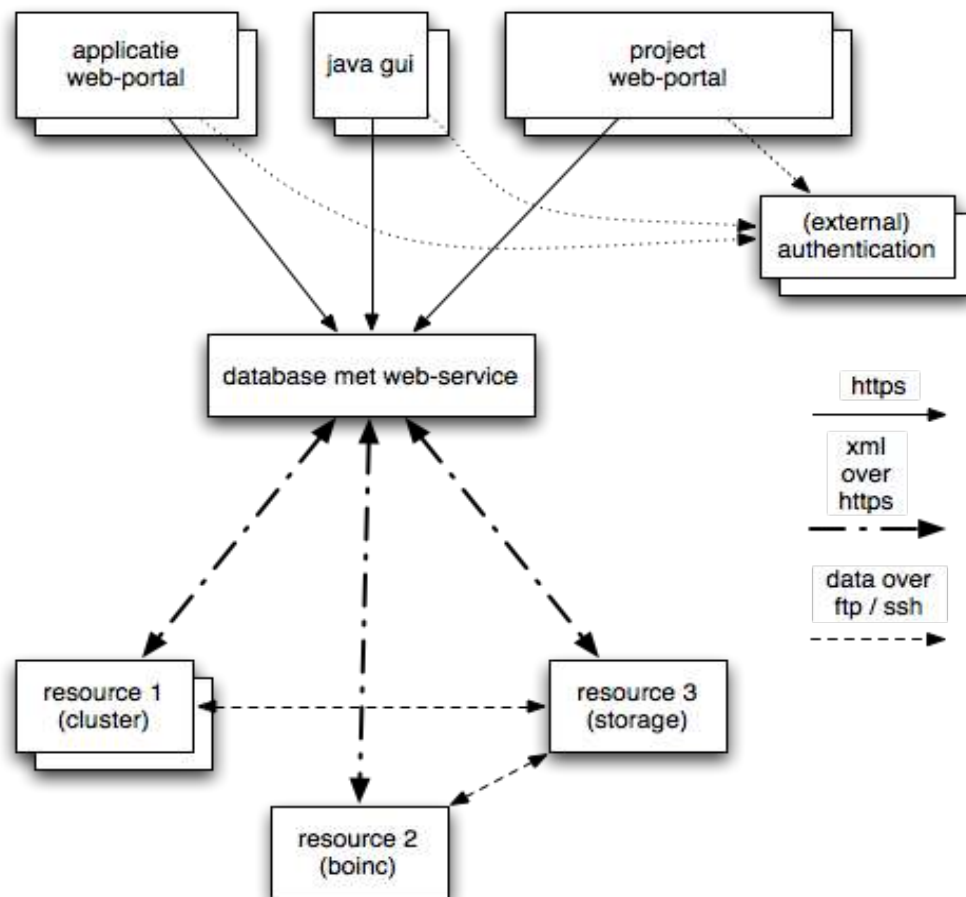

For each *project*, any number of *applications* can be set up on any number of *resources*. The *application interface*, a common interface for an application within a project, communicates with any number of *project web-servers*. One project web-server is designated to be the *master project web-server*.

The project web-servers are nothing more than machines running a web-service to a general MySQL database with a known structure. The structure of the MySQL database will be detailed upon in this document: i.e. each project web-server contains an active list of all the resources within the LGI for that project and all the needed user management information. The project, within this framework, is nothing more than a specific MySQL database on each of the project web-servers. A single web-server machine can therefore automatically handle multiple projects independently.

The communication between an application interface and the project web-server is based on exchange of XML data over https using server- and client-certificates, all signed by the Leiden Grid Infrastructure Central Authority (LGI-CA). The LGI-CA is trusted by all clients running application interfaces, all project web-servers and all resources within the LGI.

The application interfaces queue calculation- or storage-jobs into any of the project's web-server databases. This is done by requesting the project's master web-server to get a list of project web-server databases. This allows for a round-robin load balancing over these project web-servers, if desired. An application interface can also monitor the completion of these jobs and depending on the details of the project, queue as much work as is allowed according to the users credentials. The user management for the project application can be implemented in the application interface itself but can also be set up on each of the project web-server database. The project web-servers only accept application interface clients with a valid LGI-CA signed certificate.

Application interfaces can be implemented in any programming language available as long as they communicate over https, using client- and server-certificates, all signed by the LGI-CA and adhere to the web-services offered by the project web-servers.

Resources, on the other end in this design, are nothing more than computers capable of doing calculations or storing data. A resource is identified with an unique ***resource name***. In the project's master web-server an active resource table exists which couples the unique resource name to an user account on the resource (by using i.e. a [somers@teras.sara.nl](mailto:somers@teras.sara.nl) type URL) and to it's LGI-CA signed certificate, which in turn contains the public part of the RSA key-pair of the resource, as usual. The unique name of the resource is also put into the client-certificate as the common name. More details on the use of certificates is given below.

A resource essentially runs a *resource-daemon* in user-space and regularly polls the master and slave web-servers, perhaps even for different projects, to see if it is capable of performing any of the queued tasks for an application that was previously set up on that specific resource. The communication again makes use of XML over https, again with server- and client-certificates, all signed by the trusted LGI-CA. This allows for the project web-servers to identify requests through the verified client-certificates it receives.

The resource is regarded to be out of the administrating domain of the LGI; the owner and administrator of the resource can decide for which project's it will do what sort of work and for which users or groups of users for each of those project's applications. The resource-daemon runs usually as a non-privileged user on the resource and has only a limited access to the resources available on the resource. This construct allows for, for example, regular user accounts on super-computers to be set up as a resource within the LGI for that specific project, user or group of users. More details on the resource daemon implementations are given in the following sections.

Within this design, storage and file transfers are dealt with similar to computational tasks; storing a file is regarded to be a running '*file storage*' job in the project's web-server. It can be queued (only by a resource) for a specific resource, identified through the unique resource name within the project, or for any storage resource that is capable of storing the data in one way or the other.

### Database structure

As is clear from the previous two sections, the project web-server, and with it the database, plays a central role in the LGI. A general and sound design of it's structure is therefore of out-most importance. In this part of the document some details on that matter are presented.

The project's web-server contains a MySQL database for each project it might serve for. The name of the database is taken to be equal to the project name. In the project database the following tables are defined;

1) The table '*job\_queue*';

<i>field</i>	<i>data type</i>
job_id	integer
state	string
application	string
owners	string
read_access	string
target_resources	string
input	blob
output	blob
job_specifics	string
lock_state	integer
state_time_stamp	integer

This table shows the state for each job in the project's web-server. It contains the 'job\_id' assigned to the job, it's 'state', for what 'application' it is, for which 'target\_resources', which groups or users are the 'owners' of the job and what groups or users have 'read\_access'. Only users and groups listed in the 'owners' field can modify the job. If the 'target\_resources' contains “any”, any capable resource can pick up the job. The 'owners' and 'groups' fields are comma separated values and can contain the “any” keyword.

The 'job\_specifics' may contain extra details on the specific job, perhaps even in XML format. It might contain extra scheduling information, specific to the application and the target\_resources. The resource can decide to accept the job based on information present in that string. The 'input' and 'output' fields are general input and output fields. The interpretation of these fields depend on the application in question. They need not be used.

The 'state\_time\_stamp' is the time this job went into the state it currently is. The 'lock\_state' field is used to signal a lock on this specific job. If the number is non-zero positive, an entry in the 'running\_locks' table should be present. Details on the locking mechanisms are given below.

2) The table '*running\_locks*';

<i>field</i>	<i>data type</i>
lock_id	integer
job_id	integer
resource_id	integer
lock_time	integer
session_id	integer

This table will contain all the current running locks on the jobs of the 'job\_queue' table for each session of resources. If a job in the 'job\_queue' table is locked by a resource in a session, the 'lock\_state' is a positive non-zero number in the 'job\_queue' entry and an entry in this table is present. The 'job\_id' indicates for which job in 'job\_queue' this lock is, the 'resource\_id' indicates, through the 'active\_resources' table below, which resource has locked the job at what time, which is specified by 'lock\_time' and the 'session\_id' indicates what session of the resource has locked the job. Details on the locking mechanisms are given below.

3) The table '*active\_resources*';

<i>field</i>	<i>data type</i>
resource_id	integer
resource_name	string
resource_capabilities	string
client_certificate	blob
last_call_time	integer
project_server	integer
url	string

This table contains the currently signed-up resources within the LGI for this specific project. The 'last\_call\_time' keeps track of the last time this resource has accessed this web-server. The 'project\_server' defines what sort of project server the resource is; 0 = no project server, 1 = master project server, 2 = slave project server. The 'url' field specifies the location, on the web, and under what user account this resource, on the



resource itself, is part of the grid. The 'client\_certificate' contains a copy of the resource's certificate. Be sure to use correct naming convention for the resources: [username@somemachine.org](mailto:username@somemachine.org). The 'resource\_capabilities' field contains extra information the resource daemon has sent to the server during signing-up. The extra information is found from the daemon configuration.

4) The table '*running\_sessions*';

<i>field</i>	<i>data type</i>
session_id	integer
resource_id	integer
session_time_stamp	integer

This table stores all the running sessions of all the resources. The 'session\_id' uniquely identifies the session for the resource with id 'resource\_id', The 'sessions\_time\_stamp' is a time value that is reset at each web request for which the resource needs a full session. If a session has timed-out for more than 30 minutes, the locks of that session are removed and the session itself is quited by the project web-server. any service to the resource, for that specific session, is the denied.

5) The table '*users\_allowed*';

<i>field</i>	<i>data type</i>
user_name	string
application	string
job_limit	integer

This table contains users who are granted access to the project web-server. If a specific user is not in this list, the record with the user\_name equal to “any” can be used for the specific application, however, in that case the groups setting are first checked. The application entry can also be set to “any” to allow access to all applications within the project. If no such “any” 'user\_name' is present in the list, the requesting user should be denied any service.

If the 'job\_limit' value is negative, it specifies the maximum number of 'running' and

'queued' jobs this user is allowed to have for the application on this project-server. If the number is positive it specifies the total number of jobs this user is allowed to have on this project-server, whatever the state. If the number is zero, there is no limit.

User settings always overrule all group settings, unless the “any” user record was used and a specific group record is present in the 'groups\_allowed' table.

6) The table '*groups\_allowed*';

<i>field</i>	<i>data type</i>
group_name	string
application	string
job_limit	integer

This table contains the groups who are granted access to the project web-server. If a specific group is not in this list, the group should be denied any service for the specific application. This can be overruled by allowing for an “any” group. For application the “any” name can also be specified. However, in that case, the user tables are first consulted to check if there was no “any” user defined.

If the 'job\_limit' value is negative, it specifies the maximum number of 'running' jobs this group is allowed to have for the application. If the number is positive it specifies the total number of jobs this group is allowed to have. If the number is zero, there is no limit.

Group settings are always overruled by user settings.

7) The table '*users\_denied*';

<i>field</i>	<i>data type</i>
user_name	string
application	string

This table specifies which user is denied service for an application. This table overrules the 'users\_allowed' and 'groups\_allowed' tables. If the application is set to “any”, all service will be denied. The “any” 'user\_name' is also allowed in this table.

8) The table '*groups\_denied*';

<i>field</i>	<i>data type</i>
group_name	string
application	string

This table specifies which group is denied any service for an application. This table overrules the 'user\_allowed' and 'groups\_allowed' tables. If the application is set to “any”, all service will be denied. The “any” group can also be present in the table.

9) The table '*updates*';

<i>field</i>	<i>data type</i>
version	integer
servers	string
update_query	blob

This table contains all the updates this project server knows about. Each update is identified by a non-zero positive version number. If the update was intended for the specific server, listed in the comma separated 'servers' field, the 'update\_query' has been applied to this servers project database. Only sequential updates are performed. Updates not intended for this server are still logged into this table.

### Resource interfacing with the project's web-server

In this part the API between the project's web-server and a 'resource' is detailed upon.

The web-interface to a project web-server will be implemented in php and by using XML data transfer over https, using client- server-certificates. Using these certificates, the resource can be identified through the 'common name' in the certificate. All requests are made by passing data to the php scripts through the POST method. All responses from the project's web-server will be wrapped into “<LGI> <response> </response> </LGI>” XML tags.

If an error condition has occurred during the request, a “**<error> <number> 1 </number> <message> Back-off </message> </error>**” type of response is generated. The non-zero positive numbers, enclosed in the “**<number> </number>**” tags, constitutes an error and has with it a corresponding message within the “**<message> </message>**” tags.

If a server is overloaded it should respond with the above 'back-off' error message. The resource should then try to look for the “**<timeout> N </timeout>**” tags, within the “**<error> </error>**” message and wait for at least N seconds before trying again. It could also decide to try and request a different project's web-server in the mean-time.

If a resource, not present in the web-servers 'active\_resources' table does a request, an error is returned and service is denied. Also if the certificate of a resource does not match the one stored in the 'active\_resources' table, service will be denied.

The following requests can be made to the web-server. They are listed under the 'resources' directory on the project server's main URL. For example “[https://fwnc7003.leidenuniv.nl/LGI/resources/resource\\_signup\\_resource.php](https://fwnc7003.leidenuniv.nl/LGI/resources/resource_signup_resource.php)”.

#### 1) The request '*resource\_signup\_resource*';

This request is made by the resource prior to any use of the project's web-services. It allows the project's web-server to setup a new session. The session number, which uniquely identifies this session, will be returned in the response and future requests should include that session id in their request when a full session is needed for that request. This request only needs the unique identifier of the resource, which is taken from the certificate's common name field, and the '*project*' name, which is POSTed. It is possible to POST the '*capabilities*' field to. If this field is posted, the 'resource\_capabilities' record in the database is updated with this information. The response, when an error occurred, on this request is an “**<LGI> <response> </response> </LGI>**” encapsulated error, as described above.

For a valid response, extra information can be placed by the web-server if needed, also encapsulated within the “**<LGI> <response> </response> </LGI>**” tags. Currently only the list of project's slave web-servers are exported by using the “**<project\_server number=x> url </project\_server>**” tags in which x is the logical number of the slave server. The total number of servers is also exported in the “**<number\_of\_slave\_servers> N </number\_of\_slave\_servers>**” tags.

An example response is given below:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <resource> mark@testresource.somewhere.nl </resource>
    <resource_url> </resource_url>
    <resource_capabilities> <hello_world> nothing </hello_world>
  </resource_capabilities>
    <project> testproject </project>
    <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
  </this_project_server>
    <number_of_slave_servers> 2 </number_of_slave_servers>
    <project_server number=1>
https://fwnc7003.leidenuniv.nl/testslaveserver </project_server>
    <project_server number=2>
https://fwnc7003.leidenuniv.nl/testslaveserver2 </project_server>
    <session_id> 101 </session_id>
  </response>
</LGI>
```

## 2) The request '*resource\_signoff\_resource*';

This request is made by the resource to signal the end use of the project's web-services for the session identified through the posted '*session\_id*' field. It allows the project's web-server to unlock any stale locks this resource might have on jobs in the project database and to kill the session it had with the resource. This request needs the unique identifier of the resource, which is taken from the certificate's common name field, the 'project' name, and the 'session\_id' which should all be POSTed. The response generated to this request is exactly the same as described in the above 'resource\_signup\_resource' request.

## 3) The request '*resource\_request\_work*';

This request is made by a resource that seeks for work to be done. If an unregistered resource does the request, the request will be ignored and an error response will be send back, as was previously described. A valid session of the resource is required to be able to serve this request.

The common name field of the resource certificate is used to identify resource doing the request. The 'session\_id', '*application*' and the '*project*' fields are set by a POST. The POSTing of the '*start*' and '*limit*' fields are optional in this request. If these fields are not POSTed, a default 'limit' of 10 will be used and if not POSTed, the 'start' is set

to 0.

The web-server will query the 'job\_queue' table, of the 'project' table in it's database for unlocked jobs with an offset of 'start' in the 'queued' state for the requesting resource. It will generate locks for these rows on the fly as is described below and will respond with the XML data enclosed in the “<LGI> <response> </response> </LGI>” tags.

The response will have a “<number\_of\_jobs> N </number\_of\_jobs>” section that gives the amount of jobs returned in the response. It will also have details on the requesting resource, project, the application of the request and the server's involved.

For each job in the response the “<job number=x> </job>” tags are used with x set equal to the logical number of the job in the response. Within these “<job> </job>” tags, the 'job\_id', 'owners', the 'read\_access', 'state\_time\_stamp', 'the\_job\_specifics', and 'target\_resources' are also specified. An example of a valid response is:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <start> 0 </start>
    <limit> 10 </limit>
    <resource> mark@testresource.somewhere.nl </resource>
    <resource_url> </resource_url>
    <resource_capabilities> <hello_world> nothing </hello_world>
  </resource_capabilities>
  <project> testproject </project>
  <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
</project_master_server>
  <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
</this_project_server>
  <session_id> 102 </session_id>
  <application> testapp </application>
  <number_of_jobs> 3 </number_of_jobs>

  <job number=1>
    <job_id> 140 </job_id>
    <target_resources> testresource </target_resources>
    <owners> mark </owners>
    <read_access> theor, sara, cyttron </read_access>
    <state_time_stamp> 1259926661 </state_time_stamp>
    <job_specifics>
      <nprocs> 2 </nprocs>
      <disk> 5G </disk>
      <mem> 64G </mem>
    </job_specifics>
  </job>

  <job number=2>
    <job_id> 142 </job_id>
    <target_resources> testresource </target_resources>
    <owners> freek, cyttron </owners>
    <read_access> cyttron </read_access>
    <state_time_stamp> 1259927661 </state_time_stamp>
    <job_specifics>
      <nprocs> 1 </nprocs>
      <mem> 64M </mem>
```

```

        </job_specifics>
    </job>

    <job number=3>
        <job_id> 147 </job_id>
        <target_resources> any </target_resources>
        <owners> sjoerd, cyttron </owners>
        <read_access> any </read_access>
        <state_time_stamp> 1259936661 </state_time_stamp>
        <job_specifics> </job_specifics>
    </job>
</response>
</LGI>

```

The project web-server automatically sorts the jobs for the response according to the 'state\_time\_stamp' field of the job and implements a basic fifo scheduling algorithm.

The resource-daemons should now inspect the individual jobs in the response and decide to accept the job or reject it. When the resource decides to reject it, it should unlock this job so other resources can have a look at it. If it does decide to run the job, it should change the state of the job to 'running' and request the details of the job as explained below.

#### 4) The request '*resource\_request\_job\_details*';

This request is made to the project's web-server to retrieve the full information for a job identified through it's 'job\_id'. The resource is again identified through the certificate and only if the resource is known and has a running lock on the job, this request is served. The 'job\_id' is again POSTed together with the 'session\_id' because running session with the resource is needed for this request to be able to serve. The response is very similar to the above described response, the extra information of the 'input', 'output', 'application' and the 'state' are now also returned. The 'input' and 'output' blobs are encoded into a hexadecimal (BinHex) notation so they can be transferred in the XML format over https. An example response is:

```

<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <resource> mark@testresource.somewhere.nl </resource>
    <resource_url> </resource_url>
    <resource_capabilities> <hello_world> nothing </hello_world>
  </resource_capabilities>
  <project> testproject </project>
  <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
</project_master_server>
  <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
</this_project_server>
  <session_id> 1 </session_id>
  <job>
    <job_id> 147 </job_id>
    <application> testapp </application>

```

```

        <state> running </state>
        <target_resources> any </target_resources>
        <owners> sjoerd, cyttorn </owners>
        <read_access> any </read_access>
        <state_time_stamp> 1259936661 </state_time_stamp>
        <job_specifics> </job_specifics>
        <input> CDEF9021569C8787E </input>
        <output> </output>
        <repository_content> <file name="hi"> <size> 1024 </size> <date>
1662626 </date> </file> </repository_content>
    </job>
</response>
</LGI>

```

##### 5) The request '**resource\_lock\_job**';

This request is made to the project's web-server to lock a job in the 'job\_queue' table. The resource is identified through the certificate, the 'job\_id' together with the 'session\_id' is POSTed and the lock will only be set if the job has not been locked before by any other resource and if the job's 'target\_resources' contains “any” or the requesting resource name. If the resource is unknown, this service is again denied and an error response is returned. A successful respond will be in the “<lock> </lock>” tags wrapped XML, with details of the lock:

```

<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <resource> mark@testresource.somewhere.nl </resource>
    <resource_url> </resource_url>
    <resource_capabilities> <hello_world> nothing </hello_world>
  </resource_capabilities>
    <project> testproject </project>
    <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
  </this_project_server>
    <session_id> 103 </session_id>
    <job_id> 104 </job_id>
    <lock>
      <lock_id> 10020 </lock_id>
      <job_id> 104 </job_id>
      <lock_time> 127657651276 </lock_time>
      <session_id> 103 </session_id>
      <resource_id> 3 </resource_id>
    </lock>
  </response>
</LGI>

```

If the lock cannot be set, an error response is sent back, as described previously. The resource should now wait and try again later.



## 6) The request '**resource\_unlock\_job**';

This request is made to the project's web-server to unlock a previously set lock on a job. Again the resource is identified through the certificate and both the 'job\_id' and the 'session\_id' should be POSTed. The lock will only be removed if the resource is known and had originally locked the job, or a job was locked for the resource through the 'resource\_request\_work' request. The response of a successful call again is embedded into the “<lock> </lock>” tags:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <resource> mark@testresource.somewhere.nl </resource>
    <resource_url> </resource_url>
    <resource_capabilities> <hello_world> nothing </hello_world>
  </resource_capabilities>
  <project> testproject </project>
  <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
</project_master_server>
  <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
</this_project_server>
  <session_id> 103 </session_id>
  <job_id> 104 </job_id>
  <lock>
    <lock_id> 10020 </lock_id>
    <job_id> 104 </job_id>
    <unlock_time> 127657651276 </unlock_time>
    <session_id> 103 </session_id>
    <resource_id> 3 </resource_id>
  </lock>
</response>
</LGI>
```

## 7) The request '**resource\_update\_job**';

This request is made to the server to alter some of the fields of a job. The job should be locked by the resource before this request is allowed. The resource should have a running session too. The 'job\_id' and the 'session\_id' should be POSTed together with fields that can be altered; 'state', 'target\_resources', 'input', 'output' and 'job\_specifics'. If any of these fields need changing, the new data should be POSTed. The server automatically adjusts the 'state\_time\_stamp' field if needed. The response of the server is the final data the job record will contain, as described by the 'resource\_job\_details' requests response. The 'input' and 'output' data POSTed should be first BinHexed and the server should un-BinHex them.

8) The request '*resource\_submit\_job*';

This request is made by a resource to insert a new job into the project's web-server database. Again a running session is needed for this request. The fields needed for this request are 'session\_id', 'state', 'application', 'owners' and 'target\_resources'. The other fields, 'read\_access', 'job\_specifics', 'input' and 'output', can also be POSTed if needed.

The server will check if any of the POSTed 'owners' are allowed to submit a job for the specific 'application'. If not, an error response is returned. The 'owners' credentials are checked against the 'users\_denied', 'groups\_denied', 'users\_allowed' and 'groups\_allowed' tables. Only the subset of the 'owners' that is allowed to submit a job will become part of the jobs 'owners'.

If the credentials are in order, the job is inserted into the database and automatically will be locked by the project's web-server for the resource, identified through the client certificate. The 'job\_id' will be determined by and the 'state\_time\_stamp' will also be initialized by the server.

If the 'read\_access' data was not POSTed, it will be set equal to the 'owners' by the server.

During the submission of the job, this routine automatically creates a '**repository**' for the job. Files uploaded to the server are automatically moved into the repository directory and the correct job\_specifics tags “<repository> </repository>” and “<repository\_url> </repository\_url>” are added. Read more about the repositories below. Files can be uploaded by POSTing the variable “number\_of\_uploaded\_files” to specify the number of files being uploaded. Each file is given a POST name like “uploaded\_file\_XXX” with XXX being an integer.

The response is again equal to the response obtained from the server in the 'resource\_job\_details' request. The resource can check this data, if needed, change fields by issuing an 'resource\_update\_job' request and finally do the 'resource\_unlock\_job' request.

### 9) The request '*resource\_job\_state*';

This request is made by the resource to get the state of a job, identified through the 'job\_id' being POSTed. This request is only served if the known resource, identified through the certificate, is present in the 'target\_resources' list of the job, or if this field contains the “any” resource. The response by the server is very similar to the one obtained by issuing the 'resource\_job\_details' request. The difference is that the 'input' and 'output' fields are now not reported and that the job need not be locked prior to the request. Neither does the resource need to have a running session for this request. An example of a valid response is thus:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <resource> mark@testresource.somewhere.nl </resource>
    <resource_url> </resource_url>
    <resource_capabilities> <hello_world> nothing </hello_world>
  </resource_capabilities>
    <project> testproject </project>
    <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
  </this_project_server>
    <job>
      <job_id> 147 </job_id>
      <application> testapp </application>
      <state> running </state>
      <target_resources> any </target_resources>
      <owners> sjoerd </owners>
      <read_access> any </read_access>
      <state_time_stamp> 1259936661 </state_time_stamp>
      <job_specifics> </job_specifics>
    </job>
  </response>
</LGI>
```

This request can be issued to monitor a change in state of a job by the resource. This can be used to detect an '*aborting*' state issued by an application interface. This request can also be used in the file transfer protocol, as will be described below.

### 10) The request '*resource\_request\_resource\_data*';

This request is made by the resource to get the certificate details of another resource. The compulsory field '*resource\_name*' should be POSTed to be able to serve this request. The resource is again identified through its certificate and is allowed to POST the 'project' field too. The certificate is reported in BinHexed format and no session is needed to serve this request. The response to this request looks like:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
```

```

<response>
  <resource> mark@testresource.somewhere.nl </resource>
  <resource_url> </resource_url>
  <resource_capabilities> <hello_world> nothing </hello_world>
</resource_capabilities>
  <project> testproject </project>
  <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
</project_master_server>
  <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
</this_project_server>
  <requested_resource_data>
    <client_certificate> 0F1206AC5D ... 1B4D6E </client_certificate>
    <resource_url> mark@ffwnc7003.leidenuniv.nl <resource_url>
    <last_call_time> 1287876287 </last_call_time>
  </requested_resource_data>
</response>
</LGI>

```

### Job locking mechanism

Because in the LGI several resources can request work from the project's web-server, and decide for themselves, based on the 'job\_specifics' field to perhaps accept the work for the application, a locking mechanism is needed. If a resource decides to inspect the job, another resource should not in the mean-time decide to run the job or else a race-condition is met.

The locking mechanisms in the LGI will be implemented per job and a resource is only allowed to work on a job entry of a project database if the resource has successfully locked that specific job prior to use. Moreover, the project's web server will refuse to serve 'resource\_request\_work' requests to the resource if a lock exists in the 'running\_locks' table for that resource. If somehow a resource fails to unlock the job after a while, the project's web-servers will unlock the jobs that were locked and kill the session it had and the resource should setup a new session with the project's web-server by signing up again.

When the 'resource\_request\_work' is made, the project's server follows the following steps to ensure a correct and safe locking mechanism; The requesting resource name is taken from the client-certificate it presents. It will check if the resource is registered and had a valid session running. If the resource was not registered or has no valid session, an error response is returned. Otherwise, a query is run on the 'running\_locks' table for the project to see if there are any lock currently running for that resource in the current session. If so, again an error is returned.

If no locks were present on any jobs for this session and resource, the 'job\_queue' table is queried for the specific resource for unlocked jobs (lock\_state<=0), for the

requested application, being in the 'queued' state. A limit is set to this request and results are sorted according to the 'state\_time\_stamp' field. Now for each job returned in this query in turn, the project's web-server should increase the 'lock\_state' value. It should then query again for the same job's 'lock\_state' and if it is equal to 1, the resource has successfully set the lock. If the value turns out to be 2 or more, a query to decrease the 'lock\_state' of this job is issued. The job is then ignored and not put into the response. If the 'lock\_state' returned 1 however, a new entry in the 'running\_locks' table is inserted for this job, resource and session. It will set the current time as the 'lock\_time' in the 'running\_locks' table and the job is put into the response set.

When a request is made by a resource to unlock a job, the resource is first identified and checked if it had a lock on the job in this session. If it did, the 'lock\_state' of the job in the 'job\_queue' is decreased first, before removing the corresponding entry in the 'running\_locks' table.

#### *Application interfacing with the project's web-server*

In this section the communication between an 'application interface' and the project's web-servers is detailed upon. In general the URL used to communicate between a resource and the project's web-server can be different than the URL used by the 'application interfaces' that also communicate with the project's web-server.

Reasons are that for resources there is no need to check the user and group access control lists of the database (the 'user\_allowed', 'user\_denied', 'group\_allowed', 'group\_denied' tables), a resource is identified through its certificate, usually resources interact differently and perhaps more frequent with the project's web-server than users do. Moreover, by logically separating the web-servers for 'resources' and 'application interfaces', extra scaling possibilities are introduced.

In general, all communications between the 'application interface' and the project's web-server need user credentials in the request. Also all communication is done in XML over https, using client certificates, signed by the LGI-CA, but now with common-names fields within the certificates being equal to the user credentials. See the later section on certificates for details on this.

The user credentials need to be checked for each request and only jobs, for which the user has access to, through the 'owners' and 'read\_access' fields, can be changed and

inspected respectively.

Again all responses by the server are to be wrapped into the “<LGI> <response>  
</response> </LGI>” tags. If an error condition is met, the response will contain the usual “<error> </error>” tags embedded XML messages.

The following requests can be made by the application interface to the project web-server. They are listed under the 'interfaces' directory on the project server's main URL. For example  
“https://fwnc7003.leidenuniv.nl/LGI/interfaces/interface\_submit\_job.php”.

#### 1) The *'interface\_submit\_job'* request;

This request is done by an 'application interface' to submit a job. The user is identified through the certificate's common-name field and by the POSTed 'user' and 'groups' fields. The POSTed 'user' field should equal the certificates common-name or otherwise service is denied. Further certificate checks that might be done are described below.

The other compulsory fields that also need to be POSTed in this request are the 'application' and the 'target\_resources' fields. The 'input', the 'job\_specifics', the 'owners' and 'read\_access' fields are not compulsory but can be POSTed too.

If both the 'owners' and 'read\_access' fields were not POSTed, the 'owners' field will be set to the 'users' field and the 'read\_access' field will be set to the combined 'groups' and 'user' fields which both should be POSTed. If only the 'owners' field was POSTed, it is made sure that the POSTed 'user' is part of the 'owners' and the 'read\_access' field is set to the new 'owners' field. If both the 'owners' and the 'read\_access' are posted, it is made sure that the POSTed 'user' is part of the 'owners' and 'read\_access' fields. If only the 'read\_access' field was POSTed, the 'owners' field is set to the POSTed 'user' field and it is made sure that the 'read\_access' field contains the POSTed 'user' field.

The 'target\_resources' is checked to contain valid resources, known to the project, or the “any” resource. The 'input' field, when needed, is again POSTed in BinHex format, which is again un-BinHexed by the server.

A new job will created by the server, based on the above described values of POSTed fields. The default state of the job will be the 'queued' state. During the submission of the job, this routine automatically creates a 'repository' for the job. Files uploaded to

the server are automatically moved into the repository directory and the correct job\_specifics tags “<repository> </repository>” and “<repository\_url> </repository\_url>” are added. Read more about the repositories below. Files can be uploaded by POSTing the variable “number\_of\_uploaded\_files” to specify the number of files being uploaded. Each file is given a POST name like “uploaded\_file\_XXX” with XXX being an integer. Clearly the other fields will be set by the server and a response to the 'application interface' will contain the POSTed details:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <project> testproject </project>
    <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
  </this_project_server>
    <user> mark </user>
    <groups> teras, cyttron </groups>
    <job>
      <job_id> 147 </job_id>
      <application> testapp </application>
      <state> queued </state>
      <target_resources> any </target_resources>
      <owners> sjoerd, cyttron </owners>
      <read_access> any, sjoerd, cyttron </read_access>
      <state_time_stamp> 1259936661 </state_time_stamp>
      <job_specifics> </job_specifics>
      <repository_content> <file name="hi"> <size> 1024 </size> <date>
1662626 </date> </file> </repository_content>
      <input> CDEF9021569C8787E </input>
    </job>
  </response>
</LGI>
```

## 2) The '*interface\_job\_state*' request;

This request is made by the 'application interface' to obtain information on the queue contained in the project's web-server database. Again the 'user' and 'groups' field should be POSTed and the common-name of the client certificate should match the POSTed 'user' field. This request has two ways of generating an response, depending on whether the 'job\_id' field is POSTed or not.

In case the 'job\_id' is not POSTed, the response will be a list of current jobs in the database, based on a selection by the possible POSTed 'application' and 'state' fields. Only jobs in which the POSTed 'user' or any of the 'groups' is part of the 'owners' or the 'read\_access' field will be returned. In the response, the number of listed jobs will be wrapped into the “<number\_of\_jobs> </number\_of\_jobs>” tags. A valid response looks like:

```

<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <project> testproject </project>
    <user> mark </user>
    <groups> teras, cyttron </groups>
    <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
  </this_project_server>
    <number_of_jobs> 3 </number_of_jobs>

    <job number=1>
      <job_id> 140 </job_id>
      <state> queued </state>
      <application> testapp </application>
      <state_time_stamp> 1259926661 </state_time_stamp>
      <target_resources> testresource </target_resources>
      <owners> mark </owners>
      <read_access> theor, sara, cyttron </read_access>
      <state_time_stamp> 1259926661 </state_time_stamp>
      <job_specifics> </job_specifics>
    </job>

    <job number=2>
      <job_id> 142 </job_id>
      <state> running </state>
      <application> testapp </application>
      <state_time_stamp> 1259927661 </state_time_stamp>
      <target_resources> testresource </target_resources>
      <owners> mark </owners>
      <read_access> theor, sara, cyttron </read_access>
      <state_time_stamp> 1259926661 </state_time_stamp>
      <job_specifics> </job_specifics>
    </job>

    <job number=3>
      <job_id> 147 </job_id>
      <state> finished </state>
      <application> testapp </application>
      <state_time_stamp> 1259936661 </state_time_stamp>
      <target_resources> testresource </target_resources>
      <owners> mark </owners>
      <read_access> theor, sara, cyttron </read_access>
      <state_time_stamp> 1259926661 </state_time_stamp>
      <job_specifics> </job_specifics>
    </job>
  </response>
</LGI>

```

In this mode, it does not matter if the jobs reported have running locks or not.

If the request was made with a specific 'job\_id' field POSTed, the response will be more elaborate for the specific job only:

```

<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <project> testproject </project>
    <user> mark </user>
    <groups> teras, cyttron </groups>
    <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
  </this_project_server>

```



```

<number_of_jobs> 1 </number_of_jobs>
<job_id> 140 </job_id>

<job number=1>
  <job_id> 140 </job_id>
  <state> queued </state>
  <application> testapp </application>
  <target_resources> testresource </target_resources>
  <owners> mark </owners>
  <read_access> theor, sara, cyttron </read_access>
  <state_time_stamp> 1259926661 </state_time_stamp>
  <job_specifics>
    <nprocs> 1 </nprocs>
    <mem> 64M </mem>
  </job_specifics>
  <input> DCEF18982 </input>
  <output> </output>
  <repository_content> <file name="hi"> <size> 1024 </size> <date>
1662626 </date> </file> </repository_content>
  </job>
</response>
</LGI>

```

If the possible POSTed 'job\_id' is not present in the database, or the 'user', or any of his 'groups' is not part of the 'owners' or 'read\_access' fields of the job, service is denied and an error response is returned. Also if the specific job has a lock running, an error response is sent back after the time-out period of 30 seconds has passed. During this time-out period the server waits for the lock to be cleared before a response is generated and sent back.

### 3) The '*interface\_delete\_job*' request;

This request is made by an 'application interface' to remove a job from the project's web-server database. Again the 'user' and 'groups' fields should be POSTed and the 'user' field should match the certificate. Now also POSTed is the 'job\_id' of the job that is to be killed or deleted. If the 'user', or the 'groups' are not part of the 'owners' field of the job with the POSTed 'job\_id', service is denied and an error response is sent back.

If the user credentials match and the job with the POSTed 'job\_id' is in the 'finished', 'aborted' or 'queued' state, the job can be safely removed from the database if no locks are present on the job. If the job was locked an error response is sent back after a certain time-out. During the time-out of 30 seconds, the server waits for the lock to be freed first.

If the job was in any other state than 'queued' or 'finished', the job is set into the 'aborting' state and not removed from the database, only if no lock is active on the job. The 'aborting' state allows the resource that is currently dealing with the job, to detect

the abort signal. The resource will then set the job into the 'finished' or 'aborted' state when possible. Whether the resource can abort a job immediately is highly dependent on the application and the resource it is running on. Again, if the job is still locked after the preset time-out period of 30 seconds, an error response is sent back.

If the job was successfully removed from the database, or has been set into the 'aborting' state, the response of the servers is similar to the response obtained by the 'user\_job\_state' request described above:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <user> mark </user>
    <groups> teras cyttron </groups>
    <project> testproject </project>
    <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
  </this_project_server>
    <job>
      <job_id> 140 </job_id>
      <state> aborting </state>
      <application> testapp </application>
      <target_resources> testresource </target_resources>
      <owners> mark </owners>
      <read_access> teor, sara, cyttron </read_access>
      <state_time_stamp> 1259926661 </state_time_stamp>
      <job_specifics> </job_specifics>
    </job>
  </response>
</LGI>
```

This allows the 'application interface' to record or log jobs if desired.

#### 4) The '*interface\_project\_server\_list*' request;

This request is made to get a list of project web-servers for a specific project. The 'user' and 'groups' field are POSTed and compared to the clients-certificates common-name. If they do not match an error response is returned and service is denied. If the credentials are met, a valid response will contain a list of project servers:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <user> mark </user>
    <groups> teras cyttron </groups>
    <project> testproject </project>
    <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
  </this_project_server>
    <number_of_slave_servers> 2 </number_of_slave_servers>
```

```

        <project_server number=1>
https://fwnc7003.leidenuniv.nl/testslaveserver </project_server>
        <project_server number=2>
https://fwnc7003.leidenuniv.nl/testslaveserver2 </project_server>
    </response>
</LGI>

```

The 'application interface' can now choose what project web-server to communicate to to submit or query about jobs.

### 5) The '*interface\_project\_resource\_list*' request;

This request is made to get a list of resources available for a specific project. The 'user' and 'groups' field are POSTed and compared to the clients-certificates common-name. If they do not match an error response is returned and service is denied. If the credentials are met, a valid response will contain a list of resources with some of the details on each resource:

```

<LGI>
    <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
    <server_max_field_size> 65355 </server_max_field_size>
    <response>
        <user> mark </user>
        <groups> teras cyttron </groups>
        <project> testproject </project>
        <project_master_server> https://fwnc7003.leidenuniv.nl/testmasterserver
    </project_master_server>
        <this_project_server> https://fwnc7003.leidenuniv.nl/testslaveserver
    </this_project_server>
        <number_of_resources> 2 </number_of_resources>
        <resource number=1>
            <resource_name> mark@fwnc7003.leidenuniv.nl </resource_name>
            <resource_capabilities> <hello_world> </hello_world>
        </resource_capabilities>
            <last_call_time> 1990282828 </last_call_time>
        </resource>
        <resource number=2>
            <resource_name> somers@huygens.sara.nl </resource_name>
            <resource_capabilities> <hello_world> </hello_world>
        </resource_capabilities>
            <last_call_time> 1990272828 </last_call_time>
        </resource>
    </response>
</LGI>

```

The 'application interface' can now choose what resource to target.

### Project servers communication API

In this part of the document the API that deals with the communication between two or more project servers within a single project is detailed upon. This API has been developed to allow for project servers to exchange 'updates' to keep all servers within

a project synchronized.

Each project server within a project is identified as being a resource that has the 'project\_server' field set to non-zero in the 'active\_resources' table of all the project servers. A project server is therefore also identified through a 'resource' client-certificate signed by the LGI-CA.

Updates are queries that can be executed on the project server's database. Each update is identified by an integer 'version' number and only sequential updates are allowed. Each update will be logged into the 'updates' table.

Again all responses by the server are to be wrapped into the “<LGI> <response> </response> </LGI>” tags. If an error condition is met, the response will contain the usual “<error> </error>” tags embedded XML messages.

The following requests can be made by any other project server within the project to the project web-server. They are listed under the 'servers' directory on the project server's main URL. For example  
“[https://fwnc7003.leidenuniv.nl/LGI/servers/server\\_get\\_update.php](https://fwnc7003.leidenuniv.nl/LGI/servers/server_get_update.php)”.

#### 1) The '*server\_get\_update*' request;

This request allows for any project server to inquire this server for the presence of possible updates. The requesting server is identified through its certificate common name. Only if the requesting server is listed as a project server, this request can be met. An error response is returned otherwise.

The compulsory '*version*' and 'project' fields are POSTed and identify the requesting server's latest update. If the server has any updates with a higher version number in the 'updates' table, it will report the first sequentially applicable update the requesting server should apply or log into its own 'updates' table. A valid response looks like:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <project> testproject </project>
    <project_master_server> https://fwnc7003.leidenuniv.nl/LGI
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/LGI
  </this_project_server>
    <requesting_project_server> https://fwnc7003.leidenuniv.nl/LGI2 </
requesting_project_server>
    <requesting_project_server_version> 0
```

```

</requesting_project_server_version>
    <update>
        <updates> 2 </updates>
        <update_version> 1 </update_version>
        <target_servers> any </target_servers>
        <update_query> 0002020010002AB3 </update_query>
    </update>
</response>
</LGI>

```

If there are no relevant updates, the above response will contain “<updates> 0 </updates>” and the latest version number encountered in the database is reported within the “<update\_version> </update\_version>” tags.

## 2) The '*server\_run\_update*' request;

This request allows for any other project server within the project to 'push' an update to this server. For this to work the '**version**', '**servers**' and '**update**' fields together with the 'project' fields should be POSTed. If the server has any updates higher than the POSTed version, it will ignore this update being pushed and return it's highest version number within the “<update\_version> </update\_version>” tags. If this server should sequentially apply or log this update, it will do so. If this server has to apply other updates first, an update cycle is started. If the 'version', 'servers' and 'update' fields were not POSTed, also an update cycle is started.

A valid response, when an update is being pushed, looks like:

```

<LGI>
    <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
    <server_max_field_size> 65355 </server_max_field_size>
    <response>
        <project> testproject </project>
        <project_master_server> https://fwnc7003.leidenuniv.nl/LGI
    </project_master_server>
        <this_project_server> https://fwnc7003.leidenuniv.nl/LGI
    </this_project_server>
        <requesting_project_server> https://fwnc7003.leidenuniv.nl/LGI2 </
requesting_project_server>
        <update_version> 1 </update_version>
        <target_servers> any </target_servers>
        <update_query> 0102030405011 </update_query>
        <update>
            <update_version> 1 </update_version>
        </update>
    </response>
</LGI>

```

During an update cycle, each of the marked servers is requested to report back any possible update. For this a POST to the 'server\_get\_update' API routine is performed on each server. If all updates have been applied and all project servers have been polled, the update cycle is finished. A valid response after such an update cycle looks

like:

```
<LGI>
  <CA_certificate> http://www.LGI.org/LGI-CA.crt </CA_certificate>
  <server_max_field_size> 65355 </server_max_field_size>
  <response>
    <project> testproject </project>
    <project_master_server> https://fwnc7003.leidenuniv.nl/LGI
  </project_master_server>
    <this_project_server> https://fwnc7003.leidenuniv.nl/LGI
  </this_project_server>
    <requesting_project_server> https://fwnc7003.leidenuniv.nl/LGI2 </
requesting_project_server>
    <update>
      <update_version> 1 </update_version>
    </update>
  </response>
</LGI>
```

### Certificates

Within the LGI heavy use is made of x509 server- and client-certificates. This part of the document details on the 'CommonName' field of these certificates and how they are used within the LGI.

For certificates belonging to 'resources' the 'CommonName' contains possibly two fields separated by a ';'. The first field specified the 'resource' unique name which is also present in the 'active\_resources' table. The naming convention for resources is “[user@machine.org](#)”. The second field is a comma separated field of all the projects this resource has access to. These fields within the certificate always take precedence to any other access rules implemented in the project server or fields posted to the project server. Resources always supply a valid client-certificate to the project servers.

For certificates belonging to users or 'application interfaces', the 'CommonName' possibly contains three fields separated by a ';'. The first field is the name of the user that accesses the project server through the application interfaces API. Also for interfaces and users the naming convention is “[username@location.org](#)”. The possible present second field is either a comma separated field with all the groups the user is allowed to belong to or again a comma separated field with all the projects the user is allowed to interface to. If only two fields separated by a ';', the second field is the list of projects the is allowed to interface to. Application interface's always supply a valid user's client-certificate to the project servers.

### Resource Daemon

In this section a more detailed description of the 'resource daemon' is given, which by default, runs as a non privileged user on the resource. The resource daemon is configured by a configuration file. This file has also uses the XML format and the workings of the resource daemon is best described using the following example configuration:

```
<LGI>
  <ca_certificate_file> ../certificates/LGI+CA.crt </ca_certificate_file>
  <resource>
    <resource_certificate_file> ../certificates/laptop.crt
  </resource_certificate_file>
    <resource_key_file> ../certificates/laptop.key </resource_key_file>
    <run_directory> ./runhere </run_directory>

    <owner_allow> <any> 10 </any> </owner_allow>
    <owner_deny> nobody </owner_deny>
    <job_limit> 20 </job_limit>

    <number_of_projects> 1 </number_of_projects>

    <project number=1>
      <project_name> LGI </project_name>
      <project_master_server> https://fwnc7003.leidenuniv.nl/LGI
    </project_master_server>

    <owner_allow> <any> 5 </any> </owner_allow>
    <owner_deny> nobody </owner_deny>
    <job_limit> 10 </job_limit>

    <number_of_applications> 1 </number_of_applications>

    <application number=1>
      <application_name> hello_world </application_name>

      <owner_allow> <any> 1 </any> </owner_allow>
      <owner_deny> nobody </owner_deny>
      <job_limit> 4 </job_limit>
      <max_output_size> 4096 </max_output_size>

      <job_sandbox_uid> 50001 </job_sandbox_uid>
      <capabilities> nothing special </capabilities>

      <check_system_limits_script> ./
hello_world_scripts/check_system_limits_script </check_system_limits_script>
      <job_check_limits_script> ./
hello_world_scripts/job_check_limits_script </job_check_limits_script>
      <job_check_running_script> ./
hello_world_scripts/job_check_running_script </job_check_running_script>
      <job_check_finished_script> ./
hello_world_scripts/job_check_finished_script </job_check_finished_script>
      <job_prologue_script> ./
hello_world_scripts/job_prologue_script </job_prologue_script>
      <job_run_script> ./hello_world_scripts/job_run_script
    </job_run_script>
      <job_epilogue_script> ./
hello_world_scripts/job_epilogue_script </job_epilogue_script>
      <job_abort_script> ./
hello_world_scripts/job_abort_script </job_abort_script>
    </application>
  </project>

</resource>
</LGI>
```

The resource daemon reads the the above illustrated configuration from the supplied configuration file. Before running any further, the daemon verifies all the tags of the configuration. Files referred to should be readable and exist, directories specified should be readable and also exist, all the above illustrated tags should be present and so on.

After the daemon has verified the configuration, the configuration is stored in memory and used as long as the daemon is active. Changes to the configuration file can be made active by restarting the daemon. To stop the daemon, when it is running in the background, a simple 'kill' command can be used to let the signal handler of the daemon to gracefully shut down the daemon. Any open sessions to any server are then guaranteed to be finished before the daemon is stopped.

The daemon will also generate a log. The logging level of the daemon can be supplied at the command line when the daemon is started. At the same time, the configuration file is supplied together with the option whether or not to 'daemonize' and run in the background. Below are listed the options that the daemon supports:

```
./LGI_daemon.x [options] configfile
```

*options:*

```
-d          daemonize and run in background.
-q          log only critical messages.
-n          log normal messages. this is the default.
-v          also log debug messages.
-vv         also log verbose debug messages.
-l file     use specified logfile. default is to log to standard output.
```

The daemon can run as any user on the system and it is preferred to run the daemon as an unprivileged user and not as root. If, however, the daemon is run as root, the sandboxing of jobs is automatically enabled. In general a random special uid will be used per job. Any script run for a job is correctly setuid to the random uid. One can also override the randomization of uids per application by using the '**<job\_sandbox\_uid> </job\_sandbox\_uid>**' tags.

In general, when the daemon has verified the configuration and is ready to run, the '**run\_directory**' directory is scanned through for cached jobs. This run directory contains a tree of projects and applications and within each branch, the jobs for that project and that application is cached on disk. Each job will have a unique **job\_directory** in which the complete state of the job is stored. If the daemon runs as root and the random uid sandboxing is used, care should be taken that the 'run\_directory' is world readable for any user. The daemon will make sure that the unique job sub-directories are only accessible by the randomly chosen uid user.



The state of a job in its corresponding job directory is described by several files, all beginning with a 'LGI\_' prefix. Each such file contains exactly the same information that is also stored in the projects web-server's database for that job or contains an exact copy of the scripts that should be used for that application, as was specified in the configuration file. Moreover, all the 'LGI\_XXXXXX' files, except for the LGI\_output file, each has a corresponding '.hash' file. In that file the hash fingerprint in hexadecimal format is stored. If any of the files or scripts are corrupted, edited or changed, the hash will make sure that this is detected. Scripts, for which the hash does not match, will not be run. Job directories that contain a file for which the hash does not match, will not be accepted and monitored. The following LGI\_XXX files can be used by the job scripts: "LGI\_project", "LGI\_this\_project\_server", "LGI\_project\_master\_server", "LGI\_application", "LGI\_job\_id", "LGI\_owners", "LGI\_read\_access", "LGI\_job\_specifics", "LGI\_target\_resources", "LGI\_input", "LGI\_output", "LGI\_state", "LGI\_state\_time\_stamp", "LGI\_job\_check\_limits\_script", "LGI\_job\_check\_running\_script", "LGI\_job\_check\_finished\_script", "LGI\_job\_prologue\_script", "LGI\_job\_run\_script", "LGI\_job\_epilogue\_script", "LGI\_job\_abort\_script", "LGI\_key\_file", "LGI\_certificate\_file", "LGI\_ca\_certificate\_file", "LGI\_max\_output\_size", "LGI\_job\_sandbox\_uid". Of these only "LGI\_output" is allowed to be written to.

At the start of the daemon the run directory is scanned through for cached jobs. Any job directory encountered and verified to be valid through the hashes, will be included into the set of jobs that are to be monitored by the daemon. When the daemon runs, every two minutes the state of the jobs that are to be monitored, are checked by contacting the correct job project server. If the job was issued on a slave server, only that slave server is contacted by using the 'resource\_job\_state' function. If, during this 'update cycle', the state in the database was changed, the job details are requested and the job directory on disk is synchronized to the result of the post.

After having updated all jobs on disk, each job will be inspected through the '*job\_check\_XXXX*' scripts. These scripts were provided in the configuration file, but are now also stored, with a hash, in the job directory too. This allows for a successful completion of jobs even after the configuration file has changed the scripts for any of these applications.

In general the '*job\_check\_running\_script*' script is started to check if the job is still running. This script should return an exit code of zero to signal that the job is still running. If the job was not found to be running, the '*job\_check\_finished\_script*' is

started to check if the job was finished. It also should return an exit code of zero if the job was finished. If the job was found to be running, the 'state' of the job is checked. If the 'state' of the job was changed to 'aborting', the *'job\_abort\_script'* script is run. If then the *job\_abort\_script* returns an exit code of zero, the job is considered to be aborted and the job details are again posted to the project web-server through the 'resource\_update\_job' function. After this successful post, the job is removed from the list of jobs to be monitored and the corresponding job directory is deleted. The job will end up in the 'aborted' state in the database on the project's web-server. If the job was not found to be finished or running, the run sequence of the job will be started; first the *'job\_prologue\_script'* is started and if that script returns an exit code of zero, the *'job\_run\_script'* is started on the background.

If the job was found to be finished, because the 'job\_check\_finished\_script' returned an exit code of zero, the *'job\_epilogue\_script'* script is started. If the 'job\_epilogue\_script' script returns an exit code of zero, the job details will be posted to the server. Again after a successful post, the job directory is removed, the job will not be monitored again and the job will end up in the 'finished' state on the project's web-server's database.

The use of these 'job\_XXXXX\_scripts' allows the LGI resource user to fully configure the way the application should be started and handled. Moreover, these scripts can access any of the job details through the 'LGI\_XXXXX' files also stored in the job directory. Because these scripts are copied and hashed into the job directory, a change in the configuration, or in the job scripts, will not affect any jobs prior to these changes.

Apart from doing the above described 'job update' cycle every two minutes, the daemon also performs 'request work' cycles every ten minutes or so. During this cycle all the projects and applications that are specified in the configuration file are inspected. The *'check\_system\_limits\_script'* script is used to see if there is a system wide limit reached to running a job of this application. The script returns zero if no limit is present and work can be requested by posting to the 'resource\_request\_work' function on the project's web-server.

All jobs offered by any of the project's web-servers are inspected and checked against the limits imposed by the *'owner\_allow'* and *'owner\_deny'* tags that were specified in the configuration file. If any of the jobs 'owners' was specified in any of the 'owners\_deny' tags, the job is not accepted. If a limit was specified for any of the 'owners' in the 'owner\_allow', by wrapping the maximum number of jobs allowed for

that owner in tags of the owner: “<owner\_allow> <mark> 2 </mark> <any> 1 </any> </owner\_allow>”, the number of jobs currently being monitored is checked. If the set limit would be exceeded, the job is ignored again. Only if none of the owners would exceed any limits, the job will be checked further by running the *'job\_check\_limits\_script'* script. The script will be run in a temporary job directory. If this script returns an exit code of zero, no limit is present for the job and the job will be accepted. The job will now be monitored and updated through the 'job update' cycle of the daemon. If the job didn't get accepted, the temporary job directory is removed.

For projects with multiple project (slave) servers, a list of servers is compiled first during a 'request for work' cycle. Each of these servers is then requested to give work. The list of project (slave) servers is obtained by first signing up at the server specified by the 'project\_master\_server' tags in the configuration file.

The following example scripts are included for the **'hello\_world'** application configured to be run through the TORQUE / PBS resource manager on a cluster:

```
check_system_limits_script:
#!/bin/sh
queued_in_small=`qstat -q small | awk '/small/ { print $7 }'`
if (( $queued_in_small < 1 ))
then
    exit 0
else
    exit 1
fi

job_abort_script:
#!/bin/sh
if [ -f running ]
then
    ID=`cat running`
    FINISHED=`qstat $ID 2> /dev/null`
    if [ "$FINISHED" == "" ]
    then
        if [ -f aborted ]
        then
            exit 0
        fi
        if [ -f finished ]
        then
            exit 1
        else
            exit 1
        fi
    else
        qdel $ID
        touch aborted
        exit 1
    fi
else
    exit 1
fi

job_check_finished_script:
#!/bin/sh
```

```

if [ -f running ]
then
  ID=`cat running`
  FINISHED=`qstat $ID 2> /dev/null`
  if [ "$FINISHED" == "" ]
  then
    if [ -f aborted ]
    then
      exit 0
    fi
    if [ -f finished ]
    then
      exit 0
    else
      exit 1
    fi
  else
    exit 1
  fi
else
  exit 1
fi

job_check_limits_script:
#!/bin/sh
exit 0

job_check_running_script:
#!/bin/sh
if [ -f running ]
then
  ID=`cat running`
  FINISHED=`qstat $ID 2> /dev/null`
  if [ "$FINISHED" == "" ]
  then
    if [ -f aborted ]
    then
      exit 0
    fi
    if [ -f finished ]
    then
      exit 1
    else
      exit 1
    fi
  else
    exit 0
  fi
else
  exit 1
fi

job_epilogue_script:
#!/bin/sh
exit 0

job_prologue_script:
#!/bin/sh
exit 0

job_run_script:
#!/bin/sh

cat > ./pbs_script << END_OF_PBS_SCRIPT
#PBS -S /bin/sh
#PBS -l nodes=01:ppn=01,walltime=0:15:00
#PBS -q small
#PBS -N hello_world_pbs
#PBS -o LGI_output

NODES=`cat \${PBS_NODEFILE}`
sleep 10

```

```

echo -n "Hello_World_PBS running on nodes \${NODES} in directory \${PBS_O_WORKDIR} at
"
sleep 20
cat \${PBS_O_WORKDIR}/LGI_target_resources
sleep 40
echo -n ". This job was submitted with input: "
sleep 80
cat \${PBS_O_WORKDIR}/LGI_input
sleep 160
echo "."

touch \${PBS_O_WORKDIR}/finished

END_OF_PBS_SCRIPT

qsub pbs_script > ./running

```

The actual daemon code is implemented in C++ and makes use of the Standard Template Library (STL) and the cURL library. The source code can be found in the 'daemon/src' directory. There a 'Makefile' is present and by issuing the 'make' command, the code will be compiled. One can also run 'make clean' to clean up any makes performed. A 'make install' will install the compiled binaries into the bin directory. One can also issue a 'make uninstall'.

In the 'daemon/src' directory the following files can be found:

<i>binhex.cpp:</i>	<i>contains the algorithms to convert binary to hexadecimal strings and back.</i>
<i>csv.cpp:</i>	<i>contains the comma separated value parser for strings.</i>
<i>hash.cpp:</i>	<i>contains the hash algorithm for strings.</i>
<i>xml.cpp:</i>	<i>contains the xml parser algorithms for strings.</i>
<i>logger.cpp:</i>	<i>contains the advanced logging facilities.</i>
<i>resource_server_api.cpp:</i>	<i>contains the 'project server' resource api functionality in a class.</i>
<i>daemon_configclass.cpp:</i>	<i>contains the class to read in and parse the configuration file of the daemon.</i>
<i>daemon_jobclass.cpp:</i>	<i>contains the job directory handler class for jobs.</i>
<i>daemon_mainclass.cpp:</i>	<i>contains the daemon main scheduling algorithms in a class.</i>
<i>daemon_main.cpp:</i>	<i>is the main daemon code that uses the above mentioned classes.</i>
<i>hash_main.cpp:</i>	<i>a tool to hash files.</i>
<i>csv_main.cpp:</i>	<i>a tool to extract comma separated values.</i>
<i>xml_main.cpp:</i>	<i>a tool to parse xml tags.</i>
<i>hexbin_main.cpp:</i>	<i>a tool to convert hex to bin.</i>
<i>binhex_main.cpp:</i>	<i>a tool to convert bin to hex.</i>
<i>qstat_main.cpp:</i>	<i>a tool to list jobs on project server.</i>
<i>qsub_main.cpp:</i>	<i>a tool to submit a job to a project server.</i>

```

qdel_main.cpp:          a tool to delete a job from a project server.
filetransfer_main.cpp:  a tool to upload, download, list and delete files in
repositories.

```

All compiled tools given details on their use when the '-h' option is passed when they are invoked. Furthermore, an example configuration has been setup too. Check the 'LGI.cfg' configuration file and the other 'hello\_world' scripts for even more examples on how to configure the daemon.

For the utilities LGI\_filetransfer, LGI\_qstat, LGI\_qsub and LGI\_qdel, the directory ~/.LGI can be setup to hold your default configuration. Please study the example session below how things work.

### Basic interface

A general and basic PHP implemented web interface can be found under the 'basic\_interface' subdirectory. When a user loads a PKCS12 file containing his certificate and private key into a browser, this basic interface allows the user to look at his queue, delete jobs, submit jobs and request information on the project and the specific project web-server.

### Repositories

When a job is being submitted to LGI, the project web-server will automatically create a repository for the job. The repository is a special directory on the project web-server (or an other external storage server) in which files can be uploaded to and downloaded from. Applications running on resources can now use the repository to download files from the repository and upload results to it. They should use the LGI\_filetransfer utility for this.

The actual location of the repository is specified in the 'jobs\_specifics' field in the database per job. It will contain two tags: “<repository> ... </repository>” and “<repository\_url> ... </repository\_url>”. The first tag specifies where the server created the repository directory: “<repository>

repo@fwnc7003.leidenuniv.nl:/mnt/sdb1/LGI/trunk/repository/JOB\_000f61825ff3f59c736d737612e25e3d </repository>”. The second tag shows where an interface or the basic interface can download or browse the data; “<repository\_url>

[https://fwnc7003.leidenuniv.nl/LGI/repository/JOB\\_000f61825ff3f59c736d737612e25e3d](https://fwnc7003.leidenuniv.nl/LGI/repository/JOB_000f61825ff3f59c736d737612e25e3d) </repository\_url>”. It is the later URL for which the LGI\_filetransfer utility was written.

With the LGI\_filetransfer utility files can be listed, downloaded, uploaded and deleted from a repository:

```
./LGI_filetransfer [options] command repository-url [files]
```

commands:

<i>list</i>	<i>list files present in specified repository.</i>
<i>download</i>	<i>download files from repository.</i>
<i>upload</i>	<i>upload files to repository.</i>
<i>delete</i>	<i>delete files from repository.</i>

options:

<i>-h</i>	<i>show this help.</i>
<i>-x</i>	<i>output lists in XML format.</i>
<i>-c directory</i>	<i>specify the configuration directory to read. default is</i>
<i>~/.LGI.</i>	<i>specify options below to overrule.</i>
<i>-j jobdirectory</i>	<i>specify job directory to use. if not specified try</i>
<i>current directory</i>	<i>or specify the following options.</i>
<i>-K keyfile</i>	<i>specify key file.</i>
<i>-C certificatefile</i>	<i>specify certificate file.</i>
<i>-CA cacertificatefile</i>	<i>specify ca certificate file.</i>

A project manager should make sure that on his repository server the user 'repo' exists and that project servers are allowed to 'scp' in and out of the repository server without a password. This can be accomplished by adding each project server's public ssh key into the ~/.ssh/authorized\_keys file of the 'repo' user. The public ssh key can be extracted from the X509 certificate and private key that was created for the server by the project administrator: “ssh-keygen -y -f LGI@[fwnc7003.key](https://fwnc7003.leidenuniv.nl)”.

A project web-server should also be setup to handle repositories. This is done through the “inc/Config.inc” where a project server is configured. Details on how to configure a (slave) project web-server are given in the “SETUP.txt” file.

On the repository server Apache should be configured to serve the repository directory and only accept clients with correctly signed certificates. How to setup and secure Apache to use certificates is also detailed upon in “SETUP.txt”. The default sub-directory 'respository' already contains the needed CGI scripts and the .htaccess files to correctly configure Apache.

### Example user session

In this part an example user session is demonstrated with the “hello\_world” application.

```
mark:~/home/mark/temp/LGI/daemon/bin>cd /home/mark/temp/LGI/daemon/bin
mark:~/home/mark/temp/LGI/daemon/bin>ls
binhex csv hash hexbin LGI_daemon LGI_filetransfer LGI_qdel LGI_qstat LGI_qsub
xml
mark:~/home/mark/temp/LGI/daemon/bin>ls ~/.LGI
ca_chain certificate defaultproject defaultserver groups mark@laptop.pfx
privatekey user
mark:~/home/mark/temp/LGI/daemon/bin>cat ~/.LGI/defaultproject
LGI
mark:~/home/mark/temp/LGI/daemon/bin>cat ~/.LGI/defaultserver
https://fwnc7003.leidenuniv.nl/LGI
mark:~/home/mark/temp/LGI/daemon/bin>cat ~/.LGI/groups
theor
mark:~/home/mark/temp/LGI/daemon/bin>cat ~/.LGI/user
mark@laptop
mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qstat
```

```
-----
# | job_id |          state |          target_resources |
application |          time_stamp |          owners
-----
1 | 295 | finished | somers@huygens.sara.nl |
gaussian | Tue Oct 7 12:18:34 2008 | mark@laptop
2 | 300 | finished | mark@woodcrest.wks.gorlaeus.net |
gaussian | Tue Oct 7 19:13:51 2008 | mark@laptop
3 | 301 | finished | mark@nocona.wks.gorlaeus.net |
hello_world | Tue Oct 7 20:01:13 2008 | mark@laptop
-----
```

```
Number of jobs listed : 3
This project          : LGI
This project server   : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI
```

```
mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qstat 301
```

```
This project          : LGI
This project server   : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI
User                  : mark@laptop
Groups                : theor
Job id                : 301
Job state              : finished
Job application        : hello_world
Job specifics          : <repository>
LGI@fwnc7003.wks.gorlaeus.net:/mnt/sdb1/LGI/trunk/repository/JOB_0a419e6cbf71f50ad8f09
66e4254db5f </repository> <repository_url>
https://fwnc7003.wks.gorlaeus.net/LGI/repository/JOB_0a419e6cbf71f50ad8f0966e4254db5f
</repository_url>
Target resources      : mark@nocona.wks.gorlaeus.net
Job owners            : mark@laptop
Read access on job    : mark@laptop, mark@laptop
Time stamp            : Tue Oct 7 20:01:13 2008 [1223402473]
Input                 : test...
```

```
Output                : Hello_World_PBS running on nodes node-g06 in directory /
home/mark/LGI/daemon/runhere/LGI/hello_world/JOB_87B4C791FC8B8D570A1124EB0305DF5E at
mark@nocona.wks.gorlaeus.net. This job was submitted with input: test...
```



```

.
mark:~/home/mark/temp/LGI/daemon/bin>cat ~/hello_input
testing this input...
mark:~/home/mark/temp/LGI/daemon/bin>cat ~/file_uploaded
dummy data to be uploaded...
mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qsub -a hello_world -i ~/hello_input
~/file_uploaded

Job has been submitted. Some details:

This project      : LGI
This project server : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI
User              : mark@laptop
Groups            : theor
Job id            : 303
Job state         : queued
Job application    : hello_world
Job specifics      : <repository>
LGI@fwnc7003.wks.gorlaeus.net:/mnt/sdb1/LGI/trunk/repository/JOB_bc2f7a820e70c70a533d4
57ce8e63c7e </repository> <repository_url>
https://fwnc7003.wks.gorlaeus.net/LGI/repository/JOB_bc2f7a820e70c70a533d457ce8e63c7e
</repository_url>
Target resources   : any
Job owners         : mark@laptop
Read access on job : mark@laptop, theor
Time stamp         : Wed Oct  8 13:29:56 2008 [1223465396]

mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qstat 303

This project      : LGI
This project server : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI
User              : mark@laptop
Groups            : theor
Job id            : 303
Job state         : queued
Job application    : hello_world
Job specifics      : <repository>
LGI@fwnc7003.wks.gorlaeus.net:/mnt/sdb1/LGI/trunk/repository/JOB_bc2f7a820e70c70a533d4
57ce8e63c7e </repository> <repository_url>
https://fwnc7003.wks.gorlaeus.net/LGI/repository/JOB_bc2f7a820e70c70a533d457ce8e63c7e
</repository_url>
Target resources   : any
Job owners         : mark@laptop
Read access on job : mark@laptop, theor
Time stamp         : Wed Oct  8 13:29:56 2008 [1223465396]
Input              : testing this input...

Output            :

mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qstat

-----
# | job_id |          state |          target_resources |
application |          time_stamp |          owners
-----
1 | 295 | finished | somers@huygens.sara.nl |
gaussian | Tue Oct  7 12:18:34 2008 | mark@laptop
2 | 300 | finished | mark@woodcrest.wks.gorlaeus.net |
gaussian | Tue Oct  7 19:13:51 2008 | mark@laptop
3 | 301 | finished | mark@nocona.wks.gorlaeus.net |
hello_world | Tue Oct  7 20:01:13 2008 | mark@laptop
4 | 303 | running | mark@fwnc7003.wks.gorlaeus.net |
hello_world | Wed Oct  8 13:31:26 2008 | mark@laptop
-----

```

```

Number of jobs listed : 4
This project          : LGI
This project server   : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI

mark:./home/mark/temp/LGI/daemon/bin>cat /home/mark/temp/LGI/daemon/LGI.cfg
<LGI>
    <ca_certificate_file> /home/mark/temp/LGI/certificates/LGI+CA.crt
</ca_certificate_file>
    <resource>
        <resource_certificate_file> /
home/mark/temp/LGI/certificates/mark@fwnc7003.crt </resource_certificate_file>
        <resource_key_file> /home/mark/temp/LGI/certificates/mark@fwnc7003.key
</resource_key_file>
        <run_directory> /home/mark/temp/LGI/daemon/runhere </run_directory>
        <owner_allow> <any> 10 </any> </owner_allow>
        <owner_deny> nobody </owner_deny>
        <job_limit> 20 </job_limit>

        <number_of_projects> 1 </number_of_projects>

        <project number='1'>
            <project_name> LGI </project_name>
            <project_master_server> https://fwnc7003.leidenuniv.nl/LGI
        </project_master_server>

            <owner_allow> <any> 5 </any> </owner_allow>
            <owner_deny> nobody </owner_deny>
            <job_limit> 10 </job_limit>

            <number_of_applications> 1 </number_of_applications>

            <application number='1'>
                <application_name> hello_world </application_name>

                <owner_allow> <any> 2 </any> </owner_allow>
                <owner_deny> nobody </owner_deny>
                <job_limit> 4 </job_limit>
                <max_output_size> 4096 </max_output_size>

                <capabilities> whatever </capabilities>

                <check_system_limits_script> /
home/mark/temp/LGI/daemon/hello_world_scripts/check_system_limits_script
                </check_system_limits_script>
                <job_check_limits_script> /
home/mark/temp/LGI/daemon/hello_world_scripts/job_check_limits_script
                </job_check_limits_script>
                <job_check_running_script> /
home/mark/temp/LGI/daemon/hello_world_scripts/job_check_running_script
                </job_check_running_script>
                <job_check_finished_script> /
home/mark/temp/LGI/daemon/hello_world_scripts/job_check_finished_script
                </job_check_finished_script>
                <job_prologue_script> /
home/mark/temp/LGI/daemon/hello_world_scripts/job_prologue_script
                </job_prologue_script>
                <job_run_script> /
home/mark/temp/LGI/daemon/hello_world_scripts/job_run_script </job_run_script>
                <job_epilogue_script> /
home/mark/temp/LGI/daemon/hello_world_scripts/job_epilogue_script
                </job_epilogue_script>
                <job_abort_script> /
home/mark/temp/LGI/daemon/hello_world_scripts/job_abort_script </job_abort_script>
            </application>

        </project>

    </resource>
</LGI>

mark:./home/mark/temp/LGI/daemon/bin>ps -elf | grep LGI_daemon

```

```

1 S mark      15424      1 0 76    0 - 6000 109952 13:31 ?      00:00:01 /
home/mark/temp/LGI/daemon/bin/LGI_daemon -d -l /home/mark/temp/LGI/daemon/LGI.log /
home/mark/temp/LGI/daemon/LGI.cfg
mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qstat -l

This project      : LGI
This project server : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI

mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qstat -L

This project      : LGI
This project server : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI

Resource name      : mark@laptop
Resource capabilities :
Resource time stamp : Tue Oct  7 20:03:57 2008 [1223402637]

Resource name      : mark@fwnc7003.wks.gorlaeus.net
Resource capabilities : <hello_world> whatever </hello_world>
Resource time stamp : Wed Oct  8 13:33:30 2008 [1223465610]

Resource name      : mark@nocona.wks.gorlaeus.net
Resource capabilities :
Resource time stamp : Wed Oct  8 13:34:17 2008 [1223465657]

Resource name      : mark@woodcrest.wks.gorlaeus.net
Resource capabilities :
Resource time stamp : Wed Oct  8 13:28:04 2008 [1223465284]

Resource name      : somers@huygens.sara.nl
Resource capabilities :
Resource time stamp : Wed Oct  8 13:29:10 2008 [1223465350]

Resource name      : mark@harpertown.wks.gorlaeus.net
Resource capabilities :
Resource time stamp : Wed Oct  8 13:26:57 2008 [1223465217]

mark:~/home/mark/temp/LGI/daemon/bin>cat /home/mark/temp/LGI/daemon/LGI.log
Wed Oct  8 13:31:26 2008 [NORMAL] daemon_configclass.cpp:26 ::
DaemonConfig::DaemonConfig; Reading config file /home/mark/temp/LGI/daemon/LGI.cfg
Wed Oct  8 13:31:26 2008 [NORMAL] daemon_configclass.cpp:401 ::
DaemonConfigProjectApplication::IsValidConfigured; Configuration tested valid
Wed Oct  8 13:31:26 2008 [NORMAL] daemon_configclass.cpp:237 ::
DaemonConfigProject::IsValidConfigured; Configuration tested valid
Wed Oct  8 13:31:26 2008 [NORMAL] daemon_configclass.cpp:62 ::
DaemonConfig::IsValidConfigured; Configuration tested valid
Wed Oct  8 13:31:26 2008 [NORMAL] daemon_jobclass.cpp:369 :: DaemonJob::DaemonJob; Job
with
JobDirectory=/home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2
DF79C060FA9CFF has been setup
Wed Oct  8 13:31:26 2008 [NORMAL] daemon_jobclass.cpp:924 ::
DamonJob::RunJobCheckLimitsScript; Returned 0 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:31:26 2008 [NORMAL] daemon_mainclass.cpp:566 ::
Daemon::RequestWorkCycle; Job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
accepted
Wed Oct  8 13:31:27 2008 [NORMAL] daemon_mainclass.cpp:645 ::
Daemon::RequestWorkCycle; Request for work cycle done
Wed Oct  8 13:31:28 2008 [NORMAL] daemon_jobclass.cpp:936 ::
DamonJob::RunJobCheckRunningScript; Returned 256 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:31:28 2008 [NORMAL] daemon_jobclass.cpp:948 ::
DamonJob::RunJobCheckFinishedScript; Returned 256 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:31:28 2008 [NORMAL] daemon_jobclass.cpp:960 ::
DamonJob::RunJobPrologueScript; Returned 0 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:31:28 2008 [NORMAL] daemon_jobclass.cpp:1007 ::
DamonJob::RunJobRunScript; Script started on background for job with directory /

```

```

home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:31:28 2008 [NORMAL] daemon_mainclass.cpp:375 ::
Daemon::CycleThroughJobs; Scheduling cycle through jobs done
Wed Oct  8 13:33:29 2008 [NORMAL] daemon_mainclass.cpp:645 ::
Daemon::RequestWorkCycle; Request for work cycle done
Wed Oct  8 13:33:30 2008 [NORMAL] daemon_jobclass.cpp:936 ::
DamonJob::RunJobCheckRunningScript; Returned 0 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:33:30 2008 [NORMAL] daemon_mainclass.cpp:375 ::
Daemon::CycleThroughJobs; Scheduling cycle through jobs done
Wed Oct  8 13:35:31 2008 [NORMAL] daemon_jobclass.cpp:936 ::
DamonJob::RunJobCheckRunningScript; Returned 0 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:35:31 2008 [NORMAL] daemon_mainclass.cpp:375 ::
Daemon::CycleThroughJobs; Scheduling cycle through jobs done
Wed Oct  8 13:37:32 2008 [NORMAL] daemon_jobclass.cpp:936 ::
DamonJob::RunJobCheckRunningScript; Returned 256 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:37:32 2008 [NORMAL] daemon_jobclass.cpp:948 ::
DamonJob::RunJobCheckFinishedScript; Returned 0 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:37:32 2008 [NORMAL] daemon_jobclass.cpp:972 ::
DamonJob::RunJobEpilogueScript; Returned 0 for job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:37:33 2008 [NORMAL] daemon_mainclass.cpp:331 ::
Daemon::CycleThroughJobs; Finished job with directory /
home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2DF79C060FA9CFF
Wed Oct  8 13:37:33 2008 [NORMAL] daemon_jobclass.cpp:605 ::
DaemonJob::CleanUpJobDirectory; Cleaned up job from directory
JobDirectory=/home/mark/temp/LGI/daemon/runhere/LGI/hello_world/JOB_334C32EA066CE949A2
DF79C060FA9CFF
Wed Oct  8 13:37:33 2008 [NORMAL] daemon_mainclass.cpp:375 ::
Daemon::CycleThroughJobs; Scheduling cycle through jobs done
Wed Oct  8 13:37:44 2008 [NORMAL] daemon_mainclass.cpp:645 ::
Daemon::RequestWorkCycle; Request for work cycle done
mark::/home/mark/temp/LGI/daemon/bin>./LGI_qstat

```

```

-----
# | job_id |          state |          target_resources |
application |          time_stamp |          owners
-----
1 |    295 |    finished | somers@huygens.sara.nl |
gaussian | Tue Oct  7 12:18:34 2008 | mark@laptop
2 |    300 |    finished | mark@woodcrest.wks.gorlaeus.net |
gaussian | Tue Oct  7 19:13:51 2008 | mark@laptop
3 |    301 |    finished | mark@nocona.wks.gorlaeus.net |
hello_world | Tue Oct  7 20:01:13 2008 | mark@laptop
4 |    303 |    finished | mark@fwnc7003.wks.gorlaeus.net |
hello_world | Wed Oct  8 13:37:33 2008 | mark@laptop
-----

```

```

Number of jobs listed : 4
This project          : LGI
This project server   : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI

```

```
mark::/home/mark/temp/LGI/daemon/bin>./LGI_qstat 303
```

```

This project          : LGI
This project server   : https://fwnc7003.wks.gorlaeus.net/LGI
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI
User                  : mark@laptop
Groups                : theor
Job id                 : 303
Job state              : finished
Job application        : hello_world
Job specifics          : <repository>
LGI@fwnc7003.wks.gorlaeus.net:/mnt/sdb1/LGI/trunk/repository/JOB_bc2f7a820e70c70a533d4
57ce8e63c7e </repository> <repository_url>

```

```
https://fwnc7003.wks.gorlaeus.net/LGI/repository/JOB_bc2f7a820e70c70a533d457ce8e63c7e
</repository_url>
```

```
Target resources      : mark@fwnc7003.wks.gorlaeus.net
Job owners           : mark@laptop
Read access on job   : mark@laptop, theor
Time stamp           : Wed Oct  8 13:37:33 2008 [1223465853]
Input                : testing this input...
```

```
Output               : Hello_World from mark@fwnc7003.wks.gorlaeus.net submitted with
input: testing this input...
```

```
mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qdel 303
```

```
Job 303 deleted from project LGI on server https://fwnc7003.wks.gorlaeus.net/LGI
```

```
mark:~/home/mark/temp/LGI/daemon/bin>./LGI_qstat
```

```
-----
# | job_id |          state |          target_resources |
application |          time_stamp |          owners
-----
1 |    295 |    finished | somers@huygens.sara.nl |
gaussian | Tue Oct  7 12:18:34 2008 | mark@laptop
2 |    300 |    finished | mark@woodcrest.wks.gorlaeus.net |
gaussian | Tue Oct  7 19:13:51 2008 | mark@laptop
3 |    301 |    finished | mark@nocona.wks.gorlaeus.net |
hello_world | Tue Oct  7 20:01:13 2008 | mark@laptop
-----
```

```
Number of jobs listed : 3
```

```
This project          : LGI
```

```
This project server   : https://fwnc7003.wks.gorlaeus.net/LGI
```

```
Project master server : https://fwnc7003.wks.gorlaeus.net/LGI
```

```
mark:~/home/mark/temp/LGI/daemon/bin>
```