


1 — Layering


What kinds of thing exist, and who may call whom. Every call travels *downward*; nothing in a lower band knows the band above it.

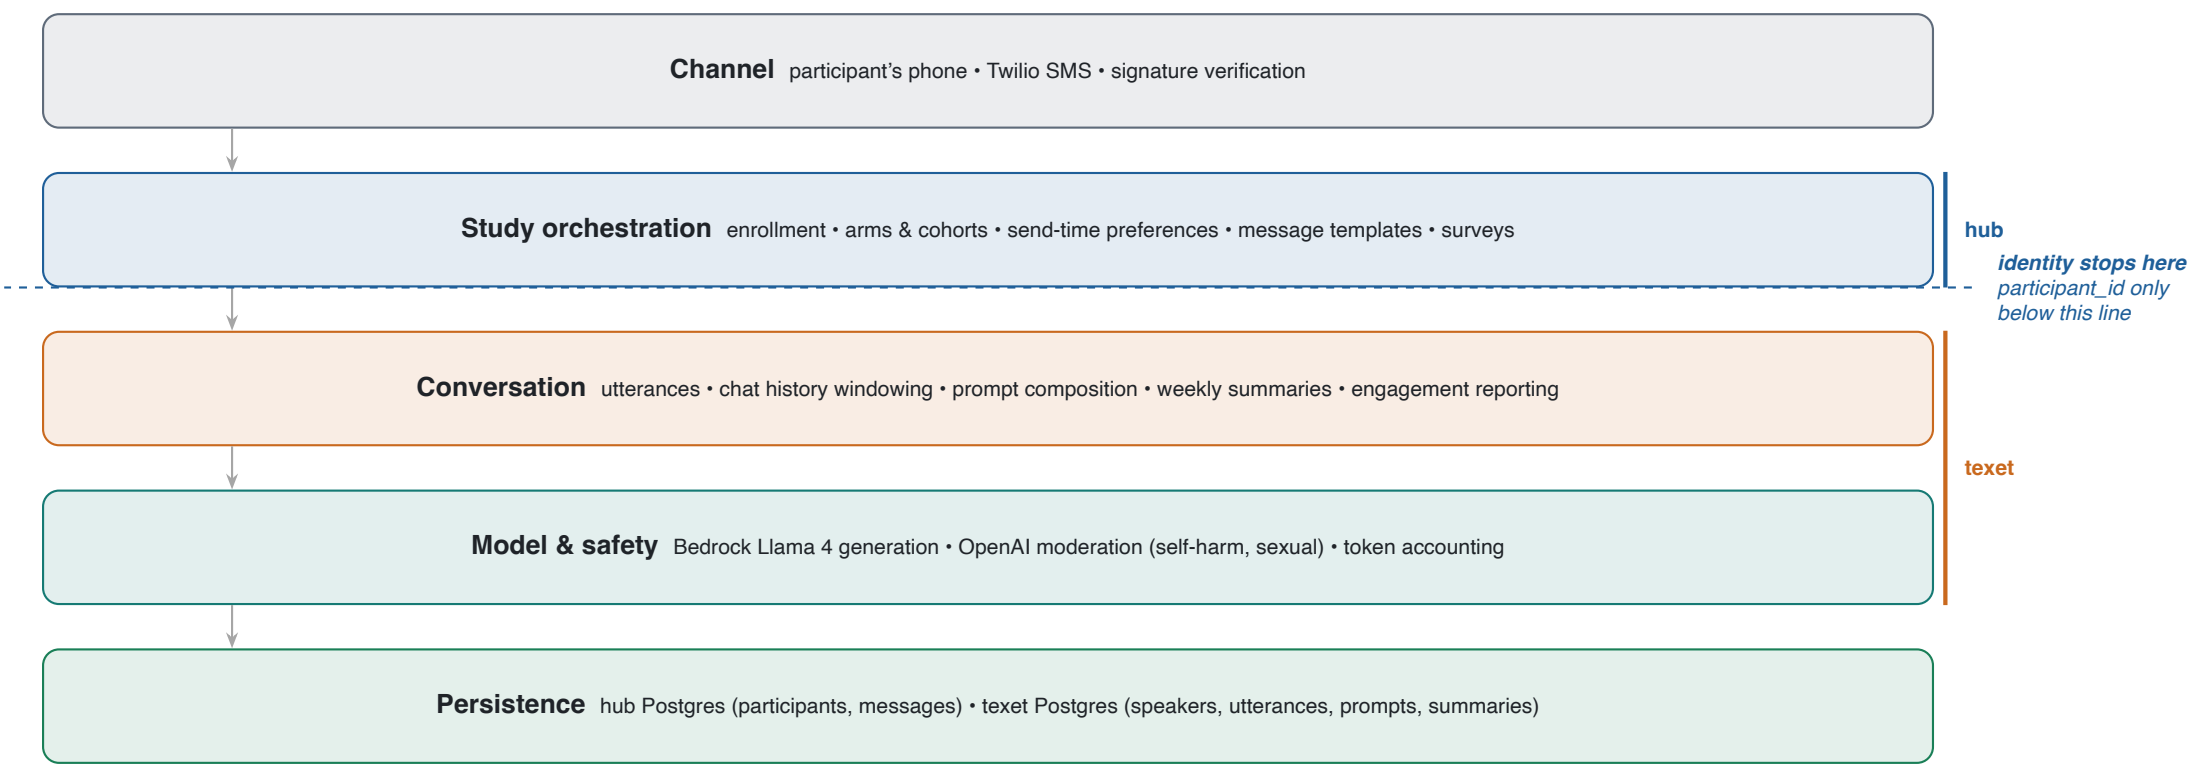

Reading the view: a band may call the band below it, never the one above. The hub never reads texet's tables and texet never reads the hub's; the only traffic between them is the two HTTP calls in diagram 2.

2 — Architecture


The two services and what lives inside each. They share no database; the entire interface is the two numbered calls.

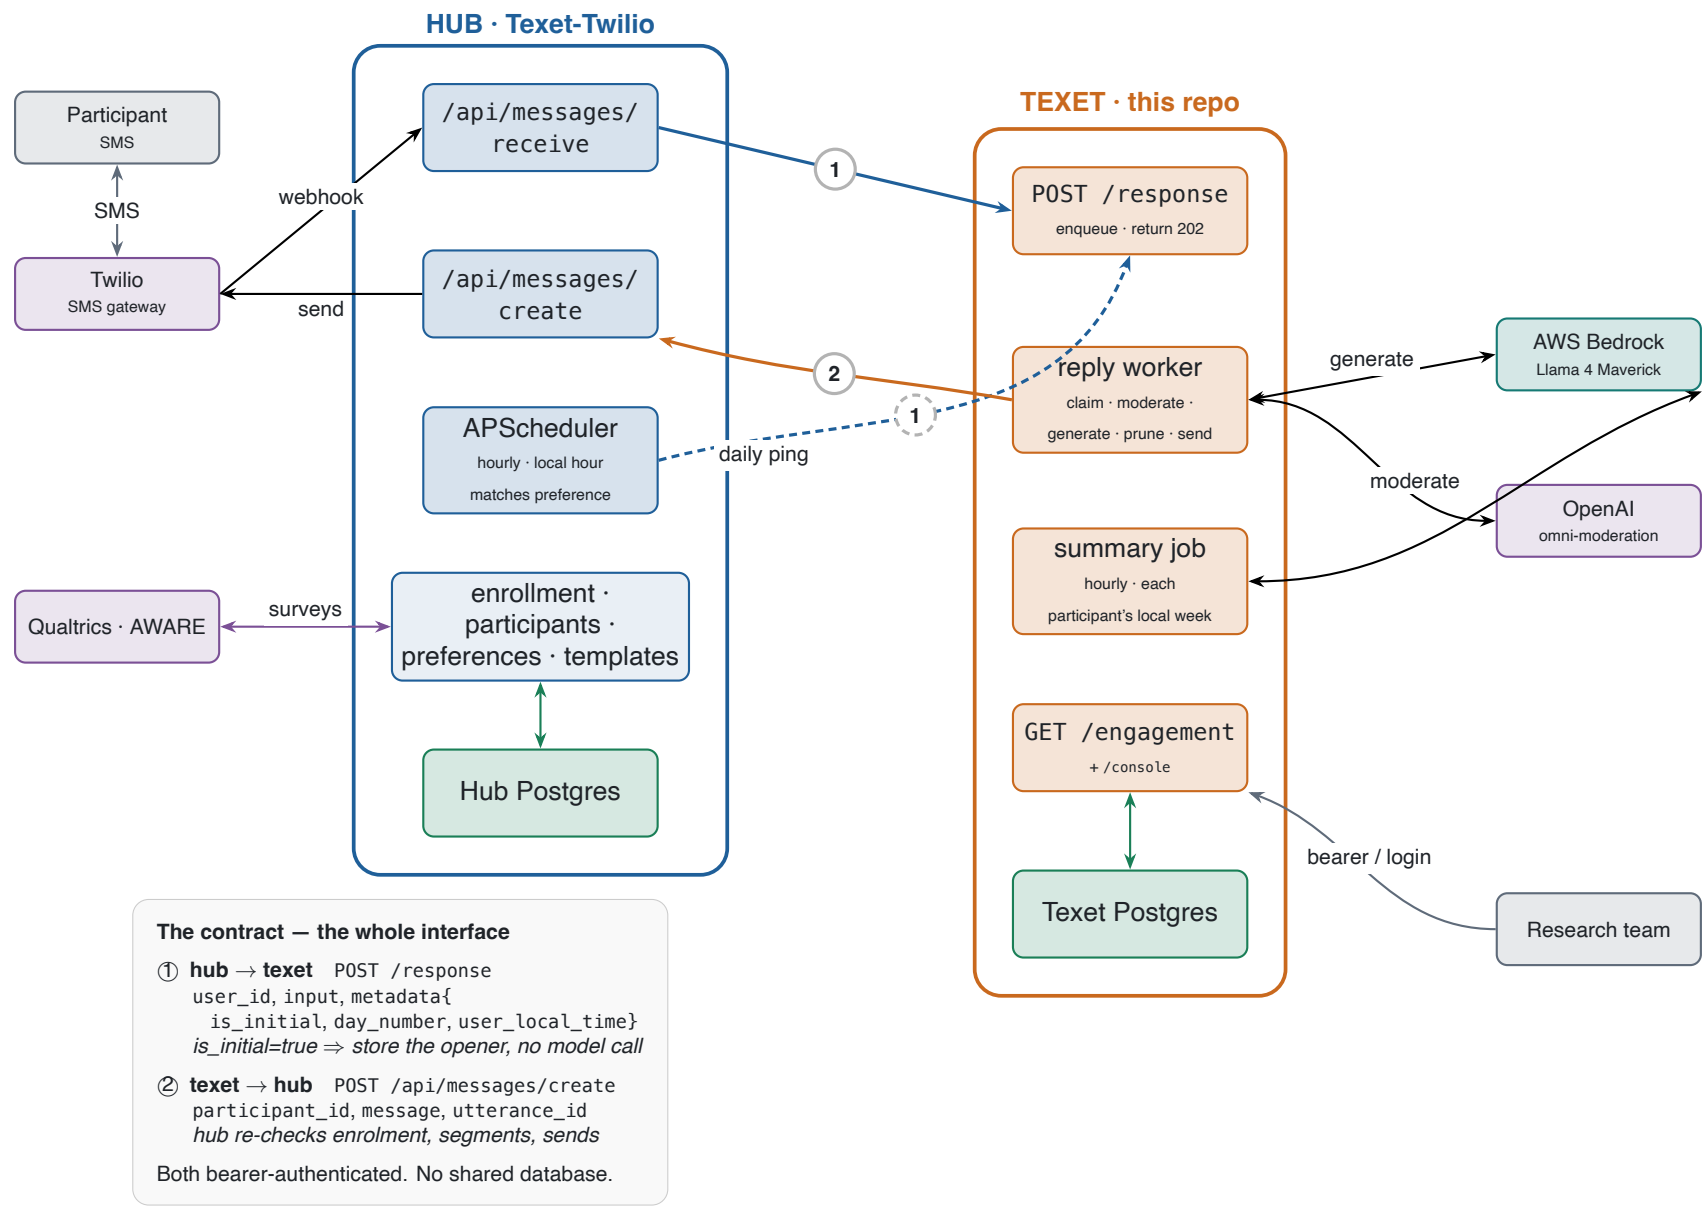

3 — Infrastructure

Two Elastic Beanstalk applications in one AWS account, each with its own RDS in a private subnet. Nothing outside AWS reaches a database.


AWS account 848180123498

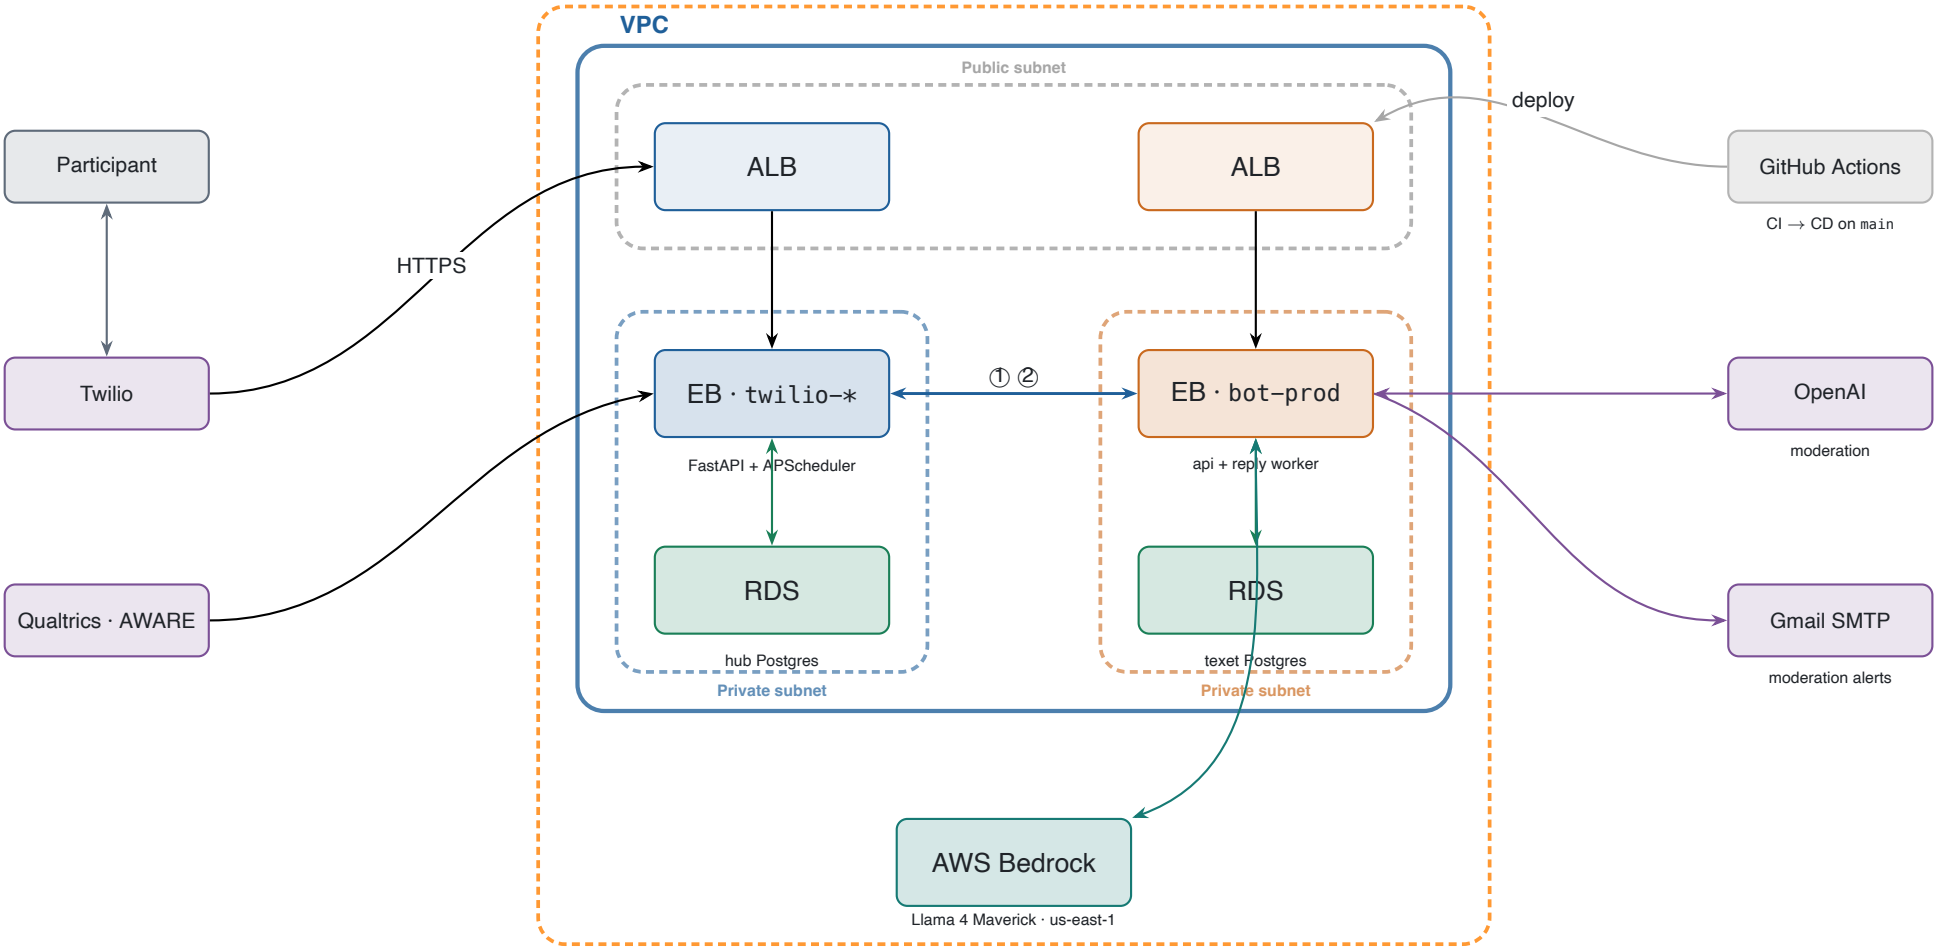

Both RDS instances are private: no public IP, no bastion. Reaching one means SSM Run Command onto the EB instance, then `docker exec` into the app container. Bedrock calls authenticate with the shared `aws-elasticbeanstalk-ec2-role` — `textet` has no service account of its own, so Bedrock spend cannot be attributed to it.

4 — Data flow

One participant message, in order. The 202 at step 5 is the point of the design: the HTTP call returns before any model work begins.

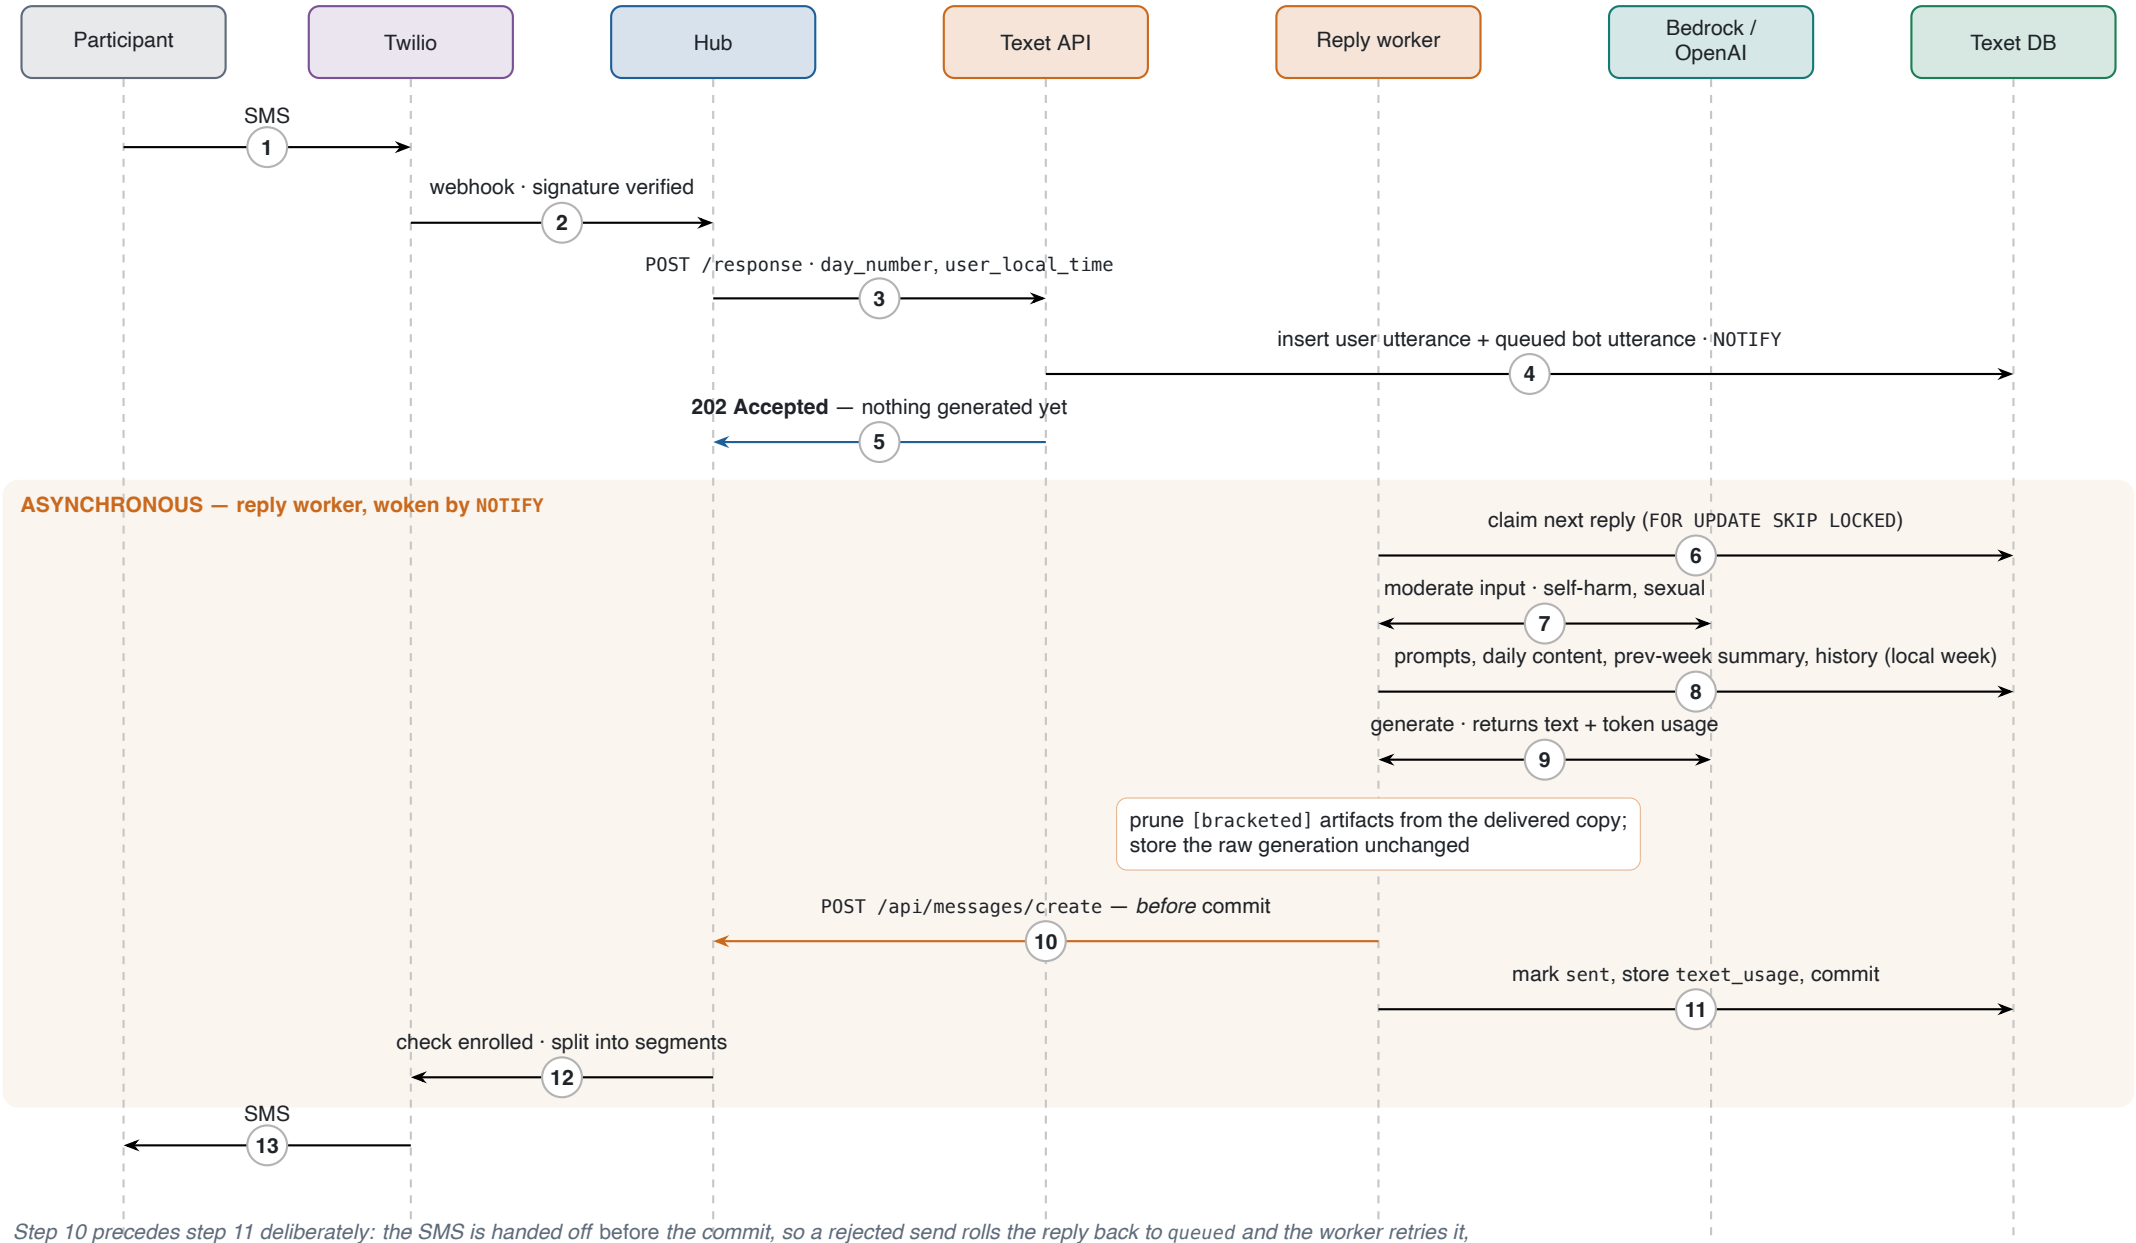

Step 10 precedes step 11 deliberately: the SMS is handed off before the commit, so a rejected send rolls the reply back to queued and the worker retries it, rather than leaving an utterance marked delivered that never went out. The cost is that a failure after hand-off can deliver a duplicate — chosen over silence.