


RatioState | recurrent storage-precision experiment

One unchanged model; six ways to retain its state between pixel calls

A Teacher-forced call and storage boundary

t = 0...782

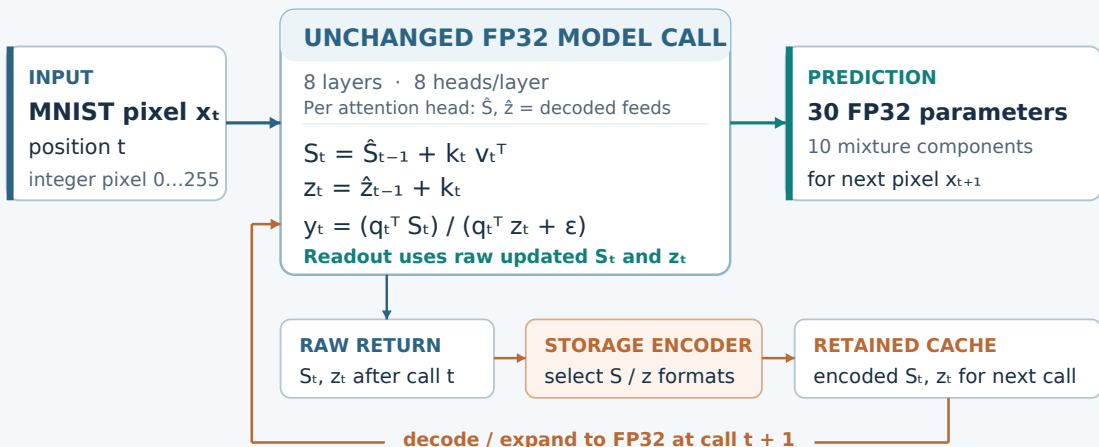

B Six retained-state formats

CROSSED MATRIX / NORMALIZER CHOICES

FP32	S-BF16	z-BF16	Joint BF16	ADDITIONAL CONTROLS	
S: FP32 z: FP32	S: BF16 z: FP32	S: FP32 z: BF16	S: BF16 z: BF16	FP16	Two-word BF16
				S: FP16 z: FP16	S: BF16 pair z: BF16 pair

The intervention is applied to every layer and head only after each current call.

C Evaluation and saved outputs



Each image is the paired unit; the conditional discretized mixture score is defined separately from the graph.