
Graduation Blueprint · Data Flow Diagram, Level 1

The engine decides (3.0, 4.0 and 7.0 are deterministic code); Claude (5.0) only explains, using engine tool results. Student* is the same entity drawn twice.

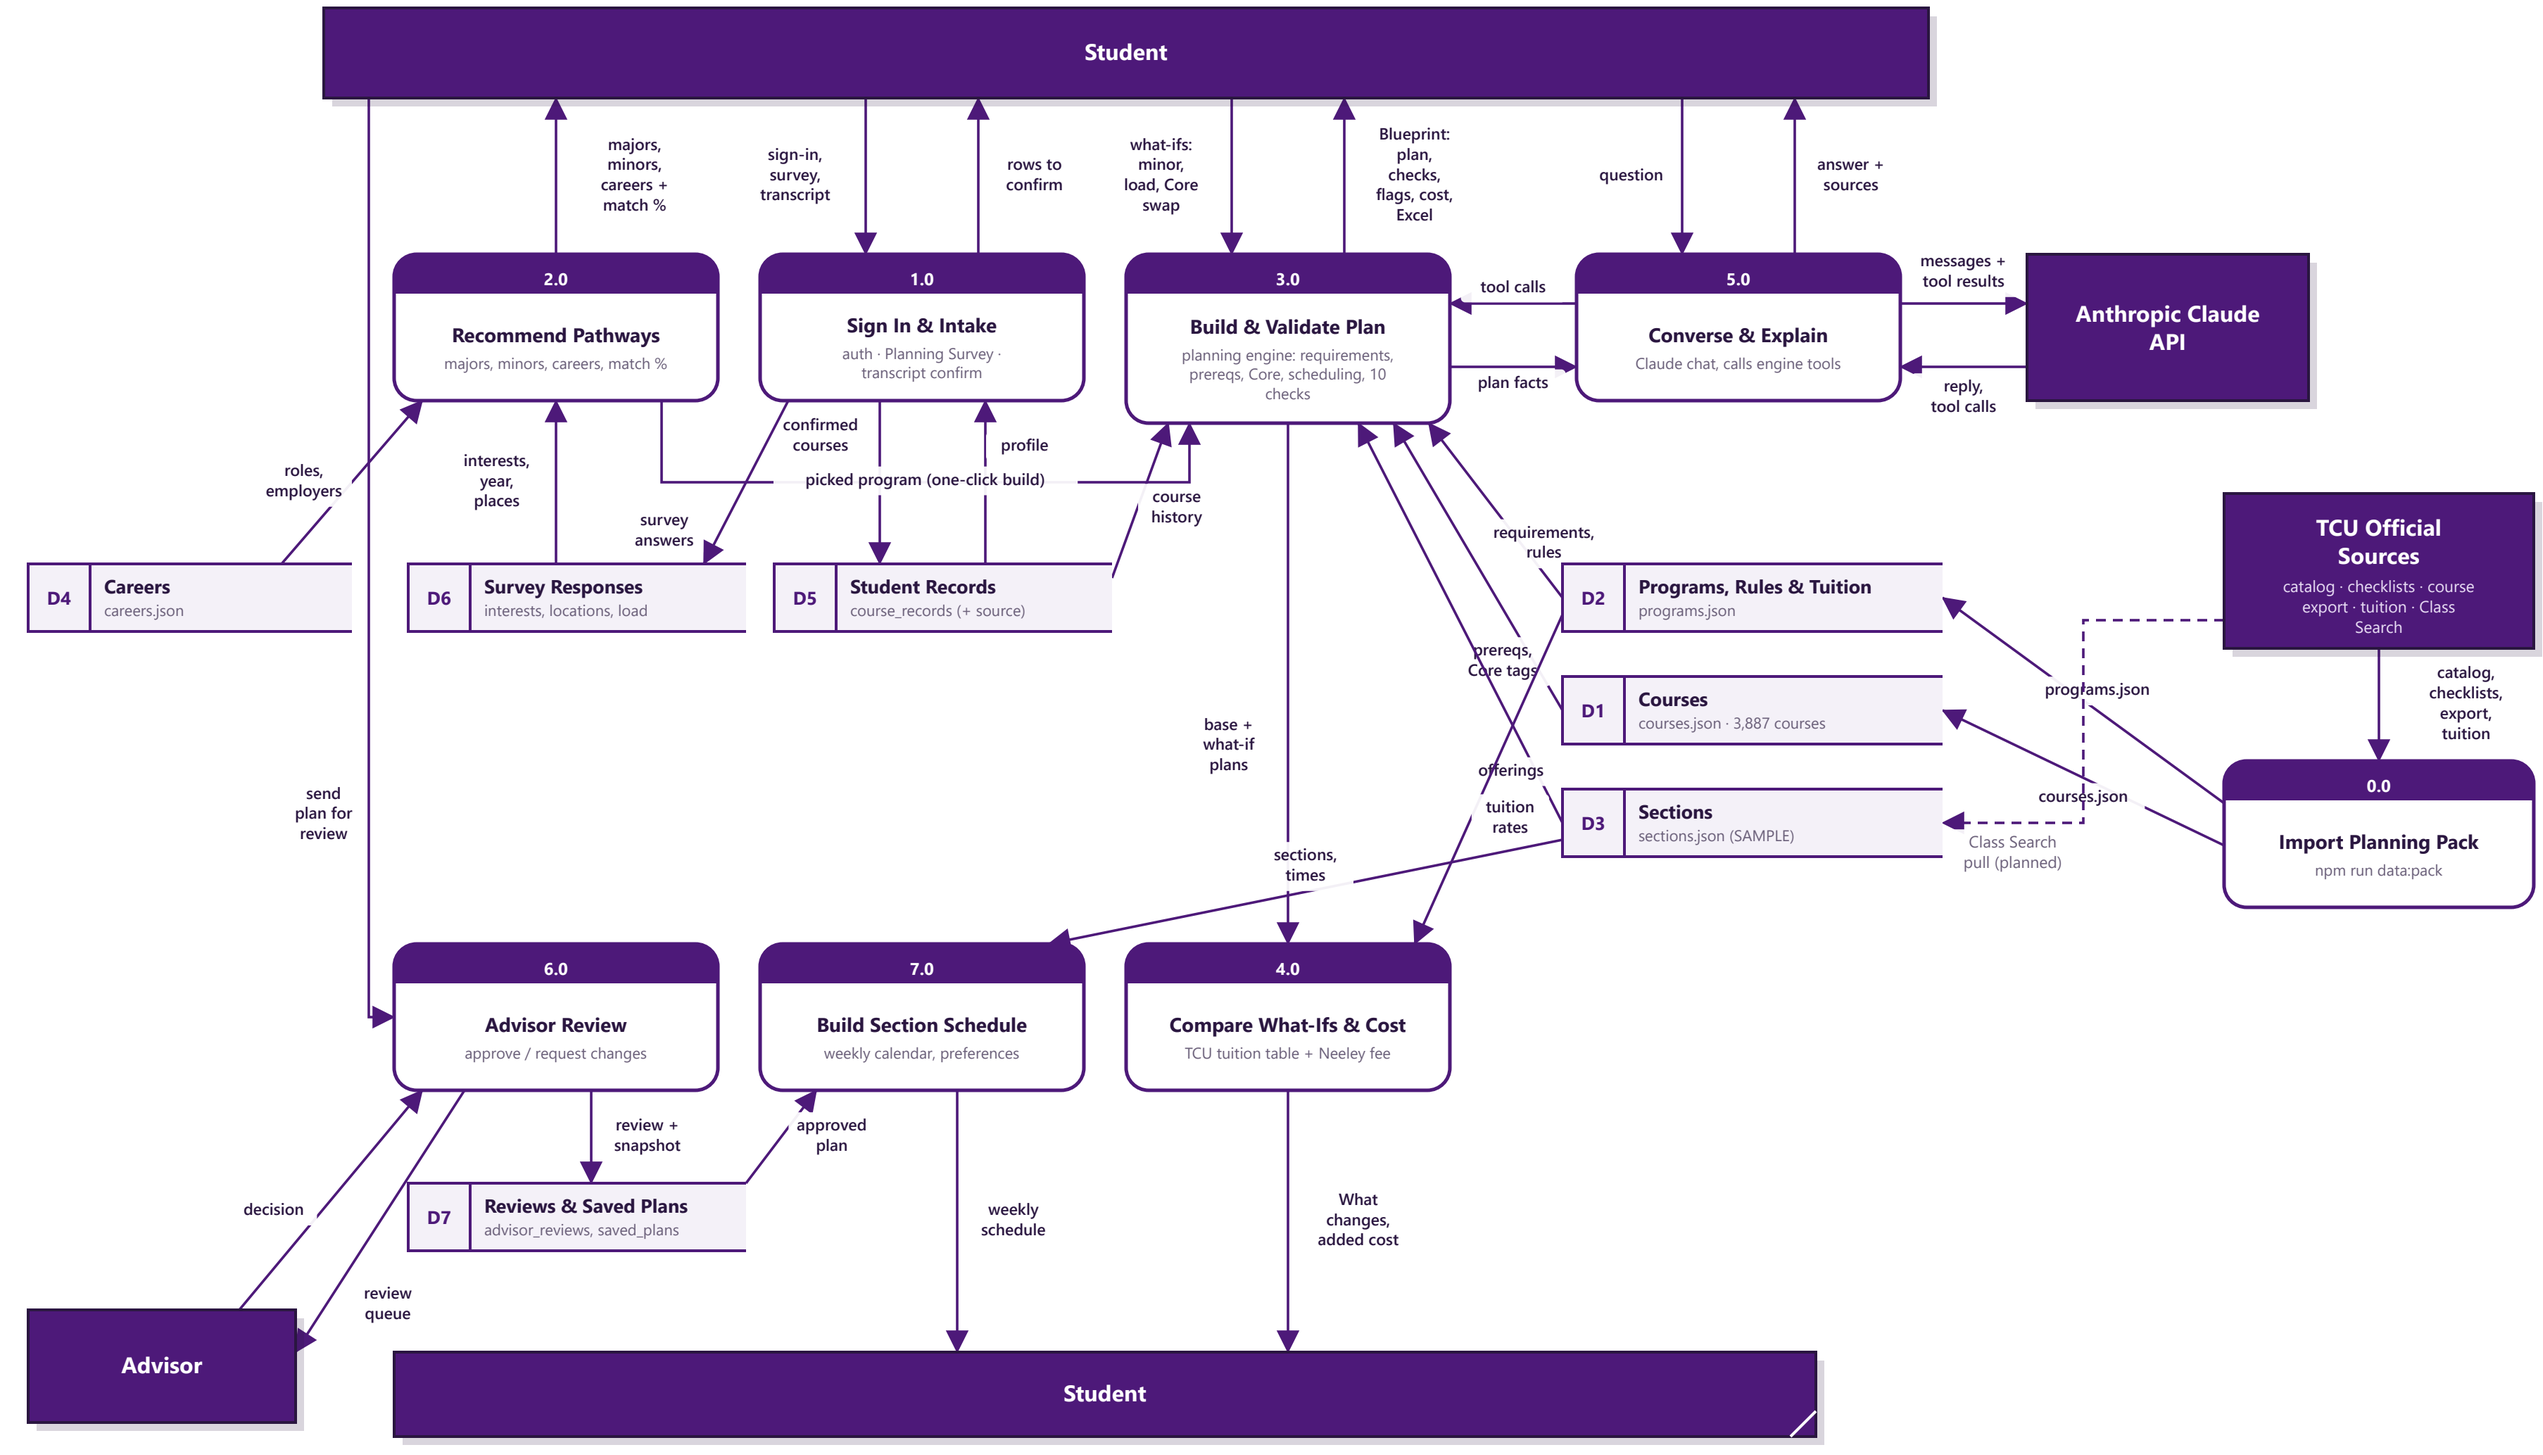

D1-D4 are JSON files re-read at runtime (update data without a rebuild). D5-D7 live in Supabase Postgres with row-level security: students see only their own rows; advisors see all. D3 Sections is SAMPLE data until the Class Search pull.