Marginal Q coverage in the frozen 5–20 GHz training subsets

FORMAL 10K snapshot | STRICT_LUMPED | shared geometry-hash train split | Q = min(Qp, Qs)

Exact local counts; row n is the full eligible train denominator, including both tails outside [9.5, 20.5).

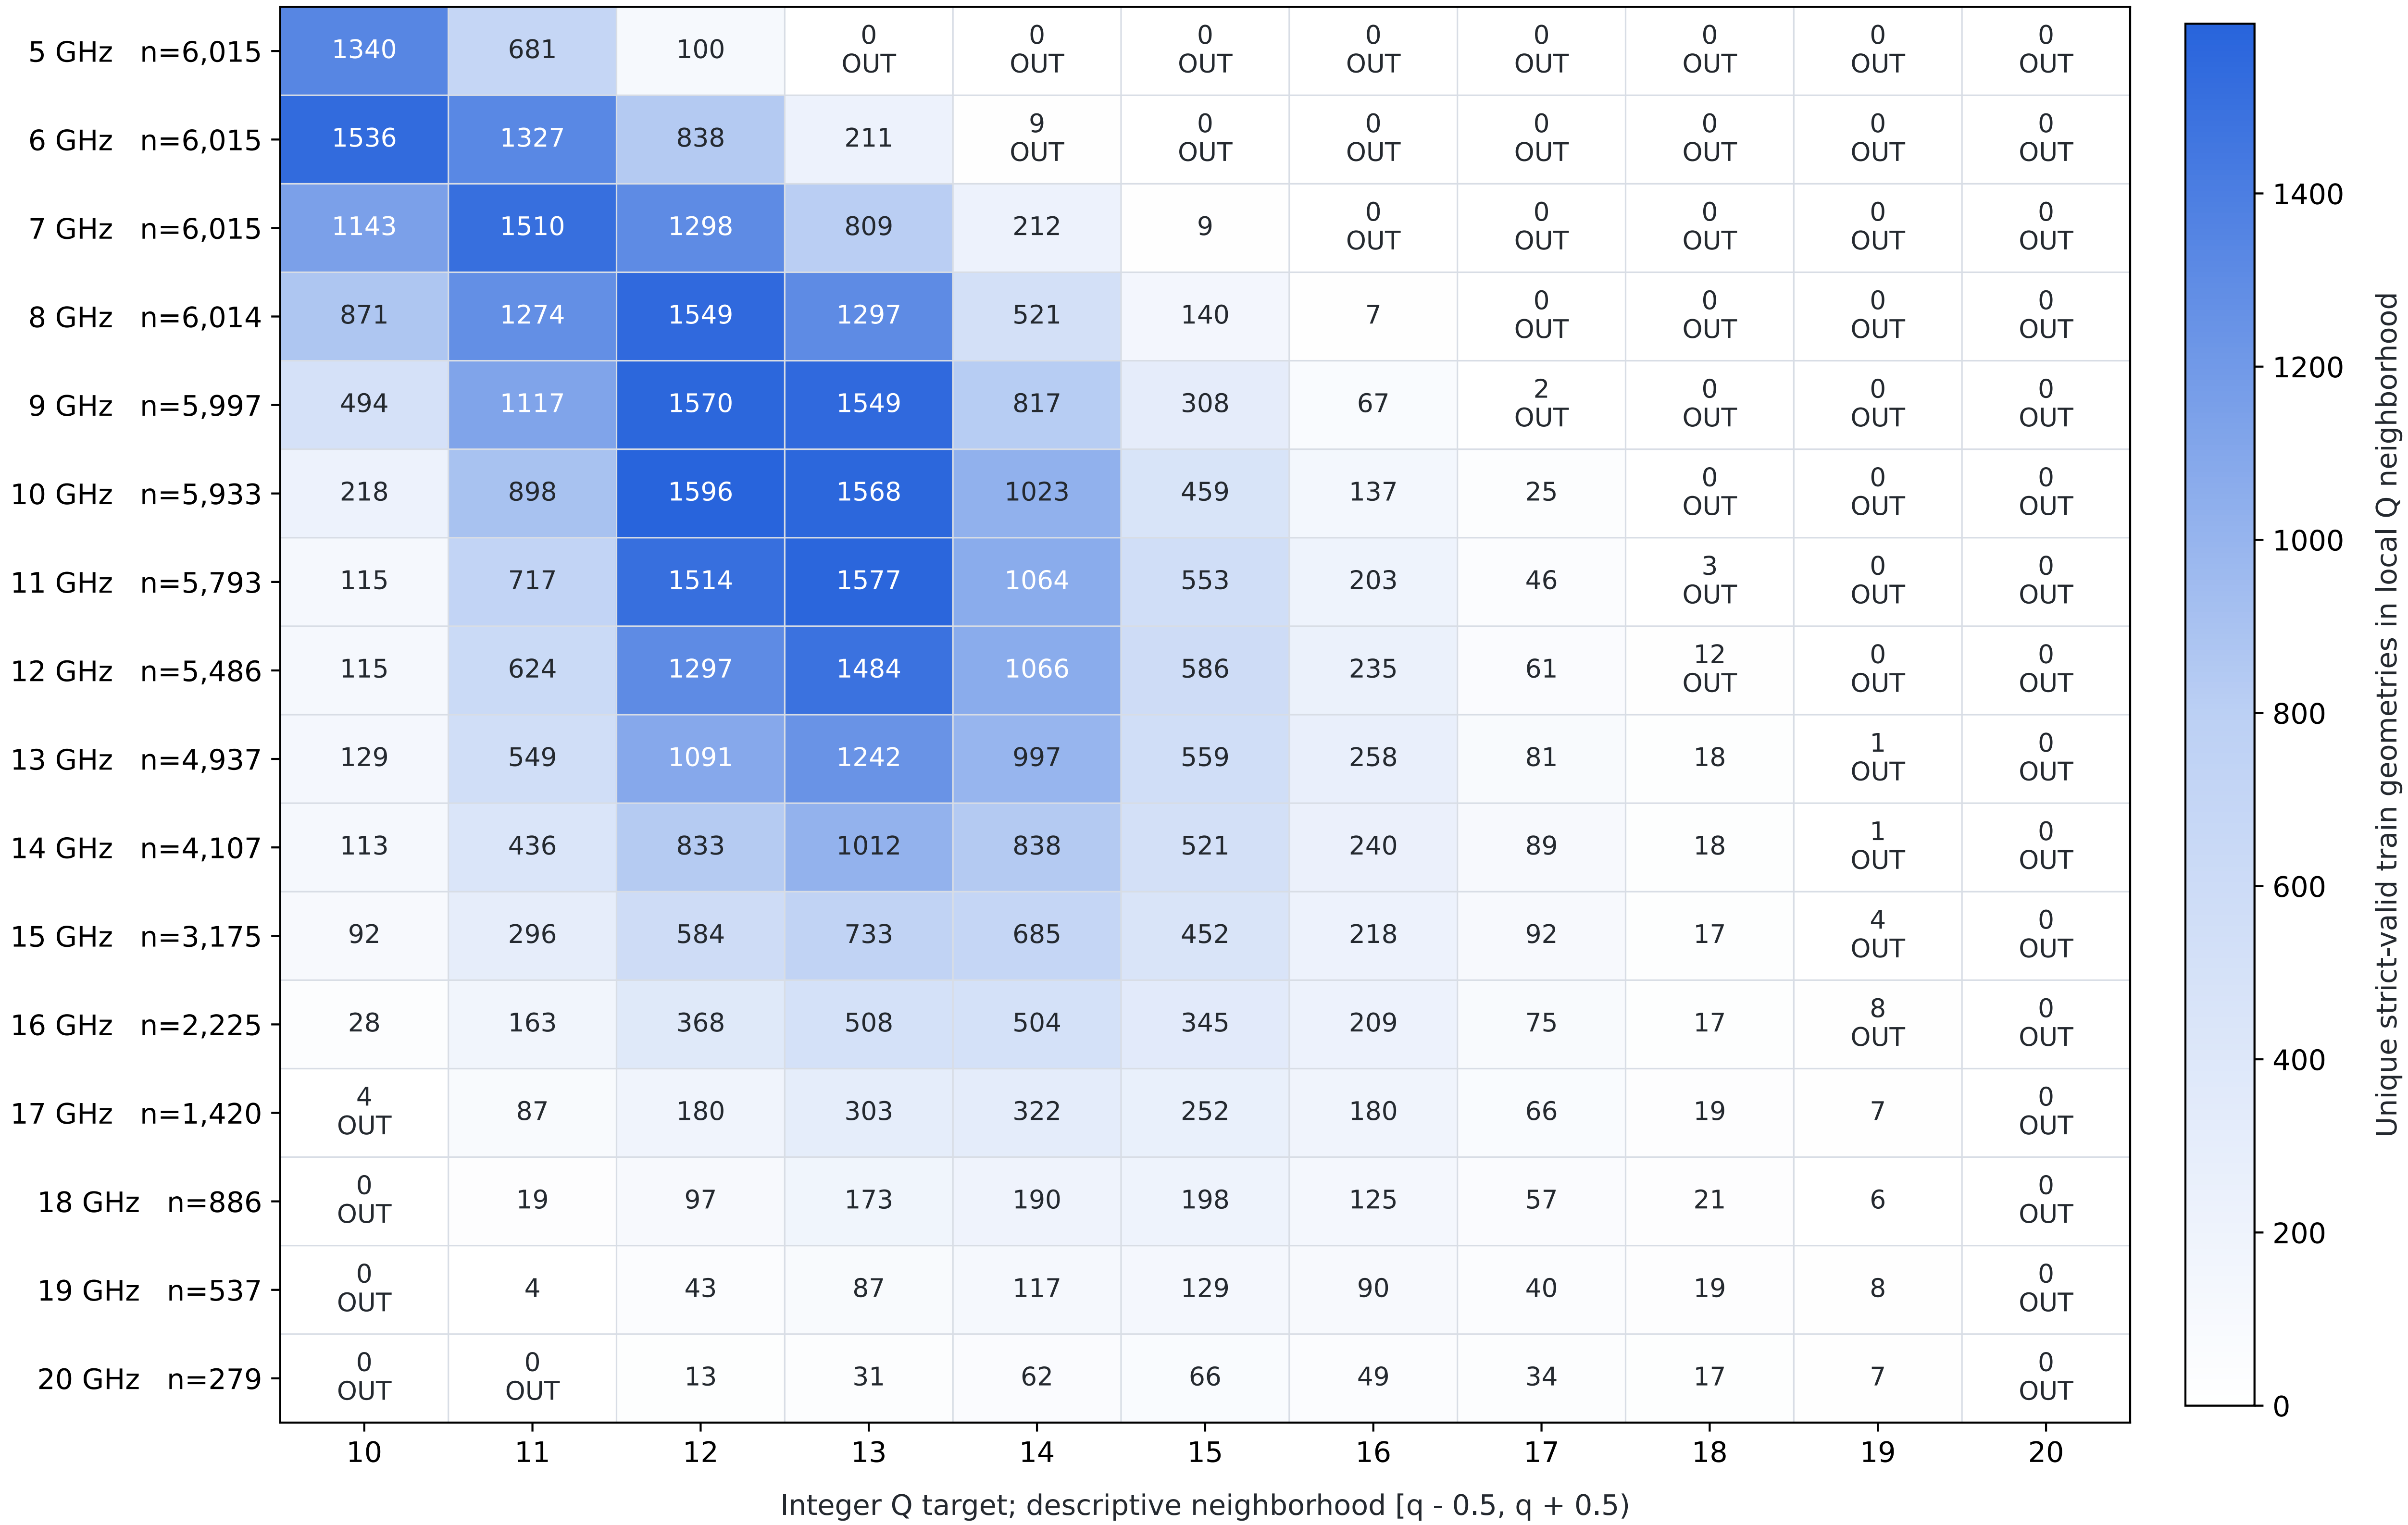

OUT: integer q lies outside observed train min/max; independent of the local-bin count. 0 = EMPTY neighborhood.
Positive counts are COUNT_ONLY, not adequate support. No conditioning on Lp, Ls or |k|; joint reachability remains UNKNOWN.
Neighborhood width 1 is descriptive density, NOT an error tolerance or changed eligibility gate. No arbitrary sparse threshold or CI.

Contract SHA-256 9cd0eb8c3d6f44c48448aa75893f360d7d18a90ae992a1fd394456192a183620

Prepared dataset SHA-256 a2d35c1e5a4f9d72c4101d2767018bb4de2c6de86fb09e90cc0efba3b0385669