

# SpaceX Falcon 9 First Stage Landing Prediction

IBM Data Science  
Capstone Project

Yanping Wang  
May 11, 2023

## Contents

---

**Executive Summary**

---

**Introduction**

---

**Methodology**

---

**Results**

---

**Discussion**

---

**Conclusion**

---

**Appendix**

## Executive Summary



### Goal

- Predict SpaceX Falcon 9 first stage landing success rate by using historic launching data.



### Data Source

- Data requested from spacexdata.com using API.
- Falcon 9 launching data obtained from Wikipedia using web scraping.



### Methodology

- Data processing: pandas, numpy, sql, BeautifulSoup, requests.
- Visualization and machine learning: matplotlib, seaborn, folium, dash, plotly, scikit-learn.



### Results

- The model can predict the landing successful rate with high accuracy using testing data.

## Introduction

**SpaceY**, a new born competitor of **SpaceX**, provide the space launching service to the market. In order to further reduce the cost due to the potential failure of the first stage of landing. **SpaceY** determined to use **SpaceX** Falcon 9 historical launching data to predict the success rate of landing.

Falcon 9 historical data will be collected from Wikipedia and spacexdata.com. Applying data science technique to clean and process the raw data to understand dataset and launching parameters.



Visualization the data will help understand the dataset pattern and relationship between parameters. Key parameters are used for built up machine learning model to predict the landing success rate.







A. Factors influencing the landing outcome are identified.  
B. The ideal models are developed to predict results which will be applied for future launching services.

# Data Collection And Exploratory Data Analysis



Collecting is the starting of knowing.




## Data Collection and Data Wrangling Methodology

| Data Source | spacexdata   | <a href="https://api.spacexdata.com/v4/rockets/">https://api.spacexdata.com/v4/rockets/</a><br><a href="https://api.spacexdata.com/v4/launchpads/">https://api.spacexdata.com/v4/launchpads/</a><br><a href="https://api.spacexdata.com/v4/payloads/">https://api.spacexdata.com/v4/payloads/</a><br><a href="https://api.spacexdata.com/v4/cores/">https://api.spacexdata.com/v4/cores/</a><br><a href="https://api.spacexdata.com/v4/launches/past">https://api.spacexdata.com/v4/launches/past</a> |  |
|-------------|--|---|--|
|             | Wikipedia  | <a href="https://en.wikipedia.org/wiki/List_of_Falcon_9_and_Falcon_Heavy_launches">https://en.wikipedia.org/wiki/List_of_Falcon_9_and_Falcon_Heavy_launches</a>   |  |
|             | Data Collection  |   | Data Wrangling   |
| Tools       |   |   |   |
| Key methods | <code>requests.get().json()</code><br><code>pandas.json_normalize(json_file)</code><br><code>BeautifulSoup(data, 'html')</code>  |   | <code>panda.read_csv()</code><br><code>df.isnull().sum()</code><br><code>df['feature'].value_counts(); df.mean()</code>  |

## Data Collection


| technique          | tools  | sources                      | contents   |
|--------------------|--|------------------------------|--|
| json file decoding |   | spacexdata.com API           | Contains the information of Falcon 9, launching pads, payloads, cores, and historical launching records. |
| Web scarping       |  | Wikipedia Falcon 9 launching | Falcon 9 historical launch records including features.   |

## Data Collection: SpaceX API

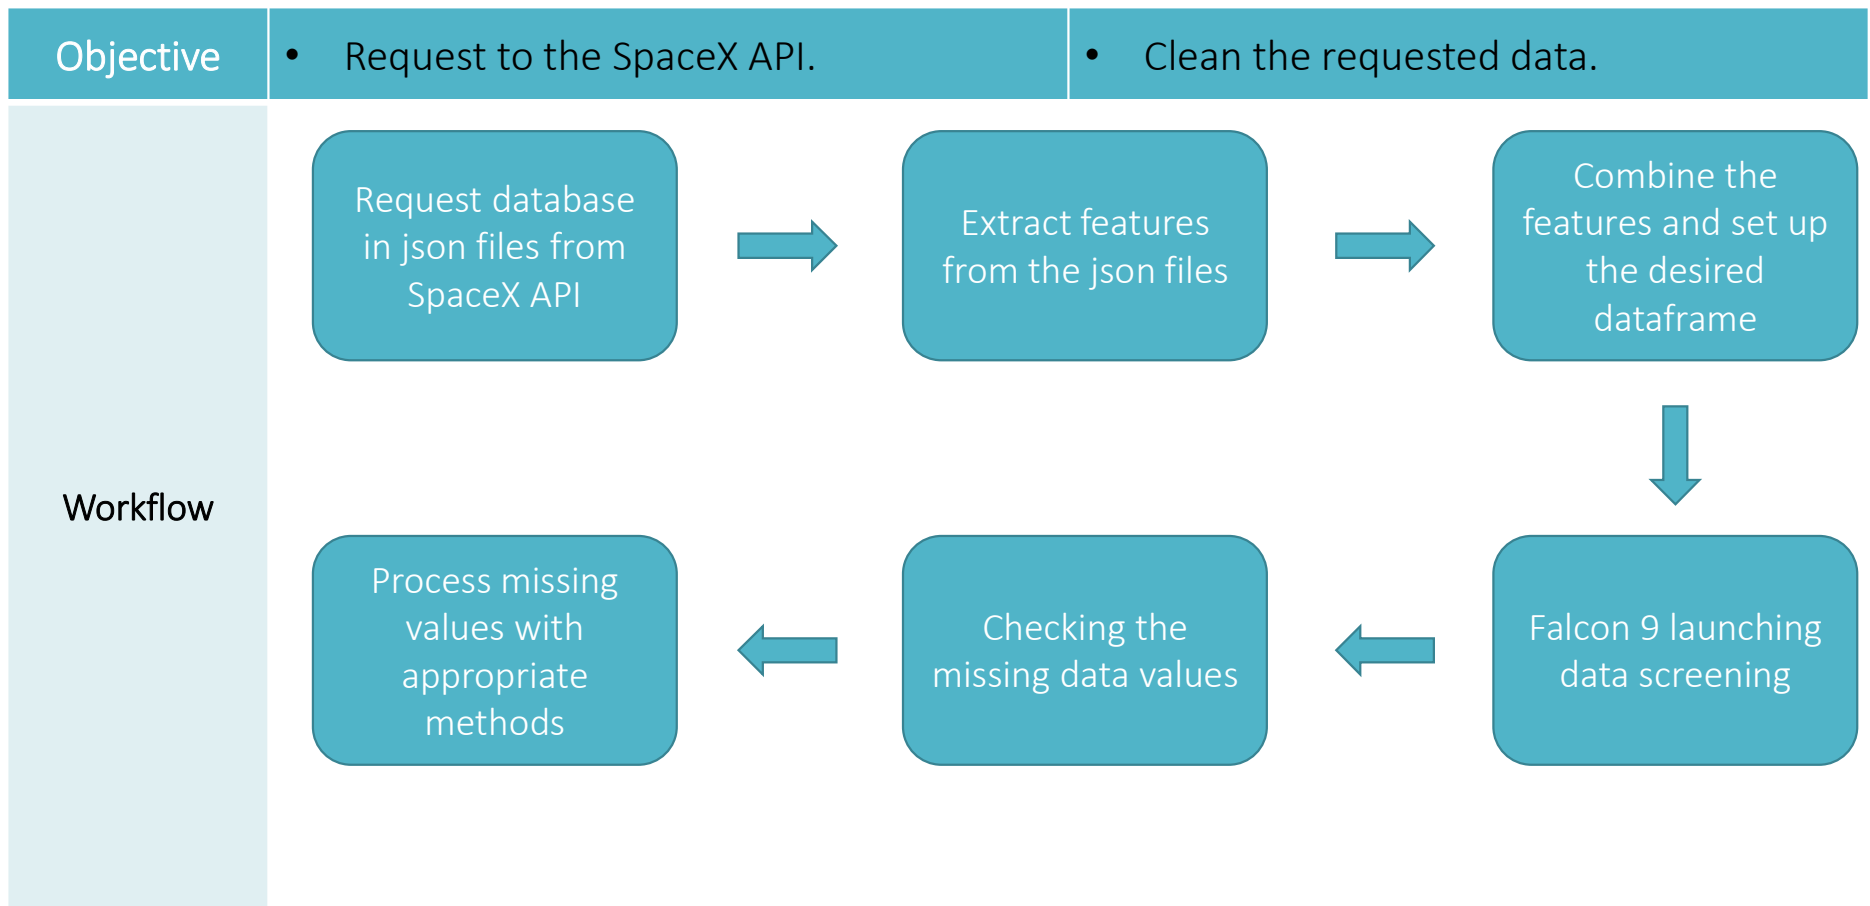





## Data Collection: Web Scrapping Wikipedia Page

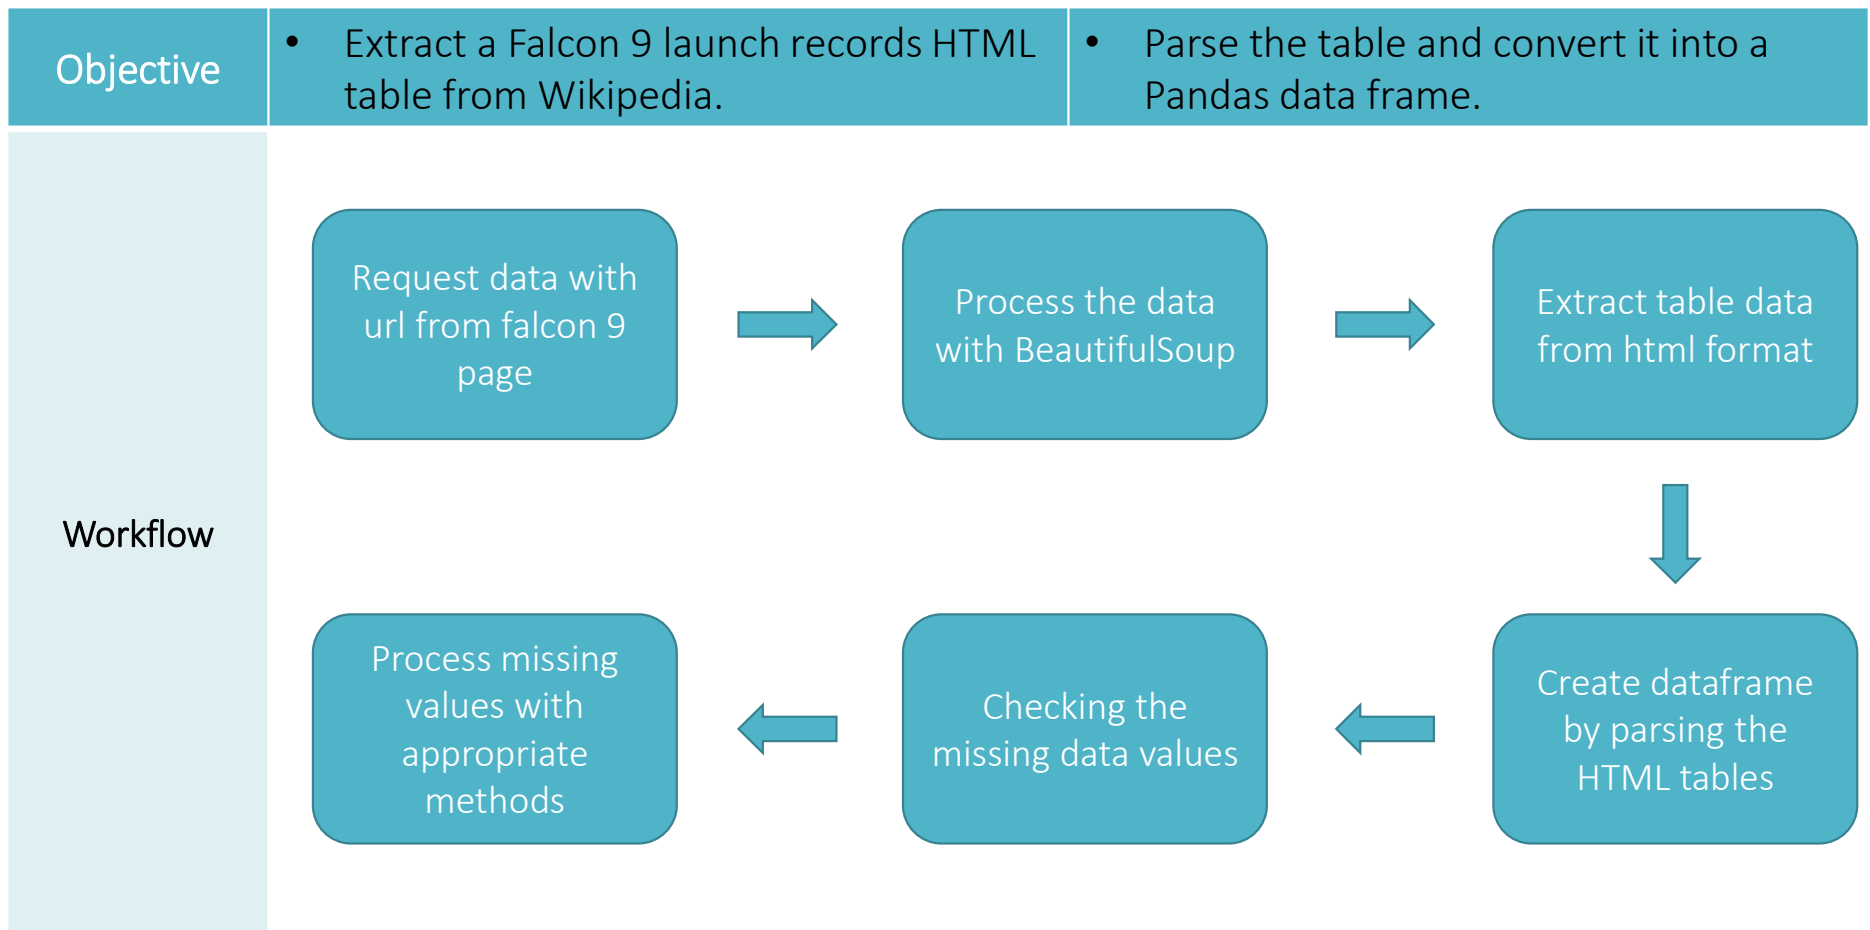

## Data Wrangling

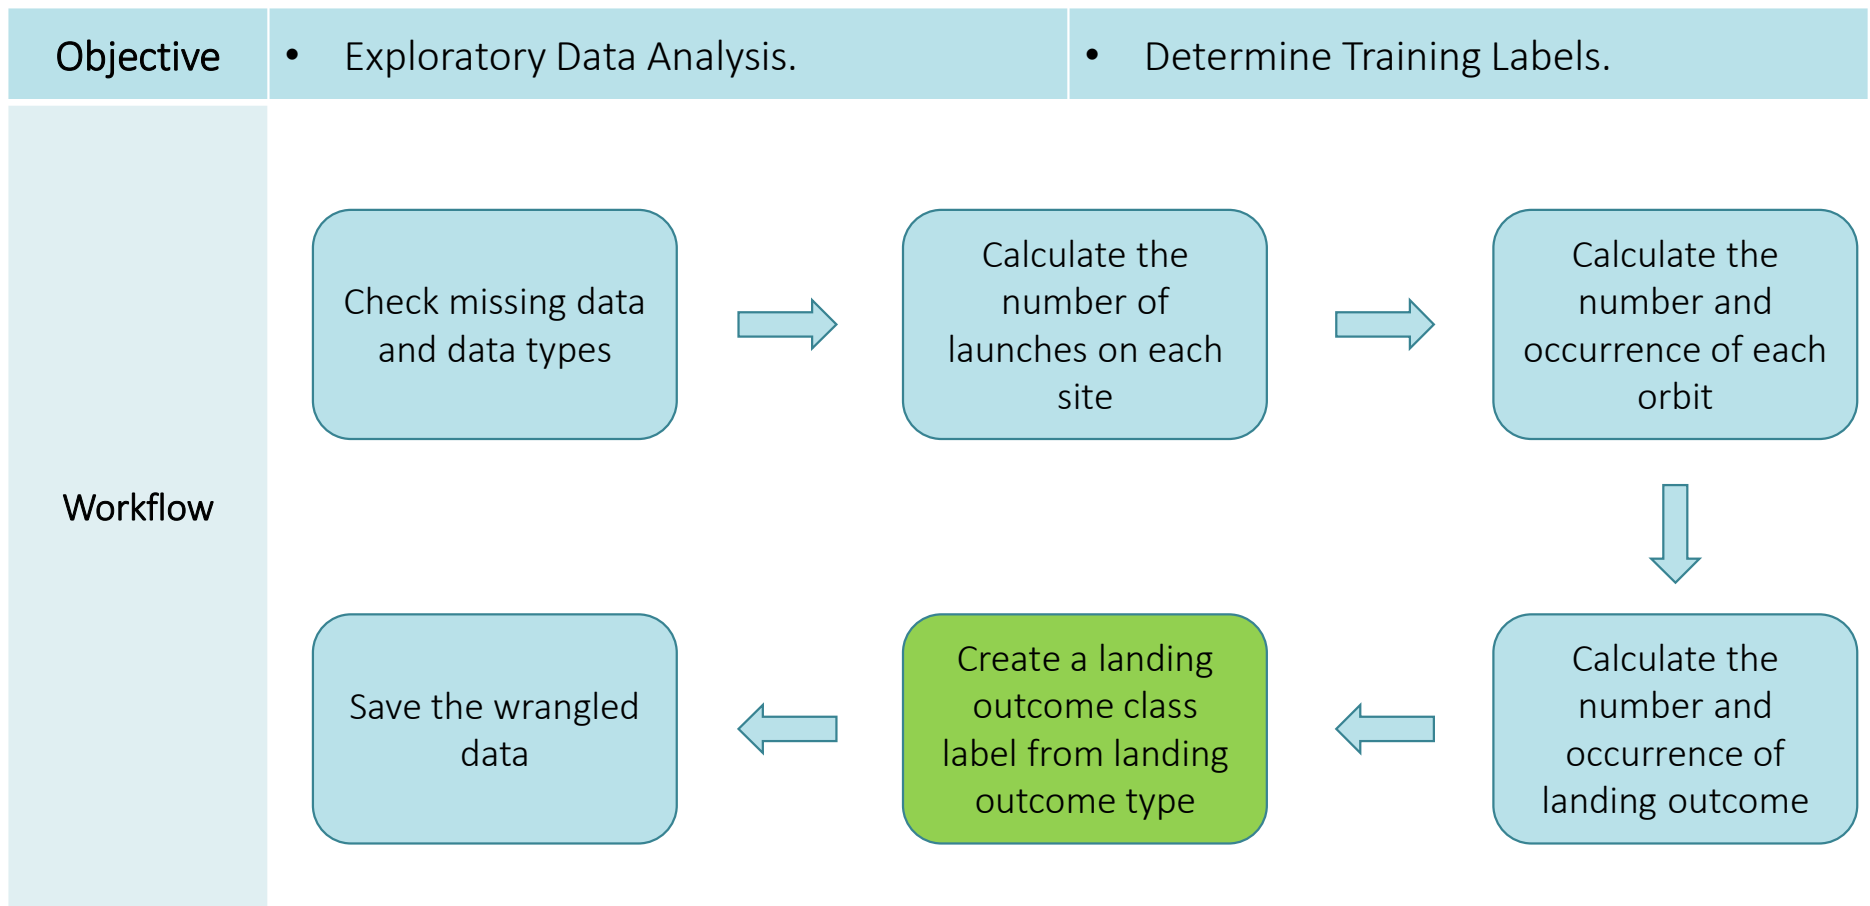

## SQL Request Objectives

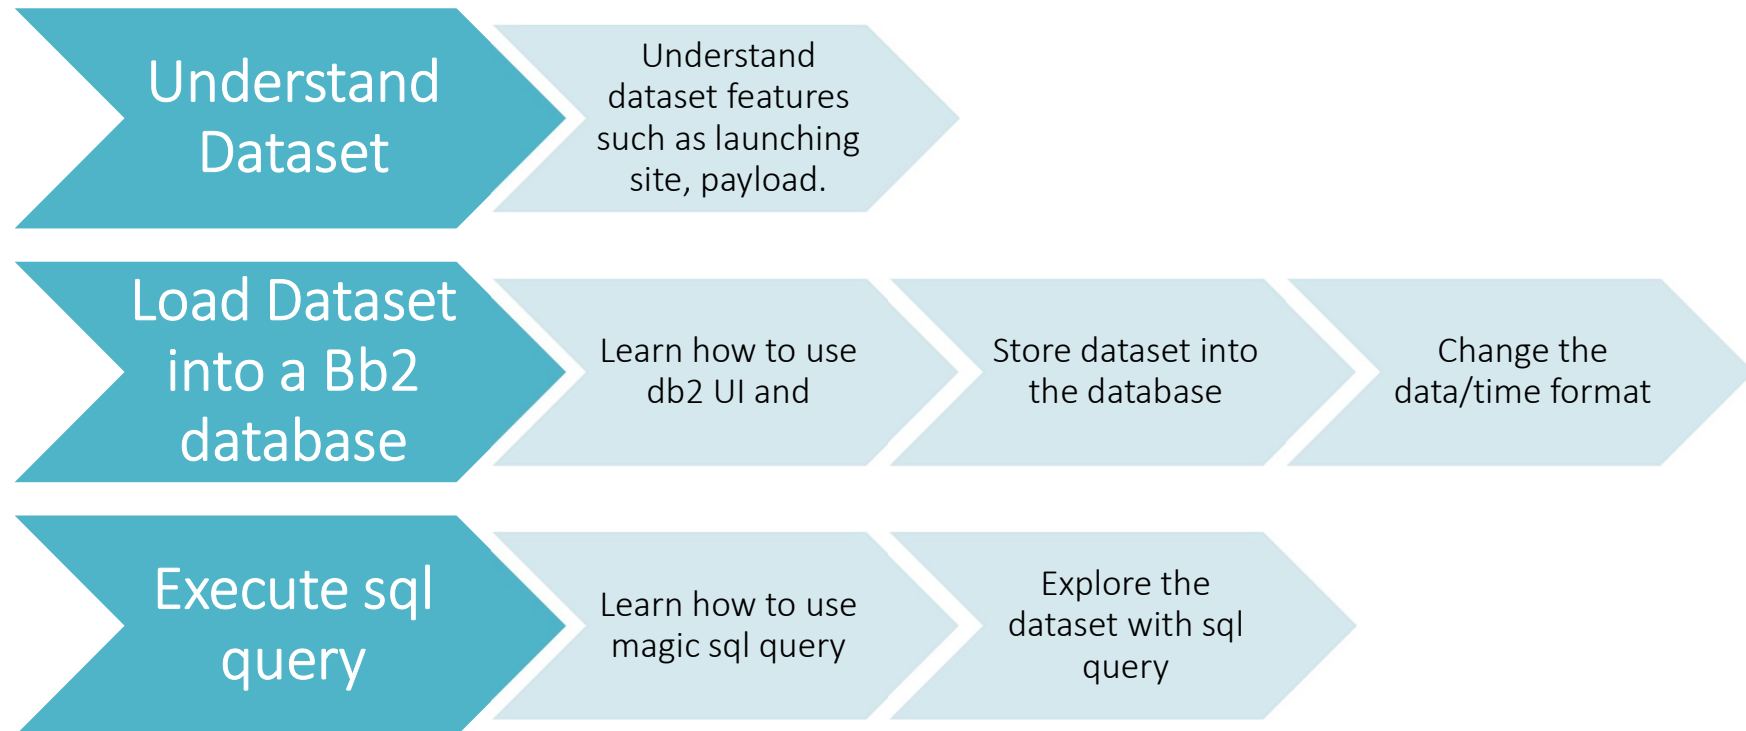

# SQL Request Result: Display Launch Sites

|         |   |
|---------|---|
| Query   | %sql SELECT DISTINCT LAUNCH_SITE FROM SPACEXTBL ORDER BY 1;   |
| Results | <div><div>launch_site</div><div>CCAFS LC-40</div><div>CCAFS SLC-40</div><div>KSC LC-39A</div><div>VAFB SLC-4E</div></div> |

# SQL Request Result: Display 5 Records of Launch Site of "KSC"

| Query   | %sql SELECT * FROM SPACEXTBL WHERE LAUNCH_SITE LIKE 'KSC%' LIMIT 5; |                |                         |                 |                   |                           |           |               |                     |                            |
|---------|---|----------------|-------------------------|-----------------|-------------------|---------------------------|-----------|---------------|---------------------|----------------------------|
| Results | DATE  | time__utc<br>- | booste<br>r_versi<br>on | launch_si<br>te | payload           | payload_<br>mass__kg<br>- | orbit     | customer      | mission_<br>outcome | landing__<br>outcome       |
|         | 2017-02-19  | 14:39:00       | F9 FT<br>B1031.<br>1    | KSC LC-<br>39A  | SpaceX<br>CRS-10  | 2490                      | LEO (ISS) | NASA<br>(CRS) | Success             | Success<br>(ground<br>pad) |
|         | 2017-03-16  | 06:00:00       | F9 FT<br>B1030          | KSC LC-<br>39A  | EchoStar<br>23    | 5600                      | GTO       | EchoStar      | Success             | No<br>attempt              |
|         | 2017-03-30  | 22:27:00       | F9 FT<br>B1021.<br>2    | KSC LC-<br>39A  | SES-10            | 5300                      | GTO       | SES           | Success             | Success<br>(drone<br>ship) |
|         | 2017-05-01  | 11:15:00       | F9 FT<br>B1032.<br>1    | KSC LC-<br>39A  | NROL-76           | 5300                      | LEO       | NRO           | Success             | Success<br>(ground<br>pad) |
|         | 2017-05-15  | 23:21:00       | F9 FT<br>B1034          | KSC LC-<br>39A  | Inmarsat-<br>5 F4 | 6070                      | GTO       | Inmarsat      | Success             | No<br>attempt              |
|         |   |                |                         |                 |                   |                           |           |               |                     |                            |

# SQL Request Result: Display the Total Payload Mass from NASA

|         |   |
|---------|---|
| Query   | %sql  SELECT SUM(PAYLOAD_MASS__KG_) AS PAYLOADMASS SPACEXTBL WHERE CUSTOMER = 'NASA (CRS)'; |
| Results | <div>Payloadmass</div> <div>45596</div>   |

# SQL Request Result: Display Average Payload Carried by F9 v1.1

|         |  |
|---------|--|
| Query   | %sql  <b>SELECT</b> AVG(PAYLOAD_MASS__KG_) <b>AS</b> PAYLOADMASS SPACEXTBL <b>WHERE</b> BOOSTER_VERSION = 'F9 V1.1'; |
| Results | <div>Averagepayload</div> <div>2928</div>  |

# SQL Request Result: Display Successful Drone Ship Landing Date

|         |  |
|---------|--|
| Query   | %sql  SELECT MIN( DATE ) FROM SPACEXTBL WHERE LANDING__OUTCOME = 'SUCCESS (DRONE SHIP)'; |
| Results | <div>1</div> <div><div></div><div>2016-04-08</div></div>                                 |



# SQL Request Result: Display Boosters with Specific Constraints

|         |  |
|---------|--|
| Query   | %sql  <b>SELECT</b> BOOSTER_VERSION <b>FROM</b> SPACEXTBL <b>WHERE</b> ((LANDING__OUTCOME = 'SUCCESS (GROUND PAD)') & (PAYLOAD_MASS__KG_ <b>BETWEEN</b> 4000 AND 6000)); |
| Results | <div><div>booster_version</div><div><div>F9 FT B1032.1</div><div>F9 B4 B1040.1</div><div>F9 B4 B1043.1</div></div></div>   |

# SQL Request Result: Display the Total Number of Different Outcomes

|         |  |
|---------|--|
| Query   | %sql  <b>SELECT</b> COUNT(MISSION_OUTCOME) AS OUTCOME <b>FROM</b> SPACEXTBL <b>GROUP BY</b> MISSION_OUTCOME; |
| Results | <div>Outcome</div> <div><div>1</div><div>99</div><div>1</div></div>  |

# SQL Request Result: Display the Booster Which Carried The Max. Payload

|               |   |                          |
|---------------|---|--------------------------|
| Query         | %sql  <b>SELECT</b> BOOSTER_VERSION, PAYLOAD_MASS__KG_ <b>FROM</b> SPACEXTBL <b>WHERE</b> PAYLOAD_MASS__KG_ = ( <b>SELECT</b> MAX(PAYLOAD_MASS__KG_) <b>FROM</b> SPACEXTBL) |                          |
| Results       | <b>booster_version</b>  | <b>payload_mass__kg_</b> |
|               | F9 B5 B1048.4   | 15600                    |
|               | F9 B5 B1049.4   | 15600                    |
|               | F9 B5 B1051.3   | 15600                    |
|               | F9 B5 B1056.4   | 15600                    |
|               | F9 B5 B1048.5   | 15600                    |
|               | F9 B5 B1051.4   | 15600                    |
|               | F9 B5 B1049.5   | 15600                    |
|               | F9 B5 B1060.2   | 15600                    |
|               | F9 B5 B1058.3   | 15600                    |
|               | F9 B5 B1051.6   | 15600                    |
|               | F9 B5 B1060.3   | 15600                    |
| F9 B5 B1049.7 | 15600   |                          |

# SQL Request Result: Display Record with Multiple Features and Constraints

| Query   | %sql SELECT SUBSTR( DATE, 1, 4) AS YEAR, SUBSTR( DATE, 6, 2) AS MONTH, MISSION_OUTCOME, BOOSTER_VERSION, LAUNCH_SITE FROM SPACEXTBL WHERE ((SUBSTR( DATE, 1, 4)='2017') & (LANDING__OUTCOME = 'SUCCESS (GROUND PAD)'));   |                 |                 |              |  |      |       |                 |                 |             |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |              |
|---------|---|-----------------|-----------------|--------------|--|------|-------|-----------------|-----------------|-------------|------|----|---------|---------------|------------|------|----|---------|---------------|------------|------|----|---------|---------------|------------|------|----|---------|---------------|------------|------|----|---------|---------------|------------|------|----|---------|---------------|--------------|
| Results | <table><tr><th>year</th><th>month</th><th>Mission_Outcome</th><th>Booster_Version</th><th>Launch_Site</th></tr><tr><td>2017</td><td>02</td><td>Success</td><td>F9 FT B1031.1</td><td>KSC LC-39A</td></tr><tr><td>2017</td><td>01</td><td>Success</td><td>F9 FT B1032.1</td><td>KSC LC-39A</td></tr><tr><td>2017</td><td>03</td><td>Success</td><td>F9 FT B1035.1</td><td>KSC LC-39A</td></tr><tr><td>2017</td><td>08</td><td>Success</td><td>F9 B4 B1039.1</td><td>KSC LC-39A</td></tr><tr><td>2017</td><td>07</td><td>Success</td><td>F9 B4 B1040.1</td><td>KSC LC-39A</td></tr><tr><td>2017</td><td>12</td><td>Success</td><td>F9 FT B1035.2</td><td>CCAFS SLC-40</td></tr></table> |                 |                 |              |  | year | month | Mission_Outcome | Booster_Version | Launch_Site | 2017 | 02 | Success | F9 FT B1031.1 | KSC LC-39A | 2017 | 01 | Success | F9 FT B1032.1 | KSC LC-39A | 2017 | 03 | Success | F9 FT B1035.1 | KSC LC-39A | 2017 | 08 | Success | F9 B4 B1039.1 | KSC LC-39A | 2017 | 07 | Success | F9 B4 B1040.1 | KSC LC-39A | 2017 | 12 | Success | F9 FT B1035.2 | CCAFS SLC-40 |
| year    | month   | Mission_Outcome | Booster_Version | Launch_Site  |  |      |       |                 |                 |             |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |              |
| 2017    | 02  | Success         | F9 FT B1031.1   | KSC LC-39A   |  |      |       |                 |                 |             |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |              |
| 2017    | 01  | Success         | F9 FT B1032.1   | KSC LC-39A   |  |      |       |                 |                 |             |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |              |
| 2017    | 03  | Success         | F9 FT B1035.1   | KSC LC-39A   |  |      |       |                 |                 |             |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |              |
| 2017    | 08  | Success         | F9 B4 B1039.1   | KSC LC-39A   |  |      |       |                 |                 |             |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |              |
| 2017    | 07  | Success         | F9 B4 B1040.1   | KSC LC-39A   |  |      |       |                 |                 |             |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |              |
| 2017    | 12  | Success         | F9 FT B1035.2   | CCAFS SLC-40 |  |      |       |                 |                 |             |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |            |      |    |         |               |              |

## SQL Request Result: Display Record with Multiple Features and Constraints




Query

```
%sql SELECT LANDING__OUTCOME, COUNT(*) AS COUNT_LAUNCHES FROM SPACEXTBL  
WHERE DATE BETWEEN '2010-06-04' AND '2017-03-20' GROUP BY  
LANDING__OUTCOME ORDER BY COUNT_LAUNCHES DESC ;
```


Results

| landing__outcome       | count_launches |
|------------------------|----------------|
| No attempt             | 10             |
| Failure (drone ship)   | 5              |
| Success (drone ship)   | 5              |
| Controlled (ocean)     | 3              |
| Success (ground pad)   | 3              |
| Failure (parachute)    | 2              |
| Uncontrolled (ocean)   | 2              |
| Precluded (drone ship) | 1              |

## EDA with Visualization Objectives

| Objectives | Exploratory Data Analysis<br>Visualization  | Preparing Data Feature Engineering   |
|------------|---|--|
| Tools      |  <br><br> | Use the pandas function <code>get_dummies</code> and features dataframe to apply <code>OneHotEncoder</code> to the column <code>Orbits</code><br><code>LaunchSite</code><br><code>LandingPad</code><br><code>Serial</code> |

# Visualization: Flight Number Vs Launch Site

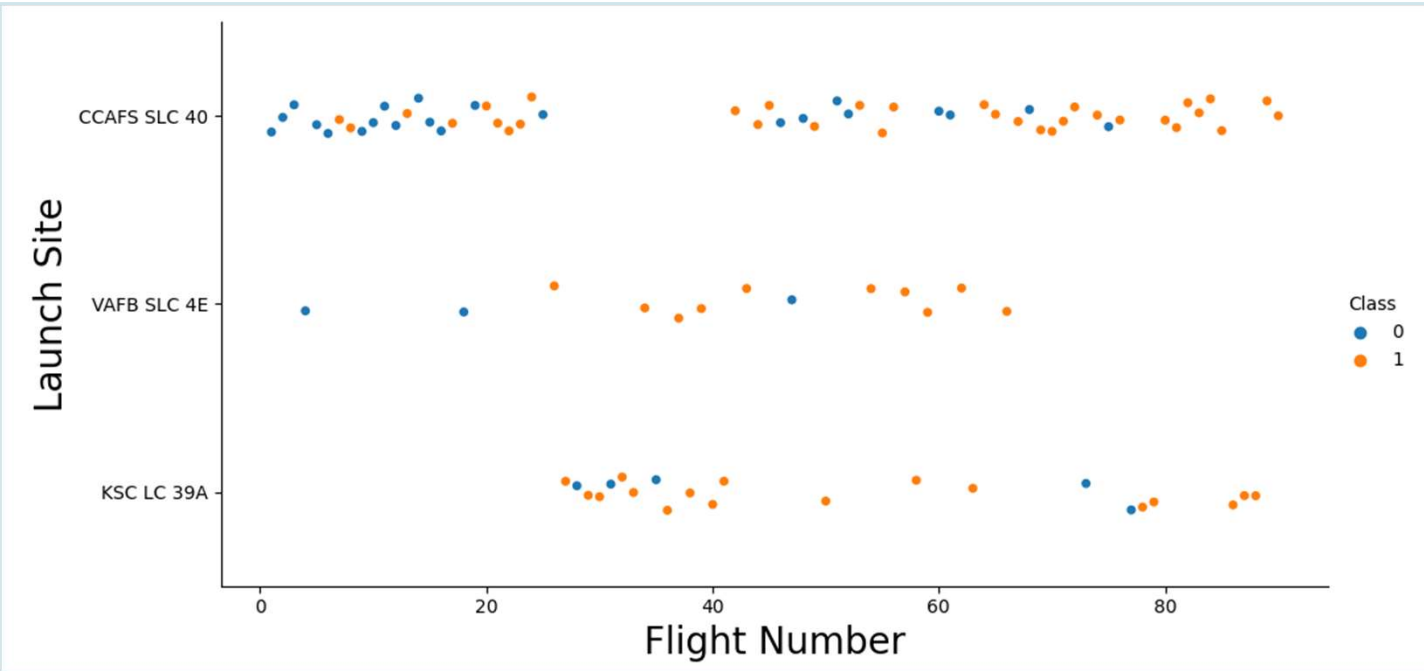
|                   |  |
|-------------------|--|
| Code              | <pre>sns.catplot(x = 'FlightNumber', y = 'LaunchSite', hue = 'Class', data = df, aspect= 2) plt.xlabel("Flight Number", fontsize=20) plt.ylabel("Launch Site", fontsize=20) plt.show()</pre> |
| Results (Figures) |   |
| Comments          | The sites CCAFS SLC40 and VAFB SLC 4E have increased successful rate along with the increasing of flight number. Launch site KSC LC 39 A has higher successful rate overall.                 |

## Visualization: Payload and Launch Site

Code

```
sns.catplot(x='PayloadMass', y='LaunchSite', data=df, hue='Class', aspect=2)
plt.xlabel("PayloadMass", fontsize=20)
plt.ylabel("Launch Site", fontsize=20)
plt.show()
```

Results  
(Figures)

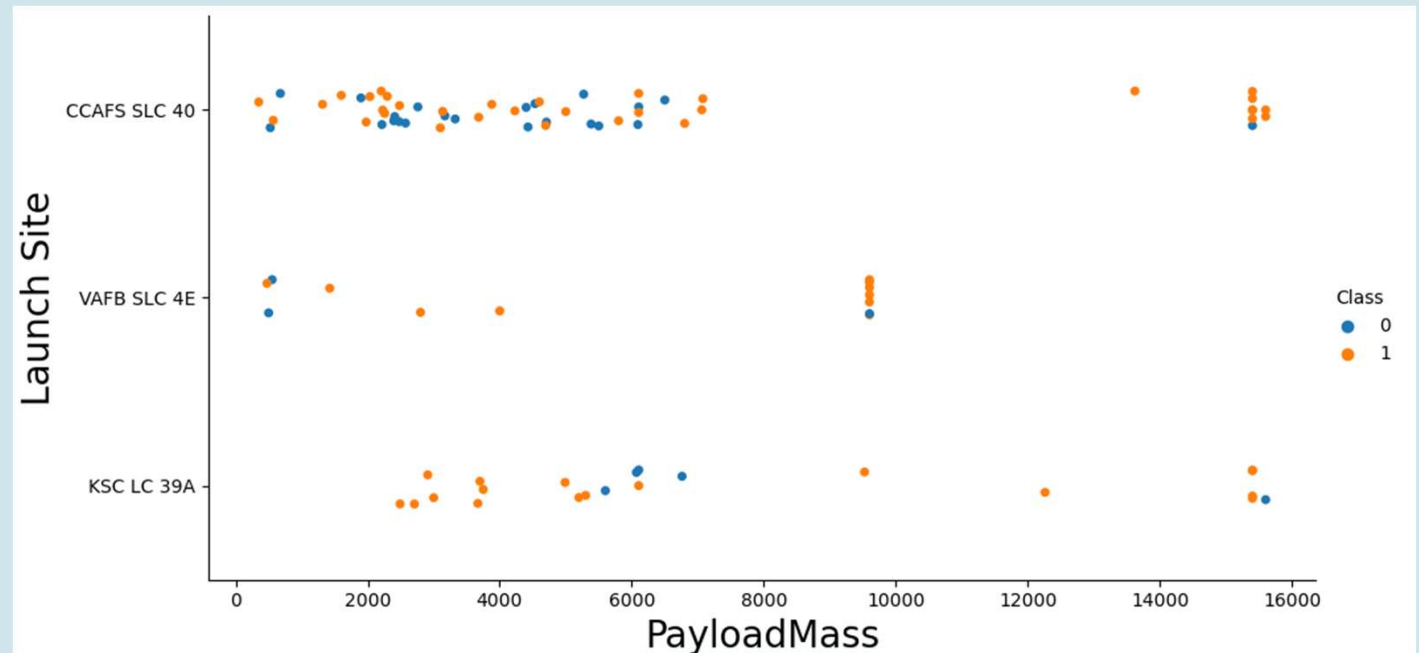

Comments

There are no rockets launched for heavy payload mass(greater than 10000) on VAFB SLC 4E.




# Visualization: Success Rate of Each Orbit

Code

```
df_orbit=df.groupby(['Orbit'])['Class'].mean().reset_index()
sns.barplot(x='Orbit', y='Class', data=df_orbit, hue='Class',dodge=False, width = 0.3)
plt.legend(loc='upper center')
plt.xlabel("Orbit", fontsize=15)
plt.ylabel("Class", fontsize=15)
plt.show()
```

Results  
(Figures)

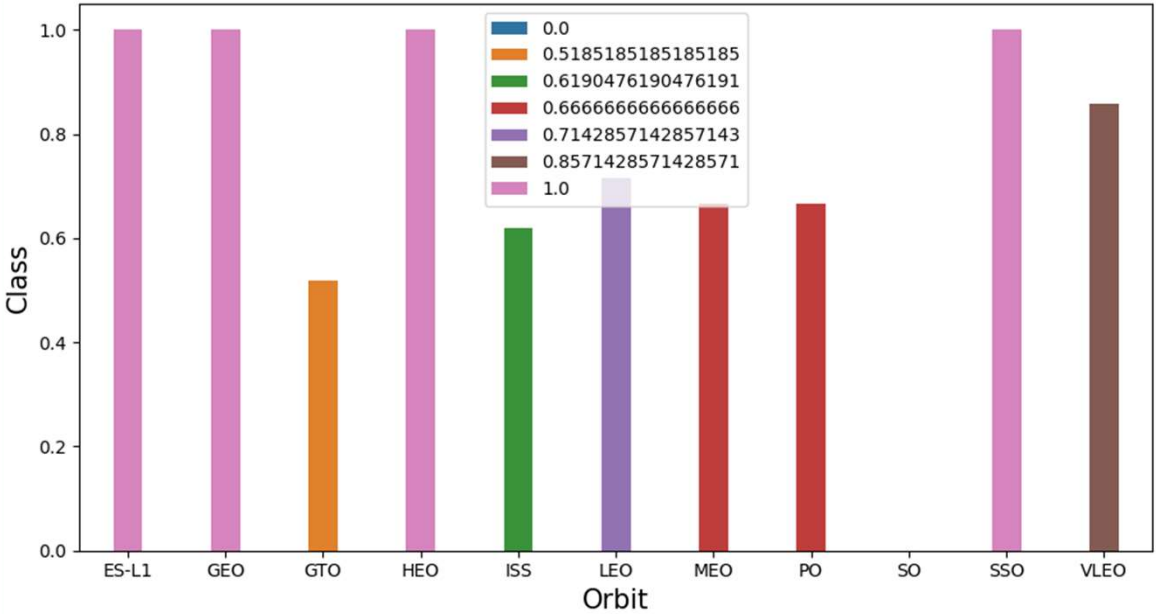

Comments


Orbits ES-L1, GEO, HEO and SSO have higher success rate.

## Visualization: FlightNumber VS Orbit type

Code

```
sns.catplot(x='FlightNumber', y='Orbit', data=df, hue='Class', height = 5, aspect=1.5)
plt.title("Flight Number VS Orbit", fontsize=6)
plt.show(block=True)
```

Results  
(Figures)

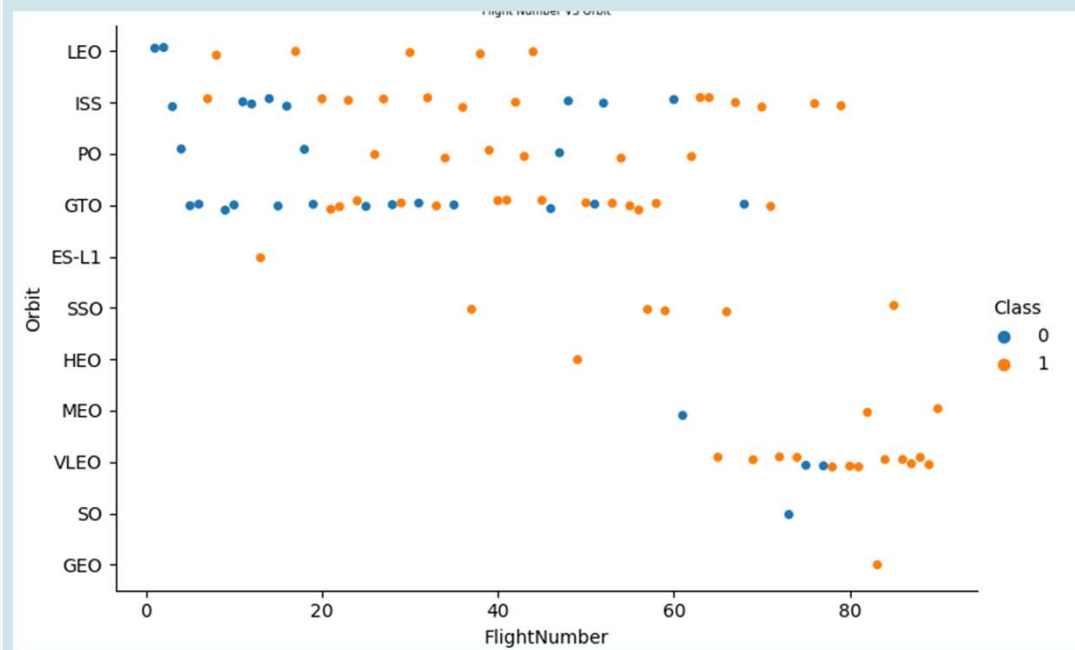

Comments


In the LEO orbit the success appears related to the number of flights; on the other hand, there seems to be no relationship between flight number when in GTO orbit.

## Visualization: Payload VS Orbit type

Code

```
sns.catplot(x='PayloadMass', y='Orbit', data=df, hue='Class', height = 8, aspect =1)  
plt.show()
```

Results  
(Figures)

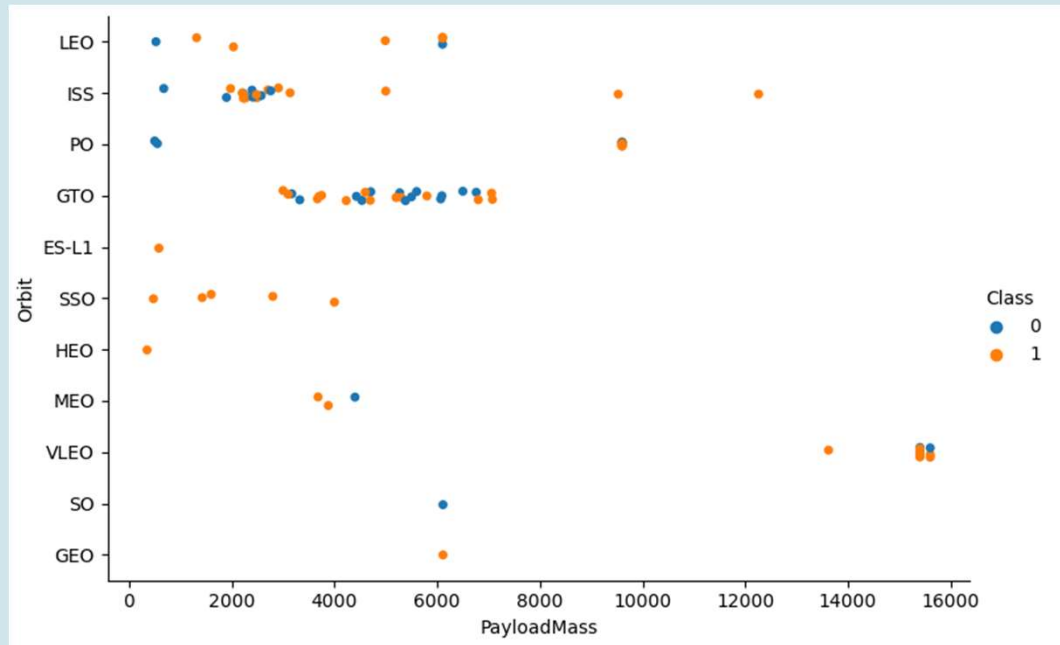

Comments


SSO, LEO and ISS have higher successful landings. GTO has mixed landing outcomes.

## Visualization: Launch Success Yearly Trend

Code

```
sns.lineplot(x='Date', y='Class', data=df, color='green')  
plt.xlabel("Launch Year", fontsize=15)  
plt.ylabel("Success Rate", fontsize=15)  
plt.show()
```

Results  
(Figures)

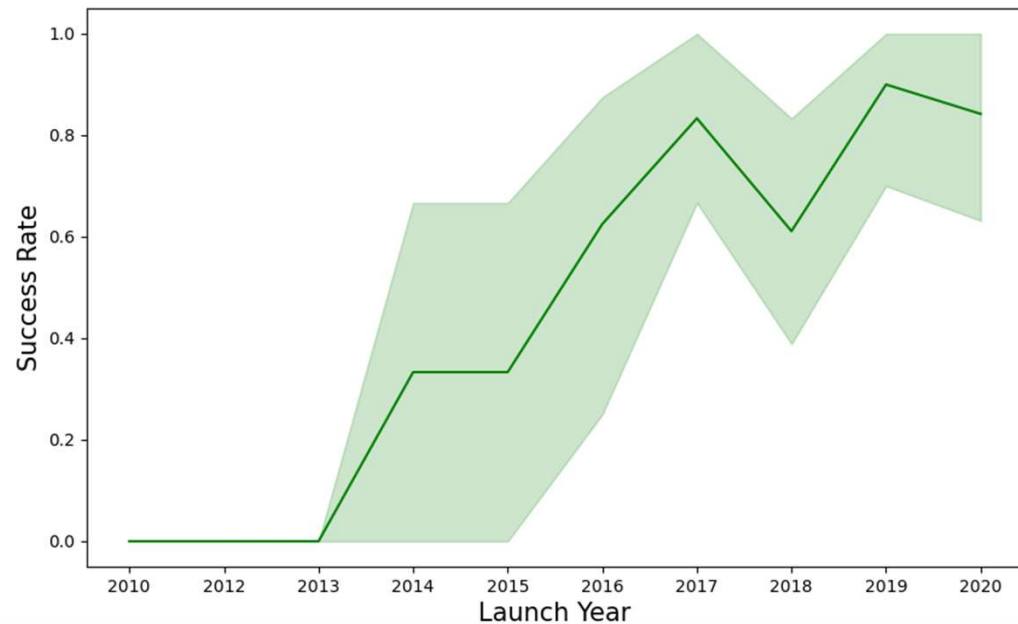

Comments

The success rate since 2013 kept increasing till 2020.

## Features Engineering: Create dummy variables to categorical columns



| Task  | Code  |
|---|---|
| Create dummy variables to categorical columns | <pre>features_one_hot=pd.get_dummies(features, columns=['Orbit', 'LaunchSite', 'LandingPad', 'Serial'])<br/>features_one_hot.head()</pre> |
| Cast all numeric columns to float64           | <pre>features_one_hot.astype('float64')</pre>   |

# Interactive Data Analysis And Machine Learning

Diving into the data; discovering the knowledge.




## Interactive Visual Analytics Objectives and Methodology

| Objective  | Tools  |
|--|--|
| <ul style="list-style-type: none"><li>• Mark all launch sites on a map.</li><li>• Mark the success/failed launches for each site on the map.</li><li>• Calculate the distances between a launch site to its proximities.</li></ul> |  The Folium logo consists of a green icon of a leaf with three veins, followed by the word "Folium" in a bold, black, sans-serif font.                            |
| <ul style="list-style-type: none"><li>• Build an Interactive Dashboard with Plotly Dash</li></ul>  |  The Plotly Dash logo features a dark blue square icon with three vertical bars and dots, followed by the text "plotly   Dash" in a dark blue, sans-serif font. |

# Launch Sites Locations Analysis with Folium

## Task 1

Mark all launch sites on a map.

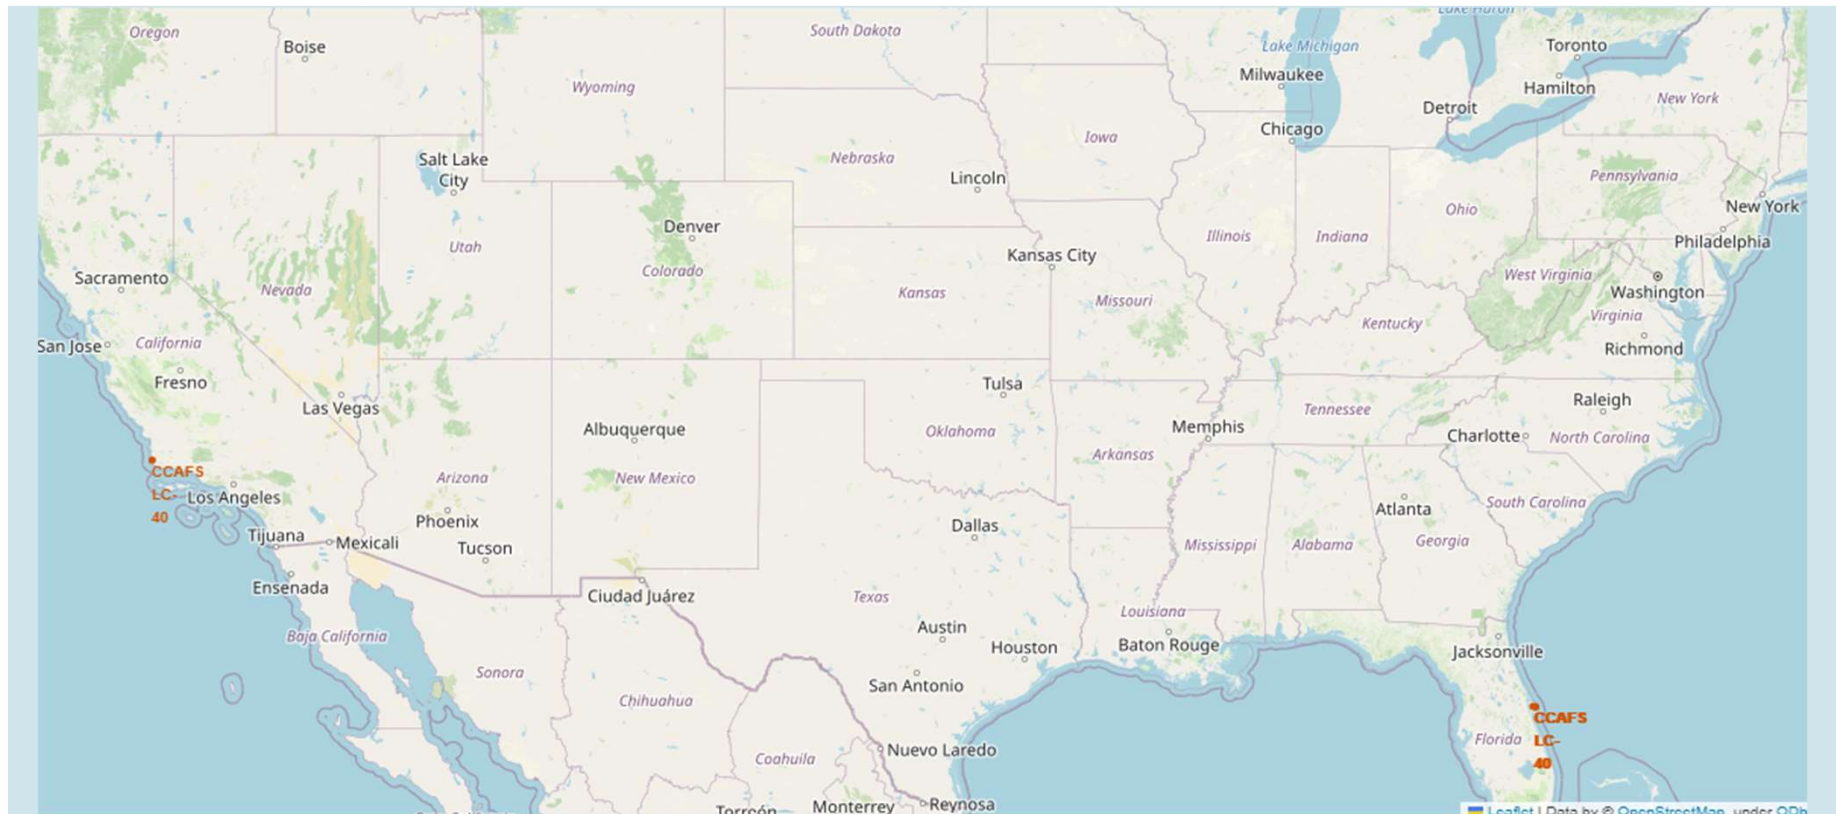




# Launch Sites Locations Analysis with Folium

## Task 2



Mark the success/failed launches for each site on the map.

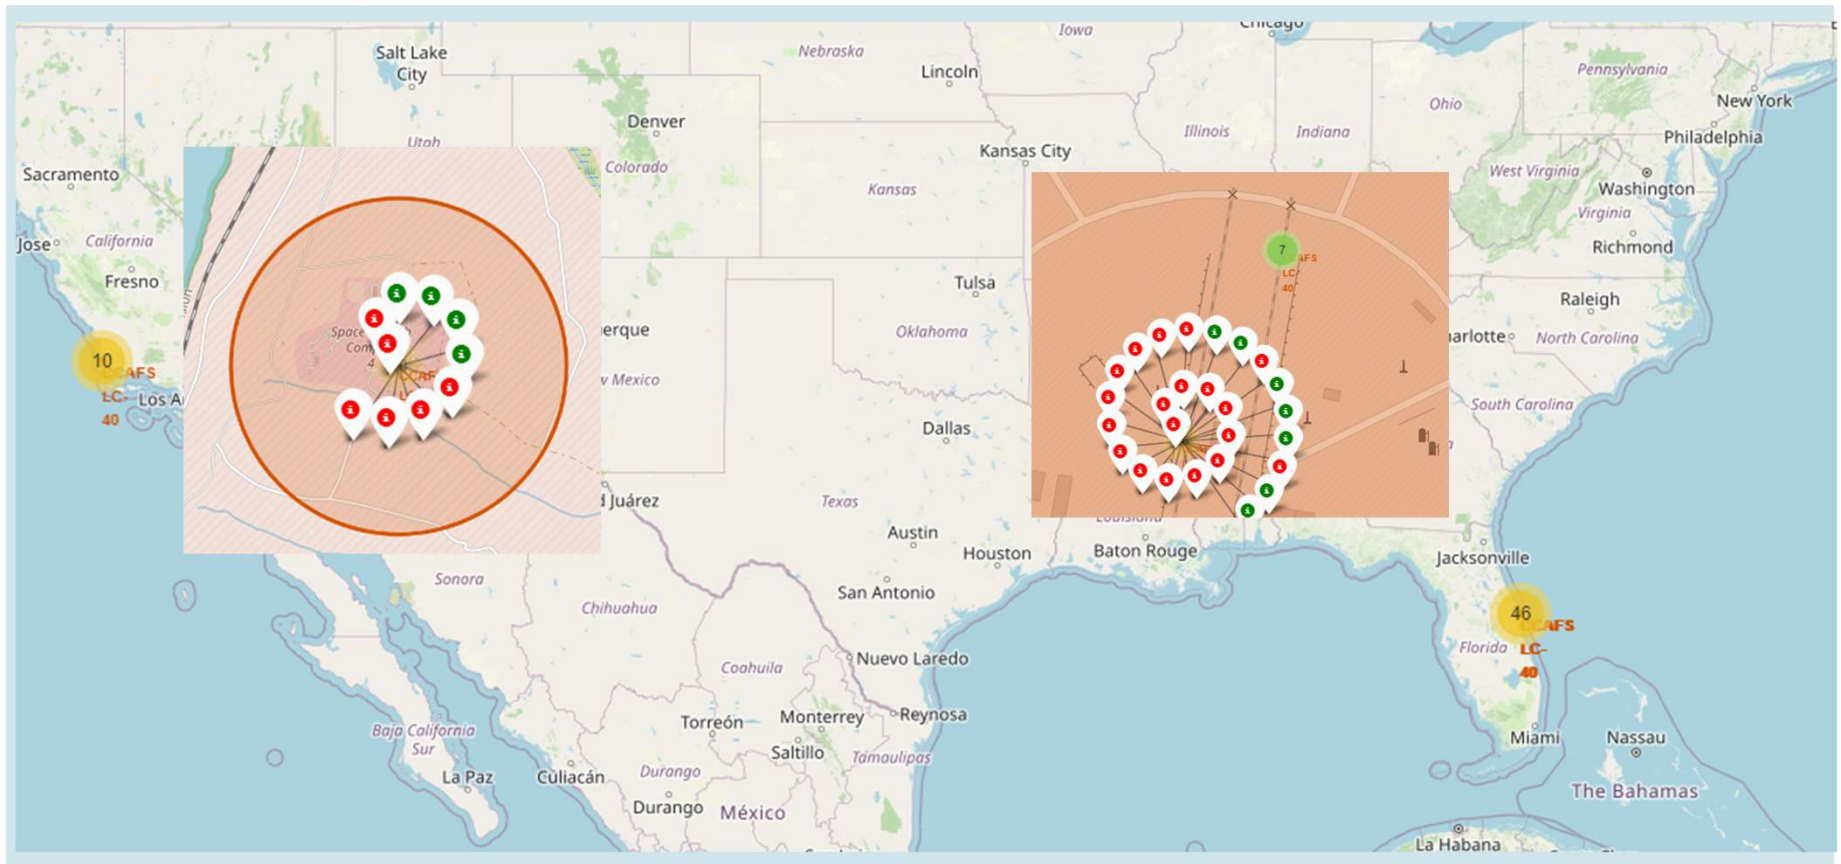

# Launch Sites Locations Analysis with Folium

## Task 3


Calculate the distances between a launch site to its proximities.

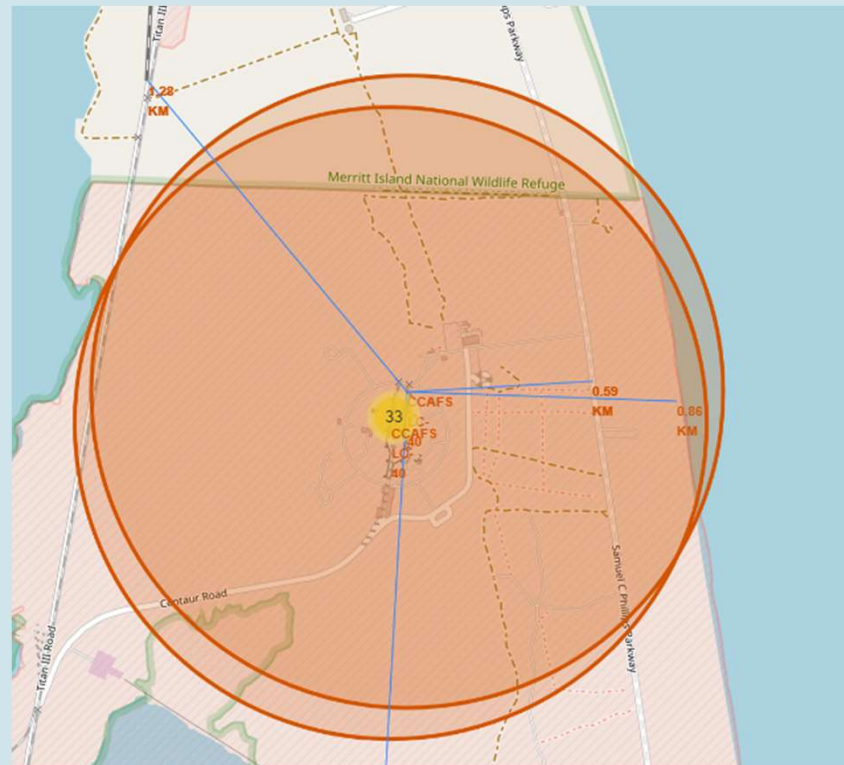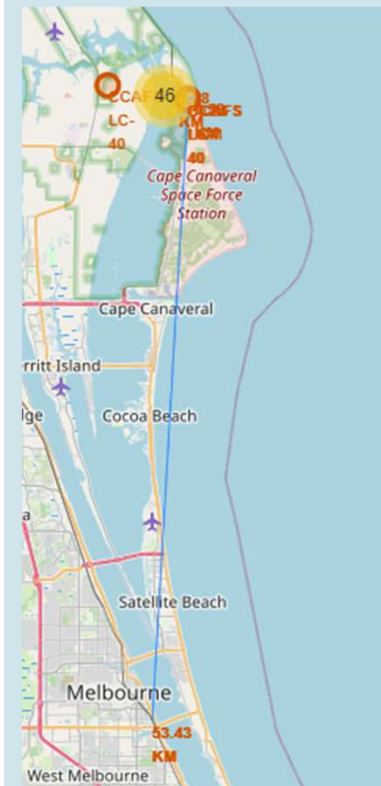

# Build an Interactive Dashboard with Plotly Dash

## Task 1


Display the success count achieved by each launch site.

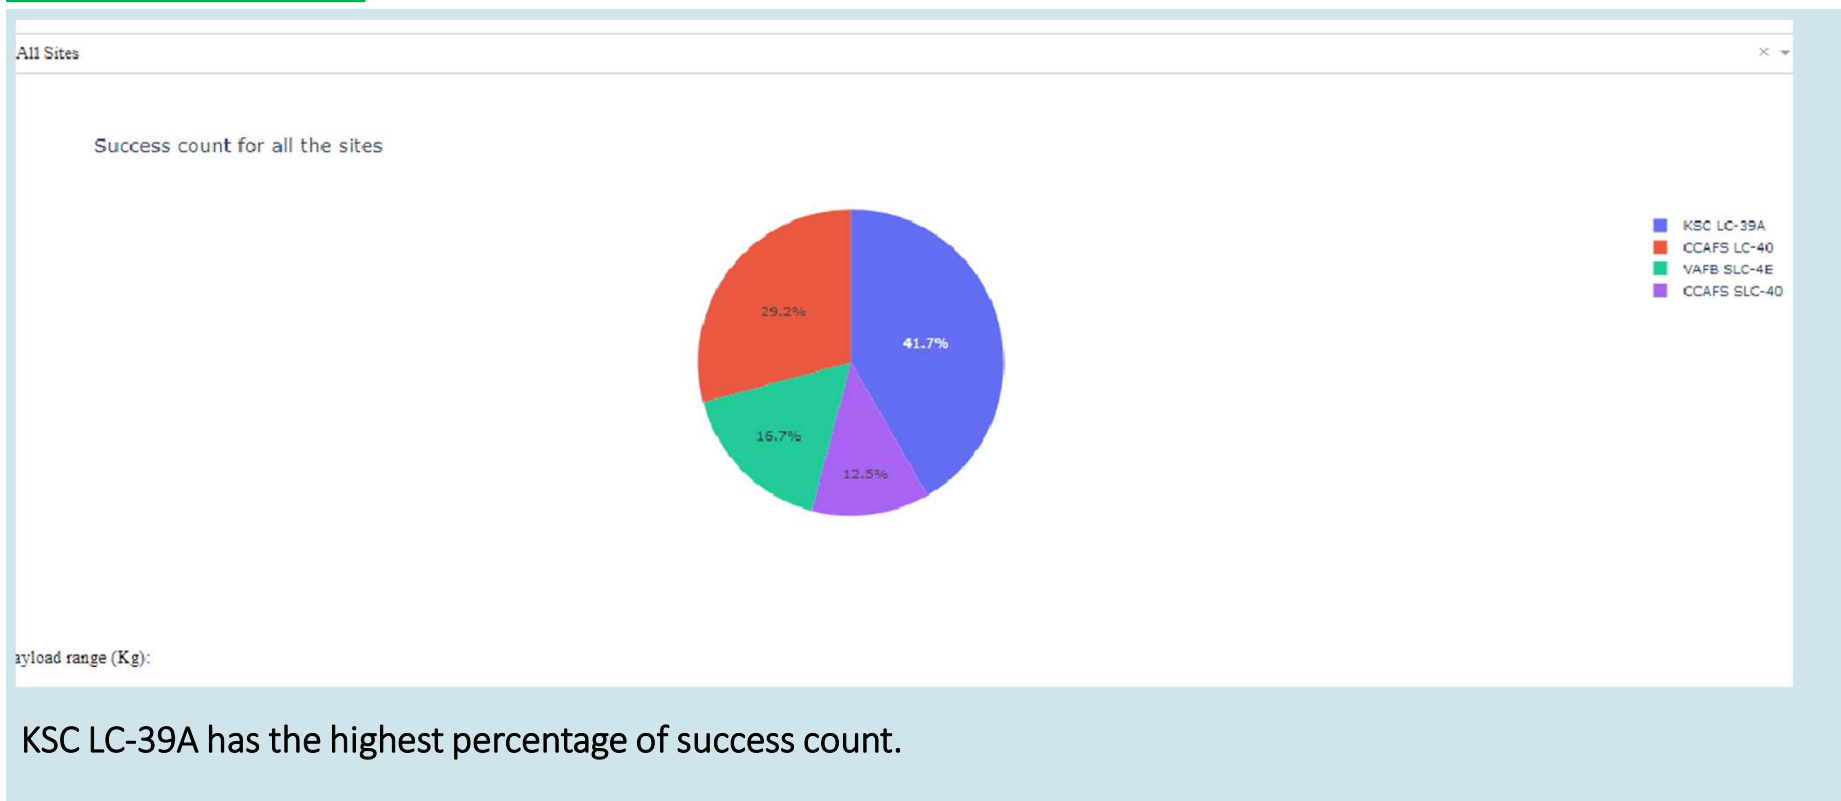

## Build an Interactive Dashboard with Plotly Dash

### Task 2

Display the success percentage achieved by a single site.

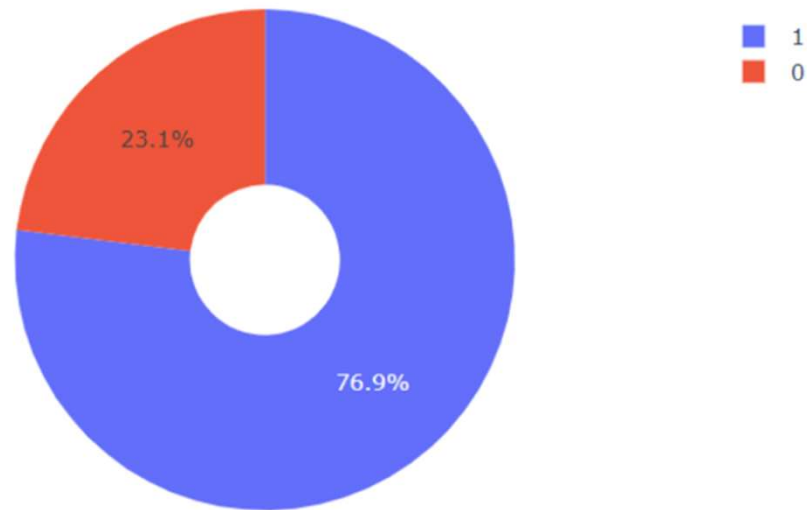


*KSC LC-39A achieved a 76.9% success rate while getting a 23.1% failure rate*



## Build an Interactive Dashboard with Plotly Dash

### Task 3

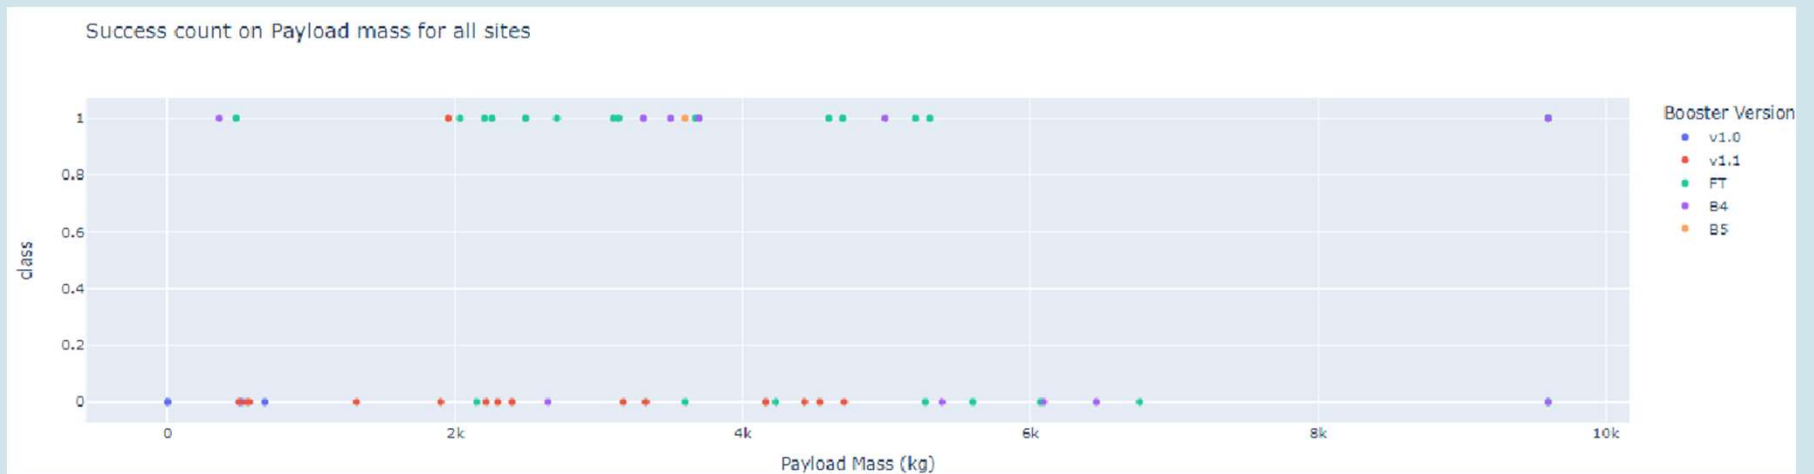Display success count on payload mass for all sites.



## Predictive Analysis Objectives and Methodology

| Objective   | Tools   |
|---|---|
| <ul style="list-style-type: none"><li>• Perform exploratory data analysis and determine training labels</li><li>• Create a column for the class</li><li>• Standardize the data</li><li>• Split into training data and test data</li></ul> |  <p>The logos for pandas, matplotlib, and seaborn are displayed. pandas is at the top, followed by matplotlib, and then seaborn.</p> |
| <ul style="list-style-type: none"><li>• Find best Hyperparameter for SVM, Classification Trees and Logistic Regression</li><li>• Find the method performs best using test data</li></ul>  |  <p>The scikit-learn logo is displayed, featuring a blue circle and an orange circle with the text 'scikit learn'.</p>              |

## Predictive Analysis:

### Task 1

Create a logistic regression object then create a GridSearchCV object logreg\_cv with cv = 10. Fit the object to find the best parameters from the dictionary parameters.

### Results

```
parameters = {"C": [0.01, 0.1, 1], 'penalty': ['l2'], 'solver': ['lbfgs']}# L1 lasso L2 ridge
lr=LogisticRegression()
# Create a GridSearchCV object logreg_cv
logreg_cv = GridSearchCV(lr, parameters, cv=10)
#Fit the training data into the GridSearch object
logreg_cv.fit(X_train, Y_train)
```

```
GridSearchCV(cv=10, estimator=LogisticRegression(),
             param_grid={'C': [0.01, 0.1, 1], 'penalty': ['l2'],
                        'solver': ['lbfgs']})
```

```
print("tuned hpyerparameters :(best parameters) ",logreg_cv.best_params_)
print("accuracy :",logreg_cv.best_score_)
```

```
tuned hpyerparameters :(best parameters) {'C': 0.01, 'penalty': 'l2', 'solver': 'lbfgs'}
accuracy : 0.8464285714285713
```

We output the `GridSearchCV` object for logistic regression. We display the best parameters using the data attribute `best_params_` and the accuracy on the validation data using the data attribute `best_score_`.

## Predictive Analysis:

### Task 2


Calculate the accuracy on the test data using the method score.

### Results

```
accuracy_logreg = logreg_cv.score(X_test, Y_test)  
print(f"The accuracy of logreg_cv on testing data is {accuracy_logreg}")
```

```
The accuracy of logreg_cv on testing data is 0.8333333333333334
```

```
yhat=logreg_cv.predict(X_test)  
plot_confusion_matrix(Y_test,yhat)
```

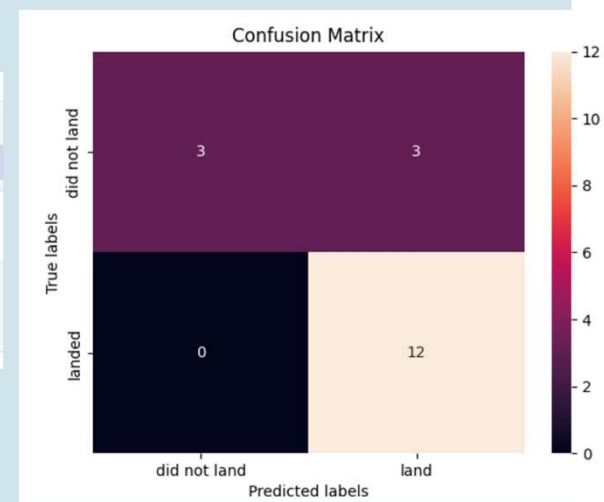



## Predictive Analysis:

### Task 3

Create a support vector machine object then create a GridSearchCV object svm\_cv with cv - 10. Fit the object to find the best parameters from the dictionary parameters.

### Results

```
parameters = {'kernel':('linear', 'rbf','poly','rbf', 'sigmoid'),
              'C': np.logspace(-3, 3, 5),
              'gamma':np.logspace(-3, 3, 5)}
svm = SVC()
```

```
svm_cv = GridSearchCV(svm, parameters, cv=10)
svm_cv.fit(X_train, Y_train)
```

```
GridSearchCV(cv=10, estimator=SVC(),
             param_grid={'C': array([1.00000000e-03, 3.16227766e-02, 1.00000000e+00, 3.16227766e+01,
                                     1.00000000e+03]),
                         'gamma': array([1.00000000e-03, 3.16227766e-02, 1.00000000e+00, 3.16227766e+01,
                                         1.00000000e+03]),
                         'kernel': ('linear', 'rbf', 'poly', 'rbf', 'sigmoid')})
```

```
print("tuned hpyerparameters :(best parameters) ", svm_cv.best_params_)
print("accuracy :",svm_cv.best_score_)
```

```
tuned hpyerparameters :(best parameters) {'C': 1.0, 'gamma': 0.03162277660168379, 'kernel': 'sigmoid'}
accuracy : 0.8482142857142856
```

## Predictive Analysis:

### Task 4


Calculate the accuracy on the test data using the method score:

### Results

```
accuracy_svm = svm_cv.score(X_test, Y_test)  
print(f"The accuracy of svm_cv on testing data is {accuracy_svm}")
```

The accuracy of svm\_cv on testing data is 0.8333333333333334

```
yhat=svm_cv.predict(X_test)  
plot_confusion_matrix(Y_test,yhat)
```

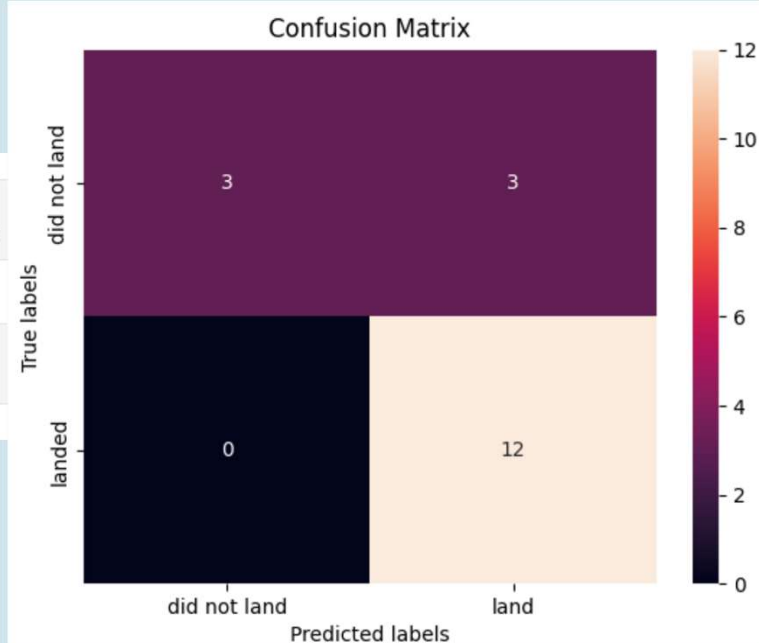

## Predictive Analysis:

### Task 5

Create a decision tree classifier object then create a GridSearchCV object tree\_cv with cv = 10. Fit the object to find the best parameters from the dictionary parameters.

### Results

```
parameters = {'criterion': ['gini', 'entropy'],
              'splitter': ['best', 'random'],
              'max_depth': [2*n for n in range(1,10)],
              'max_features': ['auto', 'sqrt'],
              'min_samples_leaf': [1, 2, 4],
              'min_samples_split': [2, 5, 10]}
```

```
tree = DecisionTreeClassifier()
```

```
tree_cv = GridSearchCV(tree, parameters, cv=10)
tree_cv.fit(X_train, Y_train)
```

```
GridSearchCV(cv=10, estimator=DecisionTreeClassifier(),
             param_grid={'criterion': ['gini', 'entropy'],
                        'max_depth': [2, 4, 6, 8, 10, 12, 14, 16, 18],
                        'max_features': ['auto', 'sqrt'],
                        'min_samples_leaf': [1, 2, 4],
                        'min_samples_split': [2, 5, 10],
                        'splitter': ['best', 'random']})
```

```
print("tuned hpyerparameters :(best parameters) ",tree_cv.best_params_)
print("accuracy :",tree_cv.best_score_)
```

```
tuned hpyerparameters :(best parameters) {'criterion': 'entropy', 'max_depth': 8, 'max_features': 'auto', 'min_samples_leaf':
2, 'min_samples_split': 2, 'splitter': 'random'}
accuracy : 0.9053571428571429
```

## Predictive Analysis:

### Task 6

Calculate the accuracy of tree\_cv on the test data using the method score:


### Results

```
accuracy_tree = tree_cv.score(X_test, Y_test)
print(f"The accuracy of tree_cv on testing data is {accuracy_tree}")
```

The accuracy of tree\_cv on testing data is 0.8333333333333334

We can plot the confusion matrix

```
yhat = tree_cv.predict(X_test)
plot_confusion_matrix(Y_test,yhat)
```

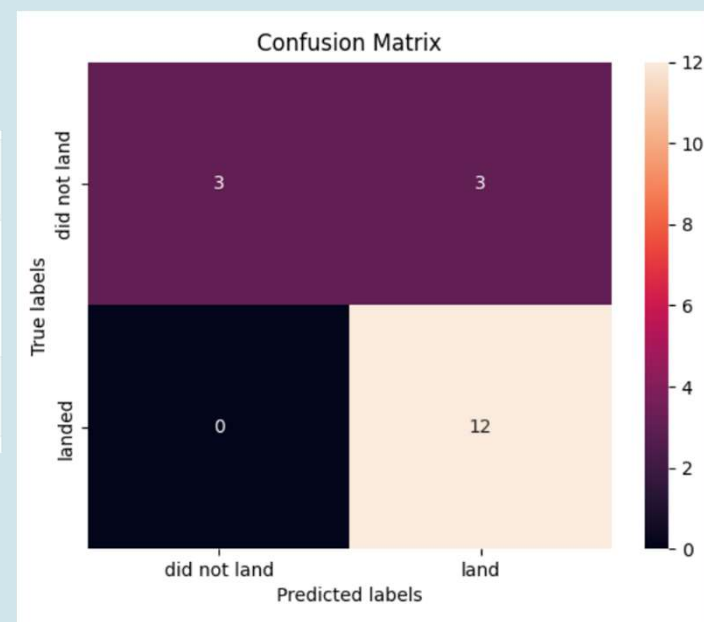

## Predictive Analysis:

### Task 7

Create a k nearest neighbors object then create a GridSearchCV object knn\_cv with cv = 10. Fit the object to find the best parameters from the dictionary parameters.

### Results

```
parameters = {'n_neighbors': [1, 2, 3, 4, 5, 6, 7, 8, 9, 10],
              'algorithm': ['auto', 'ball_tree', 'kd_tree', 'brute'],
              'p': [1, 2]}
```

```
KNN = KNeighborsClassifier()
```

```
knn_cv = GridSearchCV(KNN, parameters, cv=10)
knn_cv.fit(X_train, Y_train)
```

```
GridSearchCV(cv=10, estimator=KNeighborsClassifier(),
             param_grid={'algorithm': ['auto', 'ball_tree', 'kd_tree', 'brute'],
                        'n_neighbors': [1, 2, 3, 4, 5, 6, 7, 8, 9, 10],
                        'p': [1, 2]})
```

```
print("tuned hpyerparameters :(best parameters) ",knn_cv.best_params_)
print("accuracy :",knn_cv.best_score_)
```

```
tuned hpyerparameters :(best parameters) {'algorithm': 'auto', 'n_neighbors': 10, 'p': 1}
accuracy : 0.8482142857142858
```

## Predictive Analysis:

### Task 8

Calculate the accuracy of knn\_cv on the test data using the method score:


### Results

```
accuracy_knn = knn_cv.score(X_test, Y_test)
print(f"The accuracy of knn_cv on testing data is {accuracy_knn}")
```

The accuracy of knn\_cv on testing data is 0.8333333333333334

We can plot the confusion matrix

```
yhat = knn_cv.predict(X_test)
plot_confusion_matrix(Y_test,yhat)
```

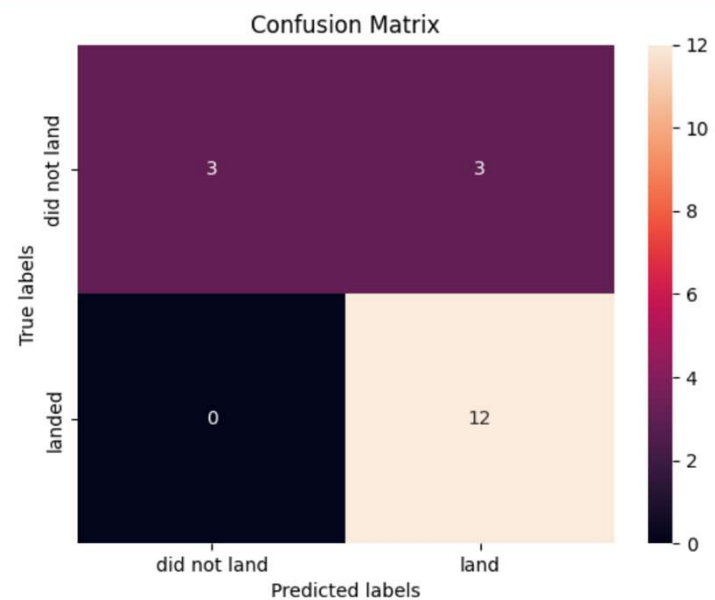

## Predictive Analysis:


### Task 9

Find the method performs best:

Results

```
method = ['LogisticRegression', 'svm', 'DecisionTree', 'KNN']
score = [accuracy_logreg, accuracy_svm, accuracy_tree, accuracy_knn]
performance = pd.DataFrame(columns=['Method', 'Score'])
performance['Method'] = method
performance['Score'] = score
performance
```

|   | Method             | Score    |
|---|--------------------|----------|
| 0 | LogisticRegression | 0.833333 |
| 1 | svm                | 0.833333 |
| 2 | DecisionTree       | 0.833333 |
| 3 | KNN                | 0.833333 |


The background of the slide is a photograph of two rockets launching from a launch pad. The rocket on the left is in the foreground, showing a large plume of fire and smoke at its base. The rocket on the right is further away, appearing smaller. The sky is blue with scattered white clouds.

## Results And Takeaway

The information from data will empower a person.



## Conclusion

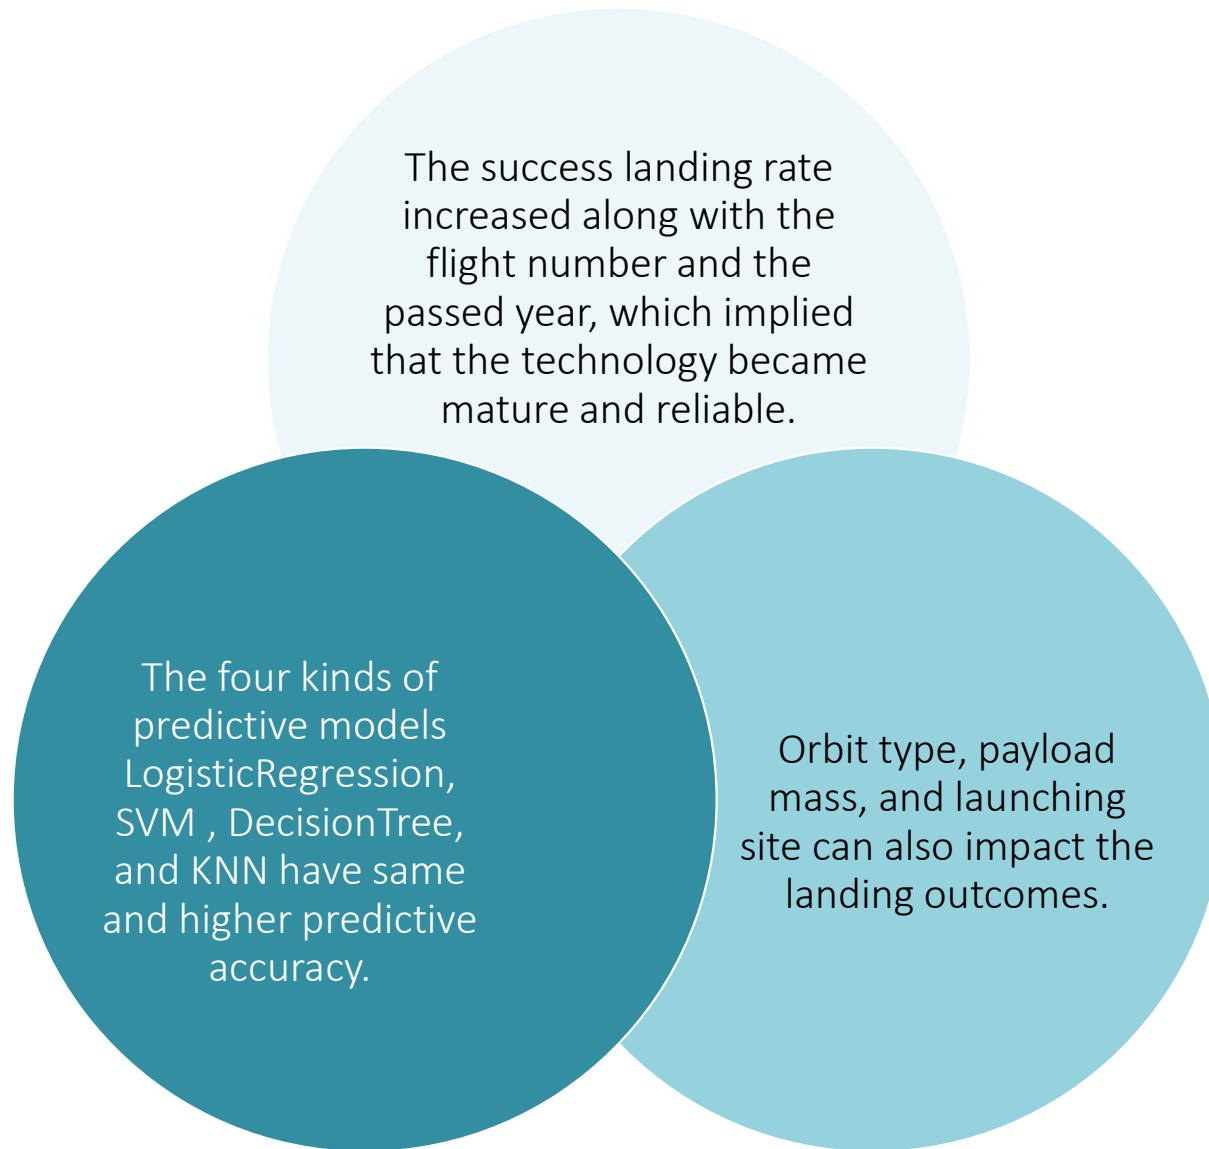

I am not able to find a better motto than this! \_YP

**Torture the data,  
and it will confess to anything.**

**- Ronald Coase**

**British Economist and Author**

