


**Txchain**, a blockchain service called, where a client issues a request for finding their current amount of **txcoins** in their account, transfers them to another client and provides a file statement with all the transactions in order. These requests will be sent to a Central Server which in turn interacts with three other backend servers for pulling information and data processing.

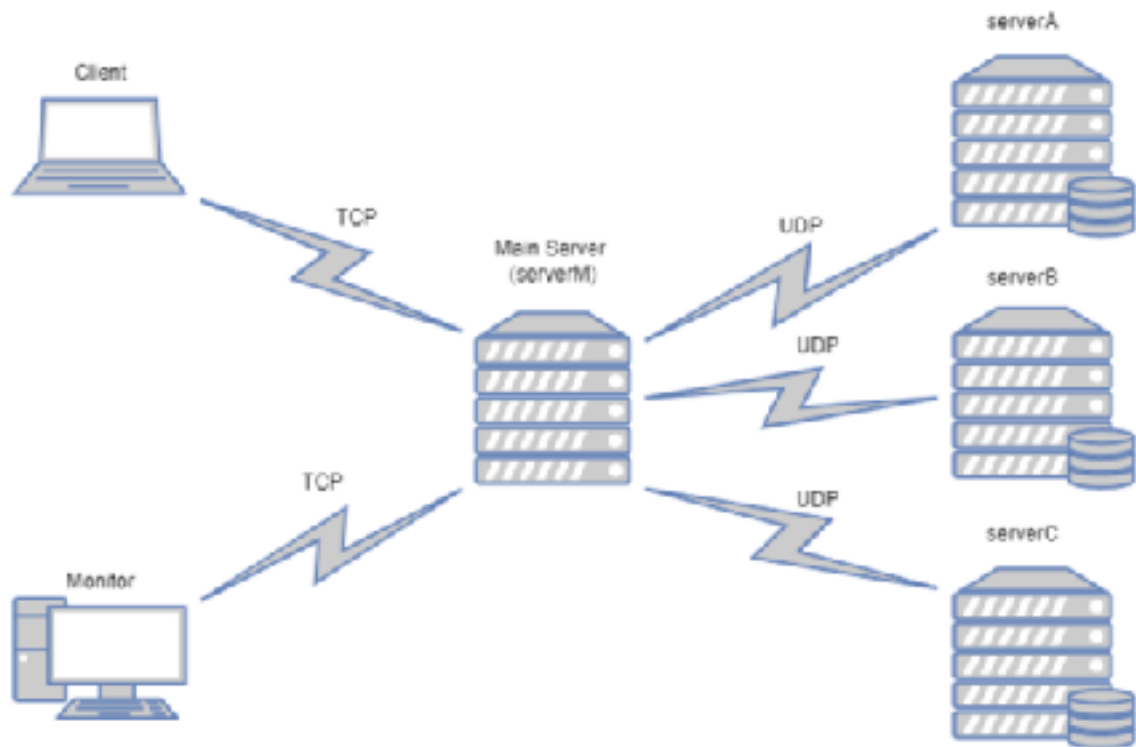

The TCP and UDP base code come from <https://beej.us/guide/bgnet/examples/>

TCP uses "client.c" and "server.c", while UDP uses "talker.c" and "listener.c".