

jettl

An Interface-Composition based
LabVIEW Actor Model

Nathan Davis

July 12, 2025

Contents

0.1	A Community Effort	4
0.2	Introduction	4
0.3	Class Hierarchy	5
0.4	Actors	5
0.4.1	Actor Benefits	5
0.5	Last Ack	5
0.6	Future Scope	5
0.7	Unit Testing	7
0.8	Debugging	7
0.8.1	Displaying Method Execution	7
0.9	Git	7
0.10	Naming Conventions	8
0.11	Examples	8
0.11.1	Hello World	8
0.11.2	Nested Actors	9
0.11.3	Sending Event Message	9
0.12	Design Patterns	9
0.12.1	State Pattern	9
0.12.2	Memento Pattern	10
0.12.3	Decorator Pattern	10
0.12.4	Strategy Pattern	10
0.12.5	Observer Pattern	10
0.13	Event Actors	10
0.13.1	Event Actor Best Practices	10
0.13.2	Event Actor Benefits	11
0.14	Event Loop	11
0.14.1	Window and Subpanel Event Actors	11
0.14.2	Synchronous Event Actor	11
0.14.3	Event Observer	12
0.15	Notifier Actors	12
0.15.1	Notifier Periodic	12
0.16	GB Transfer Actors	13
0.17	Messaging	13
0.17.1	Private Messages	13
0.17.2	Messages Up and Down the Tree	14

0.17.3	Messages with Type Definitions	14
0.18	Tools	14
0.18.1	Scripting	14
0.19	TODO	14
0.20	Errors	15
0.21	Example	16
0.21.1	Dev Actor	16
0.22	Creation	16
0.23	PPL Support	17
0.24	Opinionated Design Choices	17
0.24.1	Accessors	18
0.24.2	Color Scheme	18
0.24.3	Icons	18
0.24.4	Access Scope	18
0.24.5	Errors	19
0.25	Queue Mailbox	19
0.26	TO ORGANIZE	20
0.27	Assembler	20

0.1 A Community Effort

This document is a community effort to create a LabVIEW Actor Model that is interface-composition based. The goal is to create a design pattern that is easy to use, understand, and extend. This document is a living document, and contributions are welcome.

Along with reading this document, the model will be best understood with examples that occur in projects. To show the power of the interface-composition based approach, in particular, examples that are difficult in DQMH, Actor Framework, and other frameworks will be of upmost importance. This document is not meant to be a complete guide to the jettl framework, but rather a starting point for understanding the design philosophy and implementation details.

0.2 Introduction

“The fundamental situation is, that we don’t know much and some of it’s wrong.” -Carl Hewitt, creator of Actor Model

Strictly interface composition based asynchronous actor oriented design pattern for LabVIEW Applications. jettl also has the newer banners for vis. Easy adoption for the new age of LV developers. State pattern with decorators. It is interface composition, so stick with the same rule set for naming methods.

jettl is the alias for Actor.

Package Best Practices: Reuse code between libraries occurs ****only**** by relation (implementation/association/dependency/composition/aggregation) to

interfaces. This is dependency inversion through packages to properly decouple them.

0.3 Class Hierarchy

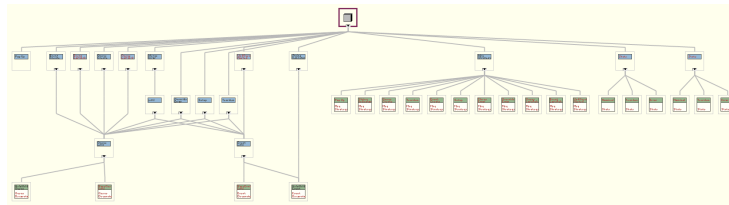


Figure 1: jettl Class Hierarchy.

Fig 1 shows the class hierarchy of jettl. In particular, there exist design patterns such as the Strategy Pattern, State Pattern, and Decorator Pattern.

0.4 Actors

0.4.1 Actor Benefits

- jettl Queue Actor: Obtains and releases its own references
- jettl Event Actor: Creates, Registers, Unregisters, and Destroys its own references

0.5 Last Ack

0.6 Future Scope

Creating an actor is NOT connected to the actor that creates it. Rather, this actor exists on its own in the “liquid” message transport. The overall “application” has access to the actor’s reference (unique message address)

As shown in Fig 3, it is as though the actors are just objects that “float” in this “liquid” messaging transport. So that way you can perform this pub-sub messaging. The objects are linked together by “who creates who”.

Same as with the pub-sub pattern, everything is a publisher-subscriber. It’s just that most relationships are just one way. Same with Git, the philosophy is that all branches are created equal

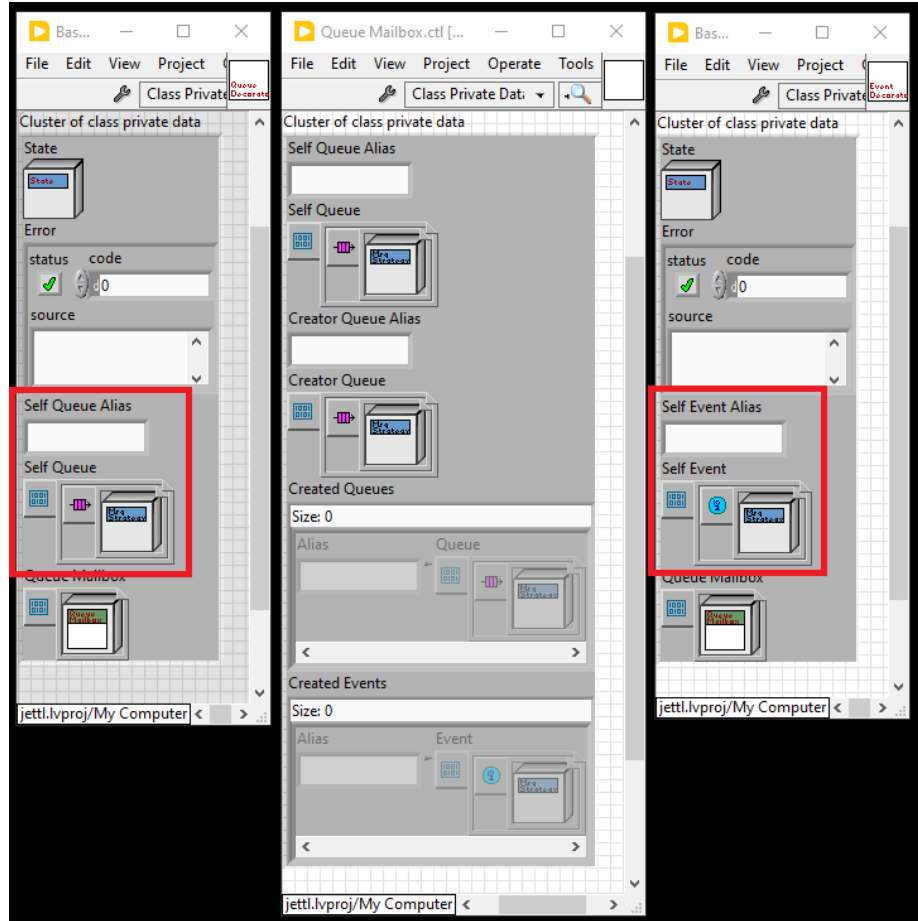


Figure 2: There exist duplicates in the Queue Mailbox and respective Base Queue jettl and Base Event jettl because the Last Ack message uses the alias of the closed down actor and this cannot be in the Queue Mailbox DVR since the DVR will have already been released. So there exists duplicates for the Self Queue Alias, Self Queue, Self Event Alias, and Self Event so that the Last Ack can still access these, even after the DVRs have been released.

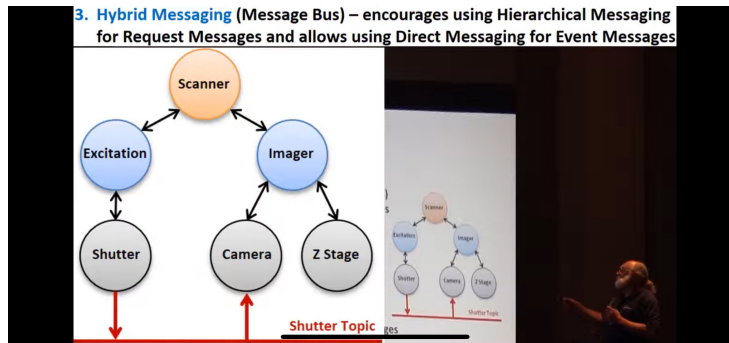


Figure 3: LabVIEW Actor Framework Message Transport.

0.7 Unit Testing

This model is interface-composition based, so unit testing is built in. In effect, instead of wrapping the Queue Base with your developed class, you can wrap the Queue Base with a Queue Base Debug class, which is wrapped with your developed class. This occurs since these all inherit from the same Queue jettl interface.

This allows for arbitrary wrapping of classes, which is a powerful feature of the interface-composition based design pattern.

For the wrapping, it is as easy as have to wire in the object in the decorator method for debugging??

0.8 Debugging

0.8.1 Displaying Method Execution

What a log for which methods are executed, instead of the dialog popups

Two project conditional blocks:

1. Occurs in all methods
2. Occurs only in message specific methods

These conditionals occur in Self Actor.lvclass. If either conditional is true, debug panel that displays the names of actors (columns), along with timestamps (rows) of when methods (data) are executed. Think discrete time water fall display.

0.9 Git

This might be of interest for submodules in git for LabVIEW. Find here: Git Submodules: An Alternative Approach to Code Reuse - Greg Payne - GDev-

Con2.

In the repos, use the tag to have different "stable" versions of the repo such as v0.1.1 or v3.8.3 This allows others to easily look at the different versions of the repo without much thought. This could also help with submodules that are referenced in other repos. Check this video near the end for reference: Git and GitHub Tutorial for Beginners

0.10 Naming Conventions

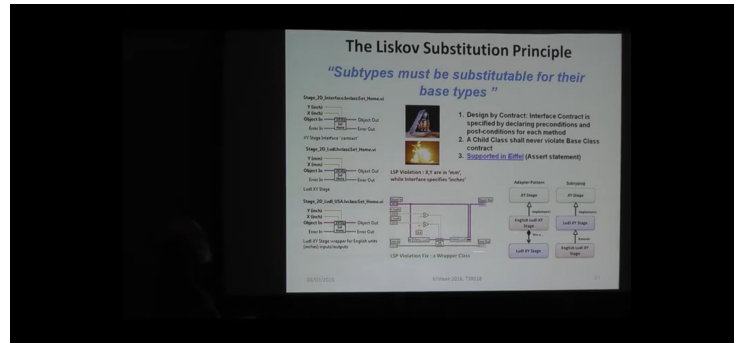


Figure 4: This image shows the naming convention for LabVIEW classes and methods.

Noting that Fig 4 shows the naming convention for LabVIEW classes and methods.

- Library-Name.lvlib
- Interface-Name.lvclass
- Class-Name.lvclass (control is capital by default!)
- method-Name.vi
- control-Name.ctl (this control, which is not tied to a class is lowercase!)

Note: Avoid underscores and spaces.

0.11 Examples

0.11.1 Hello World

Hello World Example: Don't need to send yourself Teardown for Hello World.. just have Teardown method itself at the end of the Hello World Msg.

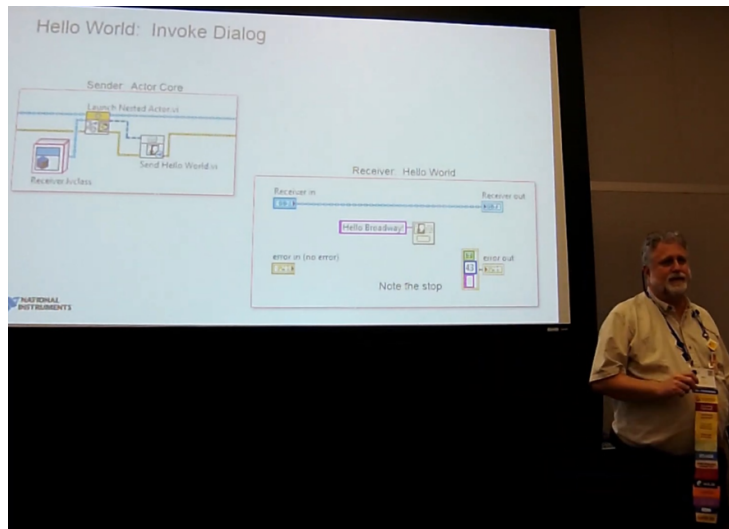


Figure 5: This image shows the hello world example.

0.11.2 Nested Actors

2018 NIWeek Allen C Smith Efficient Actor Framework Development 25:58
 Teardown vs Orderly Teardown: Allen wanted a “Stop Nested Actors Msg”, SLM against. There include two methods: Event Nested Teardown.vi and Queue Nested Teardown.vi. These two methods are used to teardown the respective nested actors.

0.11.3 Sending Event Message

Button press sends message to Self (queue actor). Queue actor internally sends a string indicator Event which occurs in event loop.

0.12 Design Patterns

0.12.1 State Pattern

Context:

Method.vi (just a wrapper for Method.vi “State”).¹

State.lvclass (interface):

Concrete State.lvclass

Method.vi “State”

¹Best Practice: use this Method.vi in other methods, rather than the Method.vi “State” itself

State Pattern Privacy

Context classes should be private, since only interface objects should be composed into a class. Dependency Inversion Principle. Since the context class is private to the library it is in (and the State Interface with its concrete state classes), public static dispatch methods can be used in the context class AND concrete state classes without worrying that they'll be used outside the library since the context class is private.

0.12.2 Memento Pattern

When saving the state of an actor, the Memento Pattern is used. Instead of sending the entire actor state in Actor Last Ack Msg, there should be another dedicated message that sends the actors state to the calling actor. This has not been done, but it is a good idea to implement this in the future.

Memento, actors shouldn't know about each other, so if the state of a nested is to be saved, then there is a separate message for this since last ack shouldn't know about this. Rather, this specialty message couples with last ack if the developer wants this functionality.

0.12.3 Decorator Pattern

0.12.4 Strategy Pattern

0.12.5 Observer Pattern

Actors references cannot be passed between actors or helper loops. They are intentionally abstracted away from the developer. Now, because helper loops are async and own their own references. Their references can be passed around the actor tree. This provides a modular way of sharing async references, following the observer pattern.

0.13 Event Actors

This is to declutter the actor by offloading certain tasks such as panel display or subprocesses that do not require an additional actor to be created. Since the Event Actors are not dependent on the Queue Actor, we can unit test an Event Actor.

Event Actors are created using Event Create.vi, where the wired in object optionally has a method for bundling in the necessary private data.

0.13.1 Event Actor Best Practices

References should not change after they are created.

0.13.2 Event Actor Benefits

Event are designed to be reusable and modular. Event Actors are not tied to the Queue Actor that creates them. Furthermore, Queue Actors should not depend on Event Actors.

These can be orphan processes i.e. they are not tied to the lifetime of the actor that creates them.

0.14 Event Loop

It is safe to send messages to the Caller, Self, AND Nested Actors. Nested actors will have the correct Msg Queue since they're updated when a Queue Nested is created in the Queue Actor. Check details outlined in the Queue Actor.vi within jettl Queue Actor.lvclass.

This method works for all types of Event Actors. In particular, ones with shown panels since the window appearance can be changed between DD methods.

Philosophy: An actor messaging should be running for the entirety of the actor. That means if you want to change an actors panel, some other entity should be changing its panel for the actor. This separates the concerns from the actor and the panel.

0.14.1 Window and Subpanel Event Actors

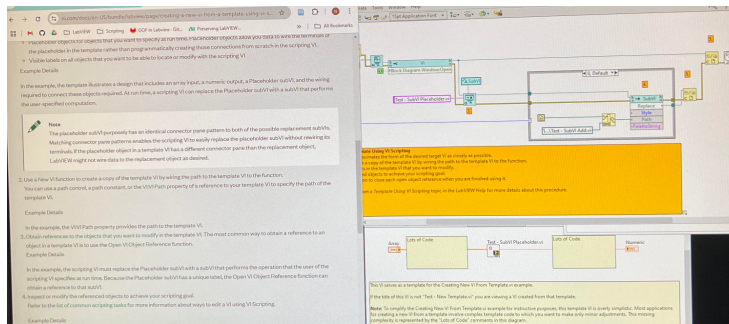


Figure 6: This image shows the UI events in LabVIEW.

Split the events as controls and indicators as shown in Fig 6.

0.14.2 Synchronous Event Actor

Since Queue Actors should always be ready to dequeue messages, it should not wait on a response. Rather, the Queue Actor should create the Synchronous Event Actor. When the Event Actor is waiting for response, that's okay since

when the event actor is waiting, it is also ready to teardown whenever since it is always waiting for an event.

0.14.3 Event Observer

A Queue Actor has in its project an Event Actor that another Actor can create. And here can send its Event Actor Ref to the Libraries Queue Actor to pump messages across the tree. For reusability, a Queue Actor has in its project the Event Actor that another Actor can create. And here can send its Event Actor Ref to the Libraries Queue Actor to pump messages across the tree.

- NIAF: 2-Dimensional tree hierarchy
- Base jettl: 3-Dimensional hierarchy

In Base Queue, a tree hierarchy of Queue Actors (follows 2-dimensional NIAF messaging scheme) and a single layer tree hierarchy of Event Actors for a given Queue Actor. The 3-Dimensional aspect comes from Event Actors being able to share their references with other Queue Actors and/or Event Actors. This allows these latter Actors to send events to the respective Event Actor who has shared their reference. This “messaging across the tree” in three dimensions can occur giving rise to a type of observer pattern (publisher/subscriber).

0.15 Notifier Actors

Notifier Actors are created using Notifier Create.vi, where the wired in object optionally has a method for bundling in the necessary private data.

0.15.1 Notifier Periodic

This could be an event actor, but notifiers work well with timing. If it was an event actor, then the event actor would have to wait for the next event to occur via the timeout case in the event loop. But there would be interruptions in the event loop, which would cause the event actor to not be able to send messages at the correct time.

Private Data:

- Iteration (0 = infinite) (U32)
- Period (ms) (default 1000) (U32?) (cannot = 0)
- Initial Wait (ms) (default 0) (U32?) (cannot = 0)

Along with the Stage Pattern used in the Base Notifier.lvclass, State Pattern can be used in the Notifier Periodic.lvclass such as

- Idle State
- Running State

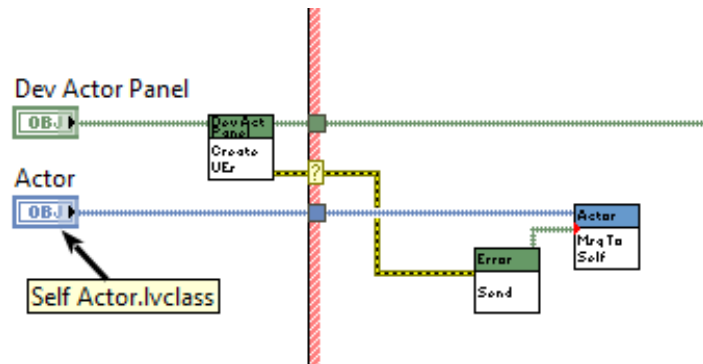


Figure 7: This is the Error message in jettl. This is a custom error message that occurs when an error occurs asynchronously.

0.16 GB Transfer Actors

These Gigabit Transfer Actors are used to transfer high rates of data. There is some overhead in the DD that occurs in the Actors. This Actor does not use the DD methods for messaging, and uses functional reentrant methods instead.

0.17 Messaging

All messages come from an interface and follow ISP where one message belongs to one interface. If there is a naming issue, that is a good thing. It means in the dependencies, you should be packaging modules so you don't run into naming issues.

All messages are interface messages. Note, they do not need to be implemented.

Actor messages error on generation of message. Error when creating a message and wiring in the interface object as an input, the message scripting doesn't know how to differentiate the class input and the parameter input.

0.17.1 Private Messages

Private messages that aren't exposed to external callers: Library access scope. To conform to this, the Last Ack messages should be private messages to the Queue Base class. This is because the Last Ack messages are not intended to be used by external callers. Further, this should also be done for the Update Queue Nested message. This should not be used by external callers, but rather only by the Event Base class.

0.17.2 Messages Up and Down the Tree

When messages are sent up the queue tree, followed by being sent down the tree, the developer could consider using event actors to message across the tree. This is a direct use case for using an Event Actor. Sharing the event actor reference to the necessary Queue Actors or Event Actors for direct communication. This is the power of Event Actors. Gives rise to the Observer (Pub-Sub) Pattern, sending NOT Msgs, but Events across the tree.

0.17.3 Messages with Type Definitions

Type definitions as inputs SHOULD be in the library, not the class they're implemented in. This is fundamentally an exercise in dependency inversion.

Cluster message with type def inside of the library. Good practice to put the type def here and NOT in the class that implements the message. This takes care of otherwise awful circular dependencies.

0.18 Tools

0.18.1 Scripting

Tips: Go through and replace all the Opens and Traverse with the hidden gem. User groups for the scripting (quick drop, right click, etc.).

Right Click Message Creation

0.19 TODO

In the DD methods, because they are not required to be overridden, have functionality within them that calls the Self Actor method (some kind of checking mechanism?).

Actor interface methods (all implemented with default functionality) to have the **new** (Actor Interface) Read Actor DD method that reads from the Dev Actor the Self Actor class and performs that interface function, then bundles back in with the Setup method.

Do this for all for the default behavior.

Note this is breaking the contract for interface DD methods not needing to be overridden.

Instead of the Setup method, create a new Actor Write method which ONLY Writes to the Actor. This can also be put inside the Setup method as a first step, the setup code follows after

State Enter Core and State Exit Core are NOT check marked. That way the developer does not need to override, just to have no functionality anyway. Read State and Write State do because they'll have functionality.

0.20 Errors

In frameworks, errors are fundamental to the program’s operation. They are not just incidental issues but rather integral to the design and flow of the application. jettl has an error object in the private data of the jettl object. At the end of the method, the error object is unbundled and checked for errors before teardown.

Error philosophy: Errors occur **ONLY** from unexpected events. For example, the error case in `Msg.vi`: in the case structure, a custom error saying that a message could not be executed occurs when ‘message name’ occurs for ‘actor name’. This is unexpected behavior since this **SHOULD** be known at edit time. This is a legit error.

’That was handled, or I wouldn’t have been called’ - SLM (The Errors of our Ways — Stephen Loftus-Mercer GDevCon N.A. 2021: 52:08)

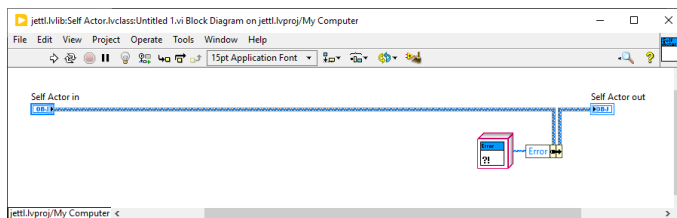


Figure 8: Method template. This has no error terminals, and the error cluster is handled internally. This is a different approach to error handling in LabVIEW methods.

Wouldn’t this make the API more beautiful and easy to understand? Having just the object wire come out of the method, and **ONLY** the object wire coming out of the method? I suppose, adopting the OO paradigm. Instead of having the error cluster inside the objects class data. Instead, it’s a dedicated “error cluster” shared for every single object in use. Encourages data flow since unbundling of errors will always occur. It’s a step in the right direction having no “error input” for methods. Now it’s time to get rid of the error out. It’s almost like branching an objects wire, in a way. There should only be one thing coming out of a method.

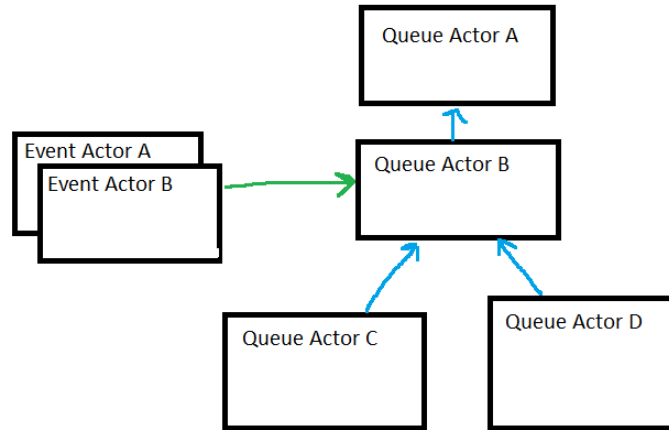


Figure 9: This image shows the creation of Base Actors.

0.21 Example

0.21.1 Dev Actor

Merge Error and Override Error are decorators used. Otherwise, the other DD methods are trivial and only used once.

0.22 Creation

Queue Actor

- Has One Caller Queue Actor
- Is a Nested Queue Actor of Queue Actor
- Is a Self Queue Actor

Event Actor

- Has One Caller Queue Actor
- Is a Nested Event Actor of Queue Actor
- Is a Self Event Actor

Framework constraint: A Queue Actor can create both Queue Actors and Event Actors whereas an Event Actor cannot create either. The Event Actor can queue itself either Queue Create or Event Create messages, but this goes to the Queue Actor to handle these. The handling does not occur in the Event Actor since the Event Actor cannot create.

A future question: Should Launch.vi exist outside the Queue Base class? If it does, then Queue Base can be marked as a private class, and the Launch.vi can be public.

Only Queue Actors can create Queue Actors and Event Actors. Event actors cannot create either. Further, because of these rules, only queue actors can receive the Last Ack from Nested. This is respectively the Queue Last Ack and Event Last Ack. Event Actors cannot receive either Last Ack. These Last Ack messages are not used by the developer. These occur in the framework itself, though functionality can be wrapped in the developed queue actor.

0.23 PPL Support

Note that jettl is designed with PPLs in mind! This is because

- jettl comes as a single library, so it can be packed into a PPL without external dependencies
- To change a class to use the PPL version of jettl is to change the
 - implemented interface to the PPL one and
 - compose in the PPL Interface.
- jettl does not include:
 - xnodes
 - malleable VIs

xnodes and malleable VIs cause build issues with PPLs, they do not exist in jettl.

For more information on PPLs, Darren Nattinger and Derrick Bommarito have excellent content:

- Debugging Symptoms - Packed Project Library PPL Dependencies - Searching for Dependencies Dialog When Running Executable
- PPL Namespaced Dependencies - Strategy/Design Discussion - Development Issues
- LUDICROUS ways to Fix Broken LabVIEW Code with Darren Nattinger — GDevConNA 2022

0.24 Opinionated Design Choices

Virtual folders are not saved on disc. These are only convenience in the LabVIEW project.

0.24.1 Accessors

Since class inheritance is not used, accessors ****are not**** used very often (aside from tightly coupled classes such as State Pattern). This is especially true with Actors. Actors are self-contained and will rarely allow other classes to use its attributes.

0.24.2 Color Scheme

”Look down at the green grass, look up to the blue sky, and look further to the purple galaxy.”

- Purple Library: RGB (166,153,182)
- Blue Interface: RGB (104,136,190)
- Green Class: RGB (110,149,108)

0.24.3 Icons

- Shows interface / class name.
- Color of banner indicates if a library/interface/class container.
- Text of method name.
- Color of method name indicates access scope of method/control.

0.24.4 Access Scope

Only public and private. Interfaces, classes, and methods have text in the icon/banner that are black for public and red for private. Private data text icon is red for class private data since inherently private.

Emphasis is put on encapsulated classes are classes (maybe container libraries) marked private. Class encapsulation. Any class should be marked as private to the library containing them. That way, it is not encouraged to use the classes in other projects, leading to use of dependency inversion. Or, stipulation, classes that are held in libraries, the library should be marked as private. Red private banner, even if the class is public but in a privately marked library. This occurs when the classes are tightly coupled, such as with the state pattern.

Rules:

- Nested Libraries should be marked private, otherwise, put the nested library outside the containing library
- Classes should be within at least one library
- To promote dependency inversion: A class should be marked private, but only public IFF within a private nested library. This keeps from others from using the class in the containing library, BUT breaks true dependency since other classes can use the class in the containing library

- Interfaces and classes must be contained in at least one library

To promote dependency inversion: A class can be marked public IFF within a private nested library. This keeps from others from using the class in the containing library, BUT breaks true dependency since other classes can use the class in the containing library.

0.24.5 Errors

Errors are built into jettl. For every actor being wrapped, there is an error cluster within their private data. The errors are abstracted away from you, but if there does exist an error you may handle it in the Handle.vi override.

Except the error that could potentially occur at the end of Queue Actor.vi and Event Actor.vi, no error goes unrecognized. Why are there are so many error case structures? All methods in Base jettl are assumed to run unconditionally when they are called. Also, no serialization of errors. Instead, it is serialization of the object wire since internally, the class on the interface object in the private data has an error cluster. The merge errors method (which internally has the Is Error.vi), dictating if Base jettl should enter the respective Error State.

Abandoning Data type IO Serialization: An indication that the data in the data type will *potentially* be manipulated is when a data type is being passed in and out through a method. Unless a data type can be manipulated in an Interface/Subclass/Subinterface, then the data type should not have an output.

If a method must be serialized, embrace the flat sequence structure / error case structure. DO NOT pass a data type from the input to the output of the method for the *sole purpose* of serialization. Understand that other developers will not know your intent and will assume that the data in the datatype will *potentially* be manipulated. Not wiring the outputs gets rid of this thinking entirely for better readability. Further, do not serialize by using an error cluster input and output. This provides difficulty for readability since the developer does not know if the error is being manipulated by the method.

No error goes unnoticed in the framework, everything is reported (except for releasing references).

Error Serialization: The traditional error input is not allowed. A method should execute unconditionally.

0.25 Queue Mailbox

Ideally speaking, there would be a Mailbox interface that Queue Mailbox implements. But since the interface checkbox is checked and cannot be changed: "Data Value References - Restrictions On New and Delete: Enabled: Restrict references of this class type to member VT's of this class", that means that Interfaces cannot be a DVR. Further, this immediately voids any dependency inversion since an object in a DVR cannot change its object, by definition such as what dependency inversion does. Therefore, the Queue Mailbox in the Queue

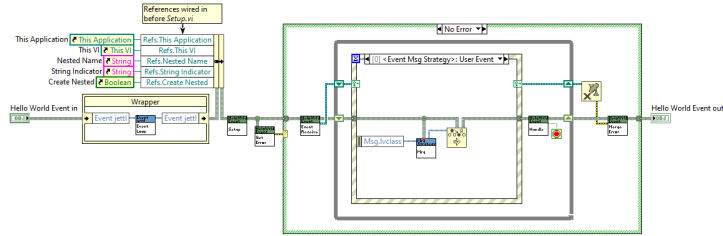


Figure 10: Event Loop. This shows the event loop in jettl.

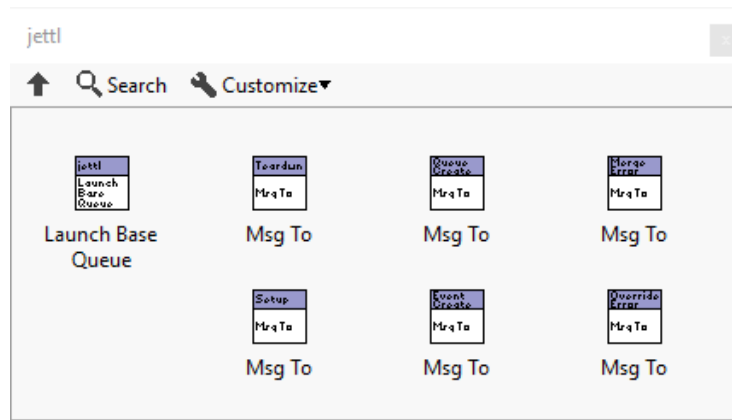


Figure 11: Palette. This shows the palette in jettl.

Mailbox library cannot be marked private, allowing other classes in the jettl library have access to it via the DVR. This really isn't a problem though since the Queue Mailbox library is marked private, so nothing outside the jettl can use this class and DVR methods, encapsulating the DVR, as intended by jettl.

This should be where the new queue nested should be sent via event to update the Queue Nested in Event Actor. Yes, it is not instant, but gives the Event Actor(s) the reference so they can send messages to this newly created Queue Actor. Beware, here with these being async processes, temporal issue may arise.

0.26 TO ORGANIZE

0.27 Assembler

Previous idea to *maybe* get back to.. Mediator pattern is data flow friendly and DOES NOT cause memory leaks since a created Actor only occurs once at a time, through the mediator. And can only shut down if the mediator says

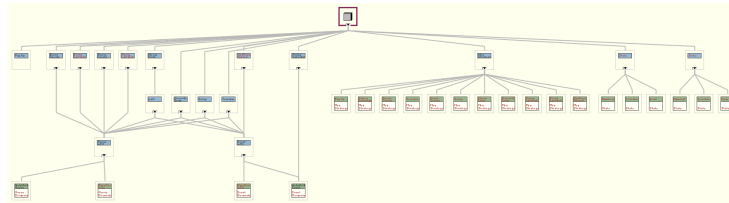


Figure 12: Class Hierarchy. This shows the class hierarchy in jettl.

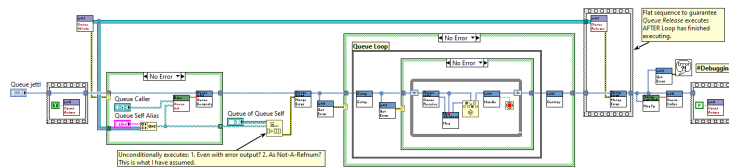


Figure 13: Queue Actor Method. This shows the method for the Queue Actor in jettl.

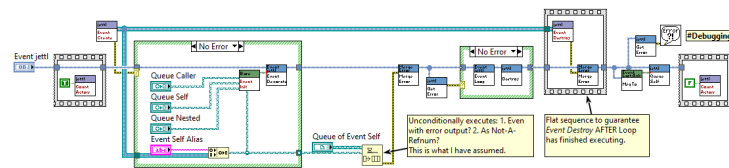


Figure 14: Event Actor Method. This shows the method for the Event Actor in jettl.

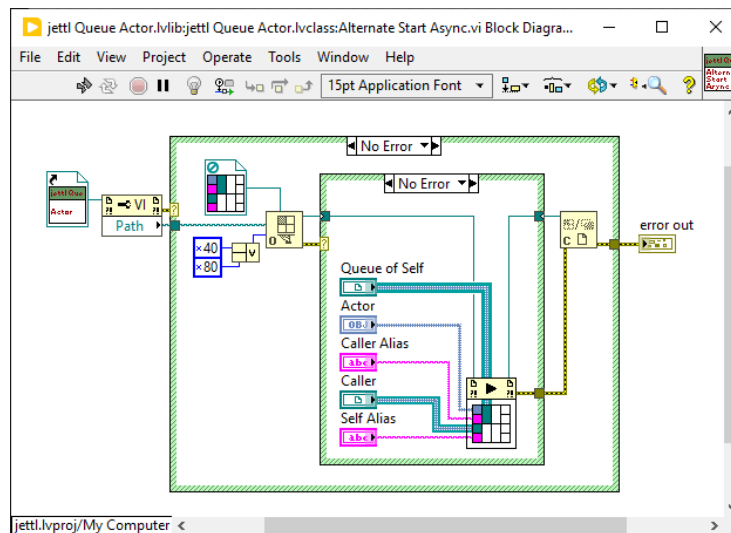


Figure 15: Alternate Start Async. This shows the alternate start async in jettl. Note this is outdated naming, but the functionality is still the same.

that the Actor should shut down. The mediator knows who has whose reference to send messages. This helps establish the observer pattern too. No deadlocks can occur since the mediator operates one by one. It is the all-knowing for the program, only forwarding messages to references that the message is intended for. An actor ever only knows about the mediator.

Kind of the same framework you currently have.. just that the messages interact with a mediator that then (since it has references to everything) sends the message to the necessary actor. Note the Self Actor still has references to its Creator, Self, and Created.. it's just that the mediator ALSO knows who has these references and easily sends the message to those who have the reference that the message is going to has. This provides well for the observer pattern i.e. publisher and subscriber. There are effectively two places references are saved: Mediator and Self Actor. The Mediator always has the references and shares the necessary duplicates of references that pertain to the Self Actor since these are references to identify the Actor and how the mediator should allow the actor to interact with other actors (though, remember, the Actor doesn't know other actors exist.. only that there is a mediator). Further, the mediator knows which methods are messages of the actor. This is known at compile time since messages are all through interfaces, allowing the mediator to know which messages the actor can execute by checking which interfaces the actor implements. This check happens in the mediator, not in the actor. This can be a set of strings relating to the method name?, so upon creation of an actor (by the mediator), the mediator holds the reference to the actor and a *set* of method names that are tied to messages.

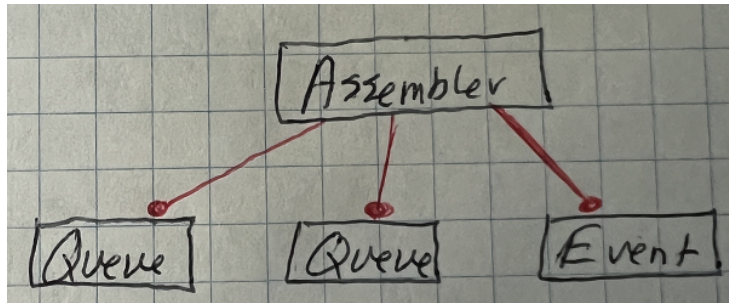


Figure 16: Assembler. This shows the assembler in jettl.

Just thinking out loud, here is a concrete component that basically handles the business logic of the system with other sub business logic components that are more specialized / reusable. This can be thought of as some top level actor.

Multiple application instances Idea: Application mediator that is between all. Or there is always a double layer of mediators? Where the top layer facilitates what the lower mediator does.. and when there is another application instance (which has its two mediators), the top mediators of both communicate to each other. The top mediators know about each other's references, so they can communicate with each other.

If two applications are talking with each other, there now exist two mediators. An idea for this: there is again a mediator that is *above?* these two mediators?

Assembler strictly for passing references to other Queue jettls for the Observer Pattern.

Queue jettl cannot create Queue jettls or Event jettls. Only the Assembler can create Queue jettls and Event jettls. They have to ASK the Assembler to create these.