

1. 创建监控用户

```
# mysql
create user 'zbx_monitor'@'%' identified with mysql_native_password by
'zabbix_password';
grant replication client,process,show databases,show view on *.* to 'zbx_monitor'@'%';
```

账号密码根据实际需要调整。

2. 创建配置文件

```
# cd /usr/local/zabbix
# vim .my.cnf
[client]
user='zbx_monitor'
password='zabbix_password'
```

3. 修改Zabbix Agent 配置文件

```
# cd /usr/local/zabbix/etc/zabbix_agentd.conf.d/
# vim template_db_mysql.conf
UserParameter=mysql.ping[*], HOME=/usr/local/zabbix /usr/local/mysql/bin/mysqladmin -
h"$1" -P"$2" ping
UserParameter=mysql.get_status_variables[*], HOME=/usr/local/zabbix
/usr/local/mysql/bin/mysql -h"$1" -P"$2" -sNX -e "show global status"
UserParameter=mysql.version[*], HOME=/usr/local/zabbix /usr/local/mysql/bin/mysqladmin
-s -h"$1" -P"$2" version
UserParameter=mysql.db.discovery[*], HOME=/usr/local/zabbix /usr/local/mysql/bin/mysql
-h"$1" -P"$2" -sN -e "show databases"
UserParameter=mysql.dbsize[*], HOME=/usr/local/zabbix /usr/local/mysql/bin/mysql -h"$1"
-P"$2" -sN -e "SELECT COALESCE(SUM(DATA_LENGTH + INDEX_LENGTH),0) FROM
INFORMATION_SCHEMA.TABLES WHERE TABLE_SCHEMA='$3'"
UserParameter=mysql.replication.discovery[*], HOME=/usr/local/zabbix
/usr/local/mysql/bin/mysql -h"$1" -P"$2" -sNX -e "show slave status"
UserParameter=mysql.slave_status[*], HOME=/usr/local/zabbix /usr/local/mysql/bin/mysql
-h"$1" -P"$2" -sNX -e "show slave status"

# vim /usr/local/zabbix/etc/zabbix_agentd.conf
Include=/usr/local/zabbix/etc/zabbix_agentd.conf.d/
```

4. 重启 Zabbix Agent

```
# service zabbix_agentd restart
```

5. 在 Zabbix Server 端验证是否能获取 MySQL 监控数据

```
# zabbix_get -s 10.0.0.20 -p 10050 -k mysql.ping[127.0.0.1,3306]
mysqld is alive
```

这里的 10.0.0.20 是客户端的 IP。


如果提示 -bash: zabbix_get: command not found

设置

```
export PATH=$PATH:/usr/local/mysql/bin:/usr/local/zabbix/bin/
```

6. 添加 MySQL 监控模板

添加路径：Configuration -> Hosts，选择主机

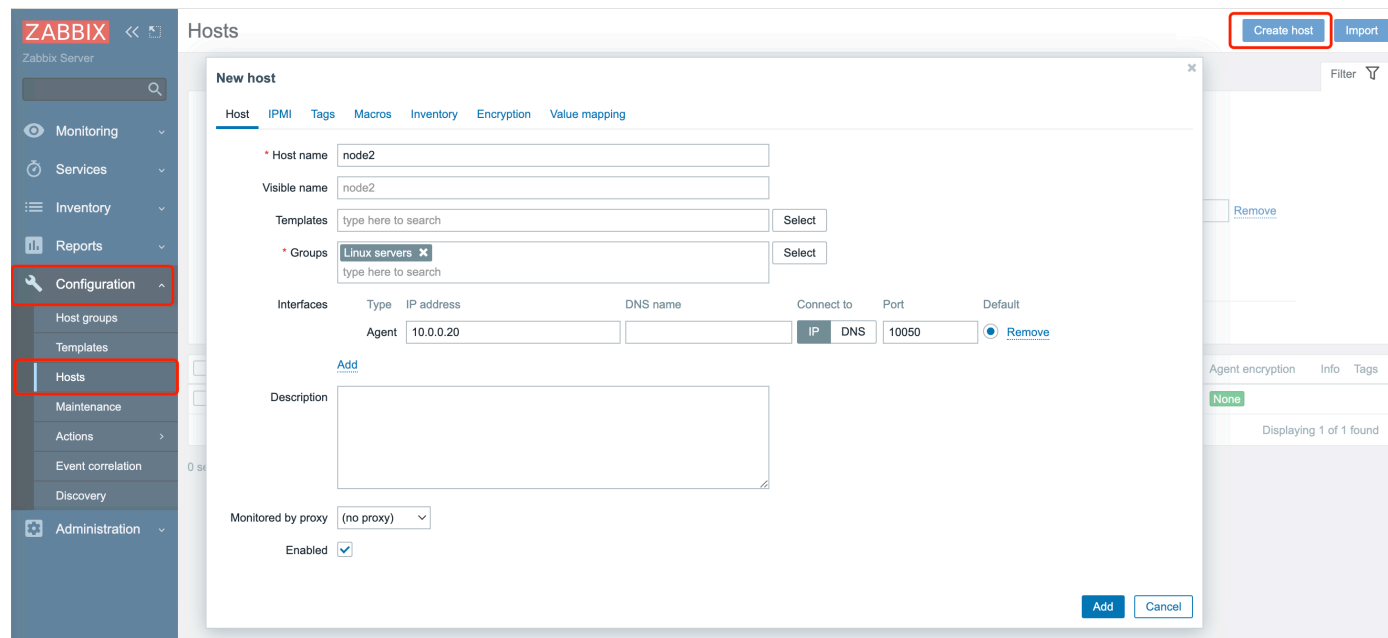

注意，Templates 选择 Linux by Zabbix agent, MySQL by Zabbix agent

☐	Name ▲	Items	Triggers	Graphs	Discovery	Web	Interface	Proxy	Templates	Status	Availability	Agent encryption	Info	Tags
☐	node2	Items 90	Triggers 25	Graphs 14	Discovery 6	Web	10.0.0.20:10050		Linux by Zabbix agent, MySQL by Zabbix agent	Enabled	ZBX	None		

7. 验证数据是否能采集上来

Monitoring -> Latest data

ZABBIX

Zabbix Server

Monitoring

Dashboard

Problems

Hosts

Latest data

Maps

Discovery

Services

Inventory

Reports

Configuration

Administration

Support

Integrations

Help

User settings

Sign out

☐	node2	MySQL: Aborted clients per second	40s	0	component: connections	Graph
☐	node2	MySQL: Aborted connections per second	40s	0	component: connections	Graph
☐	node2	MySQL: Binlog cache disk use	1m 40s	0	component: cache	Graph
☐	node2	MySQL: Buffer pool efficiency	42s	2.8261 %	component: memory	Graph
☐	node2	MySQL: Buffer pool utilization	41s	12.3413 %	component: memory	Graph
☐	node2	MySQL: Bytes received	40s	9.2974 Bps	component: network	Graph
☐	node2	MySQL: Bytes sent	40s	261.7908 Bps	component: network	Graph
☐	node2	MySQL: Calculated value of innodb_log_file_size			component: system	Graph
☐	node2	MySQL: Command Delete per second	40s	0	component: operations	Graph
☐	node2	MySQL: Command Insert per second	40s	0	component: operations	Graph
☐	node2	MySQL: Command Select per second	40s	0.01663	component: operations	Graph
☐	node2	MySQL: Command Update per second	40s	0	component: operations	Graph
☐	node2	MySQL: Connection errors accept per second	40s	0	component: connections	Graph
☐	node2	MySQL: Connection errors internal per second	40s	0	component: connections	Graph
☐	node2	MySQL: Connection errors max connections per s...	40s	0	component: connections	Graph
☐	node2	MySQL: Connection errors peer address per second	40s	0	component: connections	Graph
☐	node2	MySQL: Connection errors select per second	40s	0	component: connections	Graph
☐	node2	MySQL: Connection errors tcpwrap per second	40s	0	component: connections	Graph
☐	node2	MySQL: Connections per second	40s	0.03326	component: connections	Graph
☐	node2	MySQL: Created tmp files on disk per second	40s	0	component: storage	Graph
☐	node2	MySQL: Created tmp tables on disk per second	40s	0	component: storage component: tables	Graph
☐	node2	MySQL: Created tmp tables on memory per second	40s	0.01663	component: memory component: tables	Graph
☐	node2	MySQL: Get status variables			component: raw	
☐	node2	MySQL: InnoDB buffer pool pages free	40s	7181	component: innodb component: memory	Graph
☐	node2	MySQL: InnoDB buffer pool pages total	1m 40s	8192	component: innodb component: memory	Graph

1

2

▶

Displaying 1 to 50 of 90 found

数据采集完毕。

https://git.zabbix.com/projects/ZBX/repos/zabbix/browse/templates/db/mysql_agent