
Industrial Steam ML Workflow Demonstration

N = 2,888 (configuration); 5 TimeSeriesSplit folds

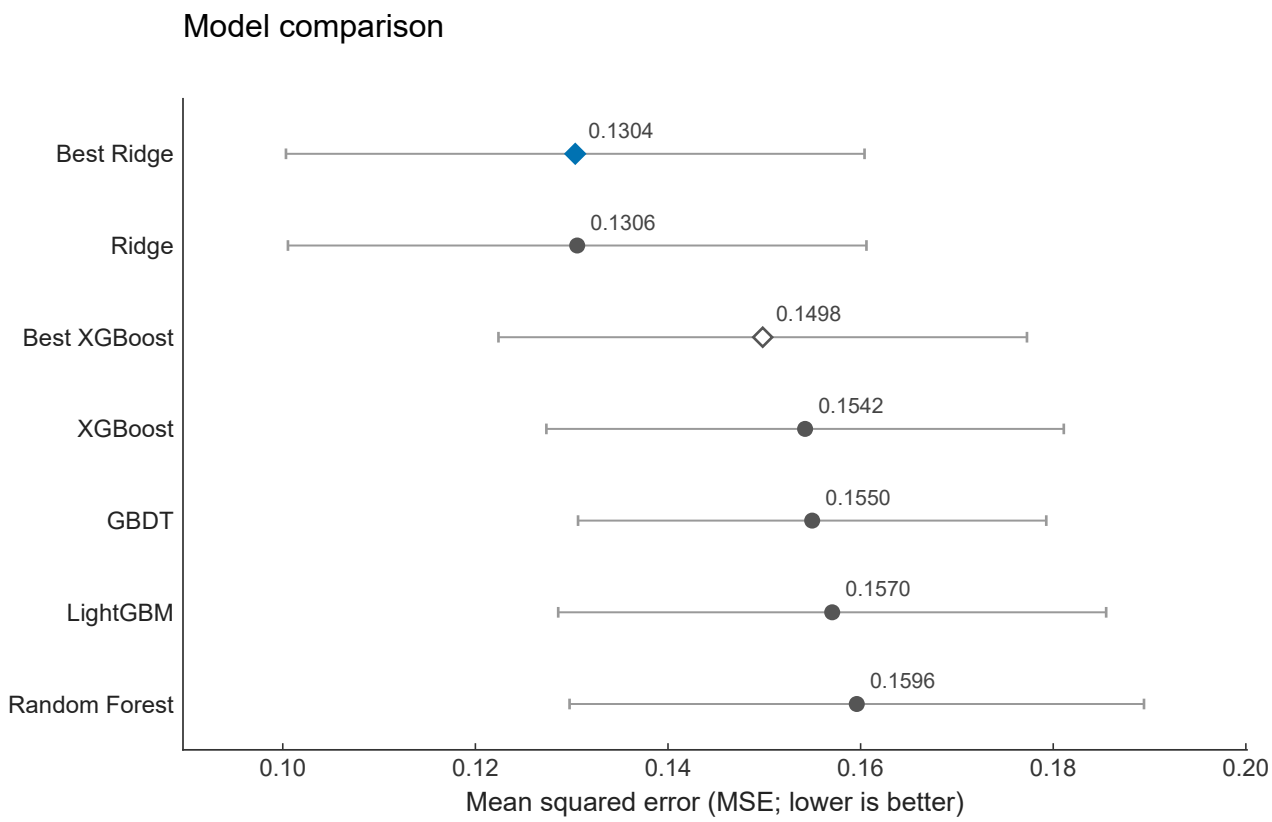

Provenance and interpretation

The original protocol compares all seven models using five ordered TimeSeriesSplit folds.

Points show mean MSE. Whiskers show +/-1 fold standard deviation, not uncertainty from repeated independent trials.

Best Ridge and Ridge are numerically close; no statistical significance is inferred.

Sources: results/paper_fig2_model_performance.csv

Canonical check: results/final_model_comparison.csv


Limitations: anonymous feature semantics; no repeated independent trials.

Five-fold CV is not comparable as a leaderboard with the 481-row fusion-validation subset.

Source SHA256 and full-precision plotted values are retained alongside this PDF.

Industrial Steam ML Workflow Demonstration

N = 2,888 (configuration); 5 TimeSeriesSplit folds

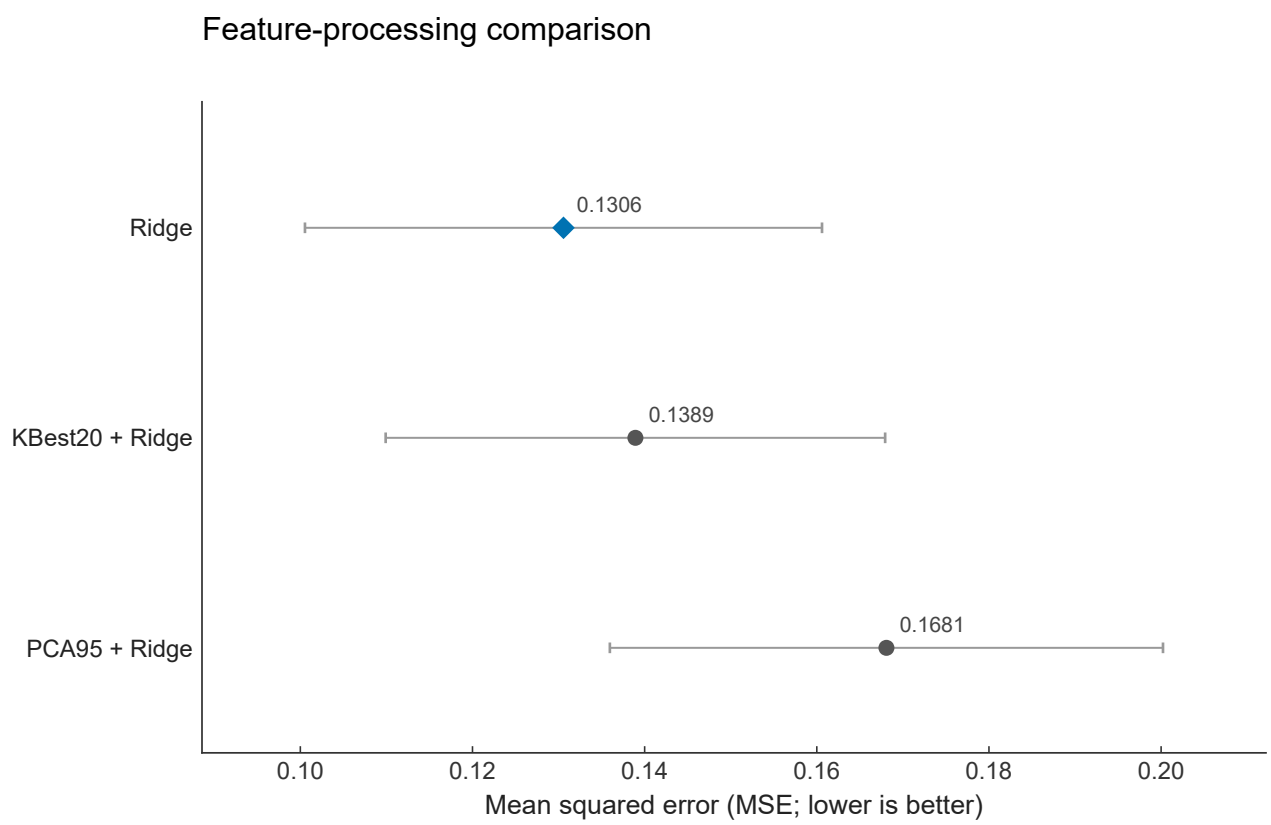

Provenance and interpretation

All 38 original features outperform KBest20 and PCA95 in this dataset and evaluated setting.

This does not establish that feature selection is generally ineffective.

No raw data, unlabeled test data, stored models or fusion predictions were opened.

Sources: results/paper_fig3_feature_method_comparison.csv

Canonical check: results/feature_method_comparison.csv

Limitations: anonymous feature semantics; no repeated independent trials.

Five-fold CV is not comparable as a leaderboard with the 481-row fusion-validation subset.

Source SHA256 and full-precision plotted values are retained alongside this PDF.