

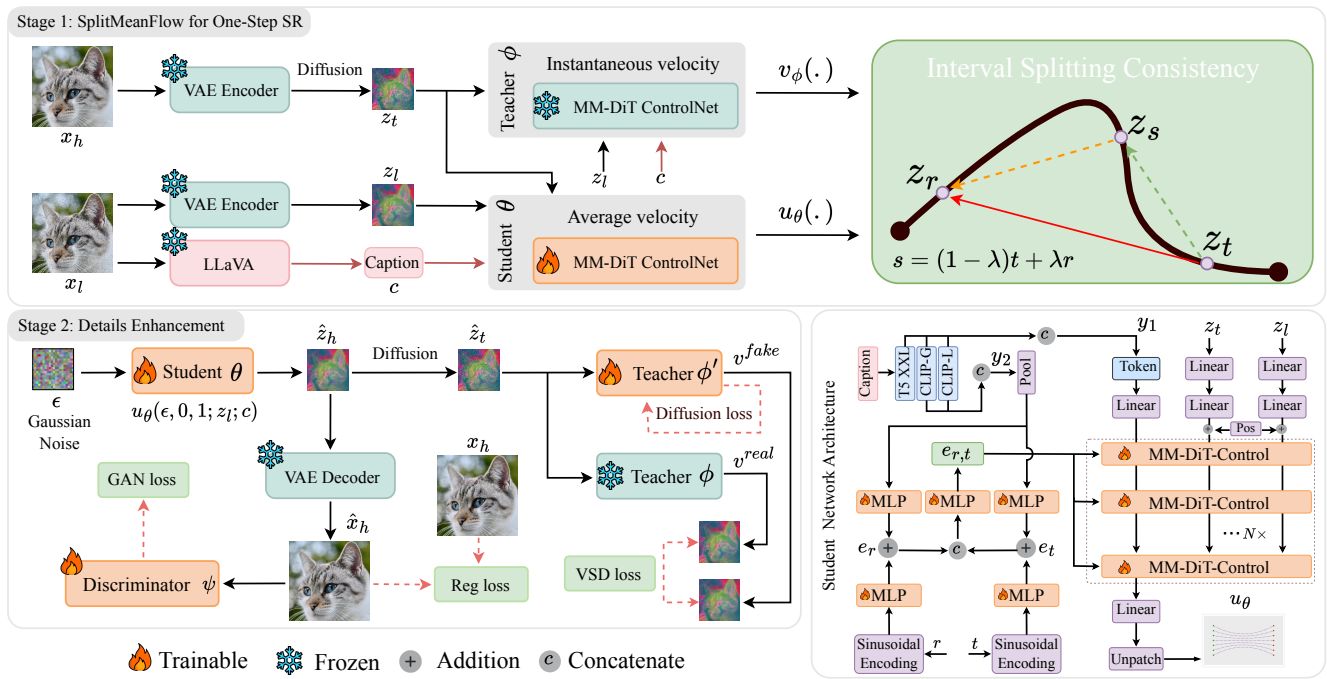


Figure 2. Training framework of SMFSR. SMFSR is trained in two stages: (1) **Noise-started one-step generation with LR-conditioned SplitMeanFlow**, where Interval Splitting Consistency trains a student model to predict the average velocity from random noise to the HR latent, enabling one-step noise-to-HR sampling with $r = 0$ and $t = 1$; and (2) **GAN-based detail refinement**, where adversarial loss, VSD loss, and regularization loss are introduced to enhance perceptual details and visual realism.