Lecture 4 window classification

Notebook:	cs224N Natural Language Processing		
Created:	2019/5/26 21:27	**Updated:**	2019/5/27 23:24
Author:	wzy816@gmail.com		

Generalization
少量数据集不要训练word vector，让他们保持不动
大量数据集重新训练

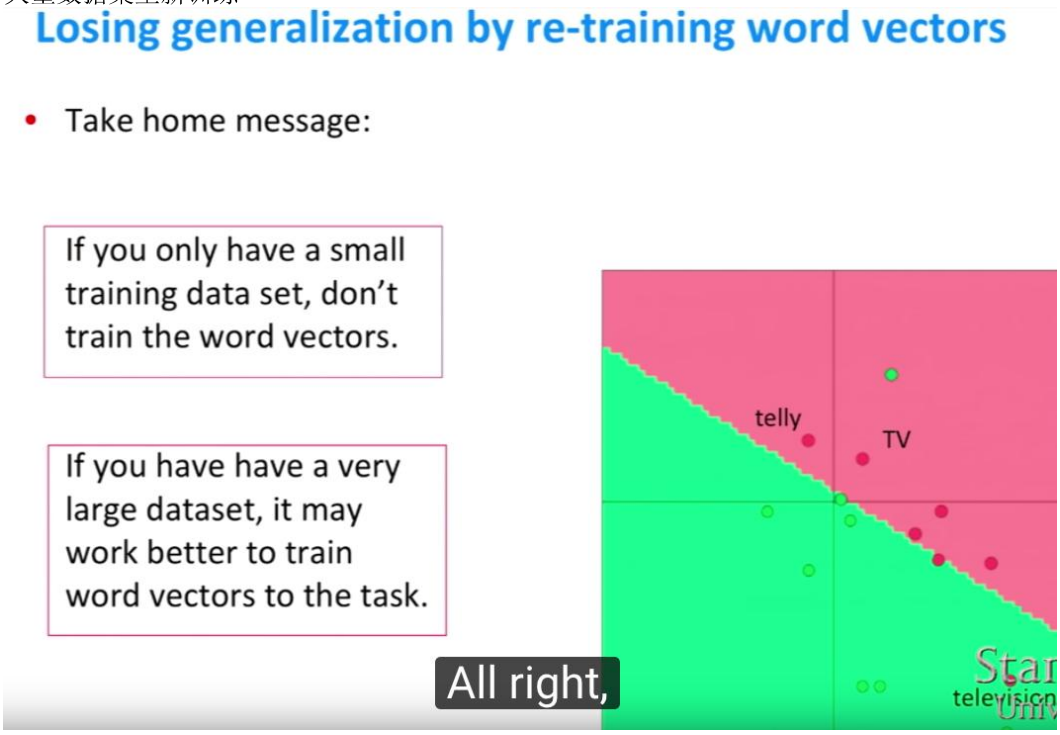

Neural networks = general function approximator

Softmax (= logistic regression) is not very powerful

- Softmax only linear decision boundaries



→ Lame when problem is complex

Wouldn't it be cool to get these correct?

Neural Nets for the Win!

- Neural networks can learn much more complex functions and nonlinear decision boundaries!





Maximize distance btw sample points

Max-margin Objective function

- Objective for a single window:

$$J = \max(0, 1 - s + s_c)$$

- Each window with a location at its center should have a score +1 higher than any window without a location at its center
- xxx |← 1 →| ooo
- For full objective function: Sample several corrupt windows per true one. Sum over all training windows