



H = K4 + C3

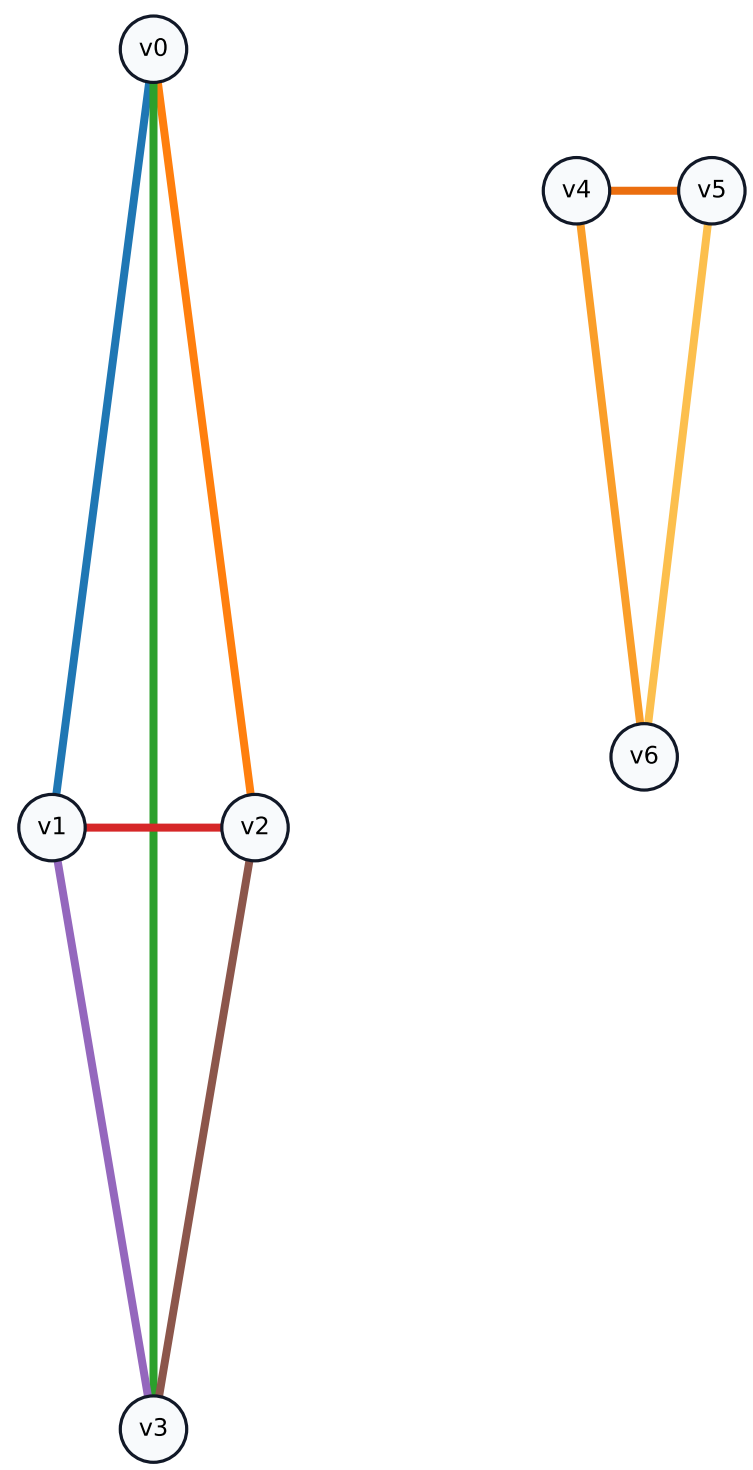

G = BA(100,2), seed 16

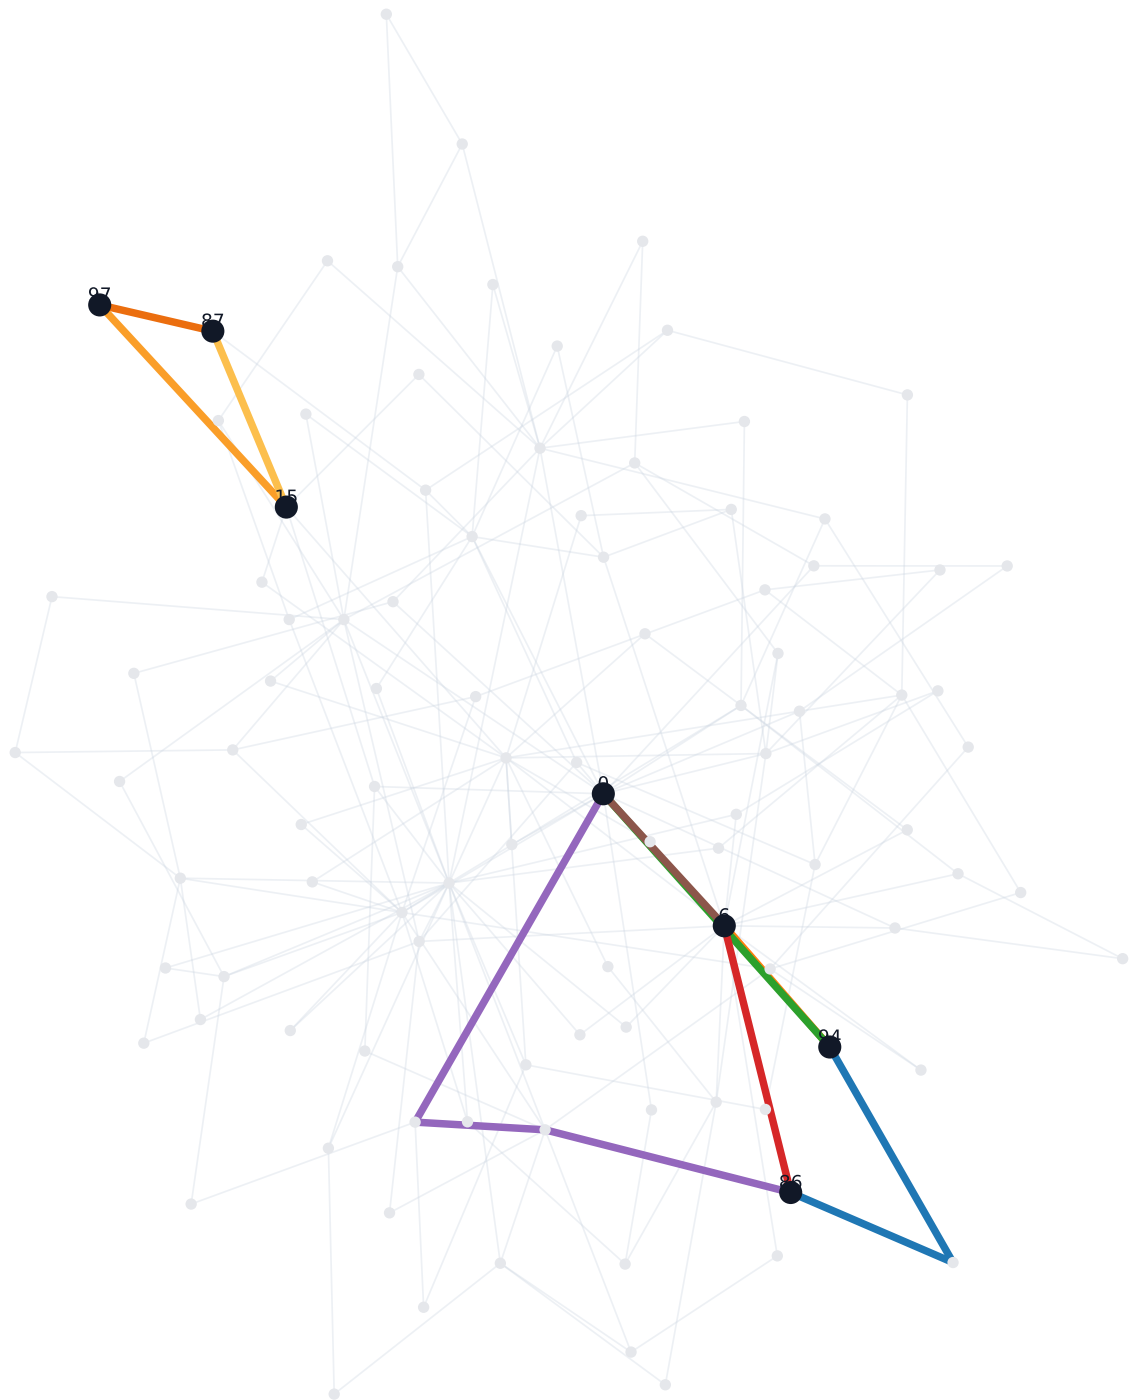

Explicit immersion

H = CompleteGraph[4] + CycleGraph[3]  
G = BarabasiAlbertGraph[100, 2], seed = 16  
|V(H)| = 7, |E(H)| = 9  
|V(G)| = 100, |E(G)| = 196  
C++ search = no --max-depth, immersion cost = 12

Vertex mapping

- v0 -> u94
- v1 -> u86
- v2 -> u6
- v3 -> u0
- v4 -> u97
- v5 -> u87
- v6 -> u15

Edge mapping

- e0 (0, 1) -> [193, 195] = [(86, 98), (94, 98)]
- e1 (0, 2) -> [86] = [(6, 94)]
- e2 (0, 3) -> [15] = [(0, 94)]
- e3 (1, 2) -> [85] = [(6, 86)]
- e4 (1, 3) -> [11, 63, 67] = [(0, 28), (4, 28), (4, 86)]
- e5 (2, 3) -> [2] = [(0, 6)]
- e6 (4, 5) -> [194] = [(87, 97)]
- e7 (4, 6) -> [122] = [(15, 97)]
- e8 (5, 6) -> [121] = [(15, 87)]