




H = K4 + K4

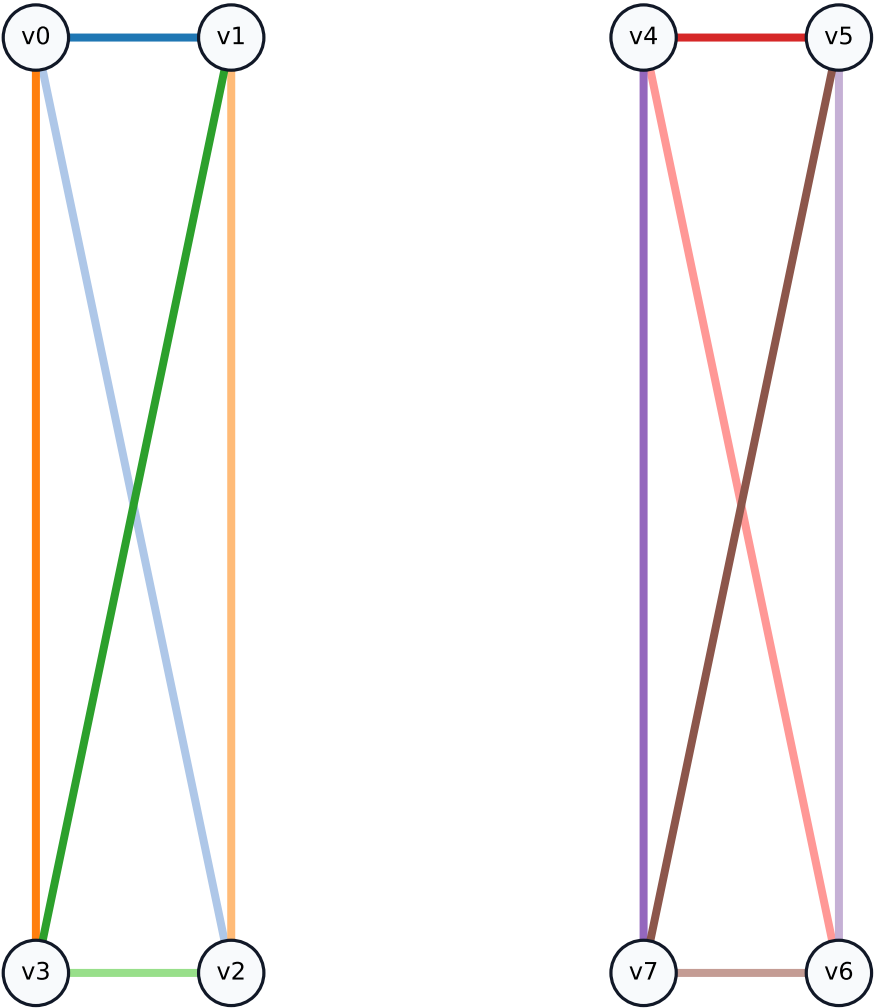

G, first K4 image, seed 0

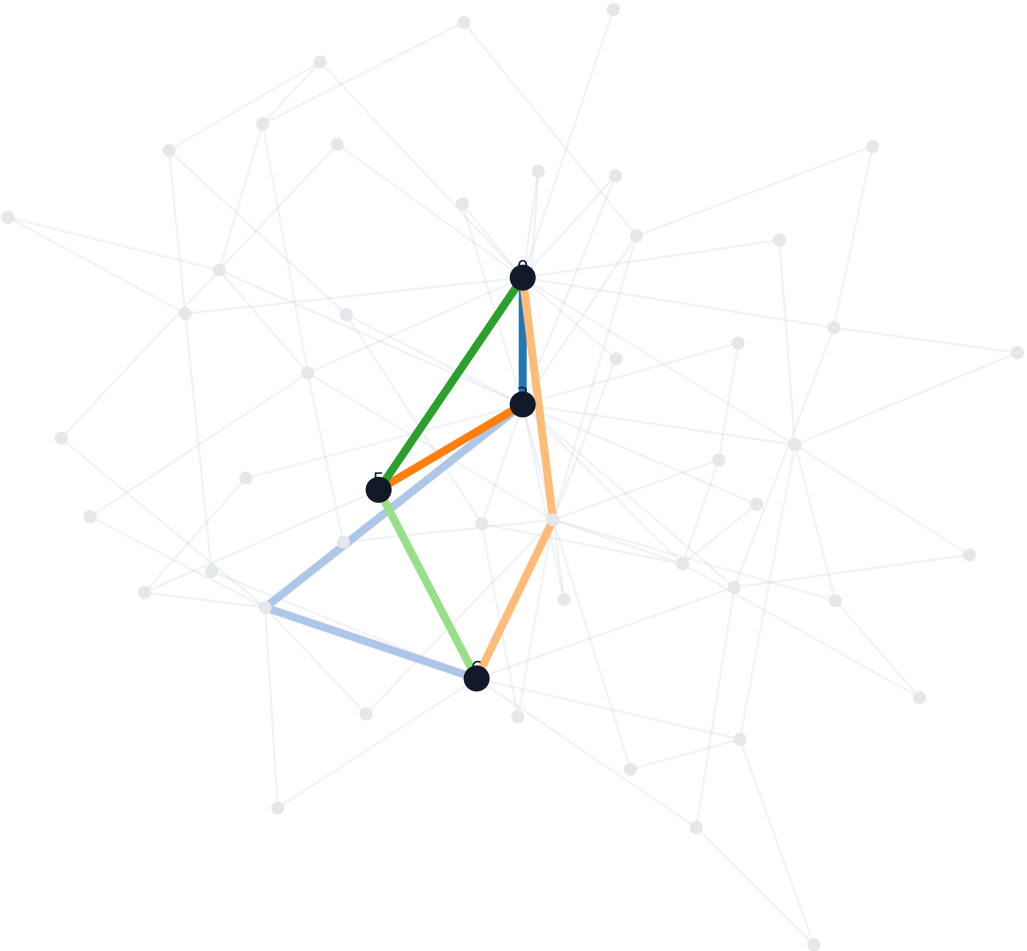

G, second K4 image, seed 0

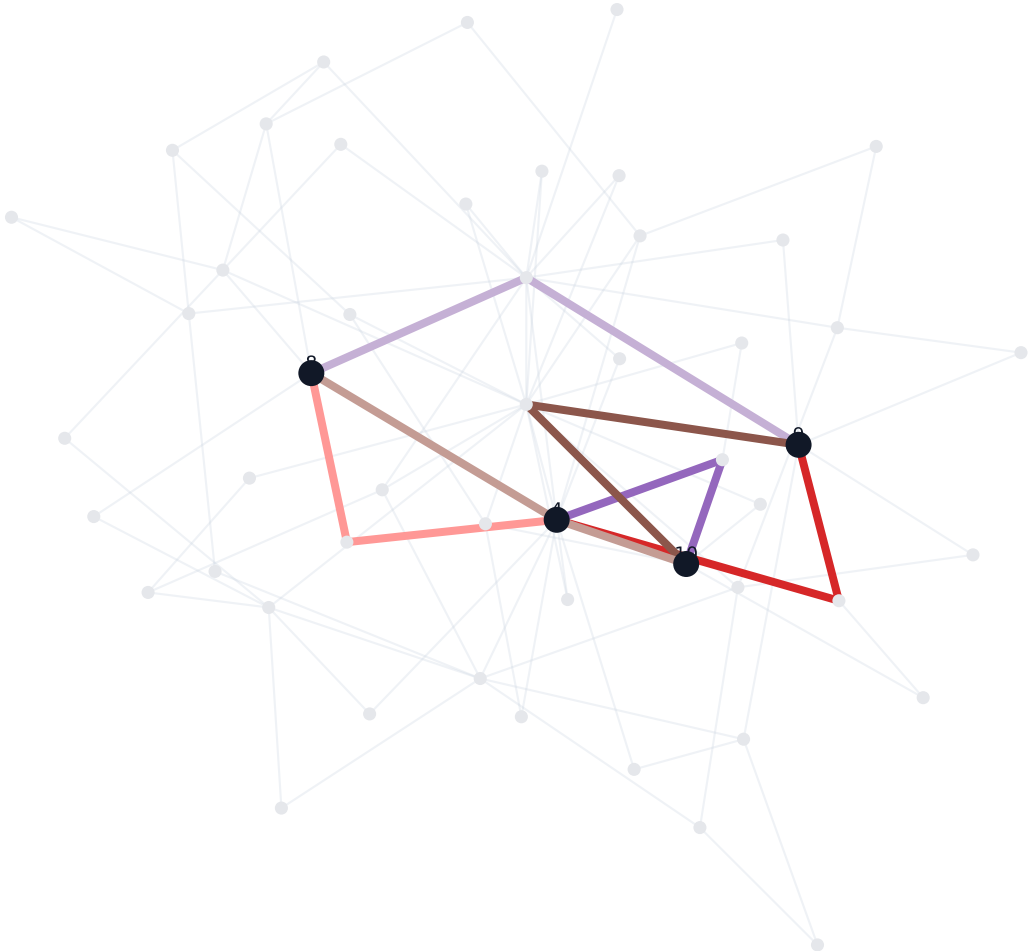

Explicit immersion

H = CompleteGraph[4] + CompleteGraph[4]
G = BarabasiAlbertGraph[50, 2], seed = 0
|V(H)| = 8, |E(H)| = 12
|V(G)| = 50, |E(G)| = 96
immersion cost = 20

Vertex mapping
v0 -> u3
v1 -> u0
v2 -> u6
v3 -> u5
v4 -> u4
v5 -> u9
v6 -> u8
v7 -> u10

Edge mapping
e0 (0, 1) -> [2] = [(0, 3)]
e1 (0, 2) -> [18, 46] = [(3, 7), (6, 7)]
e2 (0, 3) -> [17] = [(3, 5)]
e3 (1, 2) -> [3, 32] = [(0, 4), (4, 6)]
e4 (1, 3) -> [4] = [(0, 5)]
e5 (2, 3) -> [44] = [(5, 6)]
e6 (4, 5) -> [41, 64] = [(4, 36), (9, 36)]
e7 (4, 6) -> [40, 60] = [(4, 34), (8, 34)]
e8 (4, 7) -> [42, 69] = [(4, 38), (10, 38)]
e9 (5, 6) -> [6, 5] = [(0, 9), (0, 8)]
e10 (5, 7) -> [19, 20] = [(3, 9), (3, 10)]
e11 (6, 7) -> [33, 34] = [(4, 8), (4, 10)]