


K5 immersed in BA(50,2)
H = K5 **G = BA(50,2)**

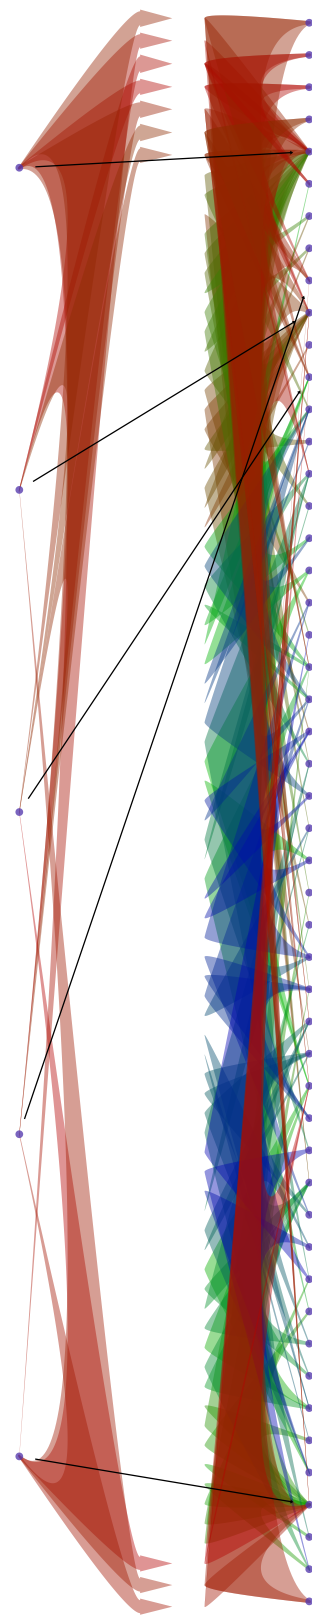

Explicit immersion

```
H = CompleteGraph[5]
G = BarabasiAlbertGraph[50, 2], seed = 0
|V(H)| = 5, |E(H)| = 10
|V(G)| = 50, |E(G)| = 96

Vertex mapping
v0 -> u0
v1 -> u3
v2 -> u4
v3 -> u5
v4 -> u7

Edge mapping
e0 (0, 1) -> [1, 15] = [(0, 2), (2, 3)]
e1 (0, 2) -> [9, 37] = [(0, 23), (4, 23)]
e2 (0, 3) -> [2, 31, 95, 45] = [(0, 3), (3, 49), (46, 49), (5, 46)]
e3 (0, 4) -> [5, 57, 52] = [(0, 8), (8, 16), (7, 16)]
e4 (1, 2) -> [20, 34] = [(3, 10), (4, 10)]
e5 (1, 3) -> [22, 47, 44] = [(3, 12), (6, 12), (5, 6)]
e6 (1, 4) -> [16, 38, 53] = [(3, 4), (4, 32), (7, 32)]
e7 (2, 3) -> [3, 4] = [(0, 4), (0, 5)]
e8 (2, 4) -> [32, 46] = [(4, 6), (6, 7)]
e9 (3, 4) -> [17, 18] = [(3, 5), (3, 7)]
```