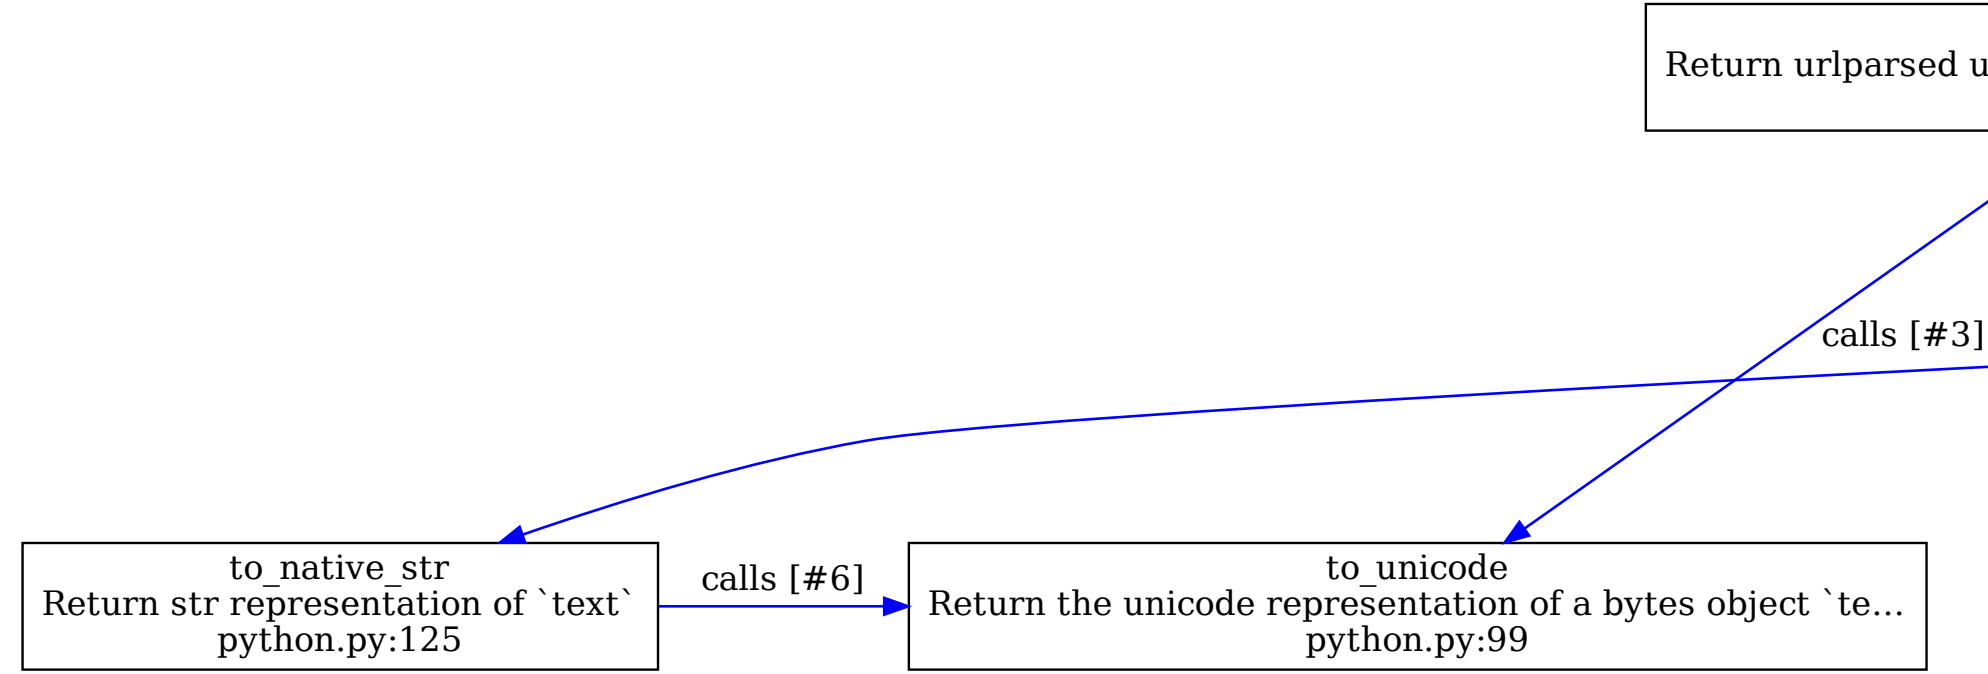
Return urlparsed u
calls [#3]
to_native_str
Return str representation of `text`
python.py:125
calls [#6]
to_unicode
Return the unicode representation of a bytes object `te...
python.py:99

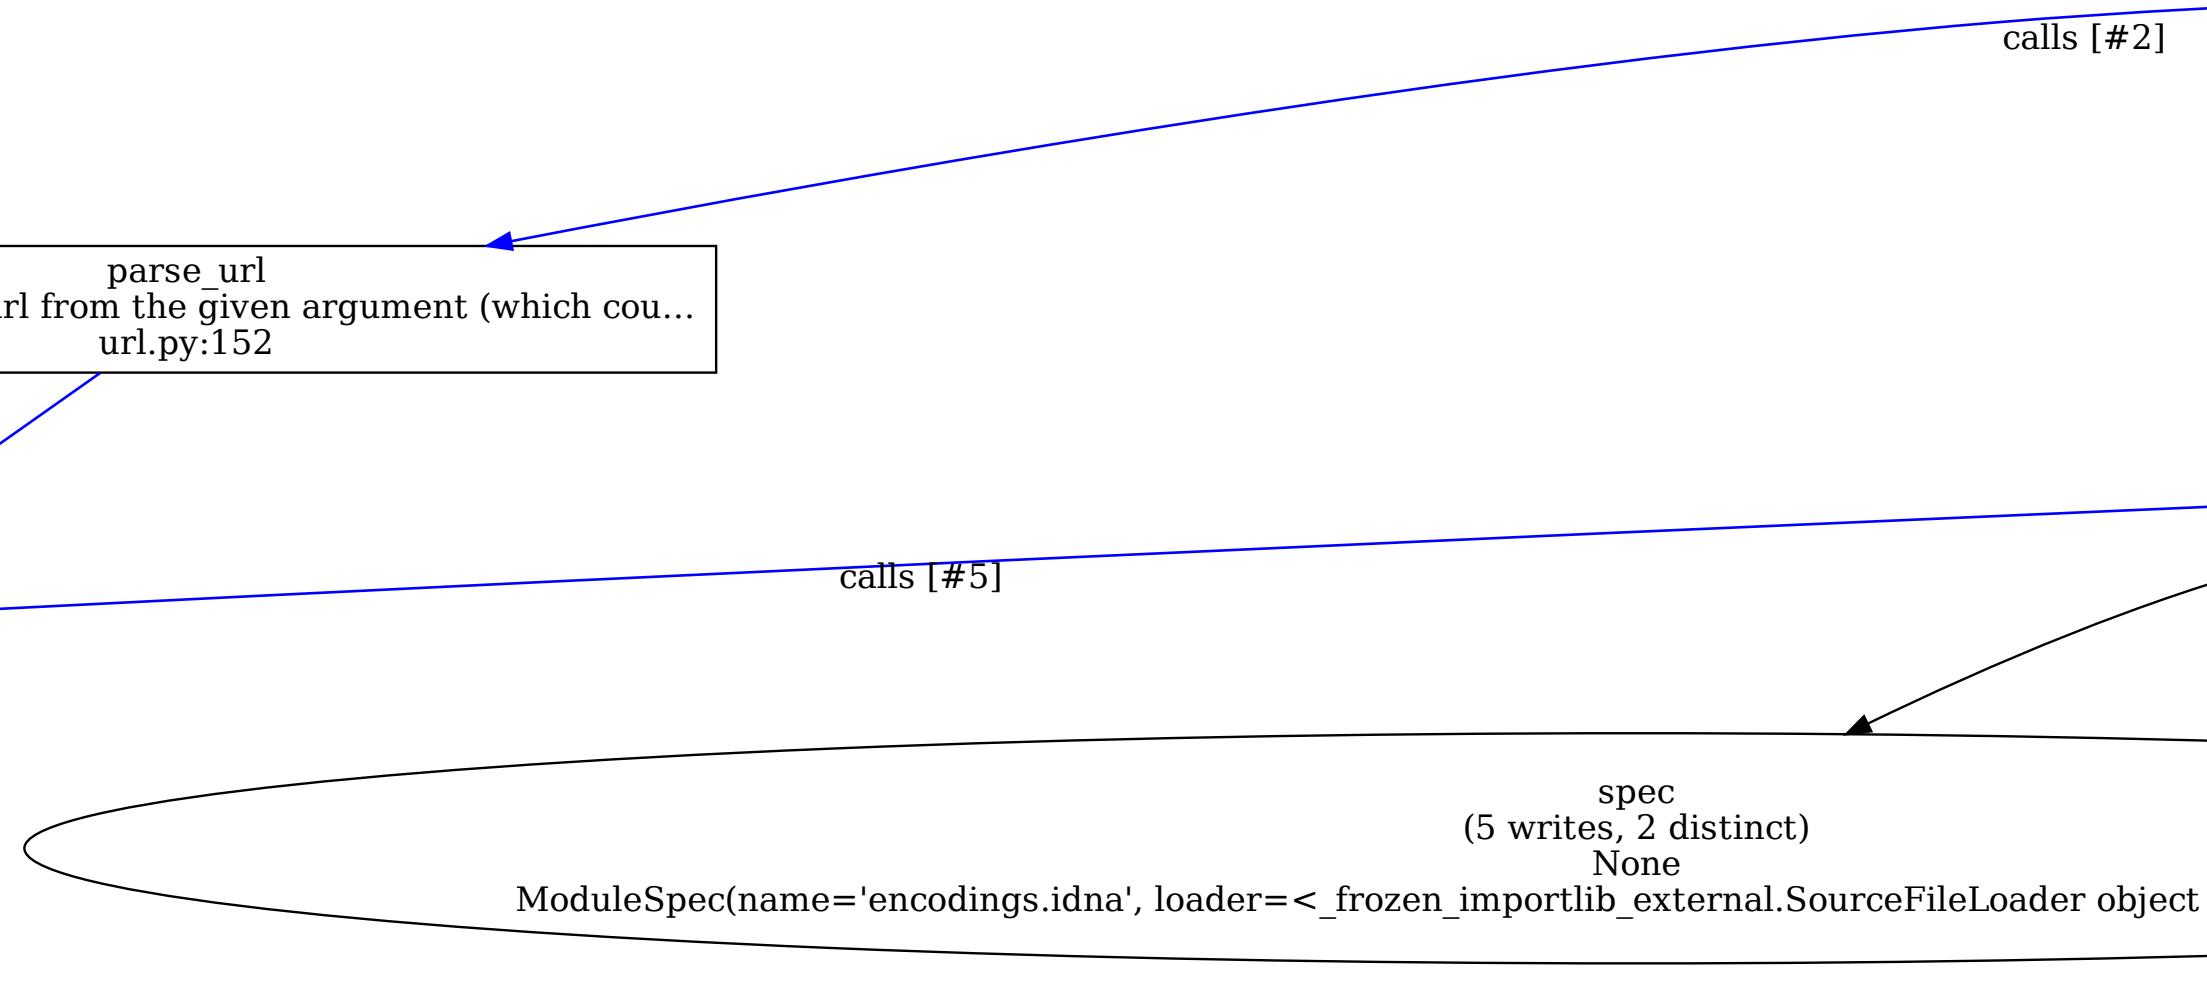
calls [#2]
parse_url
rl from the given argument (which cou…
url.py:152
calls [#5]
spec
(5 writes, 2 distinct)
None
ModuleSpec(name='encodings.idna', loader=<_frozen_importlib_external.SourceFileLoader object

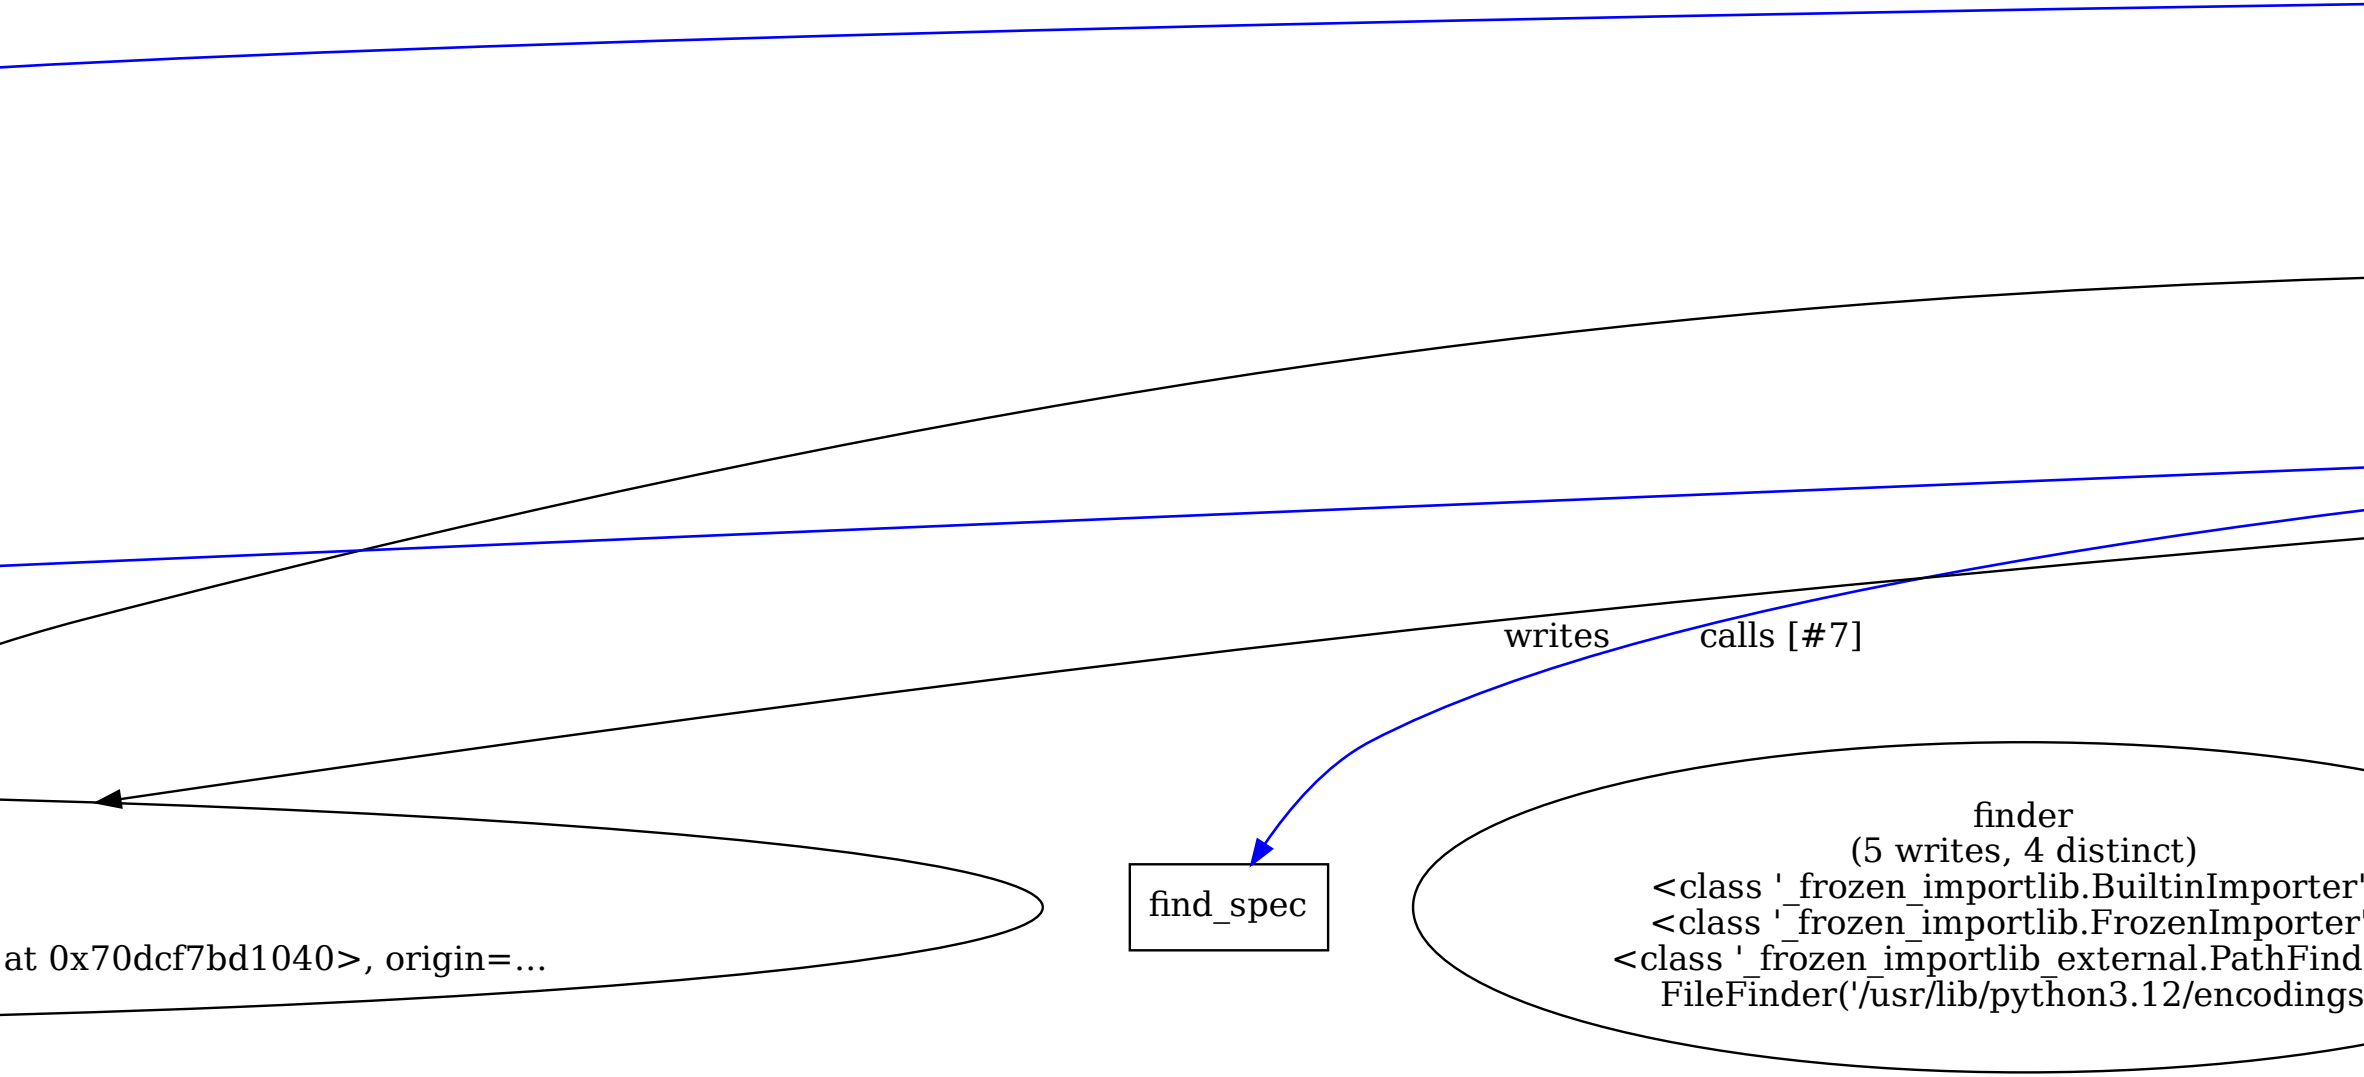
writes
calls [#7]
at 0x70dcf7bd1040>, origin=...
find_spec
finder
(5 writes, 4 distinct)
<class '_frozen_importlib.BuiltinImporter'
<class '_frozen_importlib.FrozenImporter'
<class '_frozen_importlib_external.PathFind
FileFinder('/usr/lib/python3.12/encodings

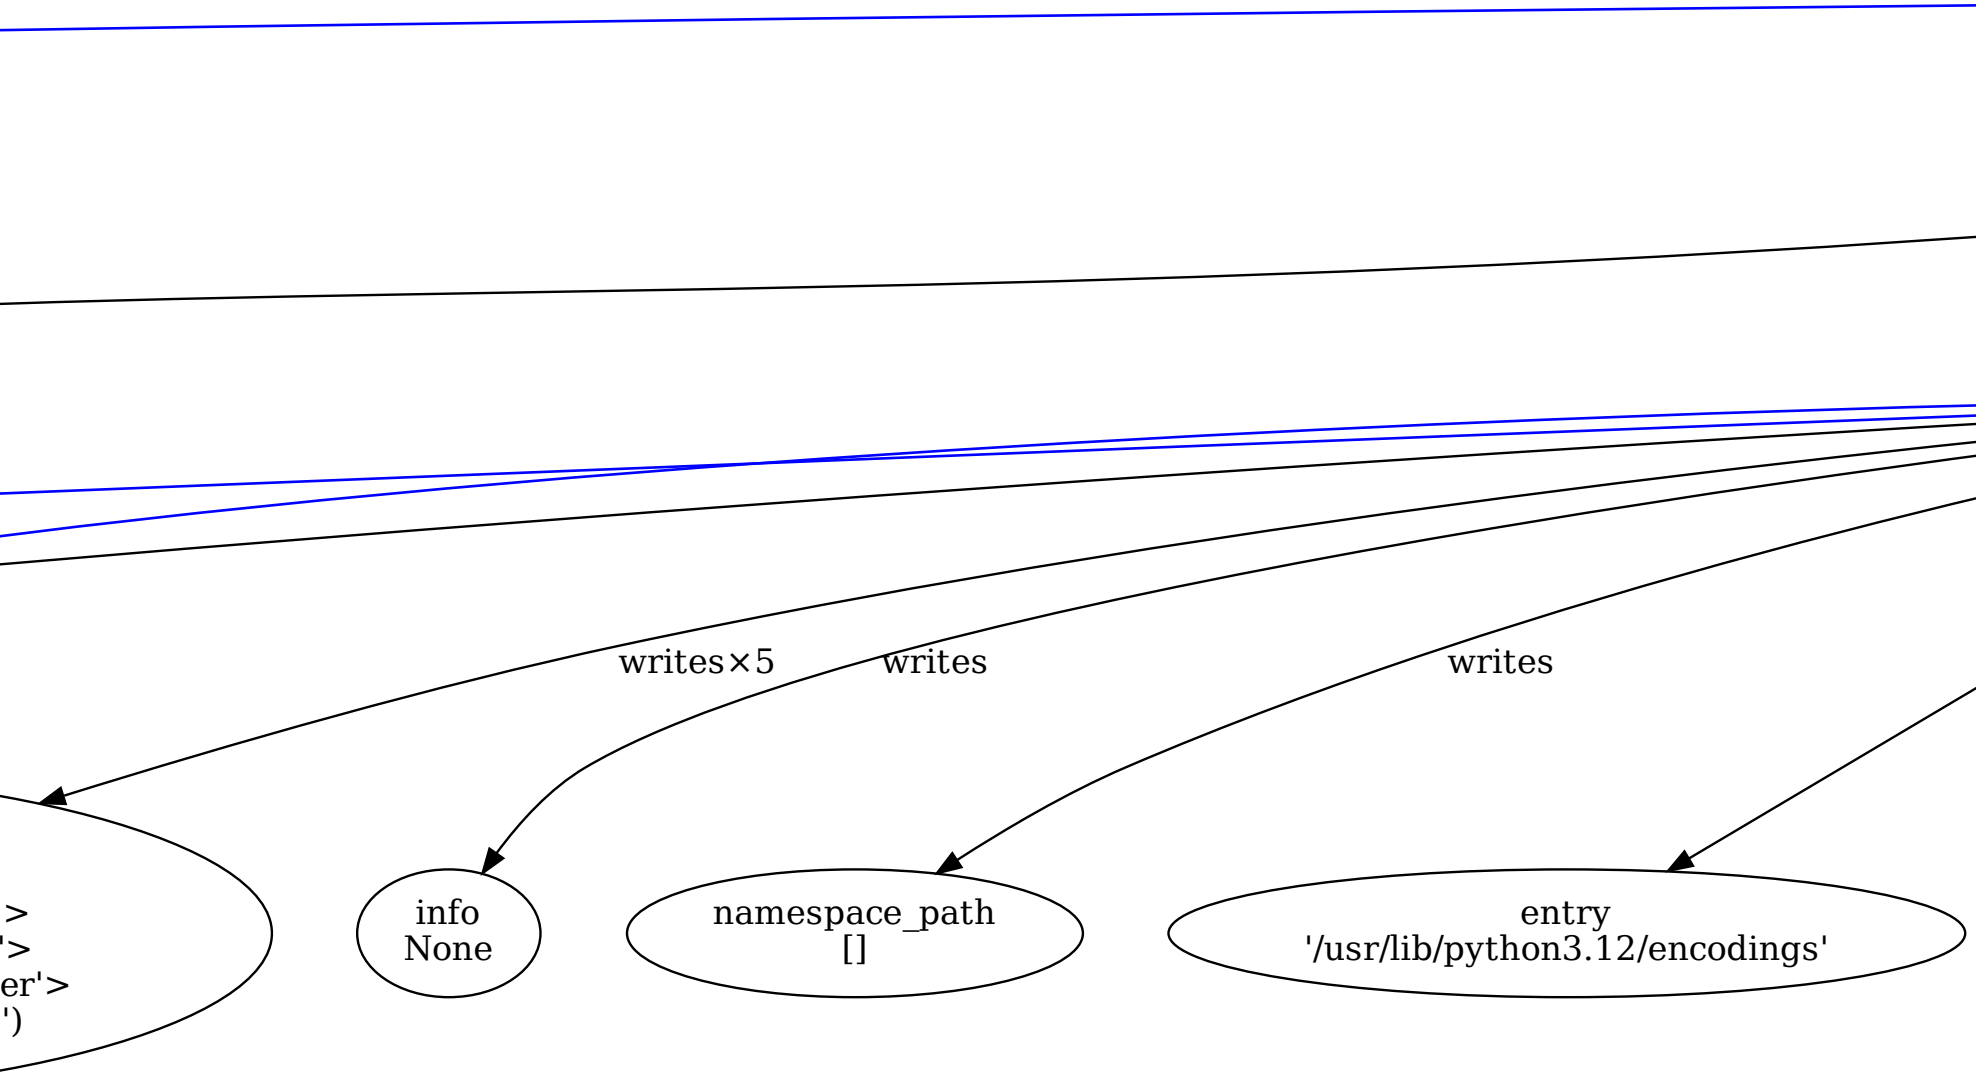
writes×5
writes
writes
>
'>
er'>
')
info
None
namespace_path
[]
entry
'/usr/lib/python3.12/encodings'

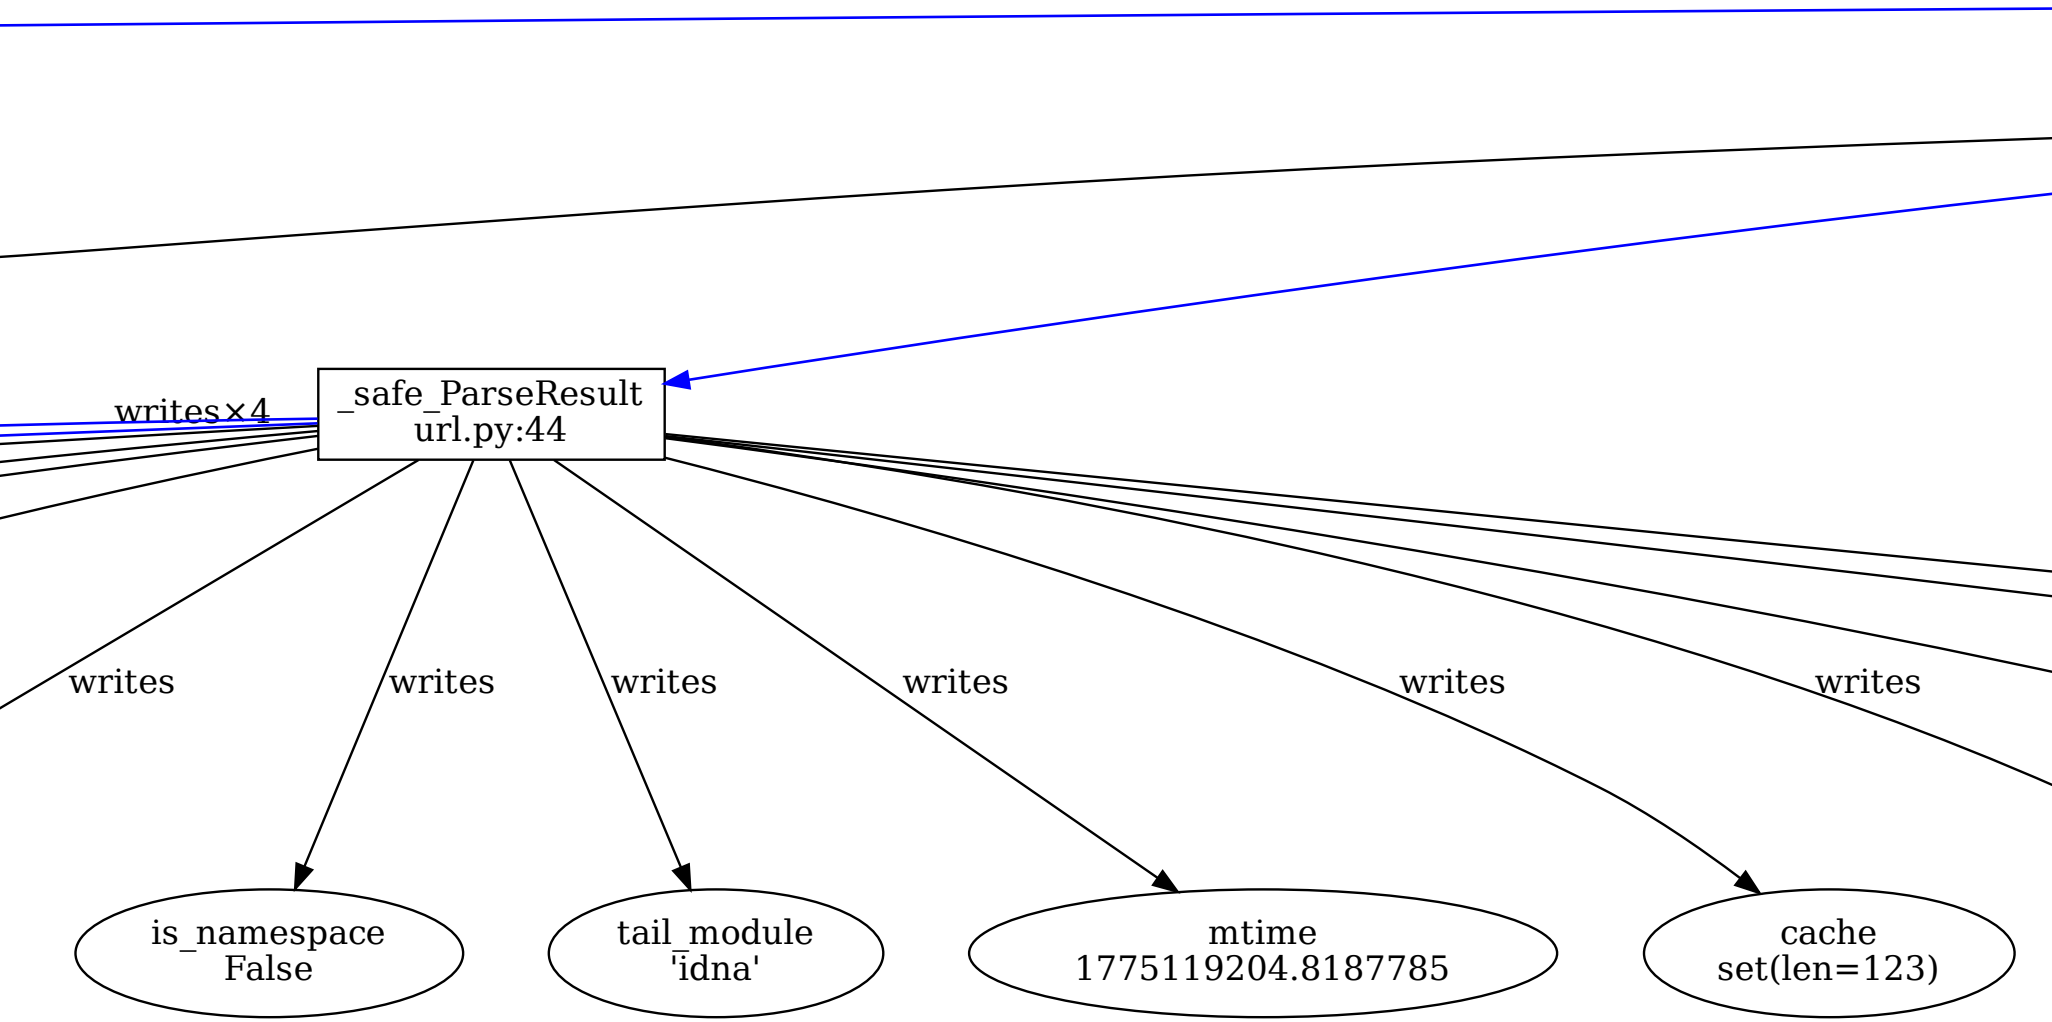
writes×4
_safe_ParseResult
url.py:44
writes
writes
writes
writes
writes
writes
is_namespace
False
tail_module
'idna'
mtime
1775119204.8187785
cache
set(len=123)

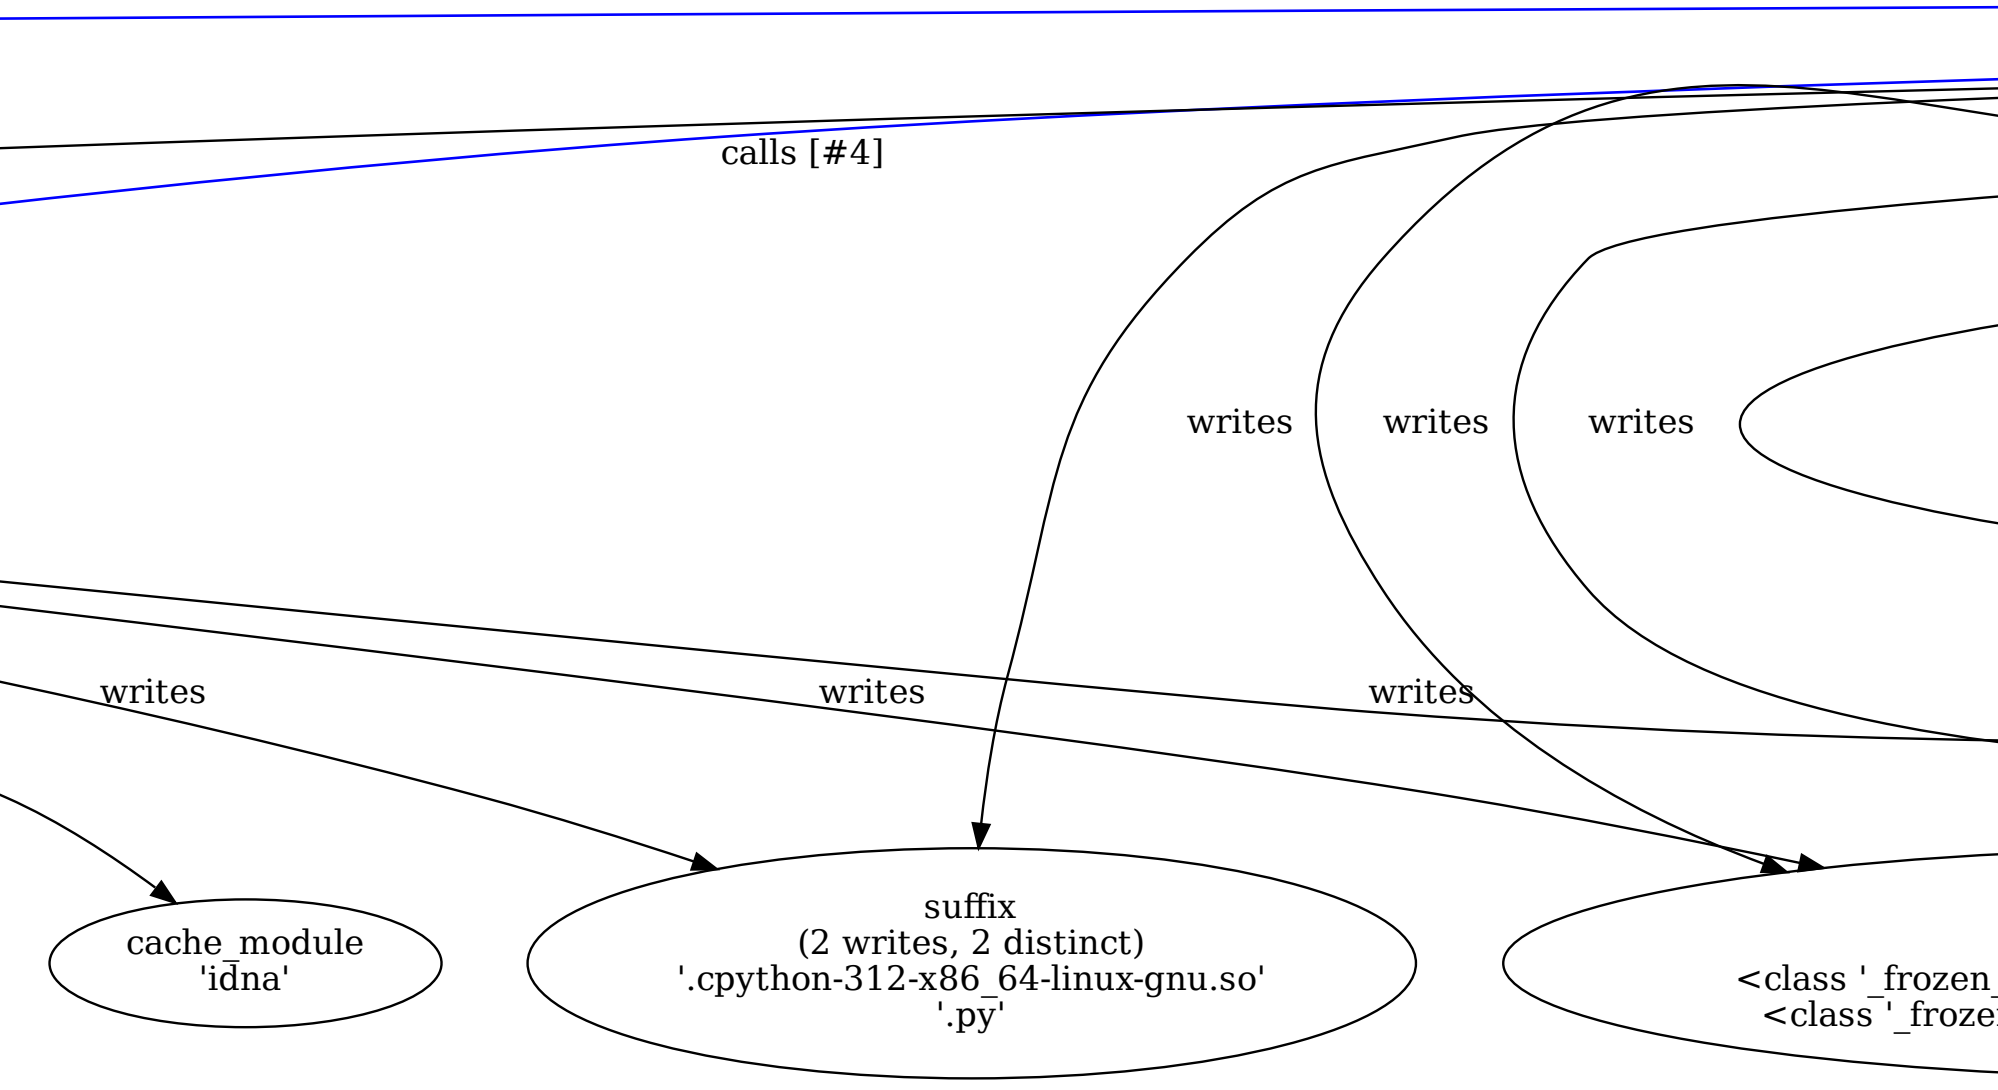
calls [#4]
writes
writes
writes
writes
writes
writes
cache_module
'idna'
suffix
(2 writes, 2 distinct)
'.cpython-312-x86_64-linux-gnu.so'
'.py'
<class '_frozen_
<class '_froze

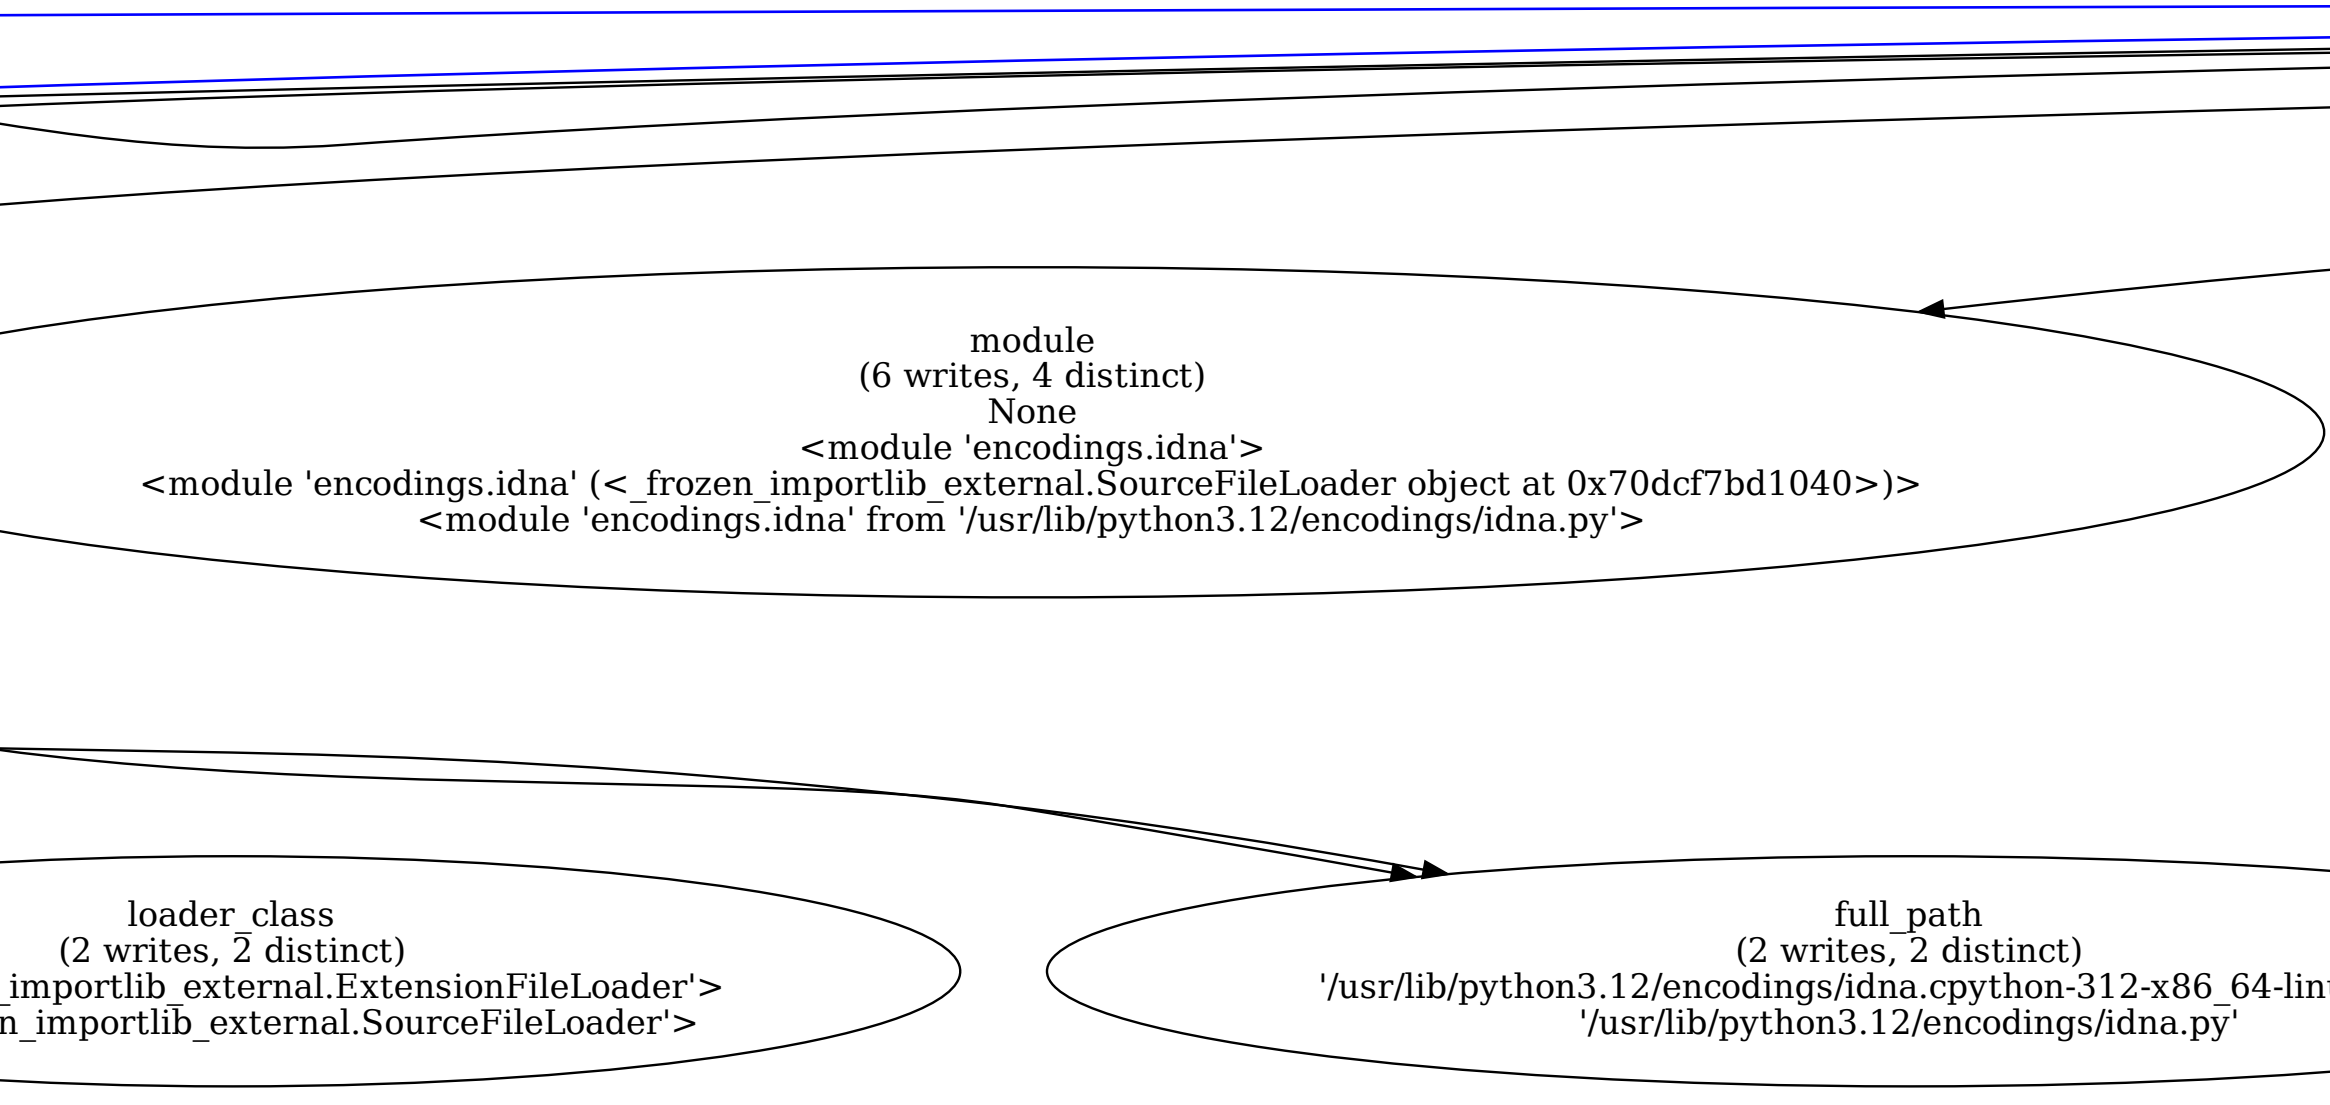
module
(6 writes, 4 distinct)
None
<module 'encodings.idna'>
<module 'encodings.idna' (<_frozen_importlib_external.SourceFileLoader object at 0x70dcf7bd1040>)>
<module 'encodings.idna' from '/usr/lib/python3.12/encodings/idna.py'>
loader_class
(2 writes, 2 distinct)
_importlib_external.ExtensionFileLoader'>
n_importlib_external.SourceFileLoader'>
full_path
(2 writes, 2 distinct)
'/usr/lib/python3.12/encodings/idna.cpython-312-x86_64-lin
'/usr/lib/python3.12/encodings/idna.py'

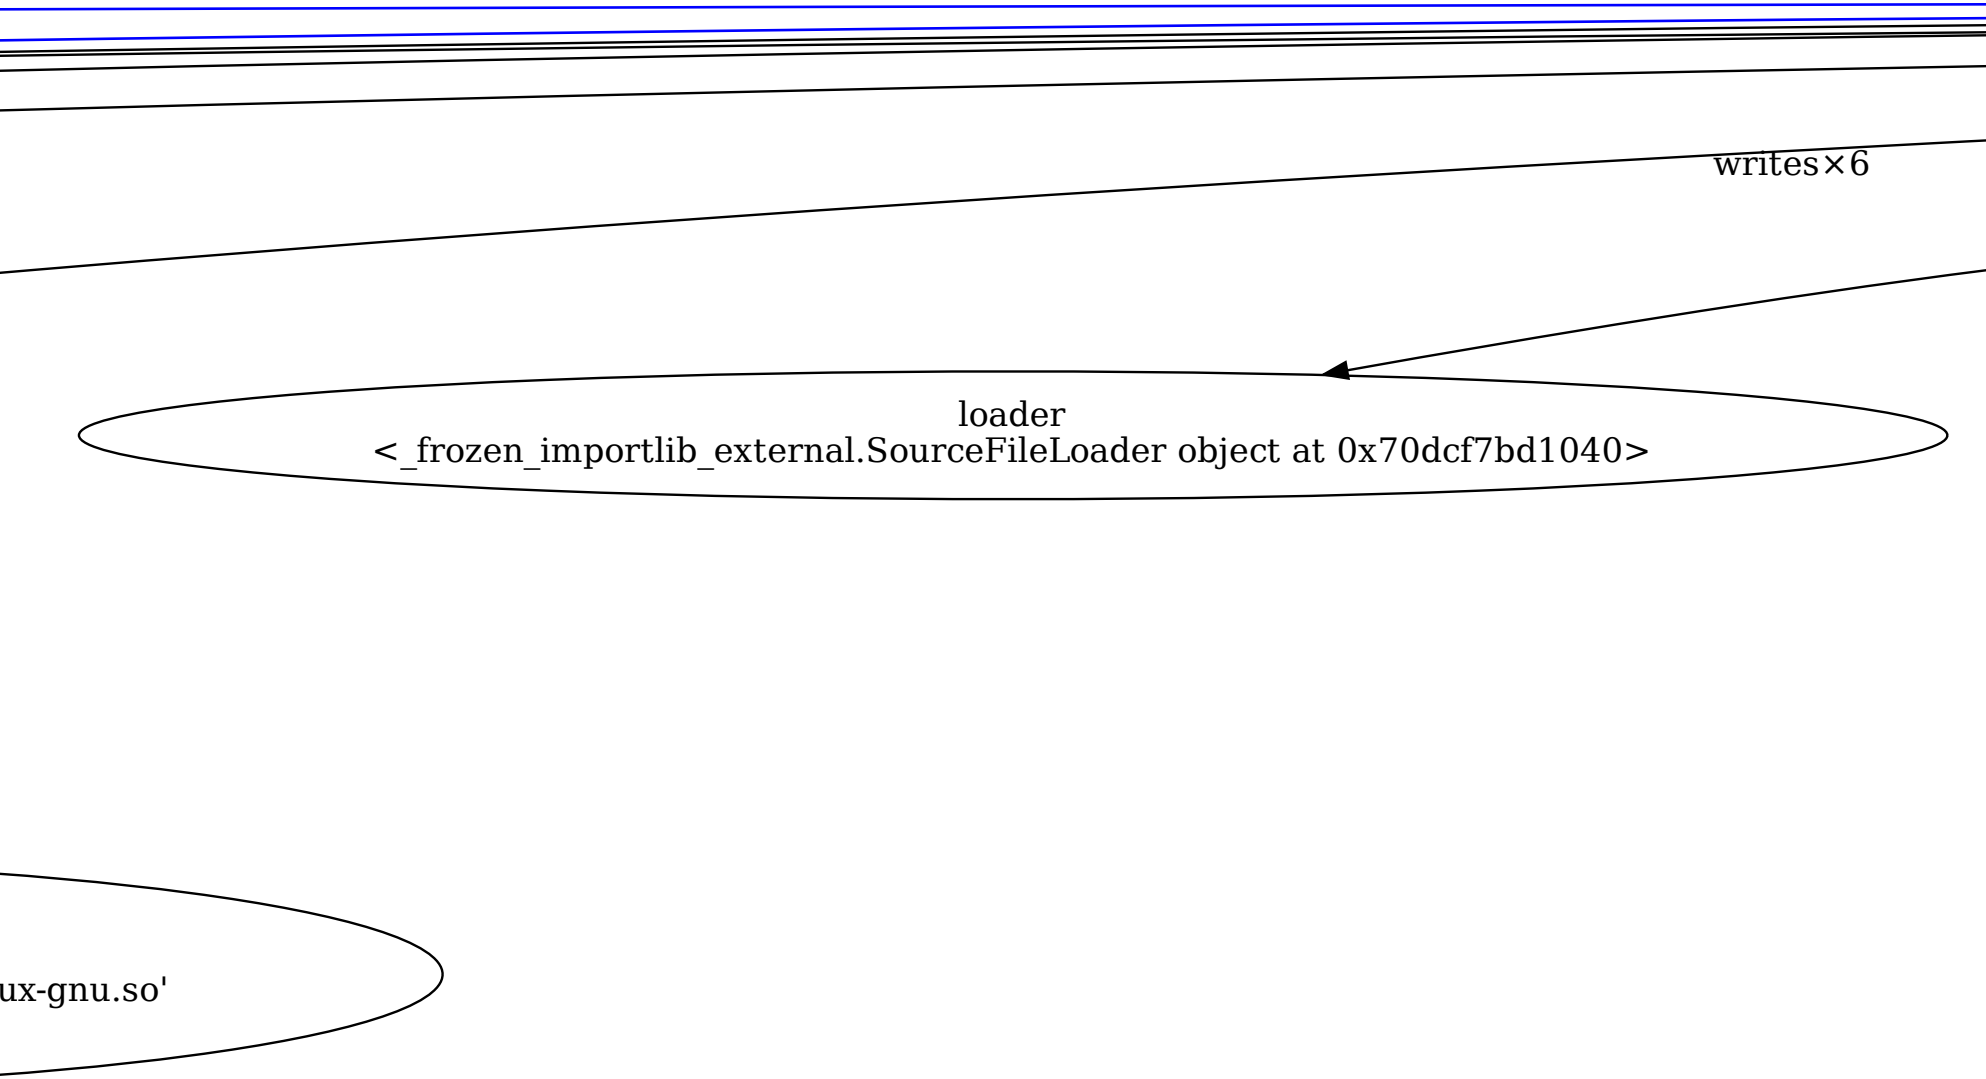
writes×6
loader
<_frozen_importlib_external.SourceFileLoader object at 0x70dcf7bd1040>
ux-gnu.so'

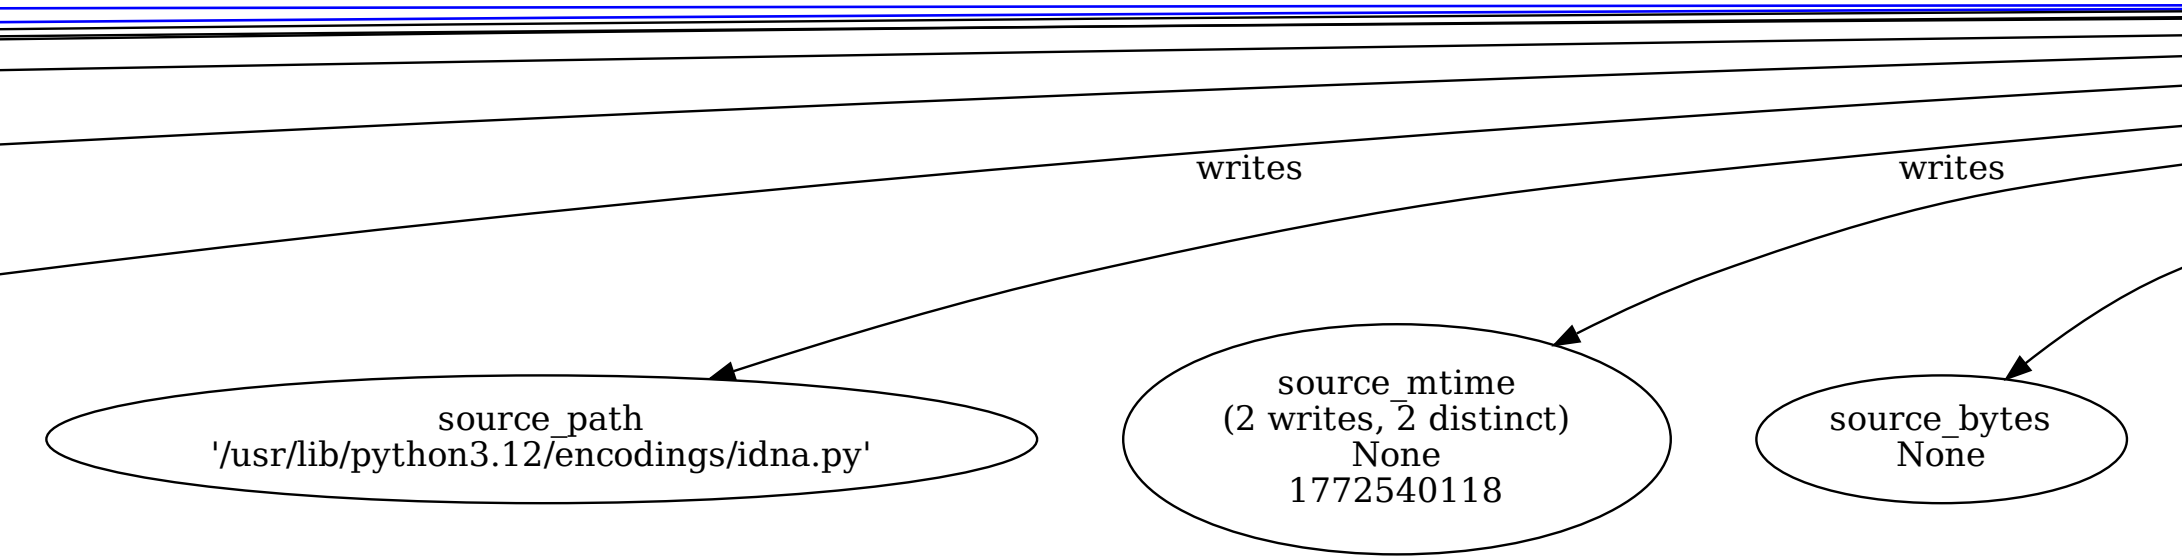
writes
writes
source_path
'/usr/lib/python3.12/encodings/idna.py'
source_mtime
(2 writes, 2 distinct)
None
1772540118
source_bytes
None

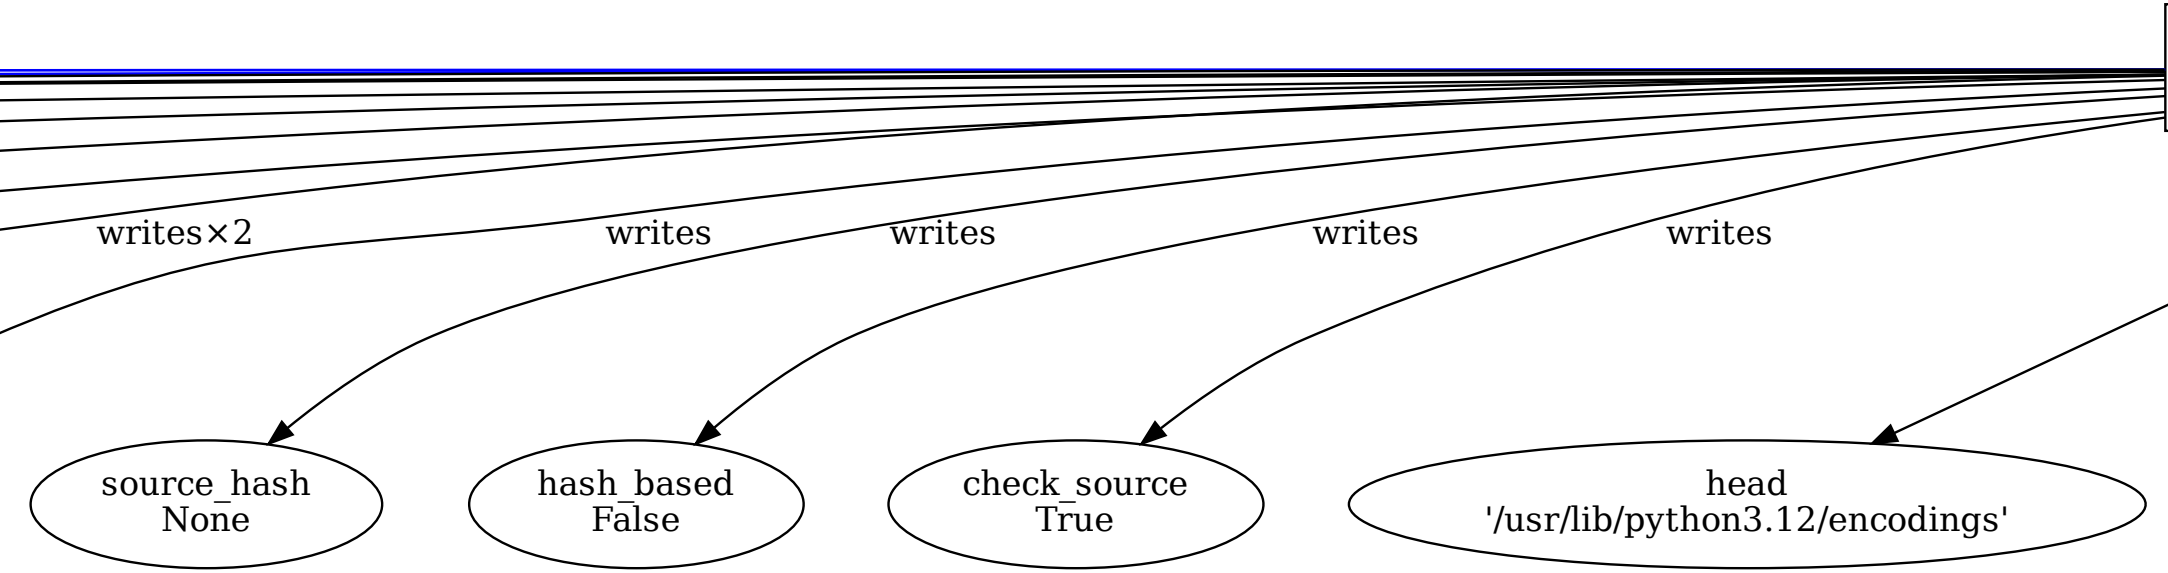
writes×2
writes
writes
writes
writes
source_hash
None
hash_based
False
check_source
True
head
'/usr/lib/python3.12/encodings'

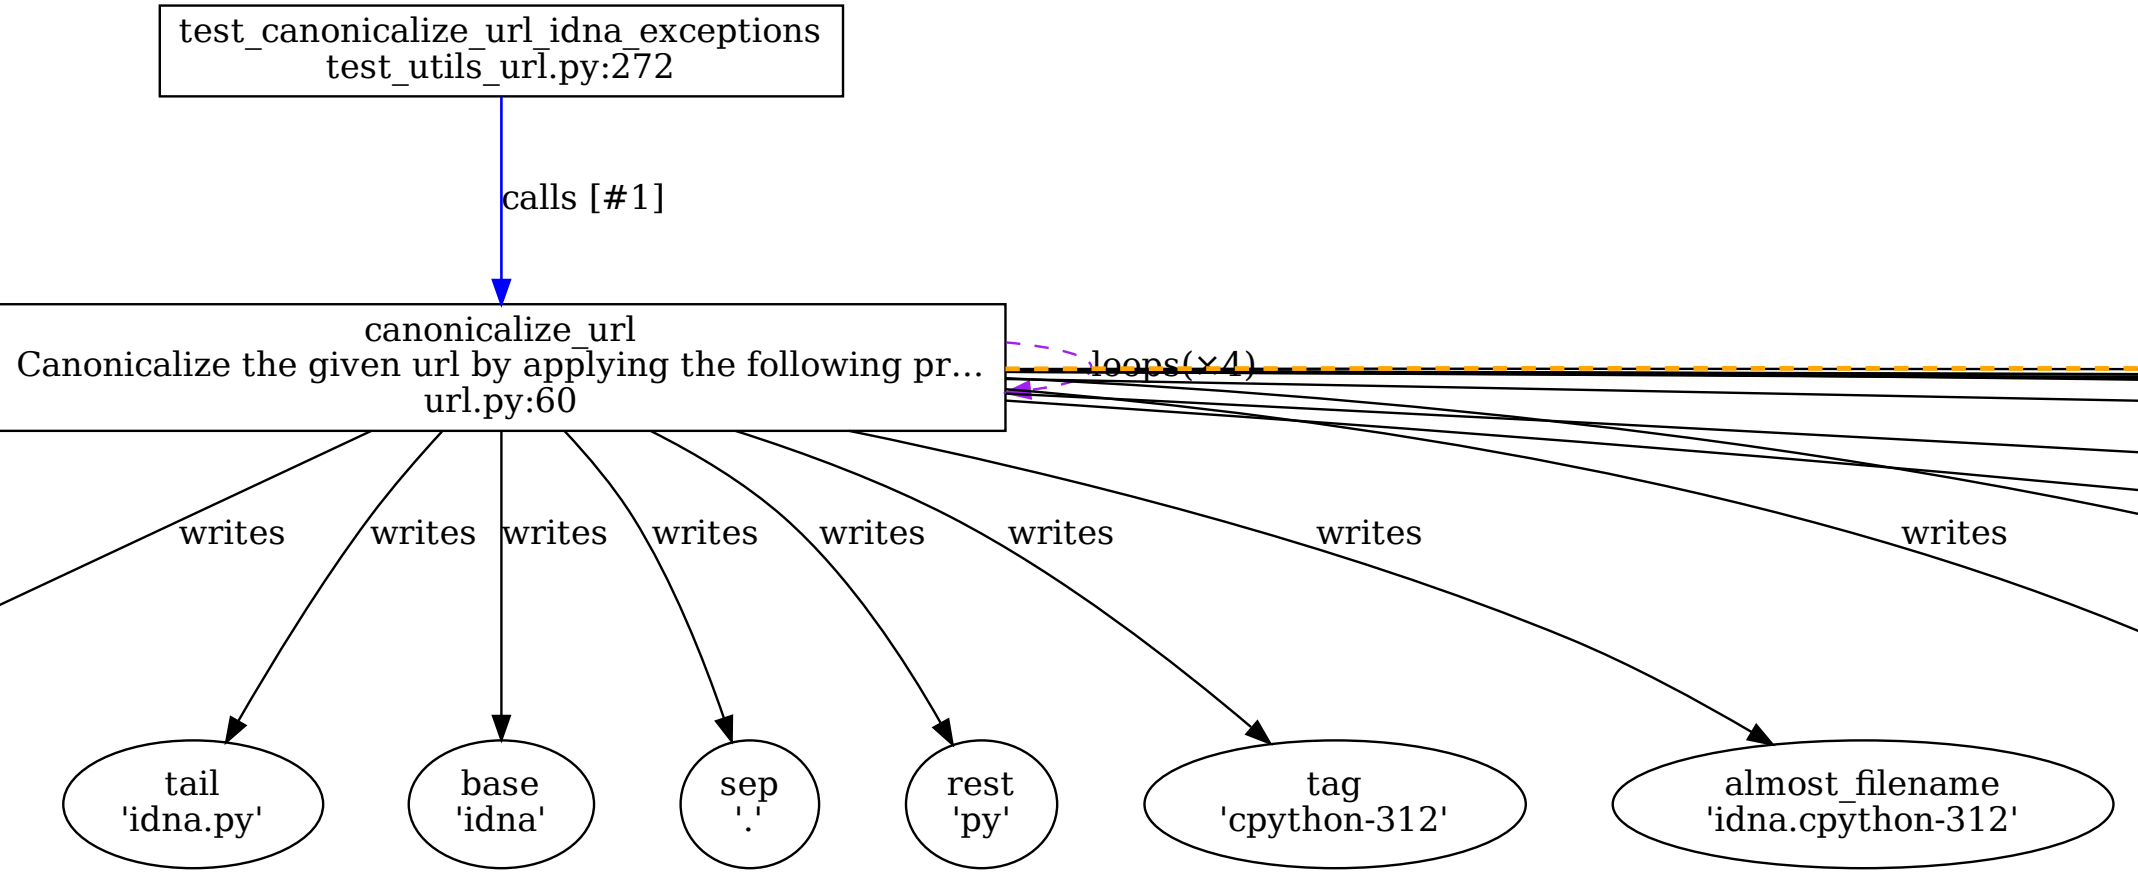
test_canonicalize_url_idna_exceptions
test_utils_url.py:272
calls [#1]
canonicalize_url
Canonicalize the given url by applying the following pr...
url.py:60
loops(×4)
writes
writes
writes
writes
writes
writes
writes
writes
tail
'idna.py'
base
'idna'
sep
'.'
rest
'py'
tag
'cpython-312'
almost_filename
'idna.cpython-312'

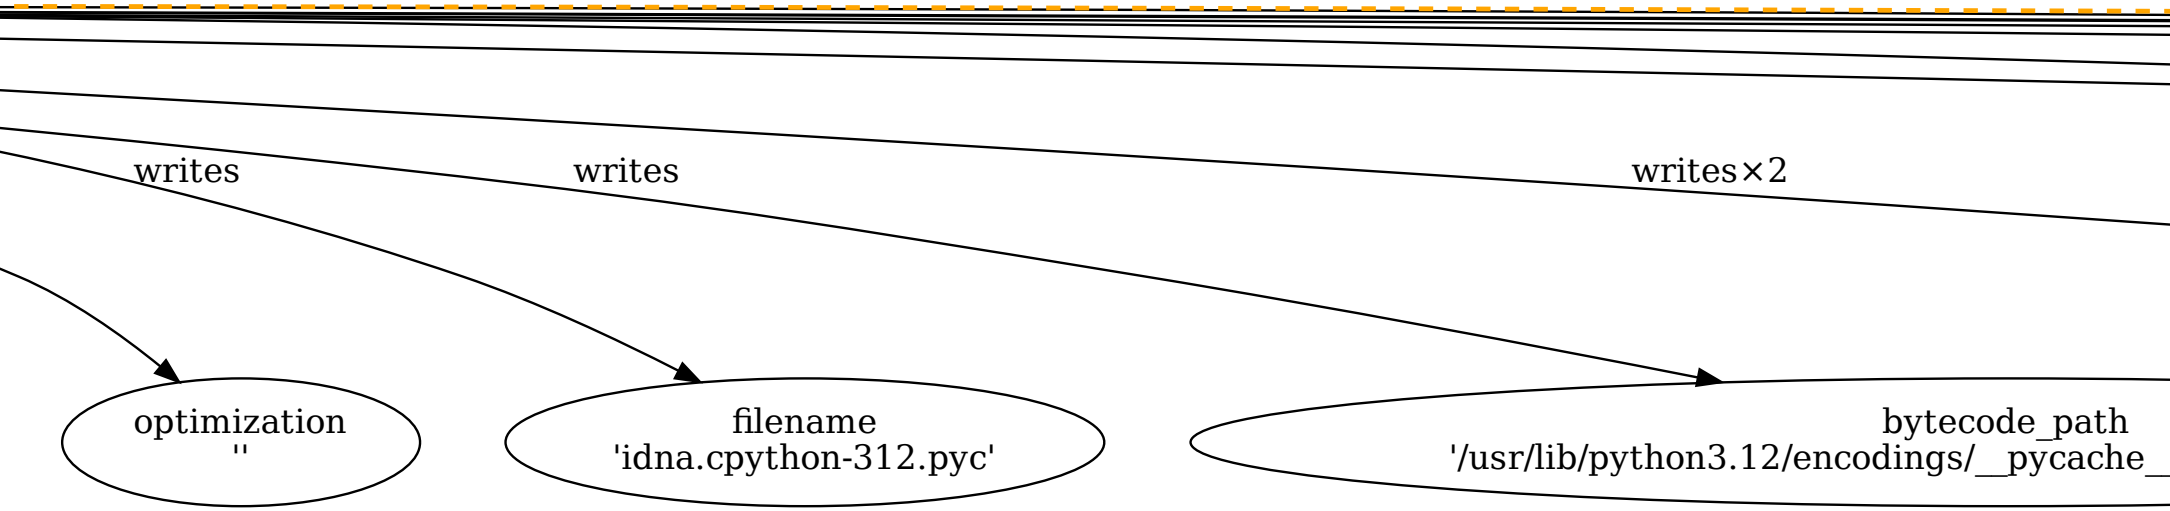
writes
writes
writes×2
optimization
''
filename
'idna.cpython-312.pyc'
bytecode_path
'/usr/lib/python3.12/encodings/__pycache__

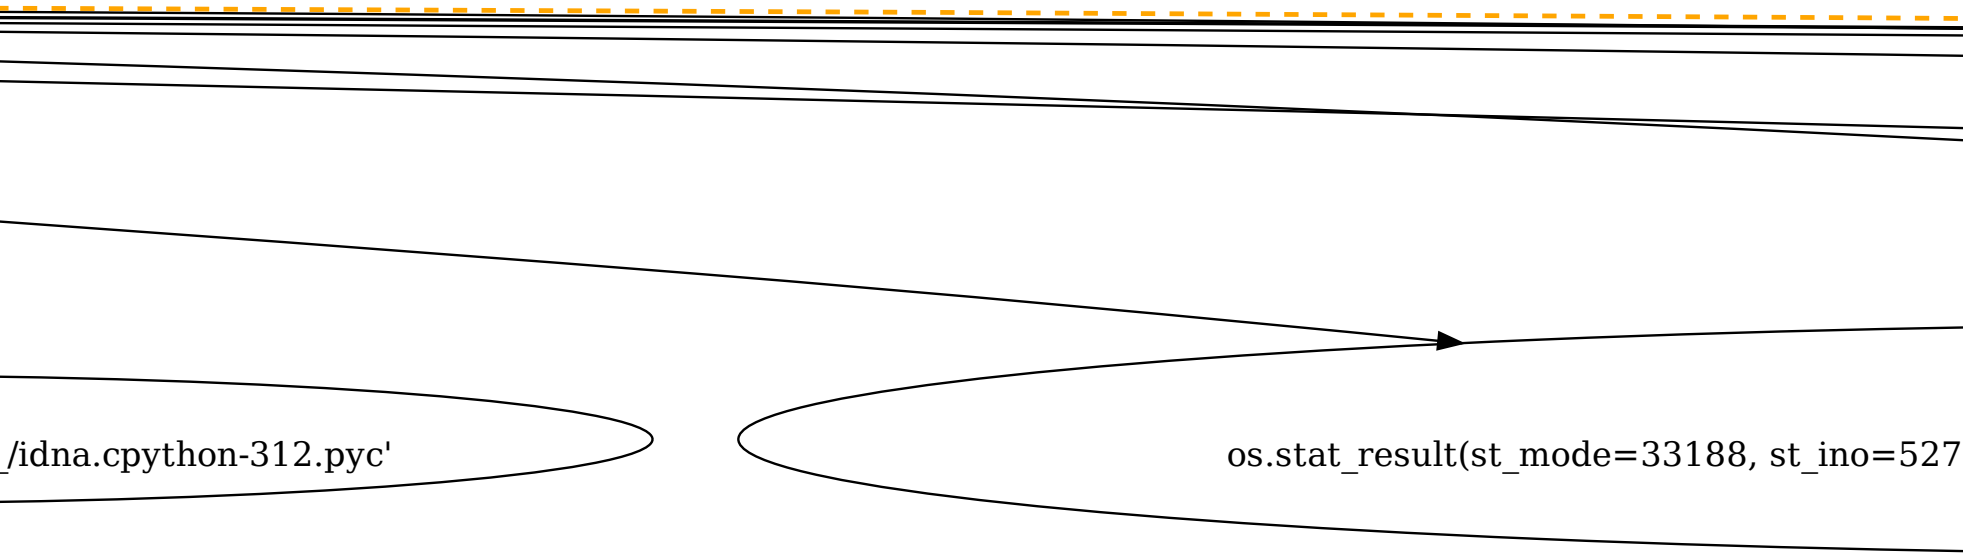
_/idna.cpython-312.pyc'
os.stat_result(st_mode=33188, st_ino=527

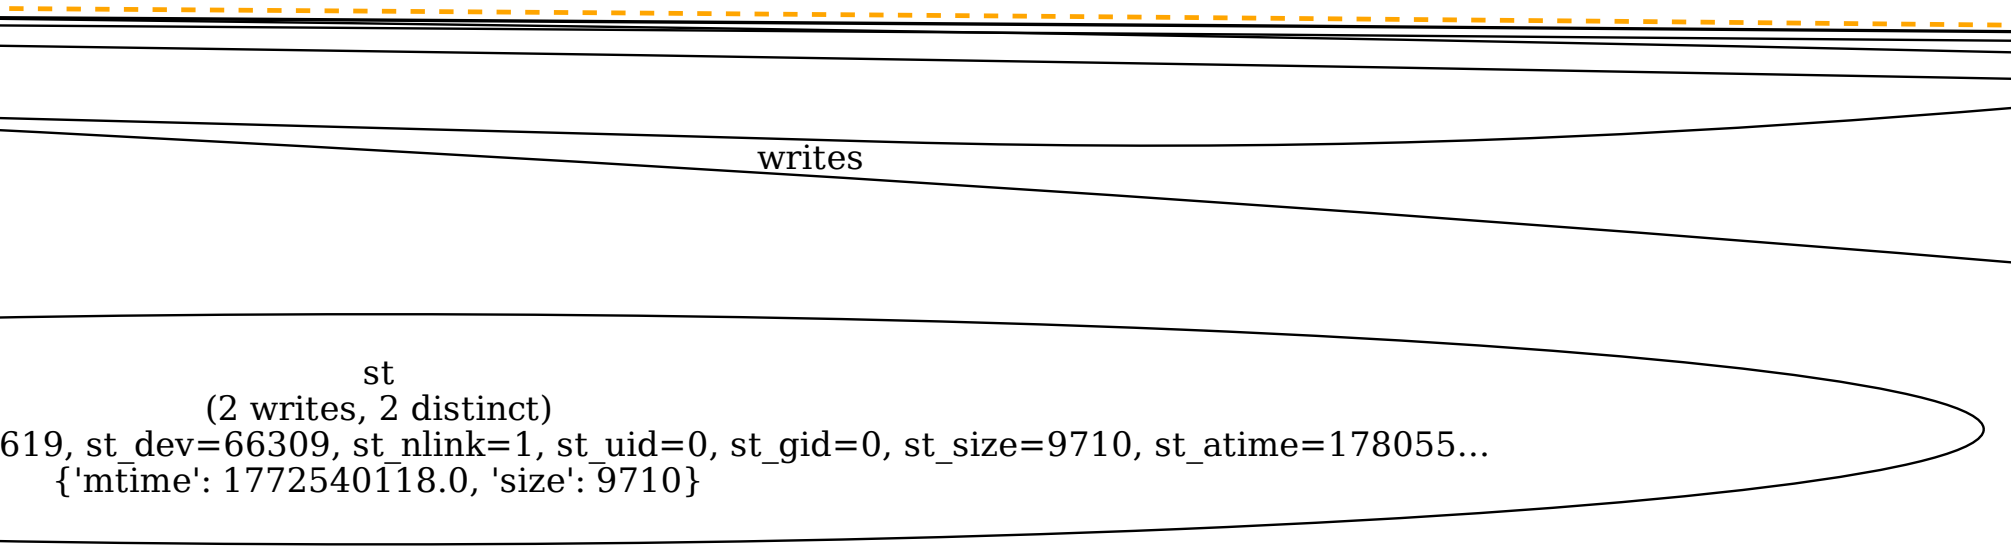
writes
st
(2 writes, 2 distinct)
619, st_dev=66309, st_nlink=1, st_uid=0, st_gid=0, st_size=9710, st_atime=178055...
{'mtime': 1772540118.0, 'size': 9710}

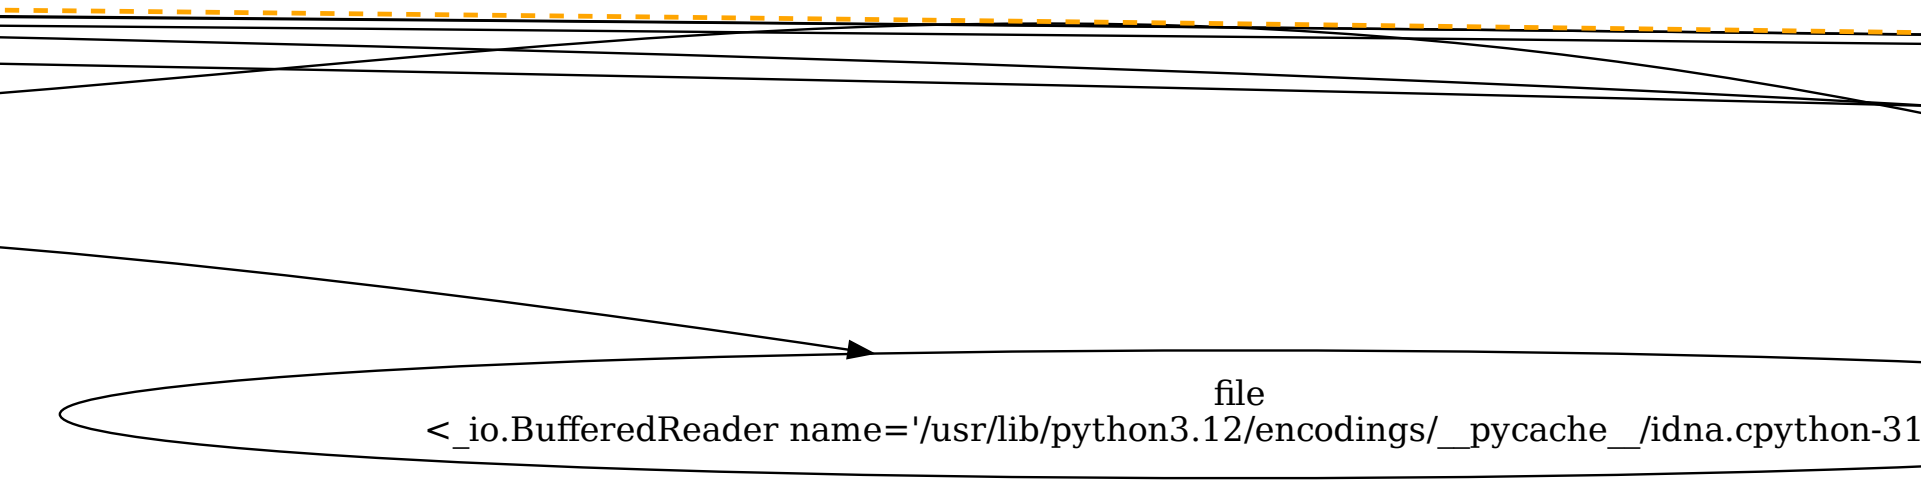
file
<_io.BufferedReader name='/usr/lib/python3.12/encodings/__pycache__/idna.cpython-31

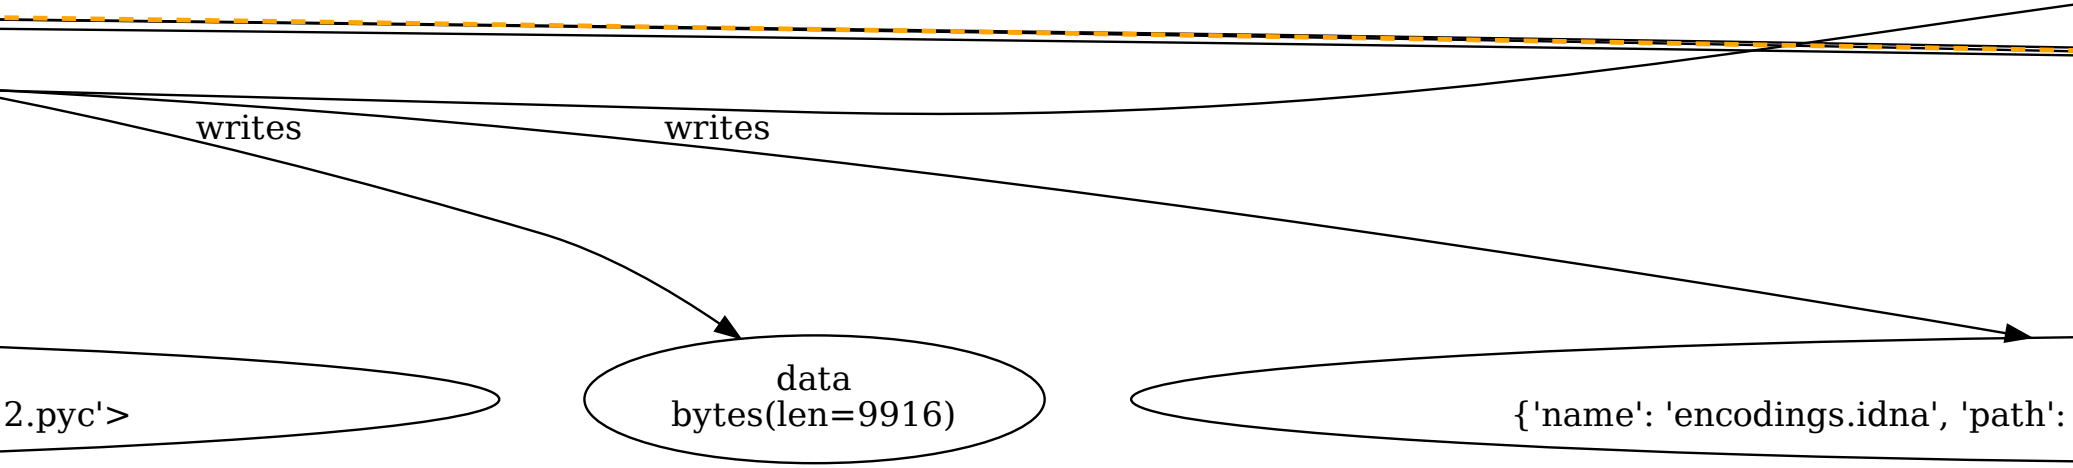
writes
writes
2.pyc'>
data
bytes(len=9916)
{'name': 'encodings.idna', 'path':

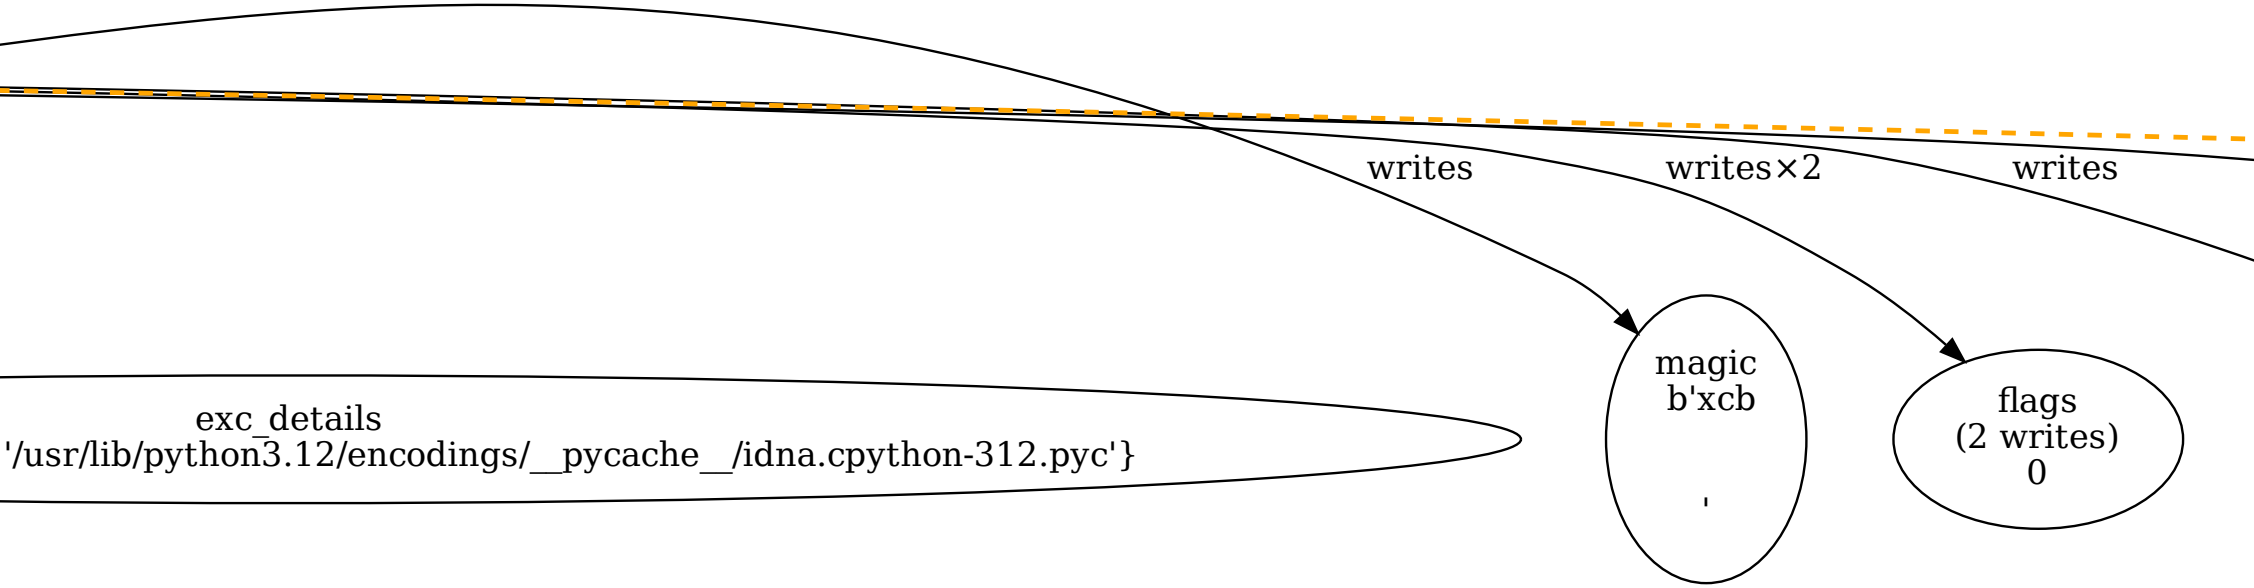
writes
writes×2
writes
exc_details
'/usr/lib/python3.12/encodings/__pycache__/idna.cpython-312.pyc'}
magic
b'xcb
'
flags
(2 writes)
0

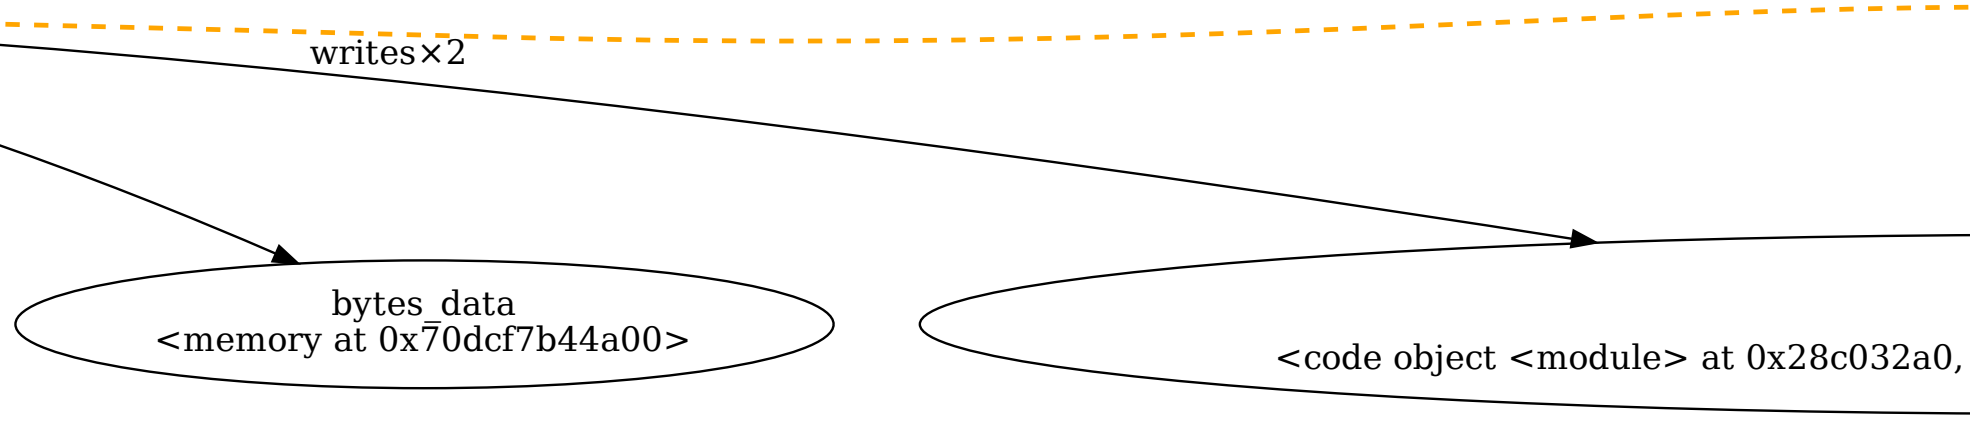
writes×2
bytes_data
<memory at 0x70dcf7b44a00>
<code object <module> at 0x28c032a0,

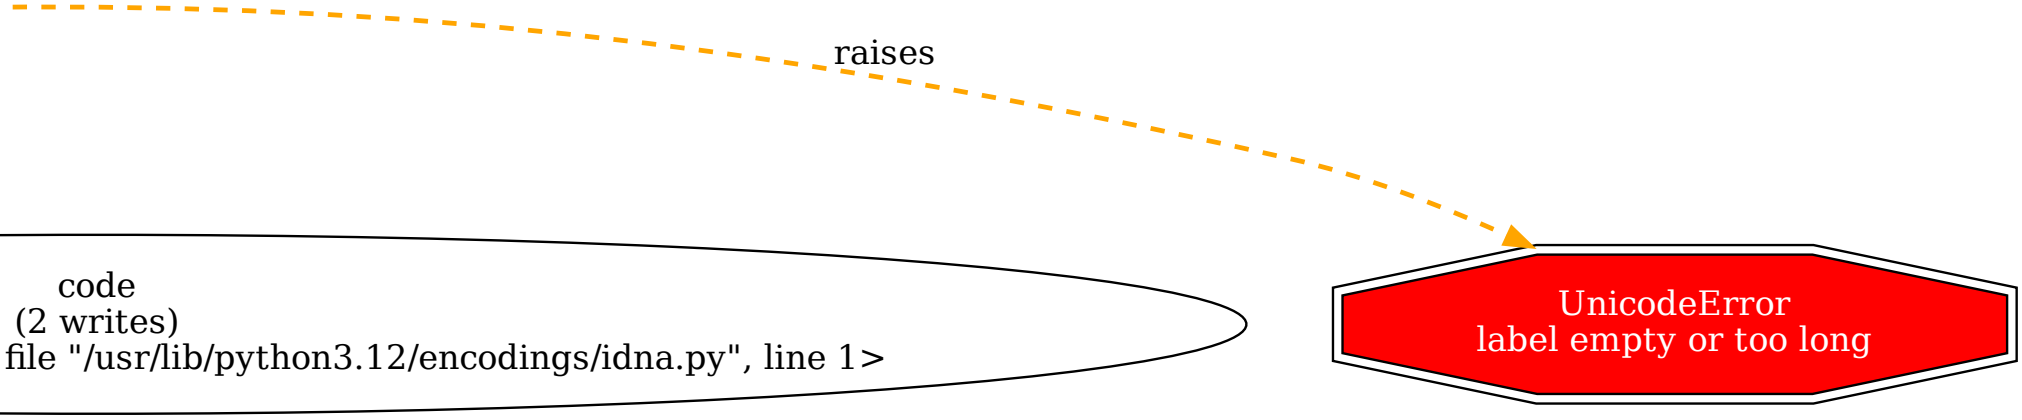
raises
code
(2 writes)
file "/usr/lib/python3.12/encodings/idna.py", line 1>
UnicodeError
label empty or too long