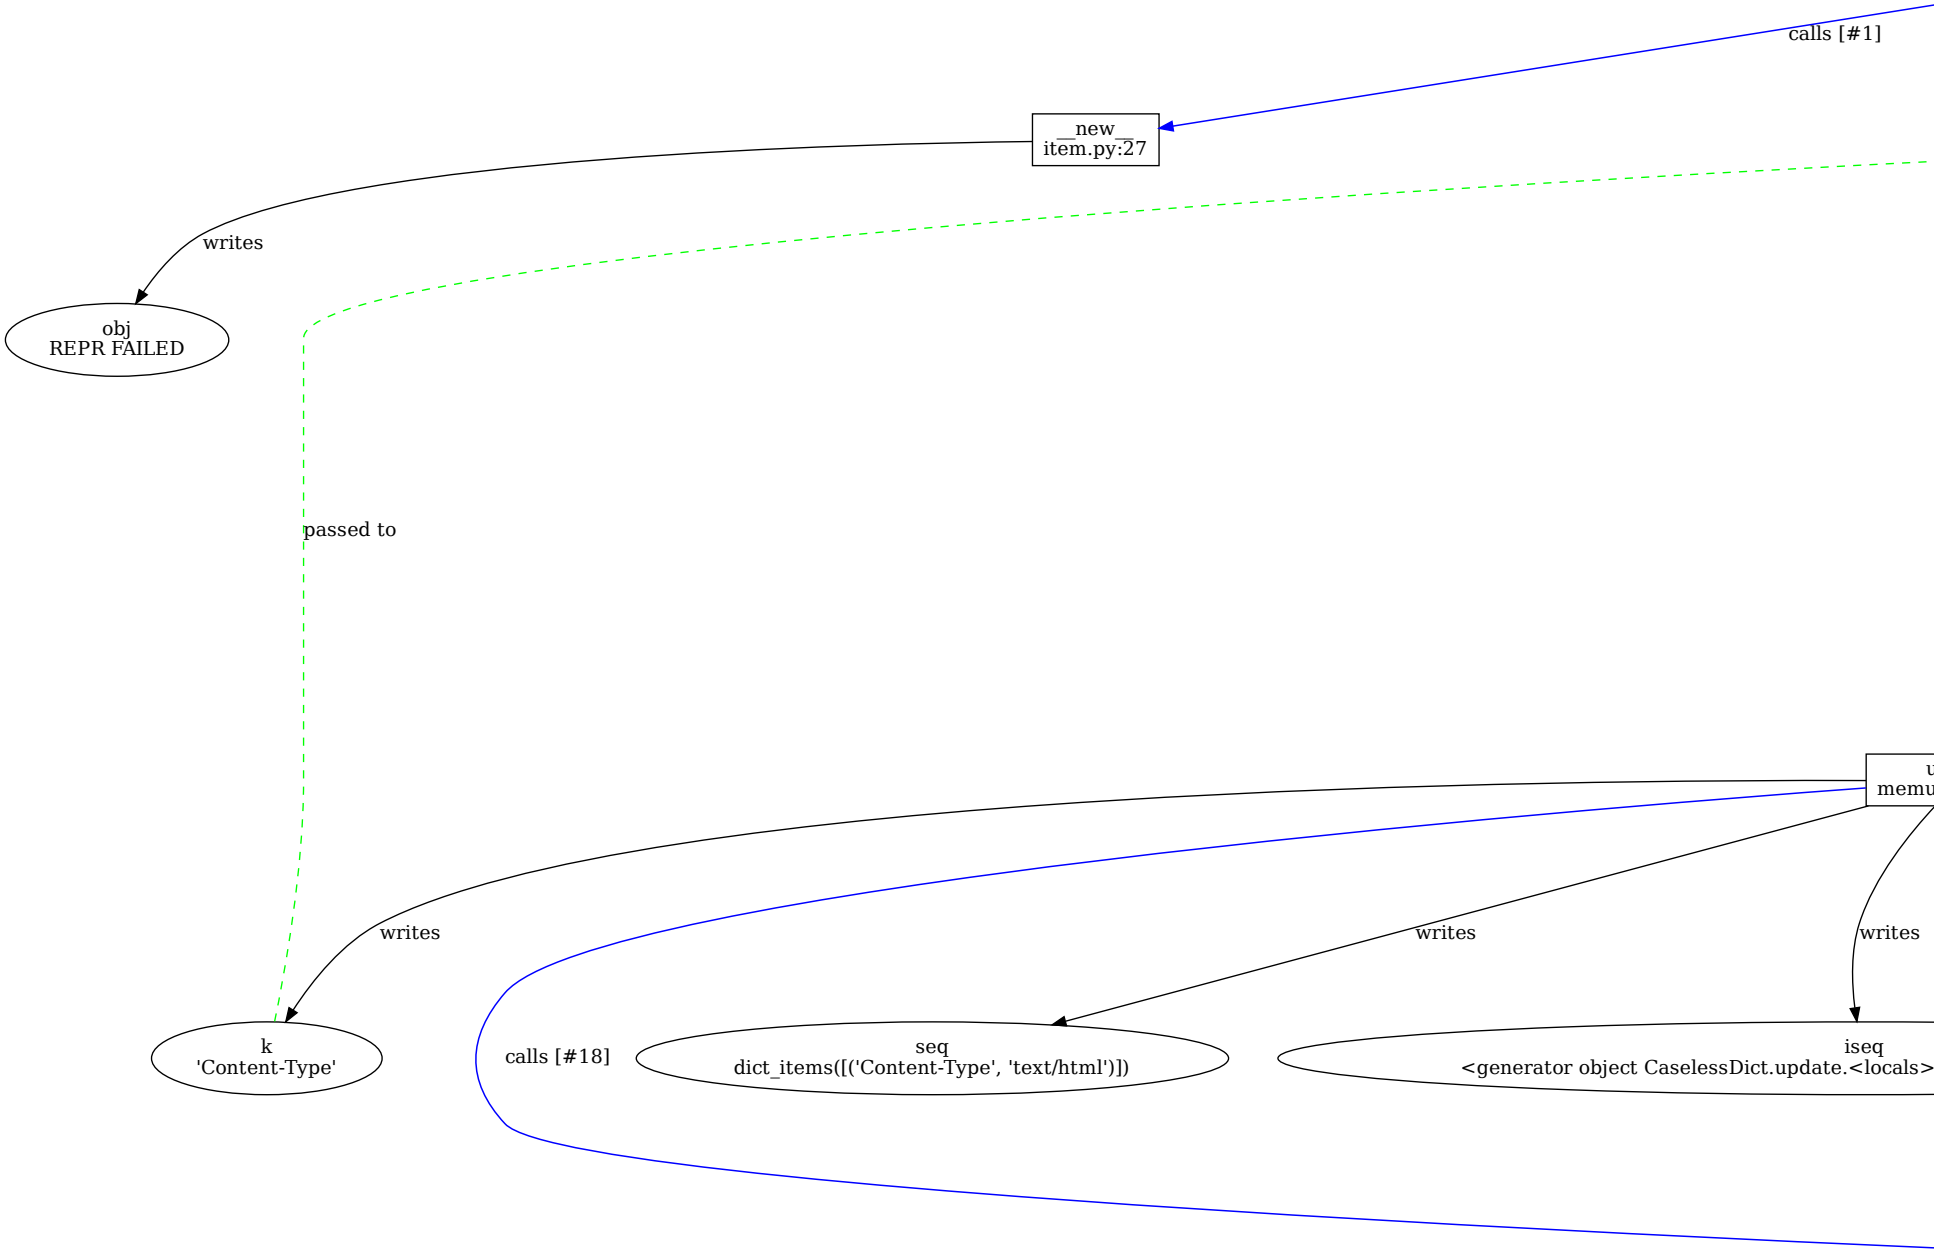
calls [#1]
__new__
item.py:27
writes
obj
REPR FAILED
passed to
writes
calls [#18]
writes
writes
k
'Content-Type'
seq
dict_items([('Content-Type', 'text/html')])
iseq
<generator object CaselessDict.update.<locals>

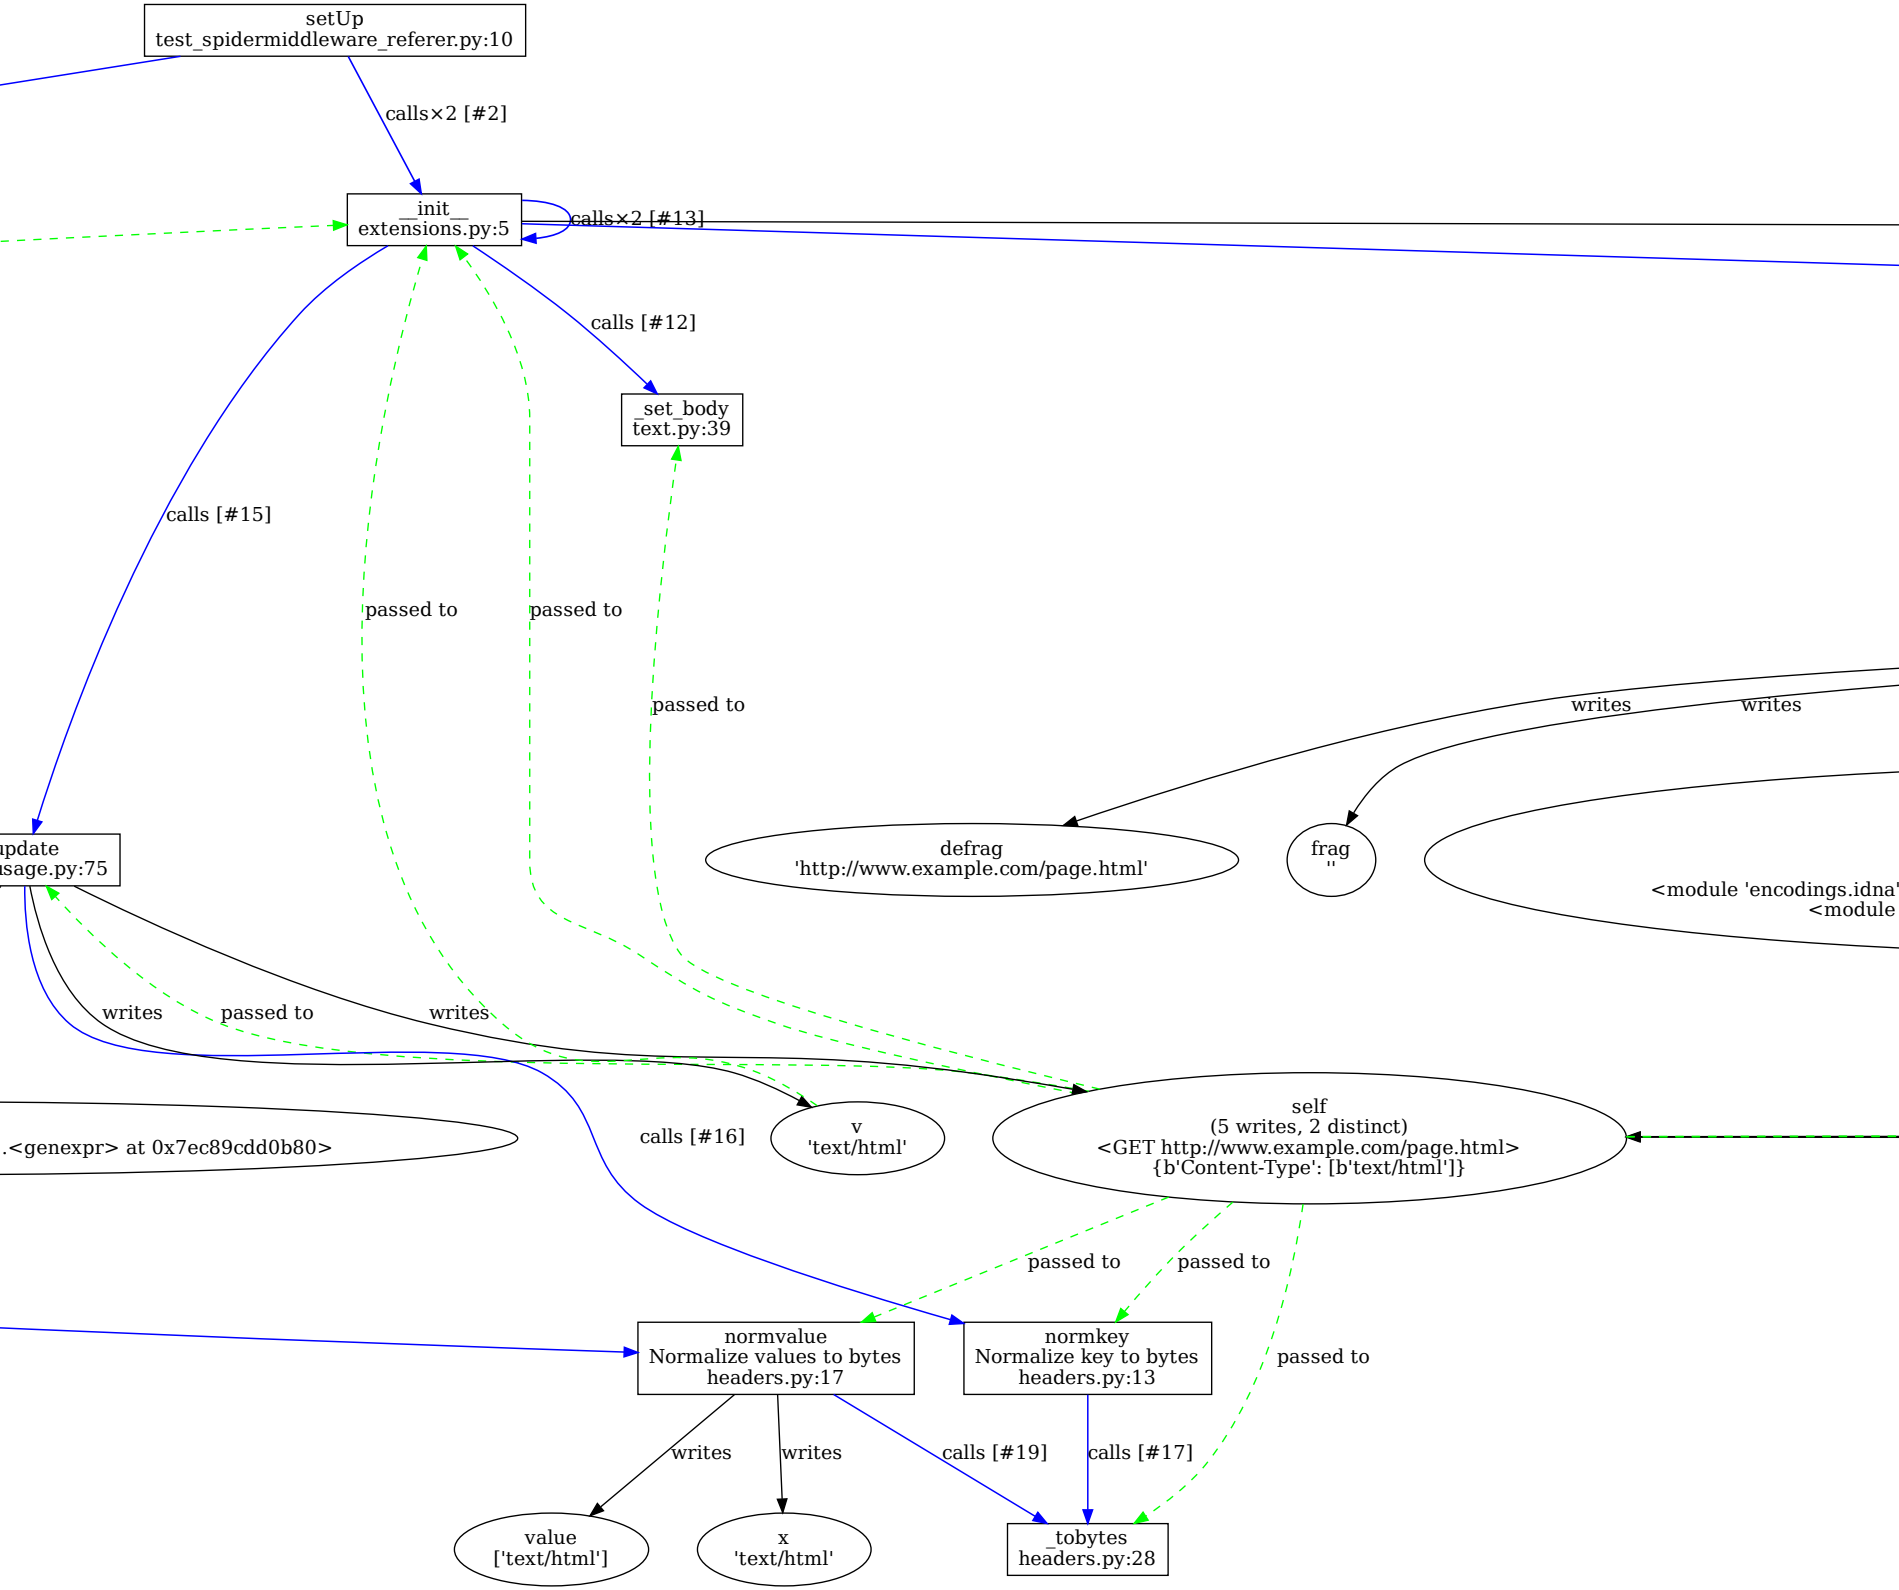
setUp
test_spidermiddleware_referer.py:10
calls×2 [#2]
__init__
extensions.py:5
calls×2 [#13]
calls [#12]
_set_body
text.py:39
calls [#15]
passed to
passed to
passed to
writes
writes
defrag
'http://www.example.com/page.html'
frag
''
<module 'encodings.idna'
<module
update
usage.py:75
writes
passed to
writes
.<genexpr> at 0x7ec89cdd0b80>
calls [#16]
v
'text/html'
self
(5 writes, 2 distinct)
<GET http://www.example.com/page.html>
{b'Content-Type': [b'text/html']}
passed to
passed to
passed to
normvalue
Normalize values to bytes
headers.py:17
normkey
Normalize key to bytes
headers.py:13
writes
writes
calls [#19]
calls [#17]
value
['text/html']
x
'text/html'
_tobytes
headers.py:28

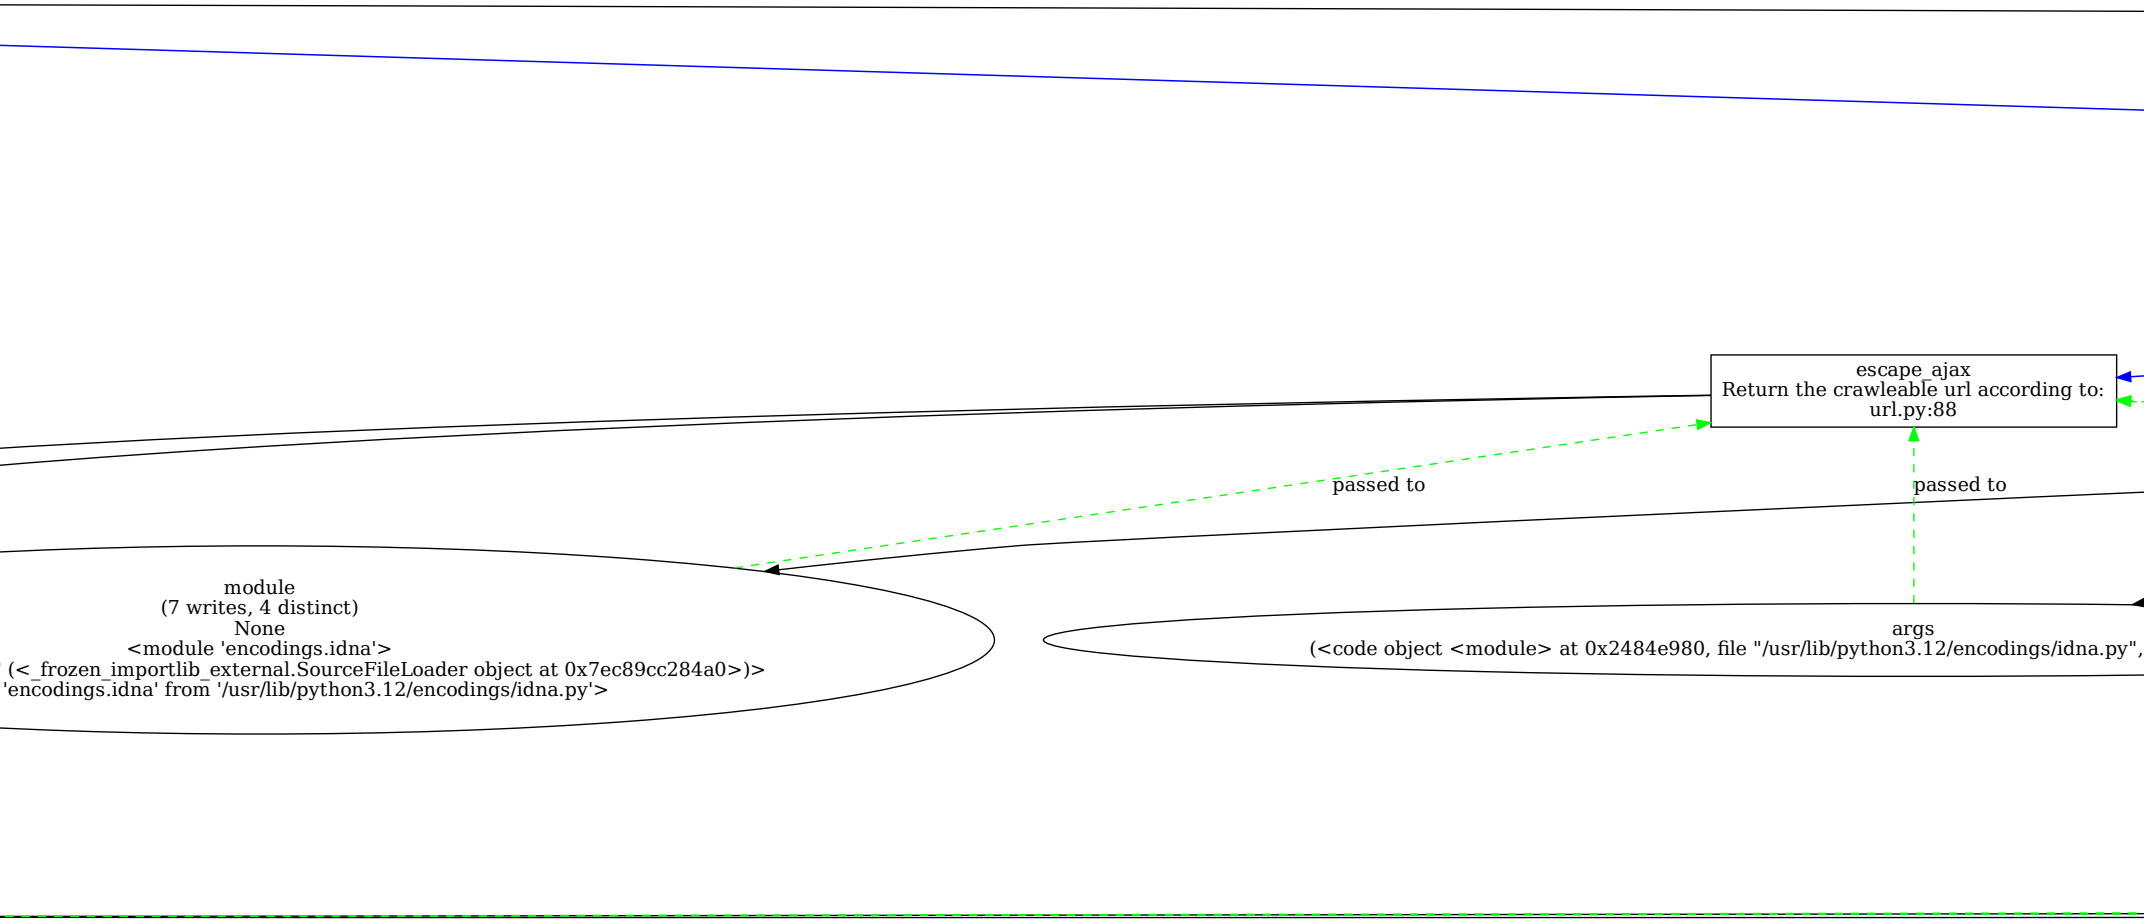
escape_ajax
Return the crawleable url according to:
url.py:88
passed to
passed to
module
(7 writes, 4 distinct)
None
<module 'encodings.idna'>
' (<_frozen_importlib_external.SourceFileLoader object at 0x7ec89cc284a0>)>
'encodings.idna' from '/usr/lib/python3.12/encodings/idna.py'>
args
(<code object <module> at 0x2484e980, file "/usr/lib/python3.12/encodings/idna.py",

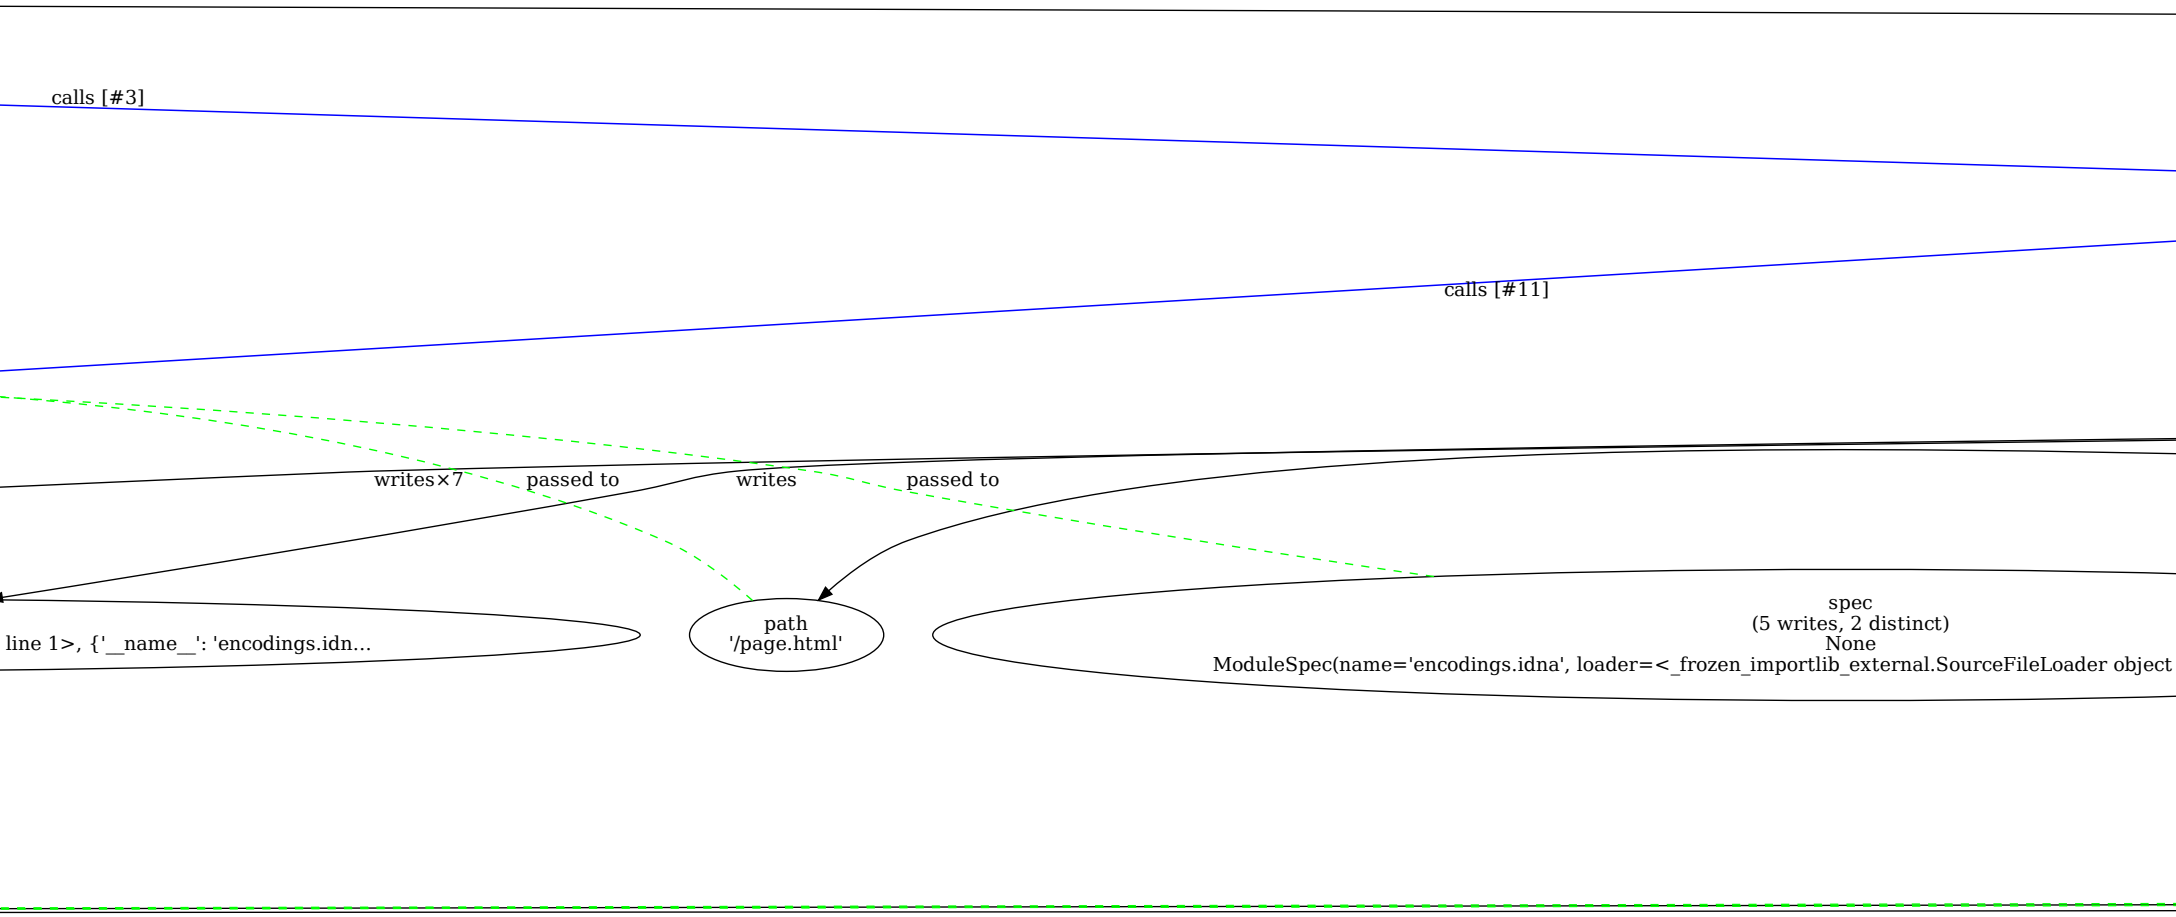
calls [#3]
calls [#11]
writes×7
passed to
writes
passed to
line 1>, {'__name__': 'encodings.idn...
path
'/page.html'
spec
(5 writes, 2 distinct)
None
ModuleSpec(name='encodings.idna', loader=<_frozen_importlib_external.SourceFileLoader object

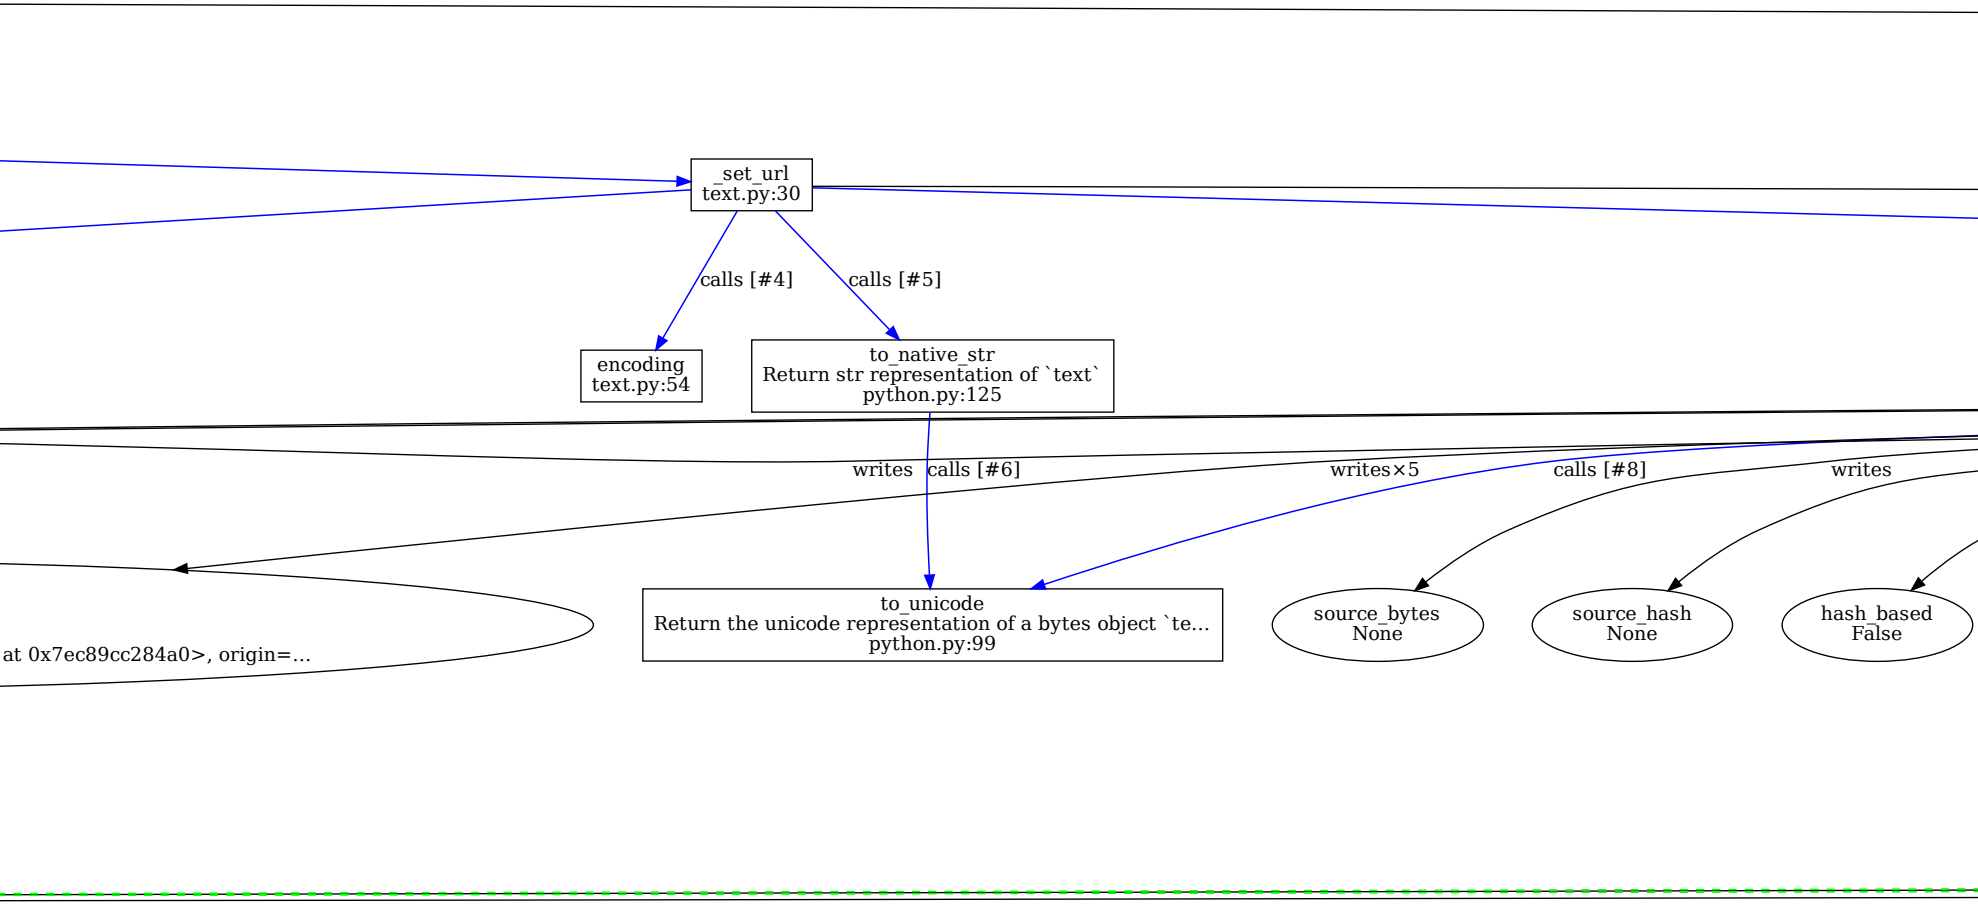
_set_url
text.py:30
calls [#4]
calls [#5]
encoding
text.py:54
to_native_str
Return str representation of `text`
python.py:125
writes
calls [#6]
writes×5
calls [#8]
writes
at 0x7ec89cc284a0>, origin=...
to_unicode
Return the unicode representation of a bytes object `te...
python.py:99
source_bytes
None
source_hash
None
hash_based
False

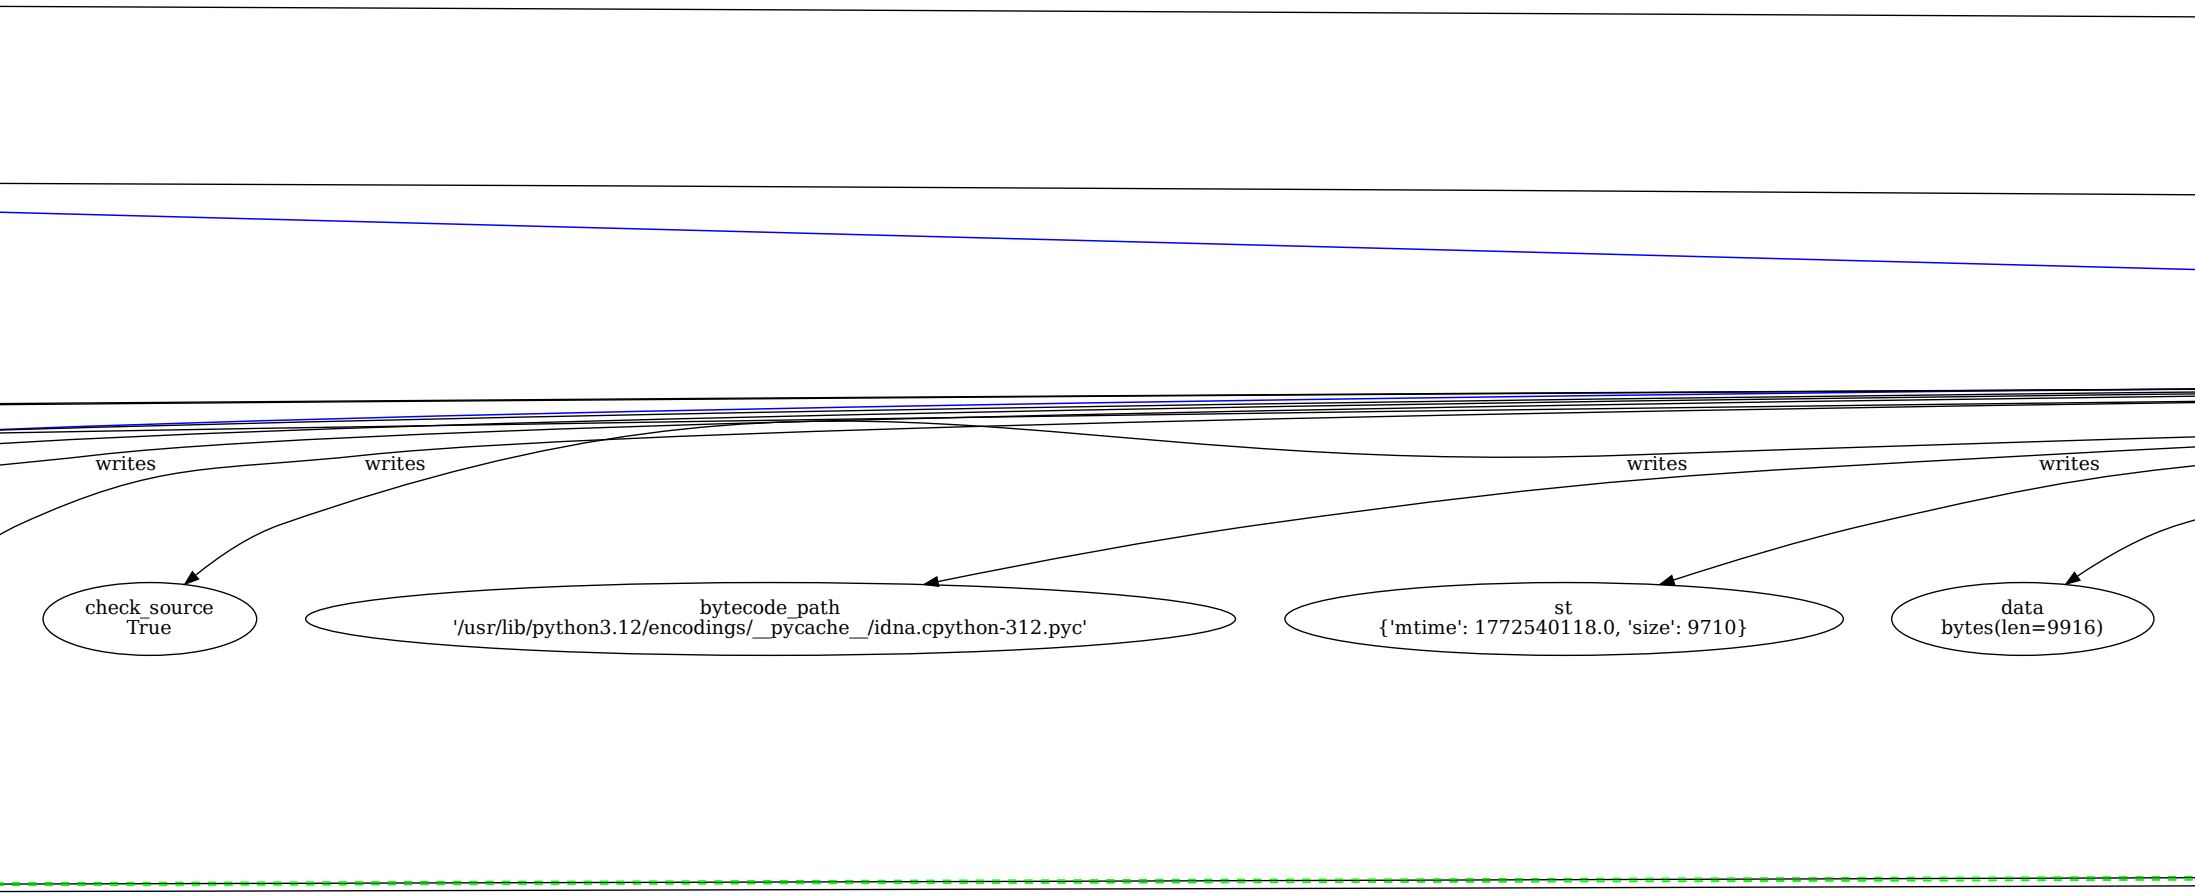
writes
writes
writes
writes
check_source
True
bytecode_path
'/usr/lib/python3.12/encodings/__pycache__/idna.cpython-312.pyc'
st
{'mtime': 1772540118.0, 'size': 9710}
data
bytes(len=9916)

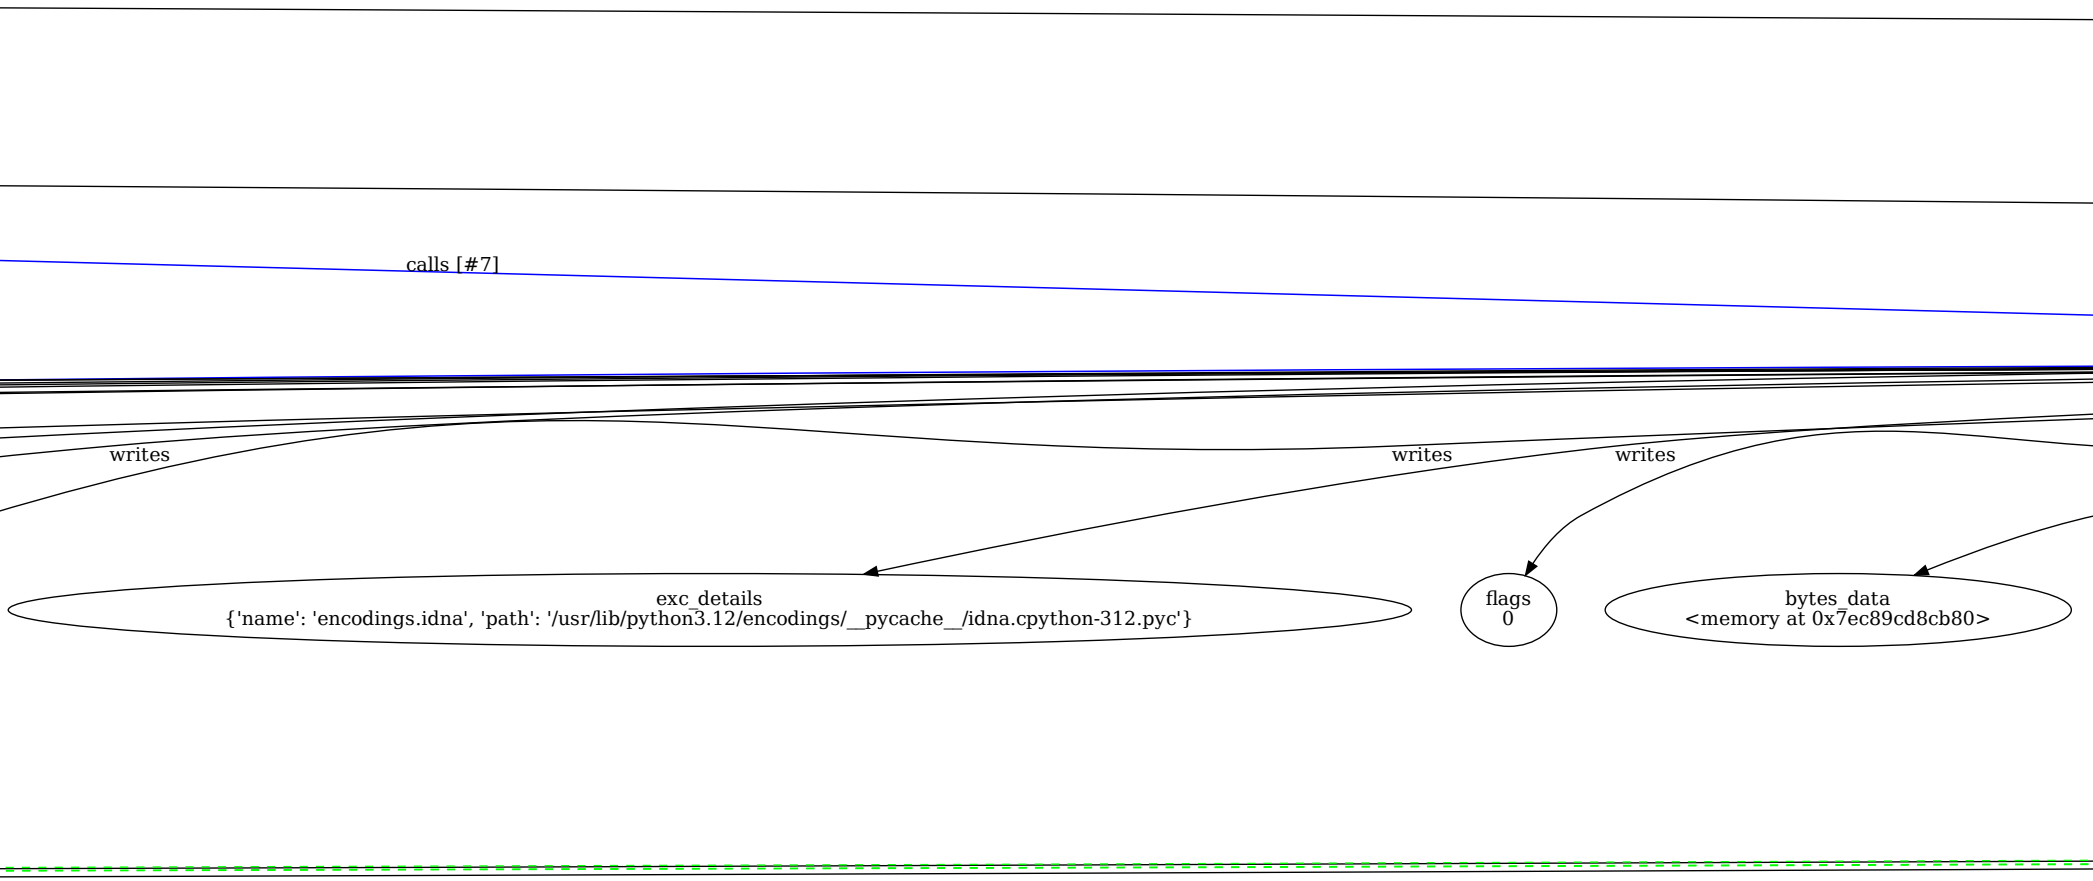
calls [#7]
writes
writes
writes
exc_details
{'name': 'encodings.idna', 'path': '/usr/lib/python3.12/encodings/__pycache__/idna.cpython-312.pyc'}
flags
0
bytes_data
<memory at 0x7ec89cd8cb80>

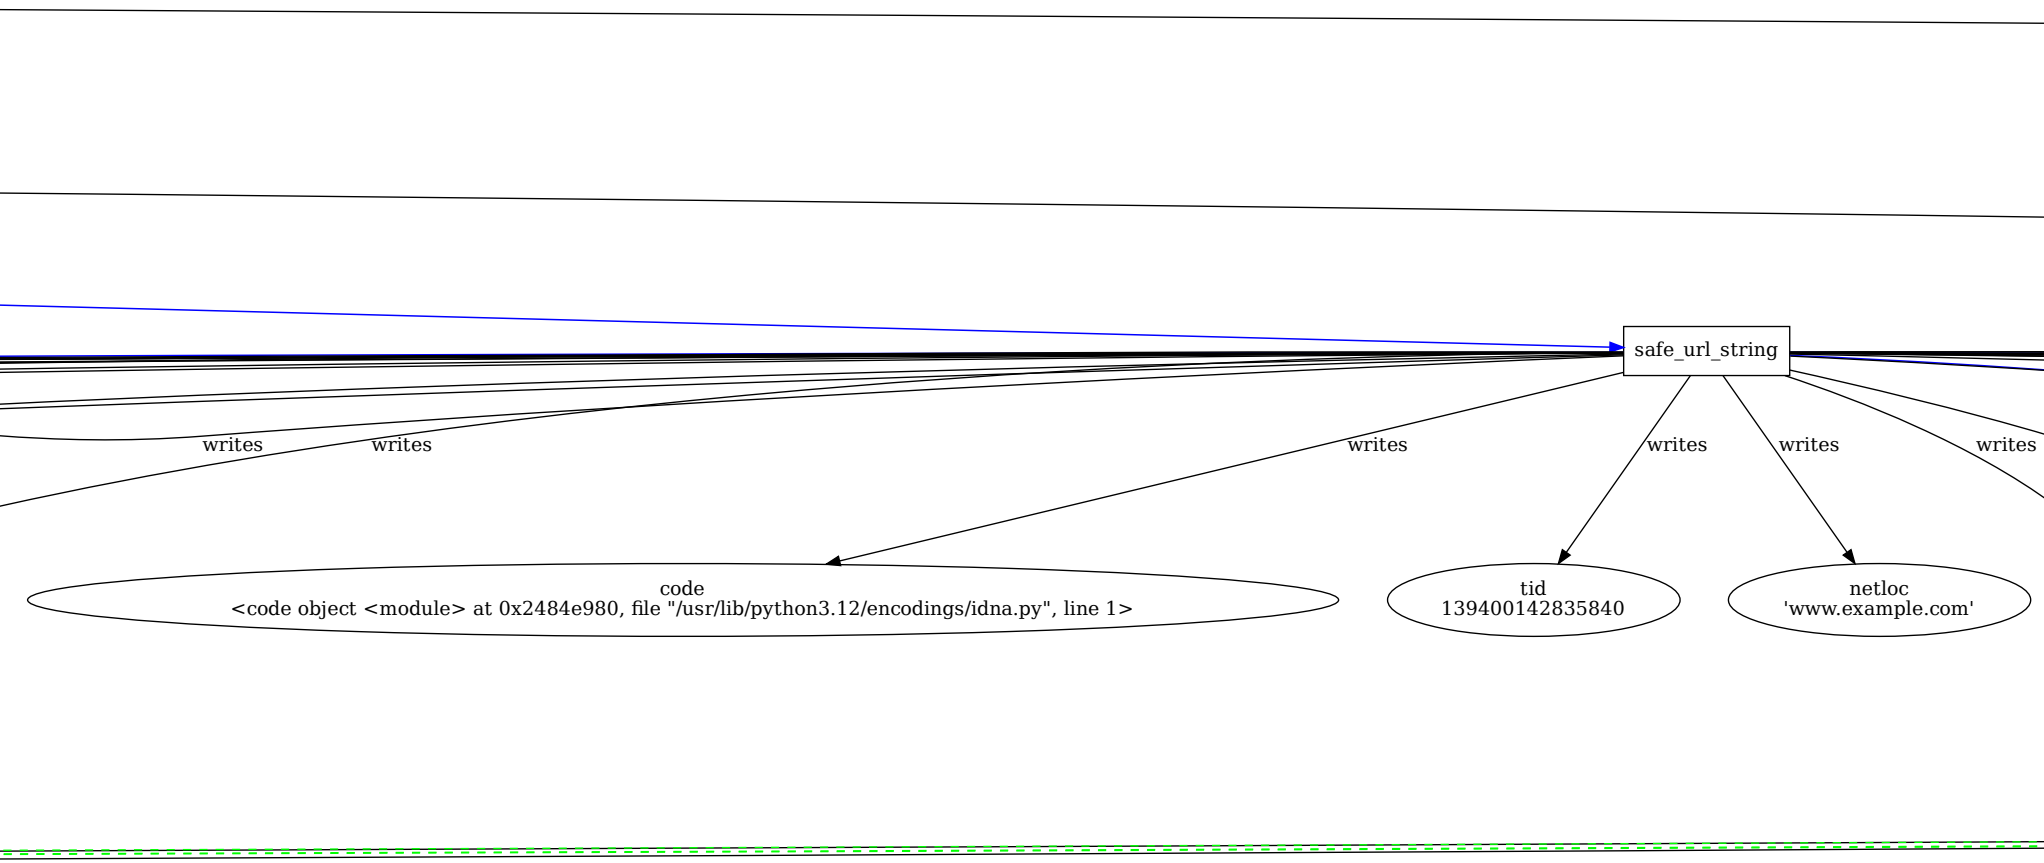
safe_url_string
writes
writes
writes
writes
writes
writes
code
<code object <module> at 0x2484e980, file "/usr/lib/python3.12/encodings/idna.py", line 1>
tid
139400142835840
netloc
'www.example.com'

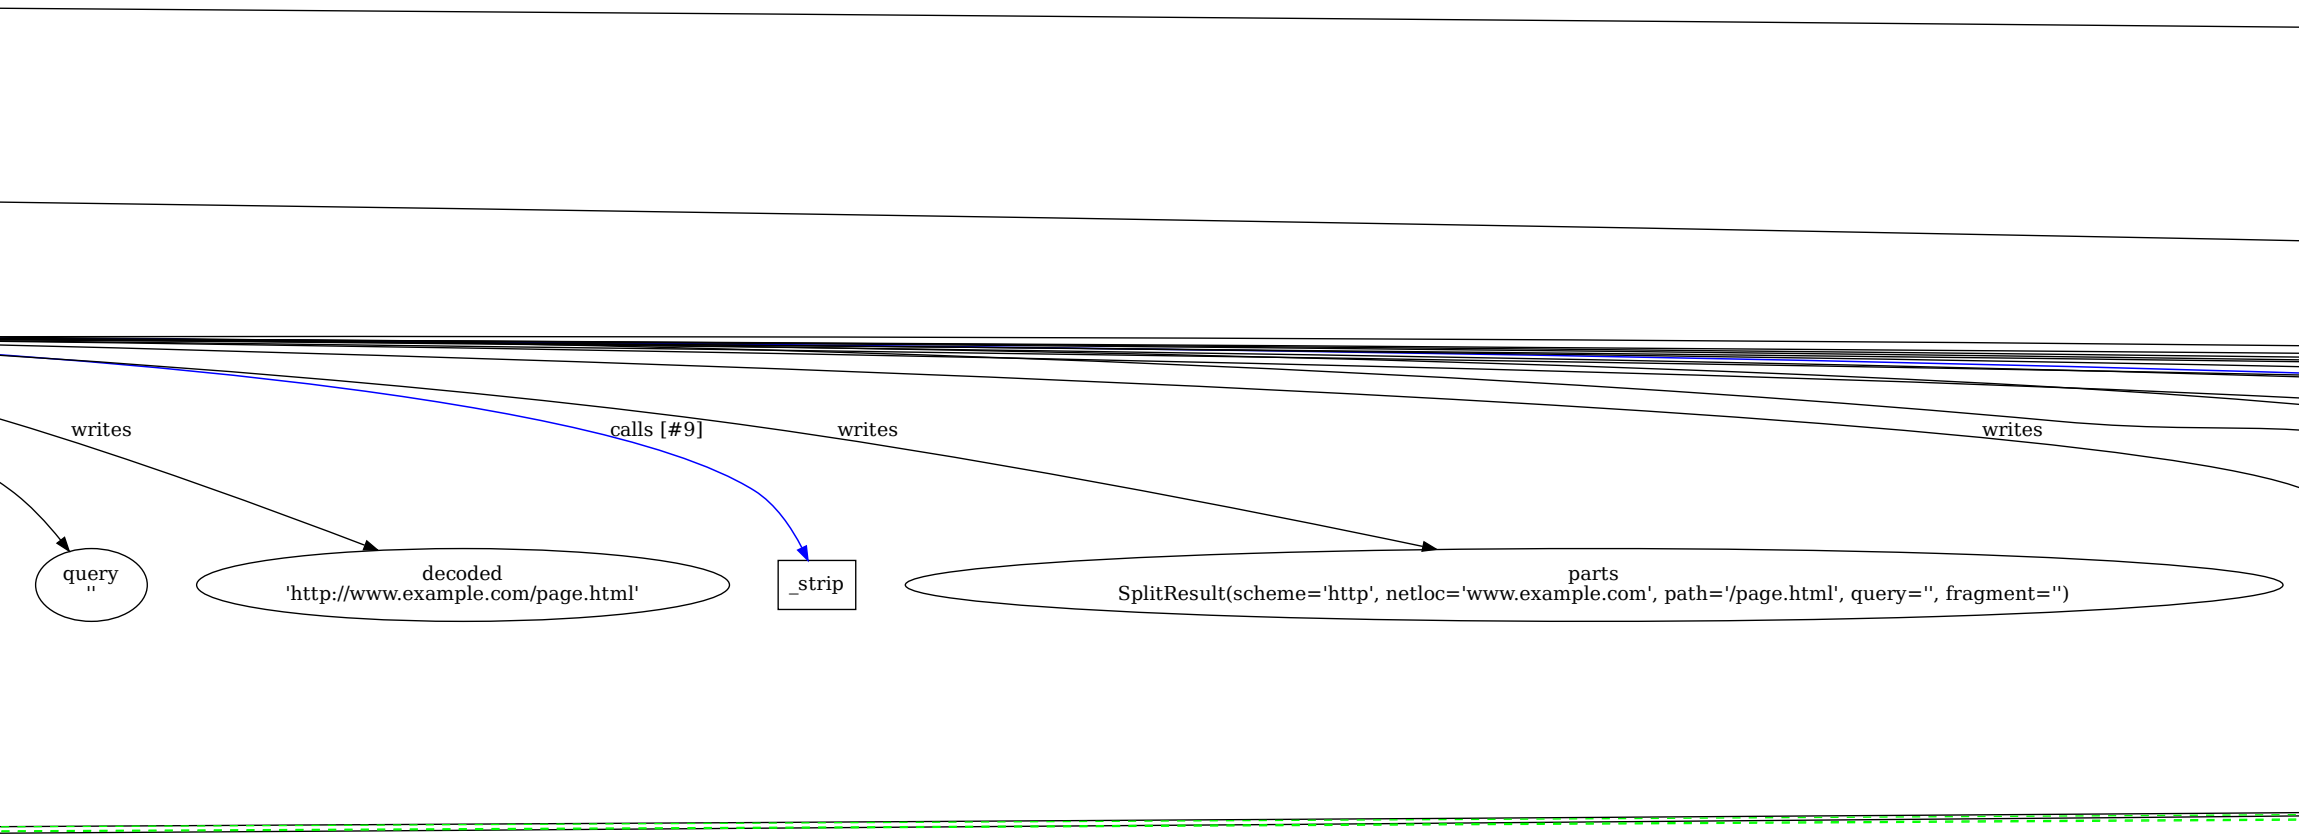
writes
calls [#9]
writes
writes
query
''
decoded
'http://www.example.com/page.html'
_strip
parts
SplitResult(scheme='http', netloc='www.example.com', path='/page.html', query='', fragment='')

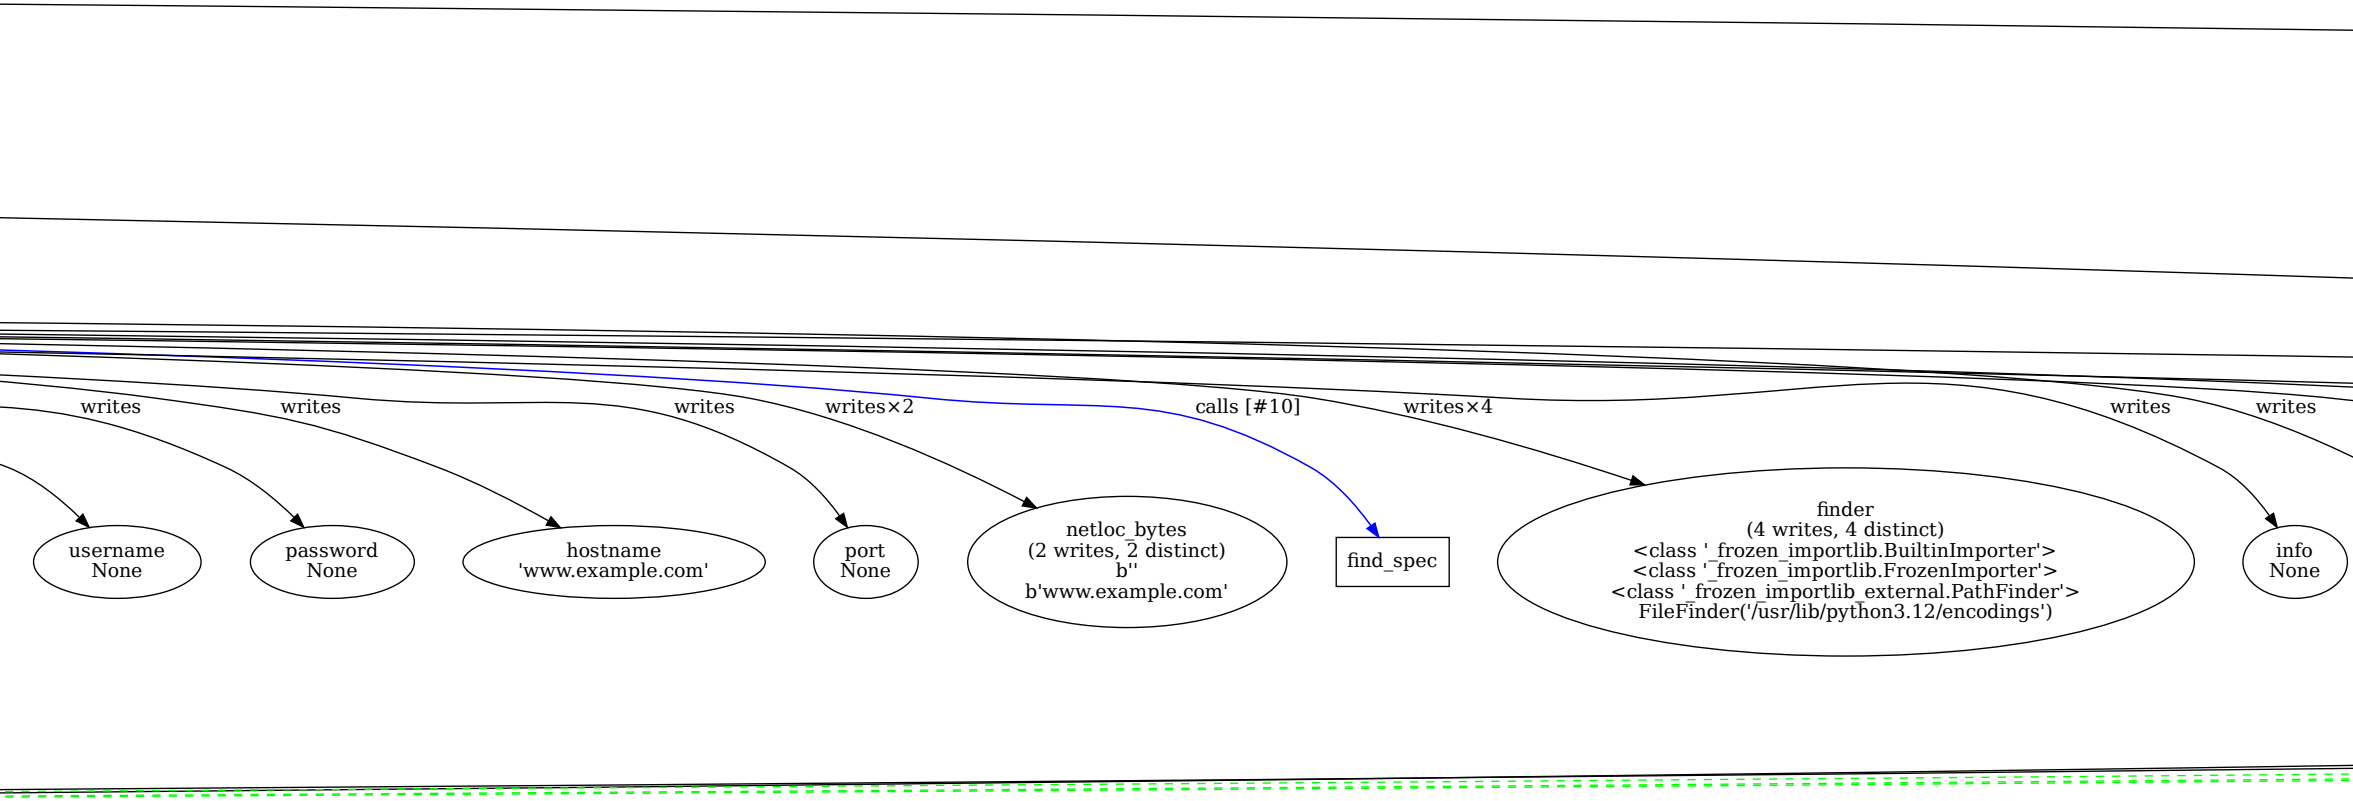
writes
writes
writes
writes×2
calls [#10]
writes×4
writes
writes
username
None
password
None
hostname
'www.example.com'
port
None
netloc_bytes
(2 writes, 2 distinct)
b''
b'www.example.com'
find_spec
finder
(4 writes, 4 distinct)
<class '_frozen_importlib.BuiltinImporter'>
<class '_frozen_importlib.FrozenImporter'>
<class '_frozen_importlib_external.PathFinder'>
FileFinder('/usr/lib/python3.12/encodings')
info
None

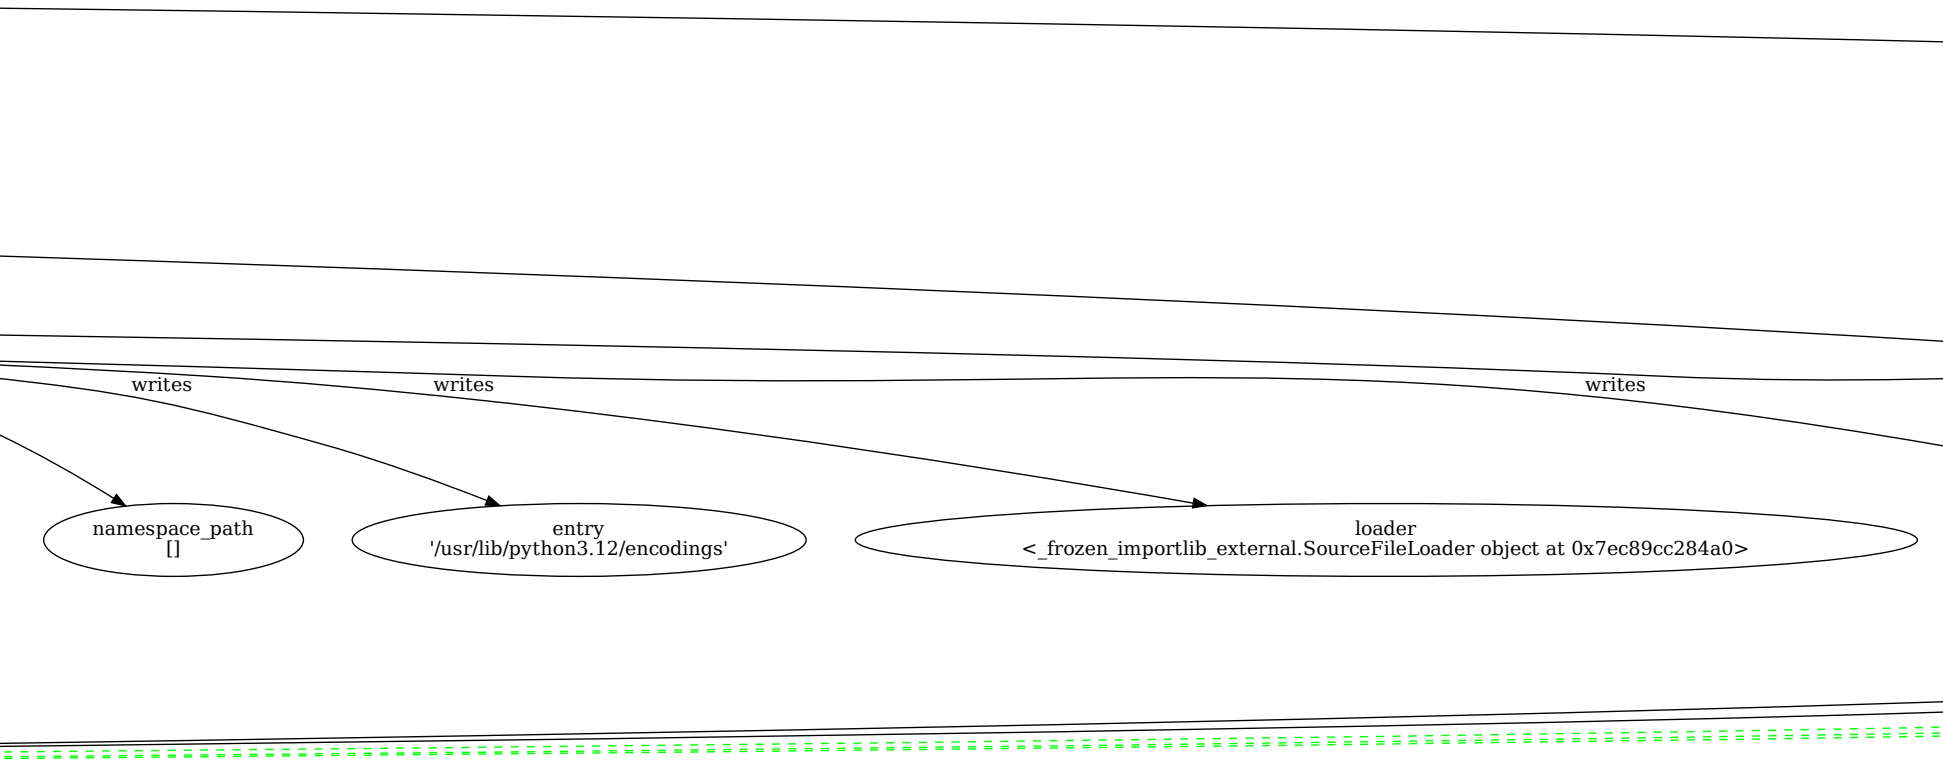
writes
writes
writes
namespace_path
[]
entry
'/usr/lib/python3.12/encodings'
loader
<_frozen_importlib_external.SourceFileLoader object at 0x7ec89cc284a0>

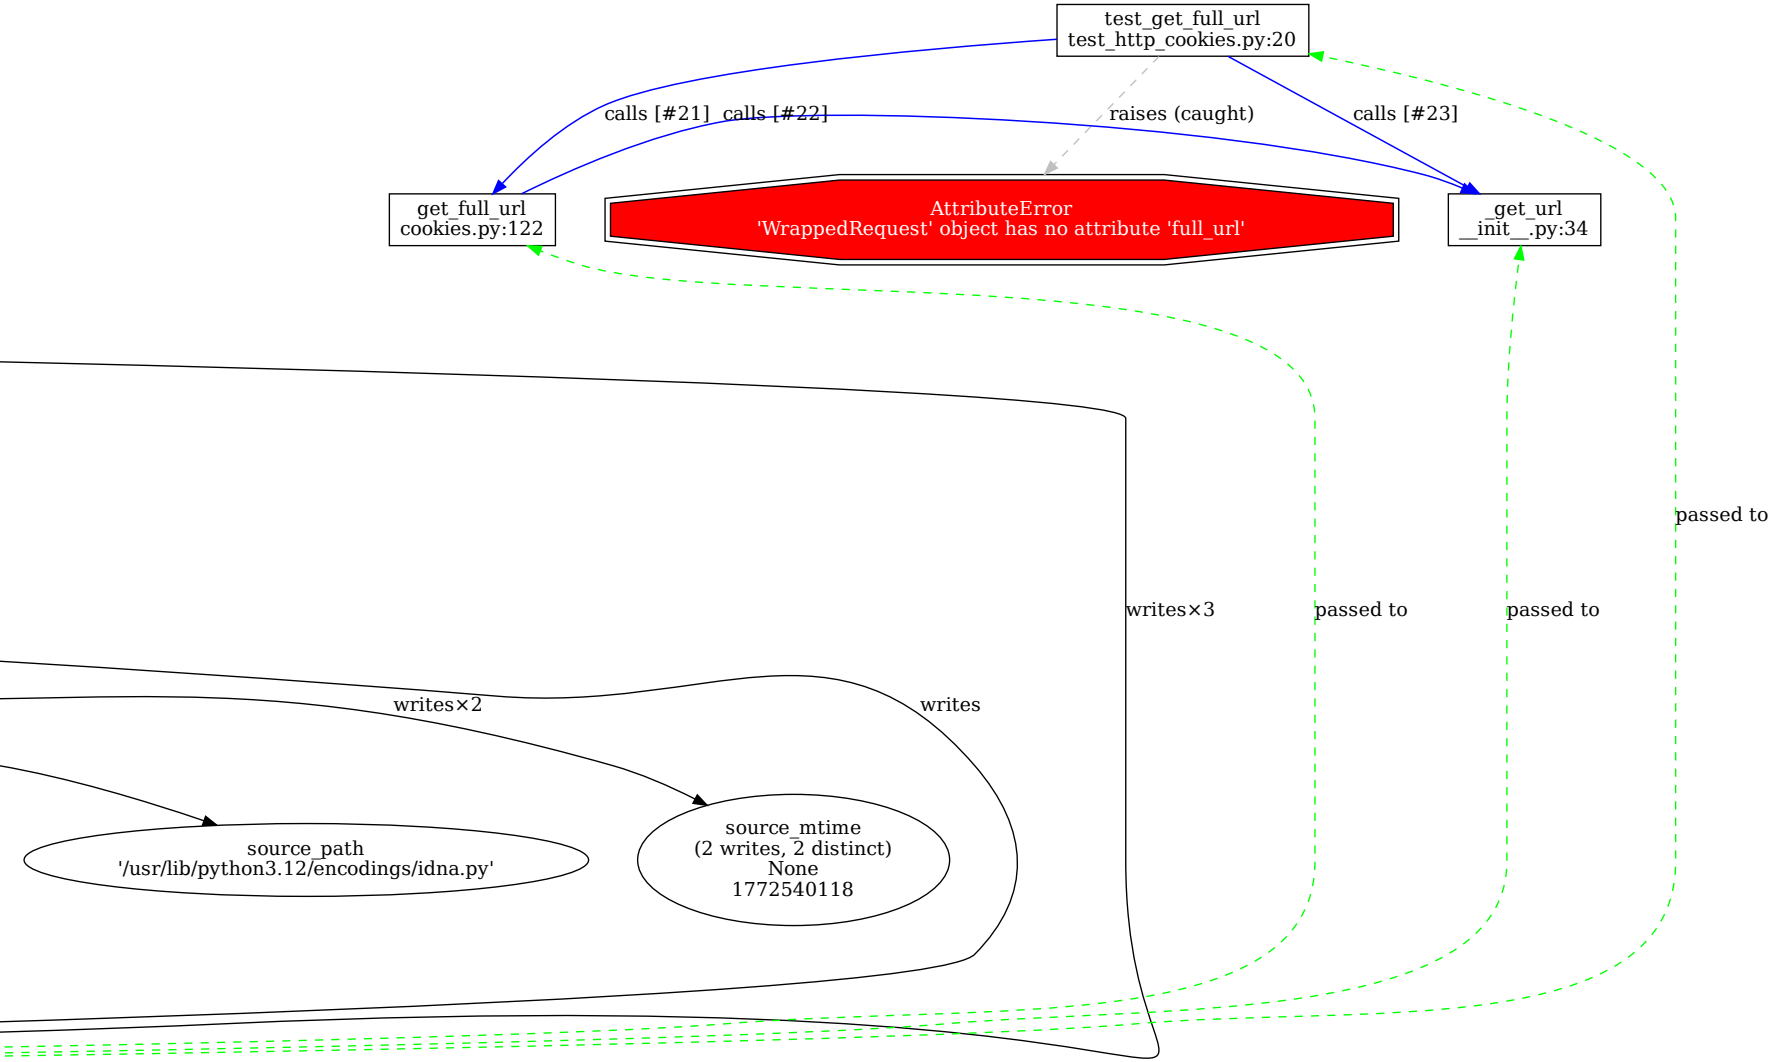
test_get_full_url
test_http_cookies.py:20
calls [#21]
calls [#22]
raises (caught)
calls [#23]
get_full_url
cookies.py:122
AttributeError
'WrappedRequest' object has no attribute 'full_url'
_get_url
__init__.py:34
passed to
writes×3
passed to
passed to
writes×2
writes
source_path
'/usr/lib/python3.12/encodings/idna.py'
source_mtime
(2 writes, 2 distinct)
None
1772540118