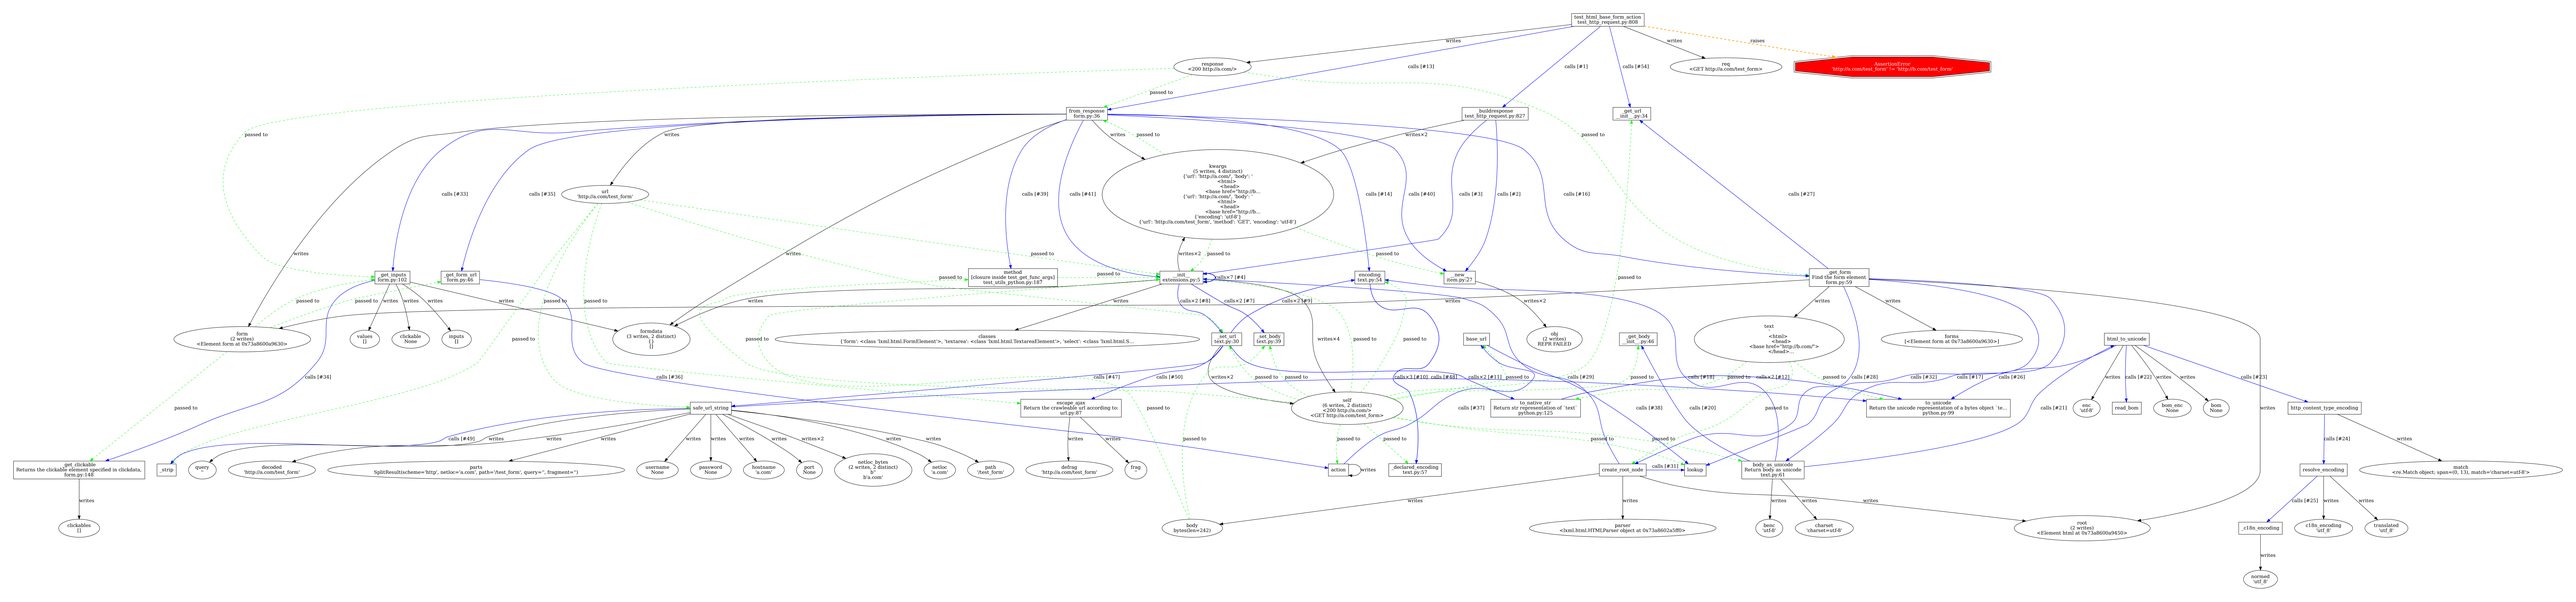

test_html_base_form_action
test_http_request.py:808
raises
AssertionError
'http://a.com/test_form' != 'http://b.com/test_form'
writes
req
<GET http://a.com/test_form>
response
<200 http://a.com/>
calls [#13]
calls [#1]
calls [#54]
passed to
from_response
form.py:36
_buildresponse
test_http_request.py:827
_get_url
__init__.py:34
writes×2
kwargs
(5 writes, 4 distinct)
{'url': 'http://a.com/', 'body': '
<html>
<head>
<base href="http://b...
{'url': 'http://a.com/', 'body': '
<html>
<head>
<base href="http://b...
{'encoding': 'utf-8'}
{'url': 'http://a.com/test_form', 'method': 'GET', 'encoding': 'utf-8'}
url
'http://a.com/test_form'
calls [#33]
calls [#35]
calls [#39]
calls [#41]
calls [#14]
calls [#40]
calls [#3]
calls [#2]
calls [#16]
calls [#27]
_get_inputs
form.py:102
_get_form_url
form.py:46
method
[closure inside test_get_func_args]
test_utils_python.py:187
__init__
extensions.py:5
calls×7 [#4]
encoding
text.py:54
__new__
item.py:27
_get_form
Find the form element
form.py:59
form
(2 writes)
<Element form at 0x73a8600a9630>
values
[]
clickable
None
inputs
[]
formdata
(3 writes, 2 distinct)
{}
[]
classes
{'form': <class 'lxml.html.FormElement'>, 'textarea': <class 'lxml.html.TextareaElement'>, 'select': <class 'lxml.html.S...
calls×2 [#8]
calls×2 [#7]
calls×2 [#9]
writes×4
_set_url
text.py:30
_set_body
text.py:39
base_url
obj
(2 writes)
REPR FAILED
_get_body
__init__.py:46
text
'
<html>
<head>
<base href="http://b.com/">
</head>...
forms
[<Element form at 0x73a8600a9630>]
html_to_unicode
calls [#34]
calls [#36]
calls [#47]
calls [#50]
calls×3 [#10]
calls [#48]
calls×2 [#11]
calls [#29]
calls [#18]
calls×2 [#12]
calls [#28]
calls [#32]
calls [#17]
calls [#26]
calls [#22]
calls [#23]
safe_url_string
escape_ajax
Return the crawleable url according to:
url.py:87
self
(6 writes, 2 distinct)
<200 http://a.com/>
<GET http://a.com/test_form>
to_native_str
Return str representation of `text`
python.py:125
calls [#37]
calls [#38]
calls [#20]
calls [#21]
to_unicode
Return the unicode representation of a bytes object `te...
python.py:99
enc
'utf-8'
read_bom
bom_enc
None
bom
None
http_content_type_encoding
calls [#24]
calls [#49]
writes×2
_get_clickable
Returns the clickable element specified in clickdata,
form.py:148
_strip
query
''
decoded
'http://a.com/test_form'
parts
SplitResult(scheme='http', netloc='a.com', path='/test_form', query='', fragment='')
username
None
password
None
hostname
'a.com'
port
None
netloc_bytes
(2 writes, 2 distinct)
b''
b'a.com'
netloc
'a.com'
path
'/test_form'
defrag
'http://a.com/test_form'
frag
''
action
_declared_encoding
text.py:57
create_root_node
calls [#31]
lookup
body_as_unicode
Return body as unicode
text.py:61
match
<re.Match object; span=(0, 13), match='charset=utf-8'>
resolve_encoding
calls [#25]
clickables
[]
body
bytes(len=242)
parser
<lxml.html.HTMLParser object at 0x73a8602a5ff0>
benc
'utf-8'
charset
'charset=utf-8'
root
(2 writes)
<Element html at 0x73a8600a9450>
_c18n_encoding
c18n_encoding
'utf_8'
translated
'utf_8'
normed
'utf_8'