

VGGT-GS SLAM: Uncalibrated Monocular Gaussian Splatting SLAM with Feed-Forward Priors

Yuhang Han¹, Hao Wang¹, Jiaxi Cao¹ and Xingyu Liu^{1,*}

Abstract—We present VGGT-GS SLAM, a monocular 3D Gaussian Splatting SLAM system designed for uncalibrated videos. Starting from feed-forward VGGT pose and depth priors, our system performs submap differentiable bundle adjustment that jointly refines camera poses and a 3D Gaussian map, while optimizing submap-shared intrinsics and radial-tangential distortion through analytic calibration Jacobians. To improve global consistency, we introduce Gaussian-native alignment (GNA) for camera-anchored scale refinement between sequential submaps and verification of loop-closure candidates. Extensive experiments on standard indoor benchmarks show consistent improvements in localization accuracy and strong rendering quality under uncalibrated settings, establishing a strong baseline for uncalibrated Gaussian SLAM.

I. INTRODUCTION

3D Gaussian Splatting (3DGS) [1] enables real-time rendering and high-fidelity novel view synthesis, motivating recent Gaussian-SLAM systems that jointly estimate camera trajectories and scene maps. However, most existing methods assume known camera calibration, and many require RGB-D input for reliable Gaussian initialization. These requirements limit deployment on commodity monocular cameras that lack calibration metadata and depth sensing. For such inputs, camera calibration must be estimated alongside motion and scene structure rather than supplied beforehand.

Recent feed-forward 3D reconstruction models, including DUST3R [2], MAST3R [3], and VGGT [4], provide strong camera pose and dense geometry priors from sets of monocular images. Systems such as GeoGS-SLAM [5] already integrate these priors with Gaussian mapping and rendering-based pose-map refinement. However, these predictions remain an initialization: errors in camera calibration can be absorbed into the estimated scene geometry, and independently reconstructed submaps need not share a consistent scale. This motivates jointly refining calibration and geometry while explicitly addressing alignment between submaps.

We retain the submap organization of VGGT-SLAM [6] while converting VGGT pose and depth predictions into optimizable Gaussian submaps. VGGT-predicted depth serves as a learned geometric prior rather than sensor depth input. Within each submap, we jointly refine camera poses, Gaussian attributes, and camera calibration. Analytic calibration Jacobians let image observations refine intrinsics and distortion alongside the Gaussian map. Fig. 1 provides a qualitative trajectory and reconstruction comparison.

Since submaps are optimized independently, relative scale errors can accumulate across the sequence. Our Gaussian-

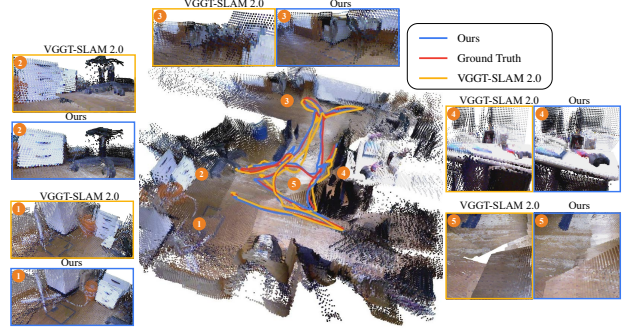


Fig. 1. Qualitative trajectory and reconstruction comparison with VGGT-SLAM 2.0 [7] on the TUM-RGBD *floor* sequence. Point clouds are visualized using input RGB pixels, VGGT-predicted depth priors, and each method’s optimized poses. Our method exhibits better local geometric consistency, with less structural fragmentation and map tearing.

native matching uses both centers and learned covariances to retain spatial information beyond point locations. It refines scale alignment between consecutive submaps and verifies loop candidates before pose-graph insertion, while preserving the original transforms of accepted loops.

Our main contributions are as follows:

- We develop calibration-aware Gaussian bundle adjustment for uncalibrated monocular SLAM, jointly refining camera poses, Gaussians, intrinsics, and radial-tangential distortion through analytic calibration Jacobians in differentiable rendering.
- We introduce covariance-aware Gaussian-native matching for camera-anchored sequential scale refinement and loop-candidate verification before global Sim(3) pose-graph optimization.
- Extensive experiments demonstrate strong localization and rendering performance under uncalibrated monocular settings.

II. RELATED WORK

A. 3D Gaussian Splatting-Based SLAM

Early neural SLAM systems use implicit scene representations [8], [9] and hybrid encodings [10] for dense tracking and mapping. In contrast, 3D Gaussian Splatting offers explicit, differentiable primitives with efficient rasterization, motivating a growing family of Gaussian-SLAM systems.

GS-SLAM develops dense RGB-D tracking and mapping with coarse-to-fine Gaussian optimization [11], while SplaTAM combines online Gaussian optimization with structured map expansion [12]. MonoGS demonstrates a purely Gaussian-based monocular SLAM pipeline and also supports RGB-D input [13]. Other systems combine established

¹Authors are with the National University of Singapore, Singapore.

*Corresponding author: Xingyu Liu (e-mail: xyl@nus.edu.sg).

tracking front-ends with Gaussian mapping, including Photo-SLAM and DROID-Splat [14], [15].

To improve scalability and efficiency, Gaussian-SLAM adopts local submaps [16].

Recent methods further address global consistency. Loop-Splat registers RGB-D Gaussian submaps to construct loop constraints and optimizes a robust pose graph [17], while GLC-SLAM introduces hierarchical loop closure and efficient submap updates after pose correction [18]. Our focus is covariance-aware, camera-anchored scale refinement under uncalibrated monocular input; for loops, Gaussian matching verifies proposals rather than replacing their initial transform.

B. Camera Self-Calibration in Monocular SLAM

Most visual SLAM systems assume known camera calibration. Self-calibrating approaches instead jointly estimate camera parameters, motion, and scene structure [19], although observability depends on camera motion and scene geometry, particularly when estimating lens distortion [20].

DroidCalib embeds self-calibrating bundle adjustment into DROID-SLAM, optimizing intrinsics through differentiable Gauss–Newton steps and supporting different camera models without retraining [21]. ORB-SLAM3 and DSO, by contrast, require camera calibration as input [22], [23].

Unlike prior methods that estimate calibration primarily from feature correspondences and geometric reprojection constraints, our method jointly refines camera intrinsics and radial–tangential distortion with camera poses and 3D Gaussians under a differentiable rendering objective within each submap.

C. Feed-Forward Geometry Priors for SLAM

DUST3R reconstructs uncalibrated image pairs through pointmap regression [2], while MAST3R adds 3D-grounded features for correspondence matching [3]. VGGT extends inference to larger image sets, jointly predicting camera parameters, depth maps, point maps, and point tracks [4].

MAST3R-SLAM uses MAST3R pointmaps for tracking, local fusion, loop closure, and global optimization, assuming only a single camera center rather than a fixed parametric camera model [24]. VGGT-SLAM aligns overlapping submaps on the $SL(4)$ manifold to address projective ambiguity under unknown calibration [6]. VGGT-SLAM 2.0 improves efficiency, enforces overlapping-frame calibration consistency, and introduces keyframe-level factor-graph optimization and attention-based loop verification [7].

AIM-SLAM uses information- and geometry-aware keyframe prioritization with joint multi-view $Sim(3)$ optimization [25]. VGGT-SLAM++ combines a visual-odometry front-end with high-cadence local bundle adjustment and scalable graph construction [26].

GeoGS-SLAM further combines uncalibrated feed-forward priors, Gaussian mapping, rendering-based pose-map optimization, and online loop closure [5]. Relative to this shared system design, our focus is explicit intrinsics and lens-distortion refinement through analytic rendering-chain

derivatives, together with covariance-aware Gaussian matching for sequential scale refinement and loop verification. Unlike overlapping-frame calibration alignment, our local BA optimizes camera parameters against image observations jointly with the Gaussian map.

III. METHOD

We initialize Gaussian submaps from VGGT predictions and jointly refine their Gaussians, camera poses, and shared calibration through differentiable bundle adjustment (Fig. 2). We then connect the submaps in a global pose graph using Gaussian-native $Sim(3)$ constraints.

A. Submaps and Initialization

Submap windowing. Following VGGT-SLAM [6], the selected keyframes are grouped into windows of $S + O$, where S is the frame number in each submap and O is the overlap frame number.

VGGT initialization. We process each $S + O$ -frame mapping window using VGGT [4]. VGGT predicts camera extrinsics $\{T_i^{c \leftarrow w}\}_{i=1}^N$, intrinsics $\{K_i\}_{i=1}^N$, and depth-confidence maps $\{D_i, C_i\}_{i=1}^N$. These predictions initialize the submap poses and geometry. We initialize the shared intrinsics K by averaging $\{K_i\}$ and set the distortion coefficients to zero.

Gaussian initialization from depth. Following the initialization strategy used in MonoGS [13], we create an initial set of 3D Gaussians from VGGT depth priors by back-projecting valid depth pixels to 3D points in the world coordinate system using the current pose and intrinsics estimate. We subsample pixels with a fixed stride and filter invalid depths ($D_i(p) > 10^{-8}$). Each retained pixel p initializes a Gaussian centered at its back-projected world point μ_j , with spherical-harmonic (SH) color coefficients derived from $I_i(p)$. We use the identity rotation and set the opacity to $\alpha_j = 0.5$ (zero logit). To adapt the initial support to the local sampling density, we set the isotropic log-scale to

$$\ell_j = \log(0.1 d_{nn,j}) \mathbf{1}_3, \quad (1)$$

where $d_{nn,j}$ is the nearest-neighbor distance among points sampled from the same frame.

B. Joint Bundle Adjustment

Within each submap, we jointly optimize the Gaussian representation, camera poses, per-frame affine brightness parameters, and a camera model shared across all frames. We fix the first camera pose to define the submap reference frame and update the remaining poses using left-multiplicative $SE(3)$ increments, $T_i^{c \leftarrow w} \leftarrow \exp(\xi_i) T_i^{c \leftarrow w}$ with $\xi_i \in \mathbb{R}^6$ for $i = 2, \dots, N$. The shared intrinsics use log-space focal-length updates and additive principal-point updates. We bound the five-parameter radial–tangential distortion coefficients through $k_j = s_k \tanh(\rho_{k_j})$ for $j = 1, 2, 3$ and $p_j = s_p \tanh(\rho_{p_j})$ for $j = 1, 2$, where $s_k, s_p > 0$ set their respective ranges. Analytic rasterization gradients for both intrinsics and distortion are detailed in Sec. III-C.

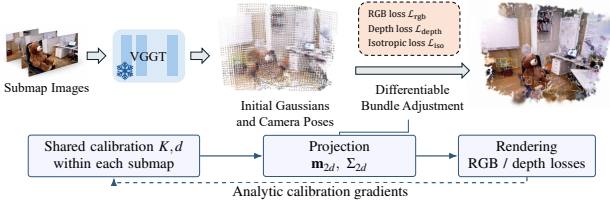


Fig. 2. VGGT [4] pose and geometry priors initialize a Gaussian submap, whose Gaussians, camera poses, and submap-shared intrinsics K and distortion d are jointly optimized through differentiable bundle adjustment.

Objective. Let $\hat{I}_i$, $\hat{D}_i$, and $\hat{A}_i$ denote the rendered color, expected depth, and alpha for frame i . We minimize

$$\mathcal{L}_{BA} = \mathcal{L}_{rgb} + \lambda_{depth} \mathcal{L}_{depth} + \lambda_{iso} \mathcal{L}_{iso}. \quad (2)$$

Here λ_{depth} and λ_{iso} weight the geometric prior and isotropic regularizer, respectively. Fixing the first pose defines the local coordinate frame, whereas the VGGT depth term supplies a predicted scale reference. We minimize this objective using AdamW with parameter-specific learning rates.

Photometric loss. Following DSO [23], we compensate exposure changes with $I'_i(p) = \exp(a_i)I_i(p) + b_i$. On valid image pixels $\mathcal{V}^I$, excluding near-black borders, the photometric term is

$$\mathcal{L}_{rgb} = (1 - \lambda_{dssim}) \|\hat{I} - I'\|_{1, \mathcal{V}^I} + \lambda_{dssim} (1 - \text{SSIM}(\hat{I}, I')). \quad (3)$$

Here $\|\cdot\|_{1, \mathcal{V}^I}$ denotes the mean absolute error over $\mathcal{V}^I$, and $\lambda_{dssim} \in [0, 1]$ is the DSSIM mixing weight. To address the common-darkening ambiguity between unconstrained exposure and learnable colors, an exposure-stabilized variant fixes $a_1 = b_1 = 0$ during local BA as a brightness reference. During subsequent map refinement, this variant freezes all estimated exposure parameters while retaining exposure compensation. The main localization and NVS results use affine compensation without these additional constraints.

Depth loss. VGGT depth serves as a weak geometric prior. Define $\mathcal{V}_i^D = \{p \mid D_i(p) > \epsilon, \hat{D}_i(p) > \epsilon, \hat{A}_i(p) > 0\}$ and the relative residual with a tolerance dead zone

$$r_i(p) = \left[\frac{|\hat{D}_i(p) - D_i(p)|}{\max(D_i(p), \epsilon)} - \tau_{depth} \right]_+. \quad (4)$$

Here $[x]_+ = \max(x, 0)$, τ_{depth} is the residual tolerance, and $\epsilon > 0$ is a numerical stabilizer. We median-normalize and clip the VGGT confidence as $\tilde{C}_i(p) = \min(C_i(p) / \max(\text{median}(C_i), \epsilon), c_{\max})$, where $c_{\max}$ is the confidence cap; we set $\tilde{C}_i(p) = 1$ when confidence is unavailable. The depth term is

$$\mathcal{L}_{depth} = \frac{\sum_i \sum_{p \in \mathcal{V}_i^D} \tilde{C}_i(p) r_i(p)^2}{\sum_i \sum_{p \in \mathcal{V}_i^D} \tilde{C}_i(p) + \epsilon}. \quad (5)$$

Isotropic regularization. Following MonoGS [13], we discourage highly anisotropic Gaussians by regularizing the physical scale $s_j = \exp(\ell_j)$:

$$\mathcal{L}_{iso} = \frac{1}{3M} \sum_{j=1}^M \|s_j - \bar{s}_j \mathbf{1}_3\|_1. \quad (6)$$

Here M is the number of Gaussians and $\bar{s}_j$ is the mean of the three scale components.

C. Analytic Calibration Jacobians

We analytically differentiate the projected 2D Gaussian center $\mathbf{m}_{2d}$ and covariance Σ_{2d} with respect to the full calibration vector $\theta_{cal} = (f_x, f_y, c_x, c_y, k_1, k_2, k_3, p_1, p_2)$ within gsplat’s differentiable Gaussian projection [27]. These Jacobians allow the rendering loss to jointly optimize all nine calibration parameters.

Camera model. For a camera-frame point $\mathbf{m} = (x, y, z)^\top$, let $u = x/z$, $v = y/z$, and $r^2 = u^2 + v^2$. With radial factor $d = 1 + k_1 r^2 + k_2 r^4 + k_3 r^6$, the distorted normalized coordinates (u_d, v_d) and corresponding pixel coordinates (U, V) are

$$u_d = du + 2p_1 uv + p_2(r^2 + 2u^2), \quad (7)$$

$$v_d = dv + p_1(r^2 + 2v^2) + 2p_2 uv, \quad (8)$$

$$(U, V) = (f_x u_d + c_x, f_y v_d + c_y). \quad (9)$$

Here (f_x, f_y) are the focal lengths and (c_x, c_y) is the principal point. Let $\mathbf{m}_d = (u_d, v_d)^\top$, $\mathbf{m}_{2d} = (U, V)^\top$, $\mathbf{c} = (c_x, c_y)^\top$, and $D = \text{diag}(f_x, f_y)$, such that $\mathbf{m}_{2d} = D\mathbf{m}_d + \mathbf{c}$. Further, let $A = \partial(u_d, v_d)/\partial(u, v)$ and $B = \partial(u, v)/\partial(x, y, z)$.

Projected-center Jacobian. For any component q of θ_{cal} , the projected-center Jacobian is

$$\frac{\partial \mathbf{m}_{2d}}{\partial q} = \frac{\partial D}{\partial q} \mathbf{m}_d + D \frac{\partial \mathbf{m}_d}{\partial q} + \frac{\partial \mathbf{c}}{\partial q}. \quad (10)$$

Projected-covariance Jacobian. For camera-frame covariance Σ_{3d}^c , the projection Jacobian and image-space covariance are

$$J = DAB, \quad \Sigma_{2d} = J \Sigma_{3d}^c J^\top. \quad (11)$$

Differentiating with respect to any component q of θ_{cal} gives

$$\begin{aligned} \frac{\partial J}{\partial q} &= \frac{\partial D}{\partial q} AB + D \frac{\partial A}{\partial q} B, \\ \frac{\partial \Sigma_{2d}}{\partial q} &= \frac{\partial J}{\partial q} \Sigma_{3d}^c J^\top + J \Sigma_{3d}^c \left(\frac{\partial J}{\partial q} \right)^\top. \end{aligned} \quad (12)$$

The CUDA kernels return gradients with respect to the physical coefficients; automatic differentiation then applies the bounded-parameter chain rule, e.g., $\partial \mathcal{L} / \partial \rho_{k_j} = (\partial \mathcal{L} / \partial k_j) s_k (1 - \tanh^2 \rho_{k_j})$. These expressions describe unclipped projection.

D. Gaussian-Native Alignment (GNA) for Submaps

Each submap has its own local frame. Adjacent submaps share an overlap keyframe. For loops, SALAD retrieves a historical frame for the current query, and joint VGGT inference initializes the inter-submap bridge (Sec. III-E). Fig. 3 summarizes the alignment and verification paths.

Camera-tied initialization. Let A and B denote the reference and source submaps. Their shared-image poses determine the rotation R from the local frame of B to that of A ; identity-pixel depth correspondences determine the initial

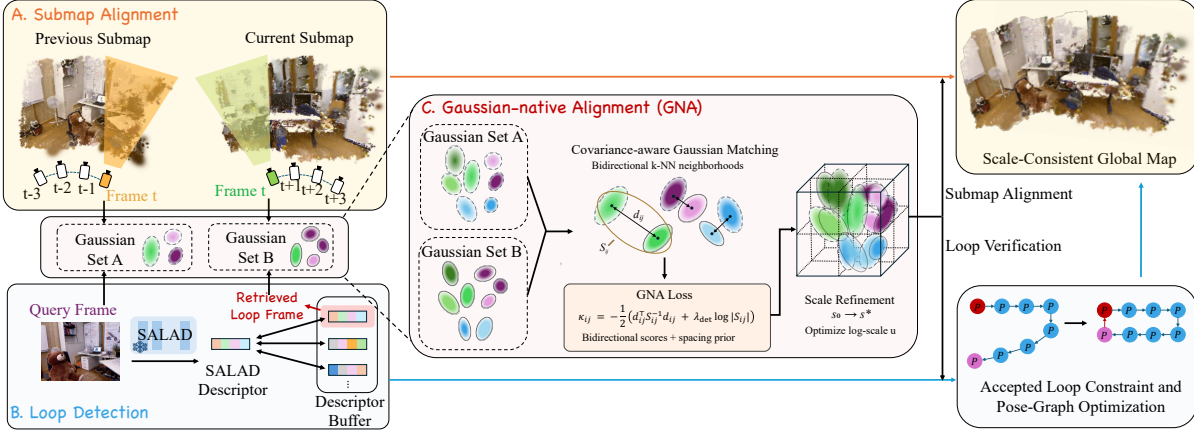


Fig. 3. **Gaussian-native alignment and loop verification.** Starting from camera-tied initialization, GNA uses covariance-aware Gaussian matching to refine the relative scale between adjacent submaps. For SALAD-retrieved loop candidates, the final GNA loss and scale correction determine acceptance before pose-graph optimization; accepted loops retain the original VGGT bridge transform.

scale s_0 ; and the corresponding camera centers c_A, c_B fix the translation as $t_0 = c_A - s_0 R c_B$. We hold R fixed, initialize $u = \log s_0$, and optimize only this log-scale. A source Gaussian j with mean μ_j^B and spatial covariance Σ_j^B is transformed into A as

$$\begin{aligned} s &= \exp(u), \\ \mu_j^{B \rightarrow A}(u) &= c_A + sR(\mu_j^B - c_B), \\ \Sigma_j^{B \rightarrow A}(u) &= s^2 R \Sigma_j^B R^\top. \end{aligned} \quad (13)$$

Gaussian-native refinement. We filter Gaussians by opacity, anchor-view visibility, and spatial scale, retaining those projecting into supported pixels of the opposite anchor view. Their learned covariances encode spatial extent and orientation beyond point centers. Before evaluating overlap, we normalize the Gaussian means and covariances by a robust reference-scene scale. For a reference Gaussian i and a transformed source Gaussian j , let $d_{ij} = \mu_i^A - \mu_j^{B \rightarrow A}$ and $S_{ij} = \Sigma_i^A + \Sigma_j^{B \rightarrow A} + (\epsilon + \tau^2)I_3$. We use the log-kernel

$$\kappa_{ij}(u) = -\frac{1}{2} (d_{ij}^\top S_{ij}^{-1} d_{ij} + \lambda_{\det} \log |S_{ij}|), \quad (14)$$

where I_3 is the identity matrix, $\epsilon > 0$ is a covariance stabilizer, τ is an annealed bandwidth, and $\lambda_{\det}$ controls the log-determinant term. With opacity α_i and observation count n_i , define $w_i = \max\{\alpha_i^2/[1 + \log(1 + n_i)], 10^{-6}\}$. For the k nearest reference centers $\mathcal{N}_A(j)$ of source center j , the directional score is

$$\ell_{B \rightarrow A} = \frac{\sum_j w_j^B \log \left(\frac{\sum_{i \in \mathcal{N}_A(j)} w_i^A e^{\kappa_{ij}}}{\sum_{i \in \mathcal{N}_A(j)} w_i^A} \right)}{\sum_j w_j^B}. \quad (15)$$

The reverse score exchanges A and B ; neighborhoods are refreshed at each bandwidth stage and fixed within it. The optimized objective is

$$\mathcal{L}_{\text{GNA}}(u) = -\ell_{B \rightarrow A}(u) - \ell_{A \rightarrow B}(u) + \lambda_{\text{sp}} \left(u - \log \frac{m_A}{m_B} \right)^2, \quad (16)$$

where m_A and m_B are the median nearest-neighbor spacings of the selected Gaussian sets and λ_{sp} weights a density-sensitive heuristic scale prior. We bound the scale update around its initialization and retain it only when it improves the normalized objective; otherwise, we keep s_0 . The resulting transform defines a sequential constraint, whereas for loop closure GNA is used only for verification as described in Sec. III-E.

E. Loop Closure with Gaussian-Native Verification

For each mapping window, we match per-frame SALAD descriptors [28] against prior submaps, exclude the immediate predecessor, and retain at most the closest pair whose descriptor distance is below the retrieval threshold τ_r . After anchor-free mapping and BA, the retrieved image is appended only to a separate joint VGGT loop-inference batch. Its predicted depth correspondences initialize the inter-submap Sim(3), which GNA evaluates solely for verification.

The update bounds and improvement-based fallback used for sequential alignment do not apply to loop verification; here, the scale correction is an acceptance criterion. GNA verifies loop candidates using the final matching loss and scale correction, while accepted loops retain their original VGGT transforms:

$$L^* = \mathcal{L}_{\text{GNA}}(u^*), \quad \Delta_s = \left| \log \frac{s^*}{s_0} \right|. \quad (17)$$

A loop enters the global Sim(3) pose graph only if GNA succeeds, $L^* \leq \tau_L$, and $\Delta_s \leq \tau_s$; the accepted measurement remains the original VGGT bridge transform. We also do a rotation-consistency check that rejects bridges differing by more than 90° from the preceding sequential chain.

Pose-graph nodes are local-to-global submap transforms $G_i \in \text{Sim}(3)$, constrained by sequential and accepted loop measurements of $G_i^{-1} G_j$, with a strong prior anchoring the first node. Optimization updates only G_i , leaving local Gaussians, poses, and calibration unchanged. For $G_i = (s, R, t)$, global Gaussian means and covariances are $sR\mu + t$ and $s^2 R \Sigma R^\top$; submaps are not merged.

F. Other Implementation Details

Keyframe selection. We select a new keyframe when the mean image-plane ℓ_1 displacement of Lucas–Kanade-tracked points exceeds τ_{disp} , or fewer than ten valid tracks remain.

Gaussian refinement. During submap BA, we periodically clone or split Gaussians using accumulated image-space gradients and prune low-opacity ones, following MonoGS [13].

Non-keyframe pose estimation. After sequence-level mapping and submap Sim(3) graph optimization, we estimate non-keyframe poses to obtain per-frame trajectories and support novel-view synthesis. Each frame uses the local submap with the latest starting keyframe at or before it, for both pose estimation and rendering, rather than a merged global map. With fixed Gaussian maps and calibration, each pose is optimized in SE(3) for 90 iterations.

IV. EXPERIMENTS

A. Experimental Setup

All experiments use RGB-only input. Experiments are performed on a server with an NVIDIA RTX PRO 6000 GPU and an AMD EPYC 9355 CPU. Unless otherwise stated, all baseline methods are locally reproduced using the authors’ released implementations.

The keyframe motion threshold is $\tau_{\text{disp}} = 30$ pixels. Each complete mapping window contains $S = 24$ new keyframes and $O = 1$ overlapping keyframe. Distortion optimization is enabled by default for uncalibrated input. In the bounded distortion parameterization, $s_k = 2$ and $s_p = 0.05$ set the ranges of the radial and tangential coefficients, respectively. For each submap, we run 550 joint BA iterations. The depth-prior and isotropy weights are $\lambda_{\text{depth}} = 0.3$ and $\lambda_{\text{iso}} = 10$, respectively. We use a relative-depth tolerance of $\tau_{\text{depth}} = 0.03$ and clip the normalized VGGT confidence at $c_{\text{max}} = 5$. GNA verifier uses $\tau_L = 1000$ and $\tau_s = 0.20$.

Boldface indicates the best results. For uncalibrated localization and NVS results, **first**, **second**, and **third** additionally highlight the top three ranks.

B. Localization Evaluation

For localization, we evaluate on TUM-RGBD [29], 7-Scenes [30], and ScanNet [31]. We compare against calibrated visual, neural, and Gaussian SLAM methods [22], [32], [33], [34], [35], [24], [13], [36], [37], [38], as well as uncalibrated monocular systems [35], [24], [6], [7], [39], [40], [25], [26], [5]. Following VGGT-SLAM, uncalibrated DROID-SLAM uses GeoCalib [41] estimates. We report translational ATE RMSE in meters after Sim(3) alignment, using each rerun method’s final native keyframes and the final graph-optimized keyframes for Ours.

As shown in Table I, our method achieves the lowest average ATE among uncalibrated systems on TUM-RGBD, obtaining 0.0304 m compared with 0.031 m for AIM-SLAM [25]. Ours ranks first on desk2 and plant and second on five additional sequences, with comparable accuracy to

TABLE I: ATE RMSE on the TUM-RGBD dataset (m).

	Method	360	desk	desk2	floor	plant	room	rrpy	teddy	xyz	Avg.
Calib.	ORB-SLAM3 [22]	×	0.013	×	0.015	0.040	0.151	×	0.498	0.008	N/A
	DeepV2D [†] [32]	0.243	0.166	0.379	1.653	0.203	0.246	0.105	0.316	0.064	0.375
	DPV-SLAM++ [33]	0.123	0.019	0.026	0.044	0.027	0.382	0.040	0.109	0.011	0.087
	GO-SLAM [34]	0.175	0.020	0.038	0.030	0.039	0.626	0.025	0.053	0.013	0.113
	DROID-SLAM [35]	0.061	0.018	0.028	0.032	0.013	0.043	0.030	0.030	0.011	0.030
	MAS3R-SLAM [24]	0.043	0.019	0.026	0.029	0.018	0.073	0.030	0.038	0.006	0.031
	MonoGS [13]	0.175	0.564	0.704	0.392	0.090	0.900	0.049	0.113	0.016	0.334
	Splat-SLAM [37]	0.056	0.019	0.028	0.030	0.018	0.044	0.022	0.042	0.012	0.030
Uncalib.	HI-SLAM2 [38]	0.155	0.016	0.022	0.035	0.015	0.057	0.025	0.027	0.010	0.040
	DROID-SLAM [35]	0.189	0.035	0.796	0.278	0.034	0.829	0.054	0.038	0.013	0.252
	MAS3R-SLAM [24]	0.072	0.038	0.059	0.050	0.038	0.098	0.041	0.135	0.020	0.061
	VGGT-SLAM [6]	0.068	0.027	0.042	0.157	0.023	0.117	0.032	0.039	0.014	0.058
	VGGT-SLAM 2.0 [7]	0.050	0.026	0.029	0.100	0.025	0.064	0.026	0.035	0.014	0.041
	SLAM-MER [39]	0.103	0.034	0.039	0.221	0.044	0.228	0.050	0.118	0.006	0.094
	EC3R-SLAM [40]	0.107	0.070	0.081	0.054	0.088	0.136	0.046	0.112	0.030	0.080
	AIM-SLAM [‡] [25]	0.050	0.017	0.028	0.024	0.026	0.062	0.021	0.039	0.010	0.031
	VGGT-SLAM++ [‡] [26]	0.042	0.025	0.027	0.077	0.042	0.027	0.026	0.029	0.016	0.036
	GeoGS-SLAM [‡] [5]	–	–	–	–	–	–	–	–	–	0.035
	Ours	0.058	0.021	0.026	0.029	0.020	0.050	0.024	0.033	0.013	0.030

[†]: Paper-reported results. GeoGS-SLAM reports only the average over the same nine sequences; its paper does not provide per-sequence values.

VGGT-SLAM++’s reported Avg. of 0.036 is retained; its listed per-sequence values average 0.0346.

×: Less than 70% time-span coverage.

TABLE II: ATE RMSE on 7-Scenes sequence 01 (m).

	Method	chess	fire	heads	office	pumpkin	redkitchen	stairs	Avg.
Calib.	ORB-SLAM3 [22]	0.043	0.030	0.069	0.092	0.116	0.046	0.272	0.095
	DPV-SLAM++ [33]	0.038	0.044	0.027	0.064	0.120	0.036	0.025	0.051
	GO-SLAM [34]	0.040	0.033	0.027	0.055	0.118	0.038	0.023	0.048
	NICER-SLAM [†] [36]	0.033	0.069	0.042	0.108	0.200	0.039	0.108	0.086
	DROID-SLAM [35]	0.032	0.028	0.025	0.080	0.088	0.041	0.017	0.045
	MAS3R-SLAM [24]	0.059	0.025	0.014	0.096	0.081	0.042	0.010	0.047
	MonoGS [13]	0.043	0.056	0.445	0.479	0.234	0.063	0.210	0.218
	Splat-SLAM [37]	0.038	0.032	0.029	0.055	0.113	0.042	0.020	0.047
Uncalib.	HI-SLAM2 [38]	0.036	0.032	0.026	0.080	0.116	0.040	0.027	0.051
	DROID-SLAM [35]	0.038	0.037	0.307	0.166	0.132	0.090	0.018	0.113
	MAS3R-SLAM [24]	0.063	0.046	0.029	0.113	0.116	0.075	0.064	0.072
	VGGT-SLAM [6]	0.037	0.025	0.018	0.098	0.139	0.071	0.092	0.069
	VGGT-SLAM 2.0 [7]	0.038	0.026	0.018	0.102	0.134	0.060	0.092	0.067
	SLAM-MER [39]	0.052	0.028	0.060	0.097	0.153	0.058	0.039	0.070
	EC3R-SLAM [40]	0.086	0.045	0.055	0.126	0.171	0.067	0.041	0.084
	VGGT-SLAM++ [‡] [26]	0.034	0.023	0.017	0.104	0.127	0.085	0.060	0.064
	Ours	0.037	0.025	0.020	0.096	0.136	0.039	0.034	0.055

[†]: Paper-reported results.

calibrated Splat-SLAM [37] (0.030 m). On 7-Scenes sequence 01 (Table II), ours achieves the best uncalibrated average of 0.055 m, improving VGGT-SLAM++ [26] (0.064 m) by 14.1%. It ranks first on office and redkitchen and second on chess, fire, and stairs. Finally, on the six ScanNet sequences in Table III, ours ranks first among uncalibrated methods on five sequences, reducing the average ATE from 0.103 m for VGGT-SLAM 2.0 to 0.090 m.

C. Novel View Synthesis

We evaluate NVS on Replica [42] and TUM-RGBD [29] against RGB-only neural and Gaussian SLAM methods [34], [13], [14], [43], [37], [38], using each work’s official implementation. We evaluate every fifth frame, excluding mapping keyframes and using a common frame set across methods. Replica and TUM use 640×360 and 512×384 images, respectively; calibrated methods use undistorted RGB, while ours uses raw RGB. For TUM scoring, we bilinearly remap our saved renders to the common undistorted domain using dataset calibration only for evaluation. All methods share the same reference RGB and geometrically valid crop, with all RGB channels scored for PSNR. We score saved 8-bit RGB outputs using PSNR, SSIM, and AlexNet-based LPIPS [44], averaging frames within scenes and then scenes equally.

For NVS, TUM uses the BA maps directly; Replica adds 500 mapping-refinement and 500 RGB-only refinement iterations per submap, with poses and calibration fixed.

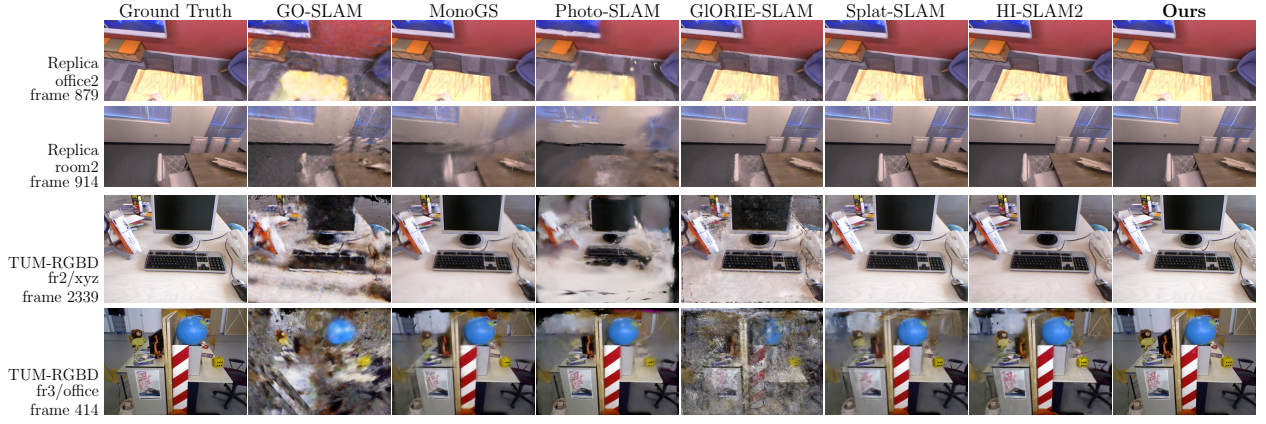


Fig. 4. Qualitative NVS examples from archived Replica and TUM-RGBD runs, with ours in the rightmost column.

TABLE III: ATE RMSE on the ScanNet dataset (m).

	Method	0000	0059	0106	0169	0181	0207	Avg.
Calib.	ORB-SLAM3 [22]	0.071	0.118	×	0.073	0.179	0.559	N/A
	DPV-SLAM++ [33]	0.086	0.214	0.126	0.091	0.117	0.301	0.156
	GO-SLAM [34]	0.055	0.097	0.152	0.099	0.085	0.076	0.094
	DROID-SLAM [35]	0.055	0.815	0.830	0.092	0.117	0.433	0.390
	MAS3R-SLAM [24]	0.060	0.082	0.086	0.084	0.070	0.066	0.075
	MonoGS [13]	1.547	0.893	1.501	1.996	0.910	0.900	1.291
	Splat-SLAM [37]	0.062	0.092	0.082	0.088	0.079	0.070	0.079
	HI-SLAM2 [38]	0.054	0.078	1.300	0.084	0.072	0.066	0.275
Uncalib.	DROID-SLAM [35]	1.655	0.728	0.153	0.107	0.449	0.443	0.589
	MAS3R-SLAM [24]	0.106	0.097	0.113	0.136	0.110	0.123	0.114
	VGGT-SLAM [6]	0.194	0.100	0.175	0.181	0.148	0.126	0.154
	VGGT-SLAM 2.0 [7]	0.116	0.092	0.097	0.142	0.080	0.090	0.103
	SLAM-MER [39]	0.211	0.106	0.228	0.144	0.211	0.166	0.178
	EC3R-SLAM [40]	0.104	0.117	0.171	0.238	0.094	0.284	0.168
	Ours	0.105	0.086	0.092	0.096	0.079	0.083	0.090

×: Less than 70% time-span coverage.

TABLE IV: Replica NVS on common frames.

Method	Metric	room0	room1	room2	office0	office1	office2	office3	office4	Avg.
GO-SLAM [34]	PSNR ↑	21.794	25.527	24.001	28.349	30.088	22.281	23.138	24.730	24.989
	SSIM ↑	0.625	0.759	0.732	0.819	0.868	0.742	0.725	0.805	0.759
	LPIPS ↓	0.570	0.449	0.483	0.430	0.319	0.454	0.449	0.455	0.451
MonoGS [13]	PSNR ↑	29.618	28.638	24.023	32.291	35.970	27.429	29.915	28.882	29.596
	SSIM ↑	0.896	0.849	0.804	0.903	0.944	0.898	0.925	0.923	0.893
	LPIPS ↓	0.095	0.161	0.333	0.158	0.096	0.169	0.092	0.143	0.156
Photo-SLAM [14]	PSNR ↑	25.065	18.801	20.301	23.441	23.886	18.360	25.087	22.940	22.235
	SSIM ↑	0.785	0.710	0.759	0.768	0.778	0.770	0.856	0.837	0.783
	LPIPS ↓	0.238	0.570	0.486	0.466	0.390	0.379	0.175	0.325	0.379
GIORIE-SLAM [43]	PSNR ↑	27.261	28.394	28.664	33.848	17.123	26.531	27.098	11.568	25.061
	SSIM ↑	0.851	0.872	0.885	0.928	0.427	0.874	0.877	0.568	0.785
	LPIPS ↓	0.179	0.184	0.190	0.112	0.692	0.212	0.160	0.753	0.310
Splat-SLAM [37]	PSNR ↑	33.273	35.472	36.297	41.053	40.809	35.701	36.284	38.288	37.147
	SSIM ↑	0.930	0.940	0.960	0.976	0.971	0.946	0.963	0.970	0.957
	LPIPS ↓	0.064	0.067	0.052	0.040	0.053	0.097	0.043	0.048	0.058
HI-SLAM2 [38]	PSNR ↑	35.888	37.233	38.503	42.440	43.089	37.746	38.117	39.355	39.046
	SSIM ↑	0.957	0.970	0.976	0.983	0.981	0.975	0.975	0.978	0.975
	LPIPS ↓	0.039	0.033	0.027	0.021	0.022	0.032	0.027	0.030	0.029
Ours	PSNR ↑	35.398	36.871	37.669	43.334	42.185	38.700	38.017	40.623	39.100
	SSIM ↑	0.956	0.962	0.969	0.986	0.978	0.975	0.973	0.982	0.973
	LPIPS ↓	0.026	0.019	0.019	0.012	0.024	0.022	0.022	0.018	0.020

Our method achieves the best average PSNR and LPIPS on both datasets (Tables IV and V). On Replica, it achieves 39.100dB PSNR and 0.020 LPIPS, compared with HI-SLAM2’s 39.046dB and 0.029. On TUM, our PSNR is comparable to Splat-SLAM (24.484 vs. 24.413 dB), with lower LPIPS than HI-SLAM2 (0.185 vs. 0.197), which achieves the best SSIM. Bicubic remapping preserves these mean rankings. Fig. 4 presents qualitative comparisons.

D. More Experiments

Unless otherwise specified, all experiments in this section use all Freiburg1 sequences from TUM-RGBD [29].

Calibration validation. Our CUDA calibration gradients

TABLE V: TUM-RGBD NVS on common frames.

Method	Metric	f1/desk	f2/xyz	f3/off	f1/desk2	f1/room	Avg.
GO-SLAM [34]	PSNR ↑	15.137	14.218	14.024	5.626	15.065	12.814
	SSIM ↑	0.489	0.462	0.433	0.077	0.495	0.391
	LPIPS ↓	0.587	0.571	0.714	0.861	0.634	0.674
MonoGS [13]	PSNR ↑	16.241	24.243	22.858	15.934	15.067	18.868
	SSIM ↑	0.587	0.826	0.788	0.579	0.536	0.663
	LPIPS ↓	0.503	0.154	0.267	0.510	0.543	0.395
Photo-SLAM [14]	PSNR ↑	14.072	15.572	17.795	12.942	12.288	14.534
	SSIM ↑	0.507	0.563	0.641	0.486	0.457	0.531
	LPIPS ↓	0.528	0.625	0.371	0.596	0.663	0.557
GIORIE-SLAM [43]	PSNR ↑	14.195	19.063	16.906	13.095	13.868	15.426
	SSIM ↑	0.315	0.622	0.403	0.249	0.279	0.374
	LPIPS ↓	0.839	0.453	0.738	0.903	0.903	0.767
Splat-SLAM [37]	PSNR ↑	25.497	26.922	23.078	22.617	23.953	24.413
	SSIM ↑	0.837	0.857	0.791	0.748	0.780	0.803
	LPIPS ↓	0.177	0.122	0.239	0.283	0.244	0.213
HI-SLAM2 [38]	PSNR ↑	24.568	27.563	23.549	22.611	21.459	23.950
	SSIM ↑	0.849	0.900	0.828	0.825	0.761	0.833
	LPIPS ↓	0.173	0.083	0.210	0.213	0.304	0.197
Ours	PSNR ↑	24.459	26.567	24.847	24.144	22.403	24.484
	SSIM ↑	0.831	0.864	0.856	0.814	0.758	0.825
	LPIPS ↓	0.175	0.123	0.163	0.208	0.254	0.185

match float64 PyTorch autograd references within 4.1×10^{-7} relative L_2 error, including reparameterization and FoV clipping. For 10^3 – 10^5 Gaussians, FP32 projection forward/backward is 6.1–12.0× faster than the matched PyTorch reference, including map and camera gradients, as measured using warmed CUDA graphs.

Under the default configuration, calibration refinement across 95 Freiburg1 submaps reduces sequence-averaged projection error from 14.791 to 11.185 px and ray error from 1.435° to 1.059° , evaluated at 41×31 uniformly spaced sample points across the 640×480 image. Intrinsic measures the pixel displacement obtained by projecting reference-camera rays through the estimated camera model; ray error measures the angle between their back-projected rays at the same pixel. In a six-window control, refining intrinsics reduces projection error from 13.982 to 10.627 px; jointly refining intrinsics and distortion achieves a similar error of 10.746 px.

Ablation study. Table VI evaluates each component by removing it individually. Removing the depth loss also removes the depth-based scale reference, without adding another scale anchor. GNA has the largest impact: removing it increases ATE RMSE from 0.0304 to 0.0720 m. Disabling calibration optimization raises the error to 0.0324 m, while

TABLE VI: Component ablation on TUM-RGBD.

GNA	Calib. opt.	Affine	$\mathcal{L}_{\text{depth}}$	$\mathcal{L}_{\text{iso}}$	ATE RMSE ↓
✗	✗	✓	✓	✓	0.0720
✓	✓	✓	✓	✓	0.0324
✓	✓	✗	✓	✓	0.0313
✓	✓	✓	✗	✓	0.0316
✓	✓	✓	✓	✗	0.0311
✓	✓	✓	✓	✓	0.0304

TABLE VII: GNA matching ablation. Sequence-averaged ATE with loop closures disabled.

Alignment variant	ATE (m) ↓
Initial alignment (no GNA)	0.0583
Center-only matching	0.0604
GNA with spherical Gaussians	0.0539
GNA without spacing prior	0.0534
Full GNA (Ours)	0.0533

removing exposure compensation, the depth loss, or the isotropic regularizer also reduces localization accuracy.

GNA matching ablation. We evaluate all 86 consecutive submap pairs across the nine TUM fr1 sequences. Table VII compares Gaussian matching objectives with loop closures disabled and identical Gaussian selections and optimization settings. Matching Gaussian distributions instead of their centers reduces mean ATE by 11.8%. Accounting for Gaussian shape and orientation provides a small improvement over spherical Gaussians, while the spacing prior has little effect in this experiment. In a separate density test on nine submap pairs, uniformly retaining 25% of the Gaussians on either side changes the estimated relative scale by at most 0.80% compared with full density, under the same update bounds and acceptance criteria.

GNA loop-closure verification. On TUM Freiburg1, SALAD [28] retrieval ($\tau_r = 1.05$, top-5; top-1 online) yields 357 proposals, of which 347 have valid ground-truth associations. A 15% bidirectional GT-depth overlap threshold identifies 255 valid loops and 92 false matches. Table VIII shows that GNA without the rotation check retains more valid loops (249 vs. 247) with fewer false accepts (3 vs. 7) than the official VGGT-SLAM 2.0 verifier [7] at its code threshold of 0.95, with or without the same check. The check accepts 83 false matches, but removes one additional false match when combined with GNA, without losing valid loops.

In a separate fixed-map replay with online top-1 retrieval, loop verification drives most localization gains; adding GNA alignment between consecutive submaps further reduces mean ATE by 2.6%. Together, they reduce mean 1-s rotational RPE RMSE from 3.181° to 1.520° . Rotational RPE measures the error in relative rotation between keyframes approximately 1 s apart (± 0.1 s, without interpolation). For identical accepted loops, the original transforms outperform GNA-refined ones, supporting verification rather than transform refinement for loop closures.

Submap-size trade-off. Table IX reports performance under different submap size averaged over nine Freiburg1. Both FPS metrics divide the number of input frames by processing time: Backend FPS covers the SLAM stage only while Full FPS additionally includes loading, non-keyframe pose esti-

TABLE VIII: Offline loop verification.

Verifier	TP	FN	FP	TN	Pos. recall ↑	Neg. rej. ↑
Rotation check only	255	0	83	9	100.00%	9.78%
VGGT-SLAM 2.0 [7]	247	8	7	85	96.86%	92.39%
+ rotation check	247	8	7	85	96.86%	92.39%
GNA w/o rotation check	249	6	3	89	97.65%	96.74%
Full GNA (Ours)	249	6	2	90	97.65%	97.83%

TABLE IX: Submap-size trade-off, GPU memory is in GiB.

size	ATE (m) ↓	Full FPS ↑	Backend FPS ↑	Avg. GPU ↓	Peak GPU ↓
2	0.040	1.453	2.044	7.211	10.277
4	0.039	2.086	3.611	6.609	11.730
8	0.040	2.709	6.141	5.619	12.510
16	0.037	3.045	9.653	4.071	12.729
24	0.030	3.157	10.765	3.745	13.281
32	0.035	3.376	13.086	3.362	13.512

TABLE X: Runtime and sampled peak GPU memory (GiB).

Method	TUM fr1/xyz		Replica office0	
	Time (s) ↓	Peak ↓	Time (s) ↓	Peak ↓
MonoGS [13]	399.61	2.40	447.85	2.90
Splat-SLAM [37]	508.48	11.35	531.45	11.65
GIORIE-SLAM [43]	1814.17	15.93	3672.51	15.36
Ours	252.80	13.28	304.23	14.24

TABLE XI: Generalization across feed-forward frontends.

Frontend	Raw ↓	+Backend ↓	Improvement
DA3-Large [45]	0.064	0.033	49.0%
Fast3R [46]	0.178	0.137	22.7%
VGGT [4]	0.074	0.0304	58.9%

mation. The 24-keyframe setting (default) gives the lowest average ATE (0.030 m) in the accuracy study.

Runtime and GPU memory comparison. Table X compares runtime and peak GPU memory on TUM fr1/xyz and the first 1,000 frames of Replica office0. The table shows baselines slower than Ours on both sequences. Timing includes loading, SLAM, non-keyframe pose estimation without additional refinement. Ours achieves 3.157/3.29 FPS on TUM/Replica, respectively, running $1.58/1.47\times$ faster than MonoGS and $2.01/1.75\times$ faster than Splat-SLAM. Non-keyframe pose estimation accounts for 69.0% and 57.1% of total runtime on TUM and Replica, respectively.

Feed-forward frontend generalization. To test whether the proposed backend depends specifically on VGGT [4], we replace the feed-forward prior with DA3-Large [45] and Fast3R [46] while keeping the 24-keyframe submap setting fixed. Raw includes submap alignment, pose-graph optimization, and loop closure, rather than isolated network predictions. Table XI reports ATE RMSE in meters: the same Gaussian BA and GNA backend improves all three frontends, reducing average ATE by 22.7–58.9%.

V. CONCLUSION

We present VGGT-GS SLAM, a monocular dense SLAM framework that jointly estimates camera poses, Gaussian maps, intrinsics, and lens distortion from uncalibrated RGB input. By combining feed-forward geometric priors with calibration-aware Gaussian bundle adjustment and Gaussian-native submap alignment and loop verification, our method achieves strong localization and novel-view synthesis performance on indoor benchmarks. Its performance remains sensitive to prior quality and calibration observability, while

local map deformation and window-induced latency remain limitations.

REFERENCES

- [1] B. Kerbl, G. Kopanas, T. Leimkühler, and G. Drettakis, “3D Gaussian splatting for real-time radiance field rendering,” *ACM Transactions on Graphics*, vol. 42, no. 4, pp. 139:1–139:14, 2023.
- [2] S. Wang, V. Leroy, Y. Cabon, B. Chidlovskii, and J. Revaud, “DUST3R: Geometric 3D vision made easy,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 20 697–20 709.
- [3] V. Leroy, Y. Cabon, and J. Revaud, “Grounding image matching in 3D with MAST3R,” in *European Conference on Computer Vision*. Springer, 2024, pp. 71–91.
- [4] J. Wang, M. Chen, N. Karaev, A. Vedaldi, C. Rupprecht, and D. Novotny, “VGGT: Visual geometry grounded transformer,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025, pp. 5294–5306.
- [5] R. Gao, L. Jin, and Y. Zhang, “GeoGS-SLAM: Online monocular reconstruction using Gaussian splatting with geometric priors,” *arXiv preprint arXiv:2607.11184*, 2026.
- [6] D. Maggio, H. Lim, and L. Carlone, “VGGT-SLAM: Dense RGB SLAM optimized on the SL(4) manifold,” in *Advances in Neural Information Processing Systems*, vol. 38, 2025, pp. 129 839–129 867.
- [7] D. Maggio and L. Carlone, “VGGT-SLAM 2.0: Real-time dense feed-forward scene reconstruction,” *arXiv preprint arXiv:2601.19887*, 2026.
- [8] E. Sucar, S. Liu, J. Ortiz, and A. J. Davison, “iMAP: Implicit mapping and positioning in real-time,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2021, pp. 6229–6238.
- [9] Z. Zhu, S. Peng, V. Larsson, W. Xu, H. Bao, Z. Cui, M. R. Oswald, and M. Pollefeys, “NICE-SLAM: Neural implicit scalable encoding for SLAM,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 12 786–12 796.
- [10] H. Wang, J. Wang, and L. Agapito, “Co-SLAM: Joint coordinate and sparse parametric encodings for neural real-time SLAM,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 13 293–13 302.
- [11] C. Yan, D. Qu, D. Xu, B. Zhao, Z. Wang, D. Wang, and X. Li, “GS-SLAM: Dense visual SLAM with 3D Gaussian splatting,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 19 595–19 604.
- [12] N. Keetha, J. Karhade, K. M. Jatavallabhula, G. Yang, S. Scherer, D. Ramanan, and J. Luiten, “SplatTAM: Splat track & map 3D Gaussians for dense RGB-D SLAM,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 21 357–21 366.
- [13] H. Matsuki, R. Murai, P. H. J. Kelly, and A. J. Davison, “Gaussian splatting SLAM,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 18 039–18 048.
- [14] H. Huang, L. Li, H. Cheng, and S.-K. Yeung, “Photo-SLAM: Real-time simultaneous localization and photorealistic mapping for monocular stereo and RGB-D cameras,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 21 584–21 593.
- [15] C. Homeyer, L. Begiristain, and C. Schnörr, “DROID-Splat combining end-to-end SLAM with 3D Gaussian splatting,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision Workshops*, 2025, pp. 2788–2798.
- [16] V. Yugay, Y. Li, T. Gevers, and M. R. Oswald, “Gaussian-SLAM: Photo-realistic dense SLAM with Gaussian splatting,” *arXiv preprint arXiv:2312.10070*, 2023.
- [17] L. Zhu, Y. Li, E. Sandström, S. Huang, K. Schindler, and I. Armeni, “LoopSplat: Loop closure by registering 3D Gaussian splats,” in *2025 International Conference on 3D Vision (3DV)*. IEEE, 2025, pp. 156–167.
- [18] Z. Xu, Q. Li, C. Chen, X. Liu, and J. Niu, “GLC-SLAM: Gaussian splatting SLAM with efficient loop closure,” *arXiv preprint arXiv:2409.10982*, 2024.
- [19] N. Keivan and G. Sibley, “Online SLAM with any-time self-calibration and automatic change detection,” in *2015 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2015, pp. 5775–5782.
- [20] B. Zhuang, Q.-H. Tran, G. H. Lee, L. F. Cheong, and M. Chandraker, “Degeneracy in self-calibration revisited and a deep learning solution for uncalibrated SLAM,” in *2019 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. IEEE, 2019, pp. 3766–3773.
- [21] A. Hagemann, M. Knorr, and C. Stiller, “Deep geometry-aware camera self-calibration from video,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 3438–3448.
- [22] C. Campos, R. Elvira, J. J. Gómez Rodríguez, J. M. M. Montiel, and J. D. Tardós, “ORB-SLAM3: An accurate open-source library for visual, visual-inertial, and multimap SLAM,” *IEEE Transactions on Robotics*, vol. 37, no. 6, pp. 1874–1890, 2021.
- [23] J. Engel, V. Koltun, and D. Cremers, “Direct sparse odometry,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 40, no. 3, pp. 611–625, 2018.
- [24] R. Murai, E. Dexheimer, and A. J. Davison, “MASt3R-SLAM: Real-time dense SLAM with 3D reconstruction priors,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025, pp. 16 695–16 705.
- [25] J. Jeon, D.-U. Seo, E. M. Lee, and H. Myung, “AIM-SLAM: Dense monocular SLAM via adaptive and informative multi-view keyframe prioritization with foundation model,” *arXiv preprint arXiv:2603.05097*, 2026.
- [26] A. Mandal, R. Kumar, S. S. Harithas, and C. Arora, “VGGT-SLAM++,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, 2026, pp. 1008–1018.
- [27] V. Ye, R. Li, J. Kerr, M. Turkulainen, B. Yi, Z. Pan, O. Seiskari, J. Ye, J. Hu, M. Tancik, and A. Kanazawa, “gsplat: An open-source library for Gaussian splatting,” *Journal of Machine Learning Research*, vol. 26, no. 34, pp. 1–17, 2025.
- [28] S. Izquierdo and J. Civera, “Optimal transport aggregation for visual place recognition,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024, pp. 17 658–17 668.
- [29] J. Sturm, N. Engelhard, F. Endres, W. Burgard, and D. Cremers, “A benchmark for the evaluation of RGB-D SLAM systems,” in *2012 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, Oct. 2012, pp. 573–580.
- [30] J. Shotton, B. Glocker, C. Zach, S. Izadi, A. Criminisi, and A. Fitzgibbon, “Scene coordinate regression forests for camera relocalization in RGB-D images,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2013, pp. 2930–2937.
- [31] A. Dai, A. X. Chang, M. Savva, M. Halber, T. Funkhouser, and M. Nießner, “ScanNet: Richly-annotated 3D reconstructions of indoor scenes,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2017, pp. 5828–5839.
- [32] Z. Teed and J. Deng, “DeepV2D: Video to depth with differentiable structure from motion,” in *International Conference on Learning Representations*, 2020.
- [33] L. Lipson, Z. Teed, and J. Deng, “Deep patch visual SLAM,” in *European Conference on Computer Vision*, 2024, pp. 424–440.
- [34] Y. Zhang, F. Tosi, S. Mattoccia, and M. Poggi, “GO-SLAM: Global optimization for consistent 3D instant reconstruction,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 2023, pp. 3727–3737.
- [35] Z. Teed and J. Deng, “DROID-SLAM: Deep visual SLAM for monocular, stereo, and RGB-D cameras,” in *Advances in Neural Information Processing Systems*, vol. 34, 2021, pp. 16 558–16 569.
- [36] Z. Zhu, S. Peng, V. Larsson, Z. Cui, M. R. Oswald, A. Geiger, and M. Pollefeys, “NICER-SLAM: Neural implicit scene encoding for RGB SLAM,” in *2024 International Conference on 3D Vision (3DV)*. IEEE, 2024, pp. 42–52.
- [37] E. Sandström, G. Zhang, K. Tateno, M. Oechsle, M. Niemeyer, Y. Zhang, M. Patel, L. Van Gool, M. Oswald, and F. Tombari, “Splat-SLAM: Globally optimized RGB-only SLAM with 3D Gaussians,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, 2025, pp. 1686–1697.
- [38] W. Zhang, Q. Cheng, D. Skuddis, N. Zeller, D. Cremers, and N. Haala, “HI-SLAM2: Geometry-aware Gaussian SLAM for fast monocular scene reconstruction,” *IEEE Transactions on Robotics*, vol. 41, pp. 6478–6493, 2025.
- [39] V. Piedade, L. Manam, M. Yamazaki, and P. Miraldo, “Revisiting monocular SLAM with spatio-temporal scene modeling,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2026, pp. 28 925–28 936.

- [40] L. Hu, N. Ait Oufroukh, F. Bonardi, and R. Ghandour, "EC3R-SLAM: Efficient and consistent monocular dense SLAM with feed-forward 3D reconstruction," *arXiv preprint arXiv:2510.02080*, 2025.
- [41] A. Veicht, P.-E. Sarlin, P. Lindenberger, and M. Pollefeys, "GeoCalib: Learning single-image calibration with geometric optimization," in *European Conference on Computer Vision*. Springer, 2024, pp. 1–20.
- [42] J. Straub *et al.*, "The Replica dataset: A digital replica of indoor spaces," *arXiv preprint arXiv:1906.05797*, 2019.
- [43] G. Zhang, E. Sandström, Y. Zhang, M. Patel, L. Van Gool, and M. R. Oswald, "GLORIE-SLAM: Globally optimized RGB-only implicit encoding point cloud SLAM," *arXiv preprint arXiv:2403.19549*, 2024.
- [44] R. Zhang, P. Isola, A. A. Efros, E. Shechtman, and O. Wang, "The unreasonable effectiveness of deep features as a perceptual metric," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2018, pp. 586–595.
- [45] H. Lin, S. Chen, J. Liew, D. Y. Chen, Z. Li, G. Shi, J. Feng, and B. Kang, "Depth Anything 3: Recovering the visual space from any views," *arXiv preprint arXiv:2511.10647*, 2025.
- [46] J. Yang, A. Sax, K. J. Liang, M. Henaff, H. Tang, A. Cao, J. Chai, F. Meier, and M. Feiszli, "Fast3R: Towards 3D reconstruction of 1000+ images in one forward pass," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025, pp. 21 924–21 935.