

Webservices - private.social

Contents

Idea and Features	1
Motivation	2
Task distribution	3
Repo structure	3
Project structures	3
CDN	3
Directory content overview:	5
API	6
Workflow for adding a new Route	7
Directory content overview:	9
Web	10
Directory structure	11
Screenshots:	13
Technology choices	13
Frontend	13
Backend	17
Getting started	17
Production environment	17
Image sizes	18
Docker compose	18
Configuration	18
Docker images	19
Docker API	20
Docker CDN	20
Docker WEB	21
Development environment	22
API	22
WEB	23
CDN	23

Idea and Features

Private.social is designed to be a truly private and secure social network that empowers users to:

- ☒ Create an account without requiring an email address or phone number.
 - ☐ Optionally add an email address to the account to enable resetting the account password.
- ☒ Set all accounts to private visibility by default. (Only followers can view profile data and posts from a private account.)
- ☒ Secure all API interactions with JWT tokens.
- ☒ Store passwords in the database hashed with bcrypt.

- ☒ Enforce password requirements:
 - ☒ Minimum of 10 characters.
 - ☒ At least one symbol.
 - ☒ At least one uppercase character.
 - ☒ At least one number.

Non-privacy related features:

- ☒ Self-hostable API, CDN, and web.
- ☐ Home view sorted chronologically.
- ☒ Posts:
 - ☐ Likes:
 - ☐ Private (only the creators can see the number of likes).
 - ☐ Disable (no one can like the post).
 - ☐ Comments:
 - ☐ Restricted (only followers can comment).
 - ☐ Mention-only (only mentioned users can comment).
 - ☐ Disable (no one can comment).
 - ☒ Caption.
 - ☐ Collaboration on posts.
- ☒ Profile:
 - ☒ Biography:
 - ☒ Text biography.
 - ☐ Custom pronouns.
 - ☒ Profile picture.
 - ☐ Profile banner.
 - ☒ Website.
 - ☒ Location.
 - ☐ Customize profile using CSS.

Mental health related features:

- ☐ Likes and comments can be restricted and disabled.
- ☐ Users can be blocked, muted, and reported.
- ☐ Posts can be reported.

Motivation

Private.social was developed during the 4th semester of our applied computer science bachelor's program by the following four individuals:

- 9525469
- 9197785
- 8478190
- 1823169

The objective of the semester's examination was to create and document an application that utilizes at least two microservices. One microservice had to be programmed by our group, while the other could be any publicly available online web service. To earn a mark higher than "good," the group had to create either a frontend web application or a mobile application. The task also required the groups to document the application interfaces with OpenAPI and keep track of which member was responsible for which task.

At Private.social, we utilize three microservices that we programmed ourselves:

- **api:** This service allows the web frontend to interact with the database.

- **cdn**: This service is responsible for storing assets.
- **web**: This service governs the web interface.

We also utilize one microservice as a database:

- **mongo**: This service is responsible for storing all user and post data.

In addition, we use one external service:

- **ui.avatars**: This service is used to provide new users with a default profile picture.

Task distribution

Team member	Task
xnacy	Web and API implementation, docs
ellirynbw	Docker, Nginx and mongodb setup, docs
derPhilosoff	Docs, API database wrapper, config package
Nosch	CDN, docs and web design

Repo structure

This project is structured into four main directories:

- **web/**: This folder contains the front-end portion of the application, which is built with React.js.
- **api/**: This directory contains the back-end of the application, which is built with Go.
- **cdn/**: This folder contains the content delivery network of the application, which is built with Go. The CDN serves pictures and videos.
- **docs/**: This folder contains the documentation for the project.

Project structures

The following chapter is a short summary of the projects directories and what path contains what part of the business logic.

CDN

The cdn is started via `go run .` which downloads all the dependencies the go compiler needs to create an executable. After starting, the cdn checks if the directory `./vfs` exists, if not it creates the directory. The next step is a custom error handler which returns a `ApiResponse` go structure to the user, which is translated to the following json object:

```
{
  "success": false,
  "code": 404,
  "message": "Not Found",
  "data": null
}
```

This structure supports errors (as showcased above) and successful responses, such as:

```
{
  "success": true,
  "code": 201,
  "message": "file uploaded successfully",
  "data": {
```

```

    "path": "/v1/asset/LHGyWsDknFdtJFzhHCprZHUhekCTTWH/dGVzdC5wbmdx"
  }
}

```

This response structure is also used in the `api` project to keep things consistent.

The `cdn` uses and registers the `cors`, `cache` and `logger` middleware, all provided by the `fiber` web server framework. The first one is used to insure cross origin resource sharing, the second one is used to aggressively cache assets uploaded to the `cdn` and the third allows for verbose event logging, which is incredibly helpful for debugging.

After the middlewares are registered, the `cdn` groups the two available routes using the `v1` group, which enables the routing using a prefix. This is useful for versioning and supporting outdated routes, while innovating.

The first of the two routes is used to upload a file `/v1/upload/:file`. It only accepts incoming requests if the `file` parameter and the request body are not empty. After a request was made, the `cdn` first determines the MIME type of the incoming binary request body and checks if it's a supported MIME type:

- `image/png`
- `image/jpg`
- `image/jpeg`
- `image/gif`
- `image/webp`
- `image/heic`
- `video/mp4`

If this isn't the case, the `cdn` responds with an error in the format of the `ApiResponse` go structure. If the mime type is supported, the `cdn` creates a random directory prefix and creates a new directory with this name. To prevent vulnerabilities caused by file paths in the request parameter which try to escape the `vfs` directory, we use a `go std lib` function to only get the base of the filename. This escaped filename is now converted to its `base64` representation and stored as a file in the previously created directory. If everything worked out as intended, the `cdn` returns the default `ApiResponse` structure with the data containing a `path` key value pair pointing to the uploaded assets:

```

{
  "success": true,
  "code": 201,
  "message": "file uploaded successfully",
  "data": {
    "path": "/v1/asset/PXKjmgzuhCK0sxcFMxnEpZqSpTKTqNEF/dGVzdC5wbmdx"
  }
}

```

To request the uploaded asset, simply concatenate the returned path and the path the `cdn` is currently hosted at:

```

"http://localhost:8080" +
  "/v1/asset/PXKjmgzuhCK0sxcFMxnEpZqSpTKTqNEF/dGVzdC5wbmdx";

```

The result, viewed in the browser:

The second available handler is bound to the `v1/asset` path and is a statically hosted directory mounted to the `vfs` directory. Its cached with a max-age of 3600 seconds (60 min / 1h) and returns a 404 `ApiResponse` structure:

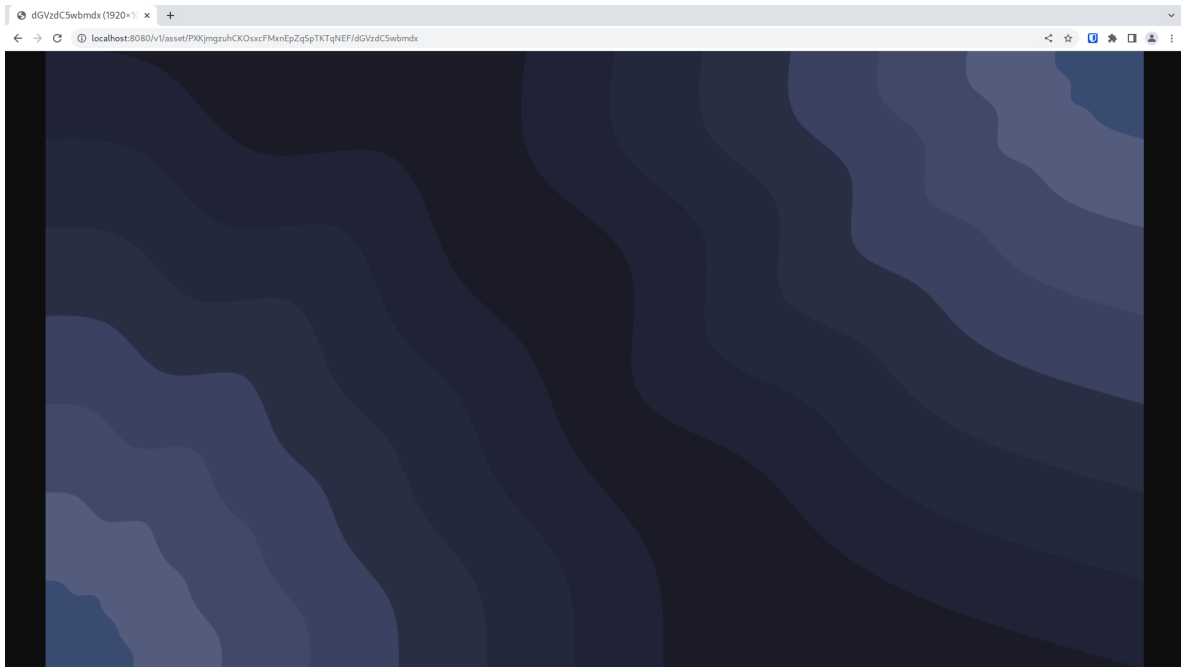


Figure 1: cdn asset screenshot

```
{
  "success": false,
  "code": 404,
  "message": "Not Found",
  "data": null
}
```

Directory content overview:

```
drwxr-xr-x  - teo 10 Mar 14:47 .
-rw-r--r-- 1.3k teo  9 Mar 11:56 | app.go
-rw-r--r-- 4.5k teo  9 Mar 16:30 | cdn-openapi.yaml
-rw-r--r-- 208 teo  6 Mar 10:35 | Dockerfile
-rw-r--r-- 896 teo  6 Mar 10:35 | go.mod
-rw-r--r-- 6.3k teo  6 Mar 10:35 | go.sum
drwxr-xr-x  - teo  9 Mar 11:56 | handlers
-rw-r--r-- 1.5k teo  9 Mar 11:56 |   | file.go
-rw-r--r-- 106 teo  6 Mar 10:35 | Readme.md
drwxr-xr-x  - teo 13 Mar 08:49 | tests
-rw-r--r-- 401 teo  6 Mar 10:35 |   | util_test.go
drwxr-xr-x  - teo  9 Mar 11:56 | util
-rw-r--r-- 3.6k teo  9 Mar 11:56 |   | util.go
drwxr-xr-x  - teo 13 Mar 08:49 | vfs
```

- app.go:

This is the main entry point of the application, and contains middlewares and restful server setup. It is responsible for setting up the different routes that the CDN will expose, and for binding the upload handler to POST /v1/upload. Additionally, it serves the vfs directory statically with a

max-age of 3600.

- Documentation:

The directory includes a CDN OpenAPI specification file, which describes the different endpoints of the CDN, and a Readme file, which provides information on how to use the CDN.

- Dockerfile:

This file is used to build a Docker image of the application. This is useful for deployment purposes, as it allows the application to be easily packaged and deployed on different platforms.

- Dependency management for Go:

go.sum and go.mod. These files are used to manage the different dependencies required by the application.

- Handlers:

This folder contains different handlers that are responsible for handling the different requests made to the CDN. The handlers are able to interact with the Fiber context, and act as routes for the CDN.

- Tests:

This folder contains unit tests for the util module.

- Util:

This folder contains a utility module for structs and small helper methods.

- Vfs:

This folder contains the directory that the CDN creates to store uploaded assets in.

API

In a nutshell the api is the layer between the web interface and the database with a bit of access security. The API is secured with usage of JWT and is at the point of writing in no way complete for all features described at idea.

As shown below, the api is a lot more structured and split up into modules than the cdn. The api also requires a database connection which is fairly complex and therefore abstracted away with a custom database wrapper.

After being started the application looks for the JWT_SECRET and the MONGO_URL environment variables using the config.LoadConfig function, the former is used for signing jwt tokens when a user registers or logs in and the second is used to connect to the database. If either of the above are not found in the process context the application throws a fatal error and exits.

After checking for the environment variables, the application calls the setup.Setup function, which creates the application, registers middlewares (cache, logger, cors) and returns the created instance of an fiber.App.

This created application is now passed to the router.RegisterRoutes function, which creates all router.Route structs in the router.UnauthenticatedRoutes array.

Example for a router.Route struct and the function call to register it as a route:

```
type Route struct {  
    Path      string  
    Method    string
```

```

    Handler    func(*fiber.Ctx) error
    Middlewares []func(*fiber.Ctx) error
}

var Routes = []Route{
    {
        Path:      "/ping",
        Method:     "GET",
        Handler:    func (c *fiber.Ctx) error {
            return c.JSON(util.ApiResponse{
                Success: true,
                Message: "pong",
                Code:    200,
                Data:    nil,
            })
        },
        Middlewares: []func(*fiber.Ctx) error{},
    },
}

app := setup.Setup()
RegisterRoutes(app, "v1", Routes...)
// running this prints:
// 2023/03/14 09:33:02 Registered route: [GET] v1/ping

```

The `router.RegisterRoutes` wrapper simplifies the registering of routes significantly.

Currently the only unauthenticated routes the api supports are the `/auth/login`, `/auth/register` and the `/ping` route.

To make all other routes only accept incoming requests if they contain a jwt in the `Authentication` http header, the application registers the jwt middleware with a custom `SuccessHandler` which uses the `util.GetCurrentUser` function to query the database for the id embeded in the jwt. The resulting `models.User` struct is stored in the fiber context using the `ctx.Locals` function.

If the user couldn't be found by the `SuccessHandler` of the jwt middleware it returns the error response we already know from the cdn:

```

{
  "success": false,
  "message": "Invalid token",
  "code": 401
}

```

After setting up the jwt middleware and therefore securing the application significantly, the application now registers all the other `router.Route` structs in the `router.Routes` array and afterwards binds a `404` error handler to all routes not bound to anything beforehand.

Workflow for adding a new Route Adding a new route to the api requires the following two choices to make:

- should it require authentication
- what path should the route answer to

For the sake of this example, lets assume we want to add a hello world route to the path `/hello/world`, it doesn't need authentication and returns a simple json object.

To get started we create a new file in the handlers directory named `helloworld.go`, in this file we write the following function:

```
// handlers/helloworld.go
package handlers

import (
    "github.com/xnacly/private.social/api/util"

    "github.com/gofiber/fiber/v2"
)

func HelloWorld(c *fiber.Ctx) error {
    return c.JSON(util.ApiResponse{
        Success: true,
        Message: "hello world",
        Code:    200,
    })
}
```

We of course need to import the fiber package for the context parameter in the function and we need to import our utility package to access our `util.ApiResponse` struct we use to keep the api responses consistent.

The response (if it has content) has the status of 200 OK, we set the `util.ApiResponse.Code` to match this status (the better way is to use `fiber.StatusOK` which maps to 200). The `util.ApiResponse.Message` is set to the string `hello world` and the `util.ApiResponse.Success` is of course `true`.

Currently this route is not registered to the application and therefore won't accept any incoming requests. To change this we need to navigate to the router package and open the `router.go` file.

At the top, right after the imports you should see a `Route` structure, which looks something like this:

```
// struct representing a route the api should handle and register
type Route struct {
    Path      string
    Method     string
    Handler    func(*fiber.Ctx) error
    Middlewares []func(*fiber.Ctx) error
}
```

To add your route to the application, simply create a new `Route` structure in the `router.UnauthenticatedRoutes`:

```
var UnauthenticatedRoutes = []Route{
    {
        Path: "/hello/world",
        Method: "GET",
        Handler: handlers.HelloWorld,
    },
    // ....
}
```

The `handler.HelloWorld` is automatically exported according to the go standard due to the uppercase function name.

Now simply restart the api and use `curl` to check if your route was registered:


```
curl --request GET \
  --url http://localhost:8000/v1/hello/world
# {"success":true,"code":200,"message":"hello world","data":null}
```

Directory content overview:

```
drwxr-xr-x  - teo 10 Mar 14:45 .
.rw-r--r-- 106 teo  6 Mar 17:06 | .env
.rw-r--r--  23 teo  6 Mar 10:35 | .env.example
.rw-r--r-- 1.8k teo  6 Mar 10:35 | app.go
drwxr-xr-x  - teo  6 Mar 10:35 | config
.rw-r--r--  951 teo  6 Mar 10:35 | └─ config.go
drwxr-xr-x  - teo 10 Mar 08:00 | database
.rw-r--r-- 1.2k teo  9 Mar 16:30 | └─ database.go
.rw-r--r--  2.3k teo 10 Mar 08:00 | └─ posts.go
.rw-r--r--  2.4k teo  9 Mar 16:30 | └─ users.go
.rw-r--r--  208 teo  6 Mar 10:35 | Dockerfile
.rw-r--r-- 1.5k teo  6 Mar 10:35 | go.mod
.rw-r--r-- 11k teo  6 Mar 10:35 | go.sum
drwxr-xr-x  - teo 10 Mar 15:10 | handlers
.rw-r--r--  4.5k teo  7 Mar 13:02 | └─ auth.go
.rw-r--r--  314 teo  9 Mar 16:30 | └─ ping.go
.rw-r--r--  3.5k teo 10 Mar 15:10 | └─ post.go
.rw-r--r--  2.8k teo  9 Mar 16:30 | └─ user.go
drwxr-xr-x  - teo  9 Mar 16:30 | models
.rw-r--r--  424 teo  9 Mar 16:30 | └─ General.go
.rw-r--r--  716 teo  9 Mar 16:30 | └─ Post.go
.rw-r--r--  2.2k teo  6 Mar 10:35 | └─ User.go
.rw-r--r--  17k teo  9 Mar 16:30 | openapi3_0.yaml
.rw-r--r--  873 teo  6 Mar 10:35 | Readme.md
drwxr-xr-x  - teo 10 Mar 14:39 | router
.rw-r--r--  2.5k teo 10 Mar 14:39 | └─ router.go
drwxr-xr-x  - teo  6 Mar 10:35 | setup
.rw-r--r--  1.4k teo  6 Mar 10:35 | └─ setup.go
drwxr-xr-x  - teo  6 Mar 10:35 | tests
.rw-r--r--  418 teo  6 Mar 10:35 | └─ config_test.go
.rw-r--r--  1.6k teo  6 Mar 10:35 | └─ util_test.go
drwxr-xr-x  - teo  6 Mar 10:35 | util
.rw-r--r--  4.8k teo  6 Mar 10:35 | └─ util.go
```

The project is structured as follows:

- app.go:
This is the main entry point of the application, similar to the CDN. It is responsible for starting the server, and setting up the different routes that the API will expose.
- Documentation:
The project includes an OpenAPI specification file, which describes the different endpoints of the API, and a Readme file, which provides information on how to use the API.
- Dockerfile:
This file is used to build a Docker image of the application. This is useful for deployment purposes, as it allows the application to be easily packaged and deployed on different platforms.

- **Configuration:**
The project includes a `.env` file, which contains environment variables used by the application, and a `.env.example` file, which serves as an example of how to set up the environment variables.
- **Dependency management for Go:**
`go.sum` and `go.mod`. These files are used to manage the different dependencies required by the application.
- **Handlers:** This folder contains different handlers that are responsible for handling the different requests made to the API. The handlers are able to interact with the Fiber context, and act as routes for the API. The handlers include:
 - `auth.go`: Contains all routes used for authentication to the API.
 - `ping.go`: Contains the ping route, which is used to check if the API is online.
 - `post.go`: Contains uploading, viewing all posts by the logged in user, viewing a post by its ID, and deleting a post by its ID.
 - `user.go`: Contains viewing the currently logged in user, viewing a user by their ID, and updating the currently logged in user.
- **Setup:**
This folder contains the module responsible for setting the error handler, registering the application, cors, cache and the logger
- **Config:**
This folder contains a module that is responsible for loading a dot env file, setting the defined environment variables in the process that the Go application is running in, and afterwards loading these environment variables in a config hashmap.
- **Database:**
This folder contains a module that is responsible for interacting with MongoDB. It includes a wrapper for creating the connection, managing users and posts.
- **Models:**
This folder contains structures for users, posts, and utility. These structures are used to encode from BSON to Go structures to JSON.
- **Tests:**
This folder contains tests for utility functions and the config module.
- **Util:**
This folder contains utility functions such as getting a timestamp for MongoDB, comparing object IDs, and getting the current user from the JWT token.

Web

The web frontend is written using Typescript, React.js as the Framework, Vite as a bundler and dev server, Tailwind & Postcss as the css framework and react-router as the routing provider.

The package manager for node is pnpm, which is faster than its competitors and stores modules globally.

Directory structure

```
drwxr-xr-x  - teo 14 Mar 13:51 .
-rw-r--r-- 216 teo  6 Mar 10:35 |— Dockerfile
-rw-r--r-- 2.3k teo  6 Mar 10:35 |— index.html
-rw-r--r-- 473 teo  8 Mar 09:51 |— nginx.conf
-rw-r--r-- 527 teo  6 Mar 10:35 |— package.json
-rw-r--r-- 45k teo  6 Mar 10:35 |— pnpm-lock.yaml
-rw-r--r--  77 teo  6 Mar 10:35 |— postcss.config.cjs
drwxr-xr-x  - teo  6 Mar 10:35 |— public
-rw-r--r-- 60k teo  6 Mar 10:35 |   |— icon.ico
-rw-r--r-- 19k teo  6 Mar 10:35 |   |— icon.png
-rw-r--r--  62 teo  6 Mar 10:35 |— README.md
drwxr-xr-x  - teo 10 Mar 14:39 |— src
-rw-r--r-- 2.3k teo 10 Mar 14:39 |   |— App.tsx
drwxr-xr-x  - teo 10 Mar 14:39 |   |— components
-rw-r--r-- 2.0k teo 10 Mar 14:39 |       |— Navigation.tsx
drwxr-xr-x  - teo 14 Mar 13:36 |       |— notification
-rw-r--r-- 944 teo 14 Mar 13:36 |           |— Notification.tsx
-rw-r--r-- 1.9k teo  6 Mar 10:35 |           |— NotificationModal.tsx
drwxr-xr-x  - teo 10 Mar 14:39 |       |— post
-rw-r--r--  61 teo 10 Mar 14:39 |           |— CreatePostModal.tsx
drwxr-xr-x  - teo 10 Mar 14:39 |       |— profile
-rw-r--r-- 4.3k teo 10 Mar 14:39 |           |— Edit.tsx
-rw-r--r-- 2.6k teo 10 Mar 14:39 |           |— EditAvatar.tsx
-rw-r--r--  59 teo  6 Mar 10:35 |— index.css
-rw-r--r-- 2.9k teo  6 Mar 10:35 |— main.tsx
drwxr-xr-x  - teo 10 Mar 14:39 |— models
-rw-r--r-- 888 teo 10 Mar 14:39 |   |— Api.ts
-rw-r--r-- 197 teo  6 Mar 10:35 |   |— Notification.ts
-rw-r--r-- 159 teo 10 Mar 14:39 |   |— Post.ts
-rw-r--r-- 308 teo 10 Mar 14:39 |   |— User.ts
drwxr-xr-x  - teo 10 Mar 14:39 |— screens
-rw-r--r-- 400 teo  6 Mar 10:35 |   |— Error.tsx
-rw-r--r--  90 teo  6 Mar 10:35 |   |— Home.tsx
-rw-r--r-- 4.1k teo  7 Mar 13:02 |   |— Login.tsx
-rw-r--r-- 2.3k teo 10 Mar 14:39 |   |— Post.tsx
-rw-r--r-- 5.3k teo 10 Mar 14:39 |   |— Profile.tsx
-rw-r--r-- 4.8k teo  6 Mar 17:21 |   |— Signup.tsx
drwxr-xr-x  - teo 10 Mar 14:39 |— util
-rw-r--r-- 1.8k teo 10 Mar 14:39 |   |— fetch.ts
-rw-r--r-- 1.8k teo 10 Mar 14:39 |   |— util.tsx
-rw-r--r--  38 teo  6 Mar 10:35 |   |— vite-env.d.ts
-rw-r--r-- 249 teo  6 Mar 17:12 |— tailwind.config.cjs
-rw-r--r-- 627 teo  6 Mar 10:35 |— tsconfig.json
-rw-r--r-- 206 teo  6 Mar 10:35 |— tsconfig.node.json
-rw-r--r-- 396 teo  7 Mar 14:37 |— vite.config.ts
```

- Configuration and Building

- Dockerfile:

The Dockerfile is an essential file used to build a Docker image of the application. It's based on the nginx image and includes a copy of the nginx configuration. This file contains

instructions that Docker uses to build the image, including which base image to use, how to install dependencies, and how to configure the environment.

- `package.json`:

The `package.json` file is used to define the application's dependencies and build scripts. It's a critical file in Node.js development that lists all the required dependencies for the application to run. It also includes scripts for building, testing, and deploying the application.

- `pnpm-lock.yaml`:

The `pnpm-lock.yaml` file is a dependency lock file used to ensure the application's dependencies remain consistent across different environments. It's similar to `package-lock.json` in NPM and `yarn.lock` in Yarn.

- `tailwind.config.cjs`:

The `tailwind.config.cjs` file is used to configure and customize Tailwind, a popular utility-first CSS framework. It includes various settings such as colors, fonts, and breakpoints.

- `vite.config.ts`:

The `vite.config.ts` file is used to configure the development server and proxy settings in Vite, a build tool used for frontend web development. It allows developers to define the proxy settings for different environments, making it easier to test the application locally.

- `postcss.config.js`:

The `postcss.config.js` file is used to configure PostCSS, a CSS preprocessor. It defines various plugins and their options, such as `autoprefixer` and `cssnano`, to transform and optimize the CSS code.

- `tsconfig.json`:

The `tsconfig.json` file is a configuration file for the TypeScript transpiler. It specifies how TypeScript should compile the application's source code to JavaScript. It includes settings such as the target environment, module system, and source map generation.

- `tsconfig.node.json`:

The `tsconfig.node.json` file is a configuration file for TypeScript's integration with Node.js. It includes settings specific to Node.js, such as the target environment and module system.

- `nginx.conf`:

The `nginx.conf` file is an nginx configuration file used for serving and reverse proxying. It's a critical file for web servers that define how requests are handled and which files are served for each request. It's also used to configure SSL and other security-related settings.

- Assets:

- `public/`:

The `public/` directory contains the favicon and the image of `private.social`. These assets are typically available to the public and are served statically by the web server. In this case, the directory includes a `favicon.ico` file and a cowboy emoji image, both used to enhance the application's visual appearance.

- `index.html`:

The `index.html` file is an HTML document that serves as the entry point for the React application. It's the initial HTML that the browser loads, and it includes a script tag that

loads the React application's JavaScript code. The React app inserts itself into this HTML document by rendering the app's root component in a designated HTML element, typically with an ID of "root." The index.html file may also include other tags, such as meta tags, links to external stylesheets, and scripts for analytics or other third-party services.

- Source code: src/

- index.css:

The index.css file contains definitions for Tailwind CSS, a utility-first CSS framework that allows developers to rapidly build custom user interfaces. It includes classes for common styling tasks such as layout, typography, and color.

- app.tsx:

The app.tsx file is the main entry point for the application. It contains the React Router rendering logic, which is responsible for rendering the appropriate screen based on the current URL. The file may also include other logic related to app-wide state management or user authentication.

- main.tsx:

The main.tsx file renders the React application into the root index.html file. It's responsible for mounting the React application to the DOM, typically in a div element with an ID of "root".

- components/:

The components/ directory contains reusable components that get used at multiple points in the application. These components are typically small, modular pieces of code that can be composed together to build more complex user interfaces.

- screens/:

The screens/ directory contains one source file for every screen/site in the application. Each file represents a different screen or view that the user can navigate to, and typically includes the logic and rendering code for that screen.

- models/:

The models/ directory contains interfaces for API and CDN interactions, as well as for Users and Posts. These interfaces define the shape of the data returned by the API or CDN, making it easier for the application to consume and manipulate the data.

- util/:


The util/ directory contains utility methods for calculating elapsed time, a fetch wrapper, and other miscellaneous functions used throughout the application. These utility methods are typically small, reusable functions that are used in multiple places throughout the codebase.

Screenshots:

Technology choices

Frontend

React is an incredibly powerful and versatile JavaScript library that has revolutionized the way we think about building dynamic user interfaces. As a developer with experience using React, I believe

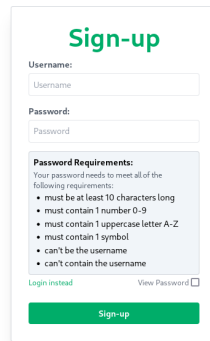

A screenshot of a sign-up form. At the top, the title "Sign-up" is displayed in green. Below it, there are two input fields: "Username:" and "Password:". The "Password:" field is followed by a section titled "Password Requirements:" which lists five criteria: must be at least 10 characters long, must contain 1 number (0-9), must contain 1 uppercase letter A-Z, must contain 1 symbol, and can't be the username. Below the requirements, there are two links: "Login instead" and "View Password" with a checkbox. At the bottom, there is a green button labeled "Sign-up".

Sign-up

Username:

Password:


Password Requirements:
Your password needs to meet all of the following requirements:

- must be at least 10 characters long
- must contain 1 number (0-9)
- must contain 1 uppercase letter A-Z
- must contain 1 symbol
- can't be the username
- can't contain the username

[Login instead](#) [View Password](#) ☐

Sign-up

Figure 2: signup page screenshot



A screenshot of a login form. At the top, the title "Login" is displayed in green. Below it, there are two input fields: "Username:" and "Password:". Below the "Password:" field, there are two links: "Sign up instead" and "View Password" with a checkbox. At the bottom, there is a green button labeled "Login".

Login


Username:

Password:

[Sign up instead](#) [View Password](#) ☐

Login

Figure 3: login page screenshot



A login form titled "Login" in green. It features a red error message box stating "An Error occurred: Username must be at least 5 characters long". Below this, there are input fields for "Username:" (containing "test") and "Password:" (masked with dots). A "Sign up instead" link is on the left and a "View Password" checkbox is on the right. A green "Login" button is at the bottom.

Figure 4: login page with error screenshot

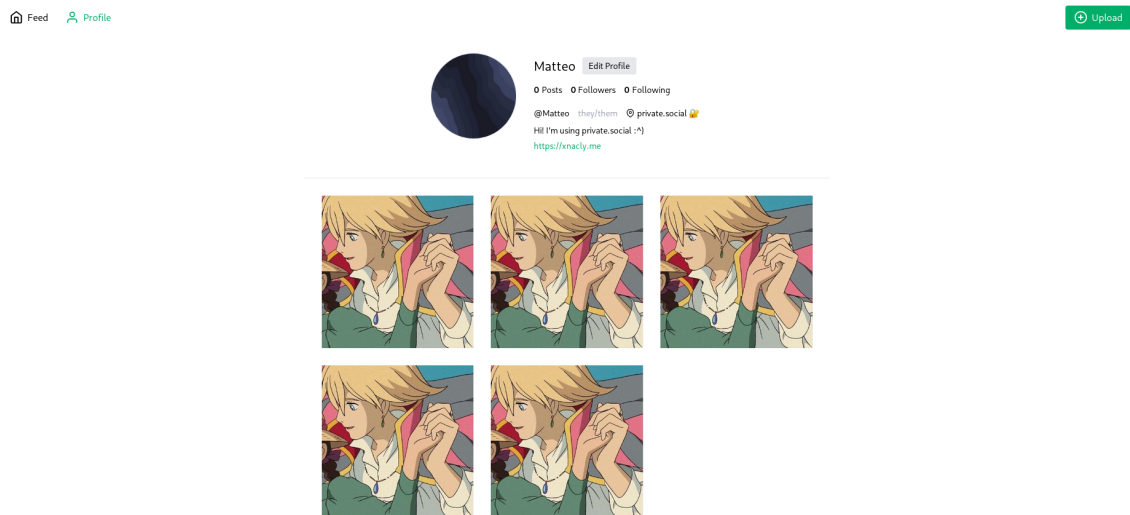


Figure 5: profile page screenshot

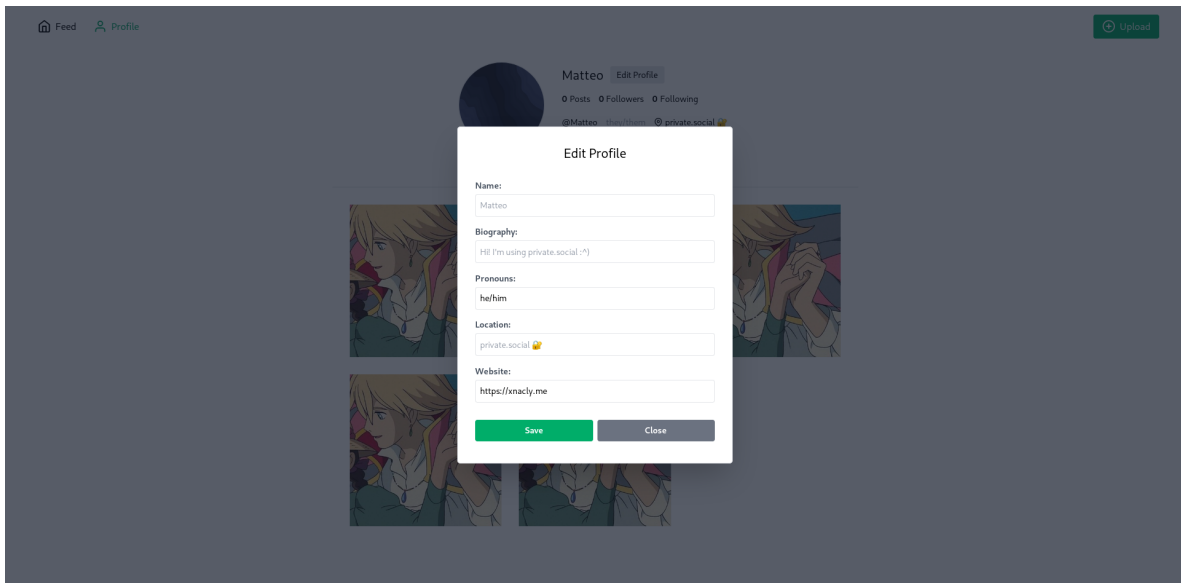


Figure 6: profile settings screenshot

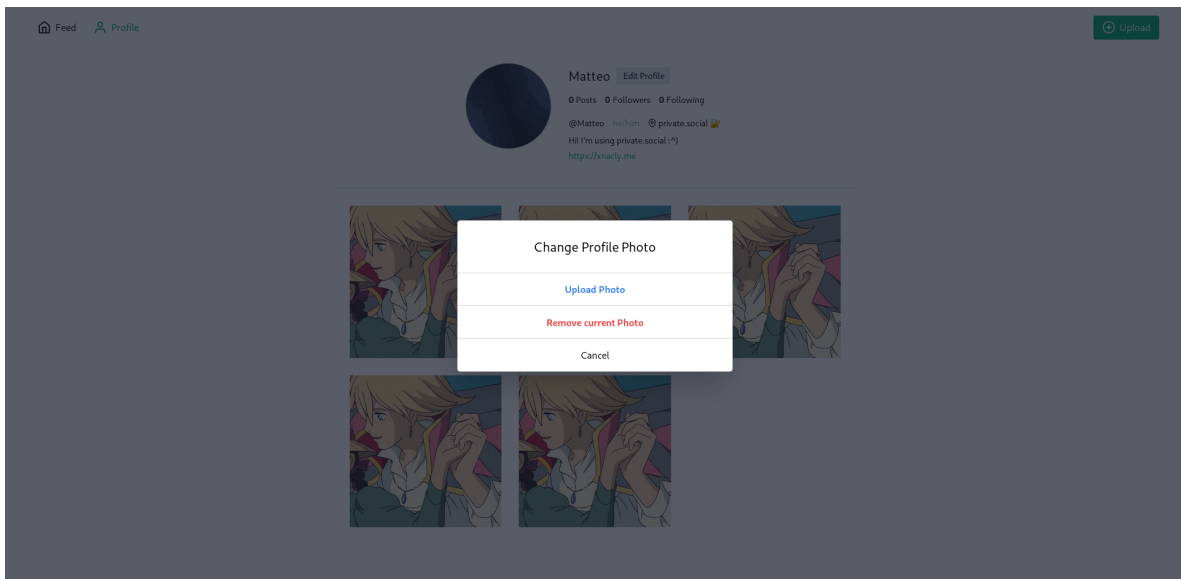


Figure 7: change avatar screenshot

that it is the best choice for building modern web applications, particularly when combined with TypeScript and a fast and lightweight bundler like Vite.

One of the main advantages of React is its flexibility and scalability. React provides a simple and intuitive way to manage the state of a web application, which makes it easy to build complex and dynamic user interfaces that can handle a wide range of different use cases. Additionally, React's component-based architecture allows developers to easily reuse code across different parts of an application, which can save a lot of time and effort when building large-scale projects.

Another key advantage of React is its extensive support for TypeScript, a popular and powerful superset of JavaScript that adds type checking and other features to the language. With TypeScript, developers can catch errors and bugs before they ever make it into production, which can help to improve the stability and reliability of a web application. And with Vite, a fast and lightweight bundler that supports TypeScript out of the box, developers can enjoy lightning-fast build times and a streamlined development experience that helps to reduce development time and increase productivity.

In my experience, React has been an incredibly powerful tool for building modern web applications, and its support for TypeScript and the Vite bundler has only made it more versatile and efficient.

Backend

When it comes to building high-performance, scalable, and reliable APIs and CDNs, there are few options better than Go. As someone who was eager to learn and use Go for backend development, I believe that it is the perfect choice for building fast, efficient, and secure web applications, especially when paired with a modern HTTP server framework like Go Fiber.

One of the key advantages of Go is its incredible speed and performance. Because Go is a compiled language, it can handle a high volume of requests with very low overhead, making it ideal for building APIs and CDNs that need to respond quickly and efficiently to user requests. Additionally, Go's built-in concurrency and parallelism features make it easy to write scalable code that can handle high traffic loads without slowing down.

Finally, as someone who has experience working with JWT and a dislike for Java and a belief that JavaScript can be too slow, Go offers a refreshing alternative that is both fast and reliable. With its focus on performance and efficiency, Go can handle large amounts of data and requests with ease, while still providing the flexibility and scalability that developers need to build modern web applications.

Given my desire to learn and utilize Go for backend development, and the advantages of using Go as outlined above, it makes sense for me and my team to adopt Go as our primary backend language for building the API and the CDN.

Getting started

Production environment

The docker-compose configuration file provided in this project is designed to spin up four containers: api, cdn, web, and mongodb.

Each container serves a specific purpose, with the web app built for production and served through nginx.

The mongo database container is configured to use a volume, making the data stored in the container persistent.

The api container is set to listen on port 8000, while the cdn is set to listen on port 8080, and the web app is set to listen on port 80.

Nginx reverse proxy is used to map requests from the web to the appropriate container.

For example, when a request is made to localhost/api, the nginx reverse proxy maps the request to the api container running on localhost:8000. Similarly, when a request is made to localhost/cdn, the nginx reverse proxy maps the request to the cdn container running on localhost:8080.

This docker-compose configuration file is an efficient way to manage multiple containers, with each container running a specific service. The use of volumes ensures that data is persistent and can be used across multiple container instances.

Image sizes

image	size	base	tech stack
web	20mb	nginx:stable-alpine	typescript, react, vite, nginx
cdn	7mb	scratch	go, fiber
api	7mb	scratch	go, fiber, go mongodb driver

Docker compose To successfully run the application, the following dependencies must be installed on your system:

- Docker, which is an open-source platform for building, shipping, and running applications in containers.
- Docker-compose, a tool for defining and running multi-container Docker applications.
- You must make sure that the Docker service is enabled and started as a daemon. This will ensure that the service is running in the background and can be accessed by the application.

It is important to note that Docker and Docker-compose are widely used in the software development industry due to their ability to simplify the process of building and deploying applications. Additionally, they provide a consistent environment across different systems, making it easier to test and debug applications.

```
git clone https://github.com/xNaCly/private.social.git
mv ps.env.example ps.env
# edit the JWT_SECRET in the ps.env.example
# choose a fairly complex secret, at least 32 chars long
docker compose up
```

Now navigate to http://localhost and use the application.

Configuration

This can differ from the compose config found in the root of the project docker-compose.yml

```
version: "3.9"
services:
  db:
    hostname: db
    # use the official mongo image
    image: mongo
    # if the container crashes, restart it
    restart: always
    ports:
      - 27017:27017
    # what command to execute
    command: mongod > /dev/null
```

```

# username and password for the database
environment:
  MONGO_INITDB_ROOT_USERNAME: admin
  MONGO_INITDB_ROOT_PASSWORD: root
# which volume to persist data to
volumes:
  - database:/data/db
api:
  # source Dockerfile from ./api/Dockerfile
  build: ./api
  hostname: api
  # start container after db container is running
  depends_on:
    - db
  # pass env variables from .env to the container
  env_file:
    - ./ps.env
  # set the db url to the db container above with username and password
  environment:
    MONGO_URL: mongodb://admin:root@db:27017/
  ports:
    - 8000:8000
cdn:
  # source Dockerfile from ./cdn/Dockerfile
  build: ./cdn
  hostname: cdn
  ports:
    - 8080:8080
  # what volume and path to persist data to
  volumes:
    - cdn:/vfs
web:
  # source Dockerfile from ./cdn/Dockerfile
  build: ./web
  # start container after api and cdn container are running
  depends_on:
    - api
    - cdn
  ports:
    - 80:3000

volumes:
  # define persistent volume for the database
  database:
  # define persistent volume for the cdn
  cdn:

```

Docker images To reduce the amount of space the docker images occupy we split the image creation into two steps:

1. Build the service
2. Move the build executable to a scratch docker image

Splitting the image creation into these two stages provides a number of benefits, including greater control over the resulting image size and the ability to optimize the build process for each stage. By building the service first and then moving the executable to a separate image, developers can ensure that the final image is as small as possible while still containing all of the necessary components.

Overall, the decision to split the image creation process into two stages is a key strategy for reducing the amount of space occupied by docker images while also ensuring that the images are optimized for performance and ease of use.

Docker API The Api is written in go using the go fiber http server library. It also makes heavy use of the go mongodb database driver for the database interactions.

The REST api is well documented in the openapi3_0.yaml file.

```
# use alpine as the first step images
FROM alpine:latest as builder
WORKDIR /api
# copy files
COPY . .
# install go using alpinex package manager
RUN apk add --no-cache go
# build the application with the following flags:
# CGO_ENABLED=0: disables the usage of cgo (builds dependencies using pure go)
# -ldflags="-w -s":
#     -s: omit symbol table and debug information
#     -w: omit DWARF symbol table
RUN CGO_ENABLED=0 go build -ldflags="-w -s" -o api_app

# use an empty image as the final image base
FROM scratch
# copy the executable from the first step
COPY --from=builder /api/api_app ./api_app
# execute the executable
CMD ["/api_app"]
```

Docker CDN The cdn uses almost the same Dockerfile as the Api. It is also written in go and uses the go fiber http server library. It does however not require a database connection.

```
# use alpine as the first step images
FROM alpine:latest as builder
WORKDIR /cdn
# copy files
COPY . .
# install go using alpinex package manager
RUN apk add --no-cache go
# build the application with the following flags:
# CGO_ENABLED=0: disables the usage of cgo (builds dependencies using pure go)
# -ldflags="-w -s":
#     -s: omit symbol table and debug information
#     -w: omit DWARF symbol table
RUN CGO_ENABLED=0 go build -ldflags="-w -s" -o cdn_app

# use an empty image as the final image base
```

```

FROM scratch
# copy the executable from the first step
COPY --from=builder /cdn/cdn_app ./cdn_app
# execute the executable
CMD ["./cdn_app"]

```

Docker WEB Unfortunately, due to our lack of experience with nginx, We faced some challenges when trying to serve the react production build statically.

In order to overcome this, I opted to use the serve package available on npm, which requires node to run. Although this is a viable solution, I must say that I was quite taken aback by the size of the node:lts-alpine image, which is a whopping 200mb in size!

```

# use the official node alpine image to build the react app
FROM node:lts-alpine as builder
WORKDIR /web
# copy all files
COPY . .
# install pnpm using npm
RUN npm install -g pnpm
# install dependencies, such as react
RUN pnpm install
# build for production
RUN pnpm build

# use the official nginx alpine image as the final image base
FROM nginx:stable-alpine
# copy the build directory to the nginx image
COPY --from=builder /web/dist /data/www
# copy the nginx config
COPY ./nginx.conf /etc/nginx/nginx.conf

```

I was able to significantly reduce the size of the image from 200mb to a mere 20mb, which translates to a reduction of 90%! This was done by splitting the image creation process into smaller, more manageable parts. Similar to the process i described before.

Once I had familiarized myself with nginx, I utilized it to properly configure the application.

The nginx configuration file plays a critical role in serving the web app and reverse proxy api and cdn.

```

events {}
http {
    # we want mime types such as image/png to be known to nginx
    include mime.types;
    sendfile on;

    server {
        # we map port 80 on the host to port 3000 in the container,
        # therefore we listen on port 3000 here
        listen 3000;

        # localhost/api should be proxied to the container api with port 8000
        location /api {
            proxy_pass http://api:8000;
            # remove '/api/' from the url

```

```

        rewrite /api/(.*) /$1 break;
    }

    # localhost/cdn should be proxied to the container cdn with port 8080
    location /cdn {
        proxy_pass http://cdn:8080;
        # remove '/cdn/' from the url
        rewrite /cdn/(.*) /$1 break;
    }

    # serve the files at /data/www at localhost port 3000
    location / {
        root /data/www;
        index index.html;
        # if error 404 occurs, redirect user to index.html
        error_page 404 =200 /index.html
    }
}
}

```

To check if everything works navigate to <http://localhost>.

Development environment

```

git clone https://github.com/xNaCly/private.social.git
cd private.social


```

API

```

cd api/
mv .env.example .env
# edit MONGO_URL and JWT_SECRET
# choose a fairly complex secret, at least 32 chars long
go run .

```

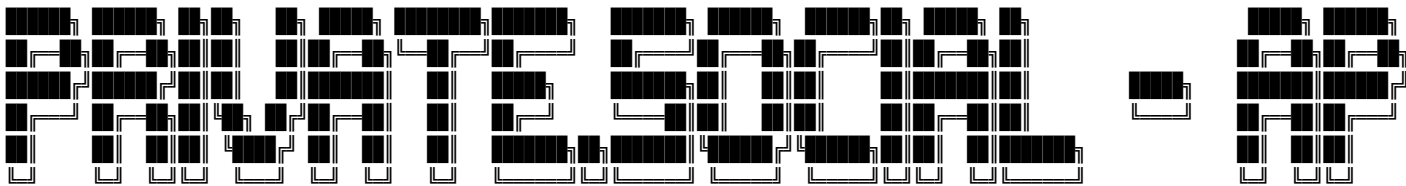

```

2023/03/13 09:58:08 loaded config key 'MONGO_URL' with value 'mongodb+srv://*****
2023/03/13 09:58:08 loaded config key 'JWT_SECRET' with value 'JWT_SECRET' from env
2023/03/13 09:58:08 Establishing connection to database...
2023/03/13 09:58:09 Connection to database established
2023/03/13 09:58:09 loaded tables 'users', 'posts'
2023/03/13 09:58:09 Setting up the app...
2023/03/13 09:58:09 Registering unauthenticated routes...
2023/03/13 09:58:09 Registered route: [GET] v1/ping
2023/03/13 09:58:09 Registered route: [POST] v1/auth/register
2023/03/13 09:58:09 Registered route: [POST] v1/auth/login
2023/03/13 09:58:09 Registered '3' routes
2023/03/13 09:58:09 Registering authenticated routes...

```

```
2023/03/13 09:58:09 Registered route: [GET] v1/user/me
2023/03/13 09:58:09 Registered route: [PUT] v1/user/me
2023/03/13 09:58:09 Registered route: [GET] v1/user/:id
2023/03/13 09:58:09 Registered route: [POST] v1/post/
2023/03/13 09:58:09 Registered route: [GET] v1/post/me
2023/03/13 09:58:09 Registered route: [DELETE] v1/post/:id
2023/03/13 09:58:09 Registered route: [GET] v1/post/:id
2023/03/13 09:58:09 Registered '7' routes
2023/03/13 09:58:09 Starting the app...
```

```
private.social/api
Fiber v2.42.0
http://127.0.0.1:8000
(bound on host 0.0.0.0 and port 8000)

Handlers ..... 15  Processes ..... 1
Prefork ..... Disabled  PID ..... 84468
```

WEB

```
cd web/
pnpm i
pnpm dev
```

Outputs:

```
VITE v4.1.4 ready in 344 ms
```

```
■ Local: http://localhost:3000/
■ Network: use --host to expose
■ press h to show help
```

CDN

```
cd cdn
go run .
```

Outputs:

private.social - cdn

```
private.social/cdn
Fiber v2.42.0
http://127.0.0.1:8080
```

```
|          (bound on host 0.0.0.0 and port 8080)          |
| Handlers ..... 5   Processes ..... 1                 |
| Prefork ..... Disabled  PID ..... 83839               |
```

To ensure that everything is working properly, please navigate to <http://localhost:3000>. If a login box is displayed, you can be confident that everything is functioning as it should