

# Unblock Me - Group 19

Guilherme Silva (201603647)

*IART*

*FEUP*

Porto, Portugal

up201603647@fe.up.pt

Miguel Duarte (201606298)

*IART*

*FEUP*

Porto, Portugal

up201606298@fe.up.pt

Rui Alves (201606746)

*IART*

*FEUP*

Porto, Portugal

up201606746@fe.up.pt

## TODO:

- Update abstract
- Update introduction - Will do it later on (Miguel)
- Game implementation section - Guilherme started
- search algorithms section - Started it but need some technical details (Miguel)
- experiments and results section - Started it but need some technical details (Miguel)
- update conclusion
- Add something about pypy because of it improving the initial python performance?

**Abstract**—The aim of this paper is to implement and compare Artificial Intelligence algorithms for solving the game *Unblock Me*, in which rectangular pieces block the path of a red special piece. The objective of the game is for the special piece to reach the exit of the level, which is achieved by moving it and the other pieces. The problem will be described and then formulated as a *Search Problem*, together with some discussion on the reasoning behind some of the decisions taken during this process. Several algorithms will be investigated, along with testing them against levels with varying difficulty and branching factors. Both the efficiency in reaching a solution and the cost of the calculated solution will be taken into account in the pursuit for the optimal *Search Algorithm*.

**Index Terms**—Artificial Intelligence, Search Problems, Path-finding algorithms, Decision-making Heuristics, Graph Algorithms, Depth-First Search, Breadth-First Search, Uniform Cost Search, Iterative Deepening, Greedy Search, A\*, Bi-Directional Search

## I. INTRODUCTION

The game that is the subject of study in this paper (*Unblock Me*) will be approached with several different *Search Algorithms*, implemented in *Python*, in order to conclude what is the best approach for solving it using *Artificial Intelligence Algorithms*.

Firstly, the game will be described in further detail, ensuring that all non-formal aspects of it are well documented. Secondly, it will be formulated as a *Search Problem*, with the approach taken in doing so being illustrated in increased depth, providing reasoning for the decisions taken. Thirdly, a research on related work on this topic will be presented, giving some insight on the problem from other points of view.

Finally, a small section will cover the conclusions and future work, by expanding on the already developed tasks and elaborating on the planned approach.

## II. PROBLEM DESCRIPTION

*Unblock Me* is a puzzle game that was released in 17-06-2009 by *Kiragames*. It is an adapted version of *Rush Hour*, a puzzle game invented by Nobuyuki Yoshigahara in the 1970s. Each level consists of a 6x6 board, surrounded with walls (except for the puzzle's exit) [1].




Fig. 1. Example of an *Unblock Me* level

The game's objective is to move a special piece to the level's exit, by moving that and the other pieces with the least number of movements possible. Pieces are rectangles with a given orientation (vertical or horizontal) and constant length. Pieces can only move in the direction of their orientation into empty cells (they may not overlap).

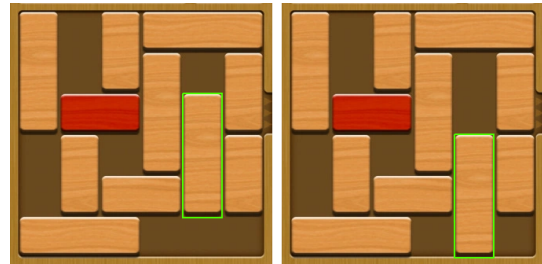


Fig. 2. Piece moving down one cell

Levels are fully surrounded by walls, except for the level's exit door that is aligned with the special piece and by which only the special piece can go through. The level is completed once the piece goes through the exit door.




Fig. 3. Beating a level by going through the exit

Some levels may even contain fixed blocks that can not be moved, representing obstacles.




Fig. 4. Example of an *Unblock Me* level containing fixed blocks

### III. PROBLEM FORMULATION

The game's solving process can be formulated as a search problem, in which the goal is to find the sequence of moves (state transitions) that take the special piece to the level's exit door - the problem's goal state.

#### A. Game State Representation

- List of pieces, where each piece contains the following information:
  - Origin Square (top left piece corner, e.g. (0,0))
  - Length (e.g. 4)
  - Direction (H or V)
- Reference to the special piece
- Matrix of booleans, where True means the cell is empty

This representation of the game state makes the generation of valid movements easier, due to the fact that to determine possible movements of a single piece, the other pieces do not need to be taken into account (assuming that all empty cells are known). Thus, to generate all possible branching options, the list of pieces needs to be iterated over, while checking if there are empty cells adjacent to the piece's extremities (these change with the piece's direction). This representation facilitates the execution of these tasks, making it less costly (important fact due to high number of operations of this kind):

- Using a list of pieces makes it trivial to determine which of them can be moved in a given state;
- Using a matrix (of booleans, that state if a cell is occupied or not) makes it trivial to check if adjacent cells to the pieces extremities are empty;

- Finally, using a reference to the special piece allows accessing it in constant time, which will be useful to heuristic related operations and determine if the goal state (subsection III-C) is achieved.

#### B. Initial State

The initial state depends of the level in question, being represented by a game state as described in subsection III-A.

#### C. Goal State

The goal state consists of a piece configuration where the special piece reaches the level exit (Figure 3).

#### D. Operators

- Move piece to the left:
  - Pre-conditions:
    - \* Piece with horizontal orientation
    - \* At least the cell that is adjacent to the piece's left extremity must be empty
  - Results: The piece is moved a number of cells to the left (at most the number of empty cells, at least one cell)
  - Cost: 1 movement
- Move piece to the right:
  - Pre-conditions:
    - \* Piece with horizontal orientation
    - \* At least the cell that is adjacent to the piece's right extremity must be empty
  - Results: The piece is moved a number of cells to the right (at most the number of empty cells, at least one cell)
  - Cost: 1 movement
- Move piece up:
  - Pre-conditions:
    - \* Piece with vertical orientation
    - \* At least the cell that is adjacent to the piece's top extremity must be empty
  - Results: The piece is moved a number of cells upwards (at most the number of empty cells, at least one cell)
  - Cost: 1 movement
- Move piece down:
  - Pre-conditions:
    - \* Piece with vertical orientation
    - \* At least the cell that is adjacent to the piece's bottom extremity must be empty
  - Results: The piece is moved a number of cells downwards (at most the number of empty cells, at least one cell)
  - Cost: 1 movement

#### E. Path cost

The solution's path cost that is to be minimized is equal to the number of movements made (number of state transitions).

#### IV. RELATED WORK

*Unblock Me* is also widely known as *Rush Hour*. In June 2018, Michael Fogleman (a Software Engineer at Formlabs) developed an artificial intelligence that solves the puzzle and created a database with over two million and a half different puzzles [2]. His solution is based on the usage of bitboards [3] (data structure that is often used by board game computer systems due to its reduced space usage and the efficiency of operating upon it) for representing the game states.

This game is also studied in the Computer Science MSc from the University of Princeton, namely in the course "Computer Science 402 - Artificial Intelligence". In this course, students implement multiple heuristics to solve the problem using the A\* algorithm [4]. Rainhard Findling, a researcher in Aalto University in Finland, proposes a solution to this problem statement, by using a heuristic based on a vote system, in which each piece that is blocking the way of the special piece to the level's exit votes on how they want to free the way (how many moves they have to perform) for the special piece [5].

Even though that the problem is not complex, increasing the board size quickly leads to a combinatorial explosion, being that a 6x6 board has over 27 billion possible states. Thus, it is not efficient to find a solution by exploring all the possible states, being a good heuristic for state exploration mandatory for complex game levels.

#### V. GAME IMPLEMENTATION

In the implementation of the game there are two classes: *GameState* and *Piece*. An instance of *Piece* contains the position of the top left corner, the length and the direction of the piece. Each of these is part of an instance of *GameState*, which besides a list of the pieces also contains a reference to the special piece and a boolean matrix, where each element of it represents the state of a given cell (empty or occupied). Using this implementation, the objective test is made by checking if the special piece intersects with the exit.

To determine all adjacent states, the list of pieces is iterated and for each one the following steps are taken:

- 1) Determine the position of the piece's extremities
- 2) For each extremity determine the direction of the directly adjacent cell (i.e. for the left extremity of an horizontal piece the adjacent cell it will be to the left)
- 3) Then create N new states with an updated matrix and an updated piece, where N is number of empty cells adjacent to the piece in direction determined in the previous step

Each of the states created using this method has the cost of the original state plus one.

##### A. File representation

Each puzzle can be represented by a single string, where 'o' represents an empty space, 'x' represents an immovable space and each piece is identified by an upper case letter, 'A' is reserved to represent the special piece.

Descrevendo o projeto e implementao, na linguagem selecionada, do jogo incluindo a forma de representao do estado do tabuleiro, operadores (verificao do cumprimento das regras do jogo) aplicveis com determinadas pr-condies e que tm efeitos sobre o estado do jogo e um dado custo, teste objetivo (determinao do final do jogo). Entre outras devem ser implementadas funes: ler nvel de ficheiro (lendo um dado nvel/estado de um ficheiro de texto), visualizar em modo de texto/grfico um dado estado, validar uma dada jogada/operador (tendo em conta as suas pr-condies), executar uma dada jogada/operador, num dado tabuleiro, tendo em conta os seus efeitos e gerando o respetivo estado sucessor, listar todas as jogadas/operadores disponveis num dado tabuleiro, avaliar um dado estado (tendo em conta a sua proximidade soluo final), testar se um dado estado soluo (teste objetivo). Os mtodos de pesquisa para clculo das jogadas a realizar que permitam ao computador jogar sozinho e resolver os puzzles devem ser descritos na seco seguinte assim como o mtodo geral para os chamar e resolver o puzzle (utilizando um dado mtodo selecionado de entre os disponveis).

#### VI. SEARCH ALGORITHMS

As determined beforehand, the following algorithms were implemented:

- BFS (Breadth-First Search)
- DFS (Depth-First Search)
- Iterative Deepening Depth-First Search
- Greedy Search
- A\* Search

The **Uniform Cost Search** algorithm was not implemented, as all of the **Operators** (described in subsection III-D) have the same cost - this algorithm would simply be a **Breadth-First Search (BFS)**.

Furthermore, it was decided that, unlike initially planned, **Bi-Directional Search Algorithms** would not be implemented. This is due to the fact that despite the **Goal State** of *Unblock Me* always featuring the special piece over the level exit, all of the other pieces might be in very different configurations. Thus it is not possible to start searching from the final state of the level, making these algorithms not applicable to the problem under consideration.

*Falar aqui sobre detalhes de implementao e talvez expandir acima sobre a razo de no ter implementado alguns - Miguel*

##### A. Breadth-First Search

**Breadth-First Search (BFS)** analyzes all of the states with a depth lower than N prior to analyzing states with a depth of N. To accomplish this, all of the nodes that need to be analyzed are kept in a *Queue*. The next state to be analyzed is at the front of the *Queue*. When analyzing a state, the next possible states are generated and appended to the end of this structure.

The time and space complexity of this approach is exponential, making the algorithm consume copious amounts of memory. This makes it hard to run for puzzles that have

a solution size bigger than 10. However, by using a *Set* of searched states to avoid the expansion of visited nodes, the algorithm can be run in a reasonable amount of time, due to the small search space and high frequency of repeated states.

**BFS** guarantees an optimal solution due to expanding each level of the state search tree sequentially, always choosing the smallest possible solution.

#### B. Depth-First Search

**Depth-First Search (DFS)** analyzes all of the states for a certain branching path before backtracking to another branch. To accomplish this, all of the nodes that need to be analyzed are kept in a *Stack*. The next state to be analyzed is on the top of the *Stack*. When analyzing a state, the next possible states are generated and placed on top of this structure.

However, this approach does not always reach a solution, due to the possibility of loops in the state search tree, which leads to infinite exploration of the same looping states. In order to avoid this, an auxiliary *Set* was used to keep track of visited nodes, thus excluding the possibility of loops.

**DFS** does not guarantee an optimal solution due to the order in which it expands the search tree - a deeper level can be expanded before a more shallow level and thus a larger (and therefore non-optimal) solution reached before a smaller one.

#### C. Iterative-Deepening Depth-First Search

**Iterative-Deepening Depth-First Search (IDDFS)** executes a **DFS** with a certain limited depth, repeating this process with a larger value for this limit each time until it reaches a solution.

Unlike **BFS**, this algorithm does not need to store all of the states to explore in memory simultaneously and unlike **DFS** it cannot enter an infinite loop.

**IDDFS** guarantees an optimal solution due to expanding each node of a given level before moving to the next level of the search tree, guaranteeing the smallest possible solution.

#### D. Greedy Search

**Greedy Search** expands the next node based on the value given to it by the chosen *Heuristic*, always expanding the node with the lower value. To accomplish this, all of the nodes that need to be analyzed are kept in a *Priority Queue*. The next state to be analyzed is on top of the *Priority Queue*. When analyzing a state, the next possible states are generated and inserted into this structure, which will reorder them as needed.

This algorithm's efficiency depends on the chosen *Heuristic*. Even when using an *Admissible Heuristic*, this algorithm does not guarantee an optimal solution due to not necessarily expanding the nodes in a shallow level before expanding nodes at a deeper level.

#### E. A\* Search

Descrevendo os vários algoritmos de pesquisa utilizados e a sua implementação de modo a calcular a próxima jogada do PC ou retornar a solução final (conjunto de operações para transformar o estado inicial no estado objetivo). Devem ser

implementados algoritmos para cálculo da solução utilizando pesquisa em largura, pesquisa em profundidade (se aplicável), aprofundamento progressivo, custo uniforme (se aplicável), pesquisa gulosa e Algoritmo A\* (estes últimos métodos utilizando várias heurísticas).

## VII. EXPERIMENTS AND RESULTS

Several tests were ran, using all of the implemented algorithms and heuristics (except some cases where the runtime or memory overhead of the algorithm was not manageable - such was the case for Iterative Deepening for Long Puzzles) for different *Categories of Puzzles*.

#### A. Puzzle Categorization

A selection of some interesting levels of the game was grouped into four categories - Easy, Medium, Hard and Long. This grouping was done based on the number of possible states since the initial configuration and the length of the solution, as these are the main determinants on how difficult it is to find a solution, and furthermore the optimal one. Eight Easy and Hard and ten Medium and Long levels were selected for evaluating the algorithms' performance, these presenting some of the most interesting initial piece configurations.

**Easy** and **Medium** levels have similar lengths for their optimal solutions (around 10 moves), differing in the number of possible states - **Easy** levels have several hundreds of possible states while **Medium** levels have tens of thousands.

**Hard** levels have a much higher number of possible states (hundreds of thousands) and a larger solution length (around 20 moves).

Finally, **Long** levels do not necessarily have a large amount of possible states (ranging between thousands and tens of thousands), but instead have a much larger solution length (around 50 moves).

*Falar aqui sobre o que quer dizer cada grupo, que eu não estou 100% - Miguel*

After running all of the implemented algorithms described in section section VI for each of the selected puzzles, the following data was collected:

- Answer Length
- Execution Time
- Number of Expanded Nodes

By analyzing the **Answer Length**, it is possible to directly measure how good the algorithm's solution is, by checking against the optimal solution of the puzzle (that has the minimum amount of moves required to reach the **Goal State**). *As expected, Algorithm X and Y always reach an optimal solution, being that DFS almost never reaches a short solution - Fica aqui o stub for expanding later pls*

Additionally, by inspecting the **Execution Time**, some insight is gained on the algorithm's **Time Complexity**. *It was confirmed, as predicted, that Algorithm X and Y have very good runtimes, but almost never reach a good solution - Fica aqui o stub for expanding later pls*

Finally, by studying the **Number of Expanded Nodes**, both the algorithm's **Space Complexity** and how fast it approaches

the optimal solution (or any solution in some cases) can be inspected. *The Informed Search Algorithms converge to a solution faster than all others, and thus end up exploring less states - Fica aqui o stub for expanding later pls*

*Parte para falar das heurísticas, principalmente da "falhada". Também é preciso inserir os gráficos depois, mas isso tem de se ver também com o resto do conteúdo onde fica melhor por causa de ter referências e pics no texto - Miguel*

Descrevendo as experiências realizadas com os vários algoritmos para resolver diversos puzzles e os resultados obtidos a nível de tempo e custo da solução obtida em cada nível, por cada um dos métodos experimentados. Devem ser incluídas tabelas comparativas dos resultados obtidos na aplicação dos vários métodos aos vários puzzles (níveis do jogo) e discutidos os resultados.

### VIII. CONCLUSIONS AND FUTURE WORK

As of yet, the problem has been completely formalized - it has been formally described, and formulated as a search problem (a Game State representation has been reached, the initial and goal states have been described and the operators and path cost have been stated).

The chosen programming language was Python, and a simple graphical interface has been implemented, in order to show the solutions of the different algorithms when they are implemented.

In order to study the best possible approach for solving *Unblock Me* puzzles, the following algorithms will be the subject of various tests:

- Breadth-First Search
- Depth-First Search
- Iterative Deepening
- Uniform Cost Search
- Greedy Search
- A\*
- Bi-Directional Search (using Greedy Search)
- Bi-Directional Search (using A\*)

For the informed search algorithms (Greedy and A\*), several different heuristics will be experimented with, such as:

- The number of pieces between the special piece and the level exit
- The number of cells (distance) between the special piece and the level exit

In order to evaluate the implemented algorithms, they will be assessed both in terms of the achieved solution's quality and in terms of the algorithm's performance. For the first metric, the main evaluation point will be the number of piece movements. For the latter, both the execution time and the number of evaluated states will be taken into account.

Sumário do trabalho realizado e conclui-se que retira deste projeto. Análise crítica dos resultados obtidos em comparação com os resultados teóricos que seriam esperados. Trabalho futuro, ou seja, formas de melhorar o trabalho desenvolvido.

### REFERENCES

- [1] "Unblock me FREE.". Google Play. February 28, 2019. <https://play.google.com/store/apps/details?id=com.kiragames.unblockmefree>.
- [2] Fogleman, Michael. "Solving Rush Hour, the Puzzle.". July, 2018. <https://www.michaelfogleman.com/rush/>.
- [3] "Bitboard.". Wikipedia - The free Encyclopedia. December 6, 2018. <https://en.wikipedia.org/wiki/Bitboard>.
- [4] Littman, Michael. "Programming Assignment P1 - What A\* Rush". Princeton. 2012. <https://www.cs.princeton.edu/courses/archive/fall12/cos402/assignments/programs/rushhour/>.
- [5] Findling, Rainhard. "The RushHour Puzzle an Artificial Intelligence Toy Problem.". April 4, 2012. <http://geekoverdose2.rssing.com/browser.php?indx=39804402&item=1>.