



GITHUB REPO: <https://github.com/xVolkov/AddressFinderApp.git>


1) Home screen:

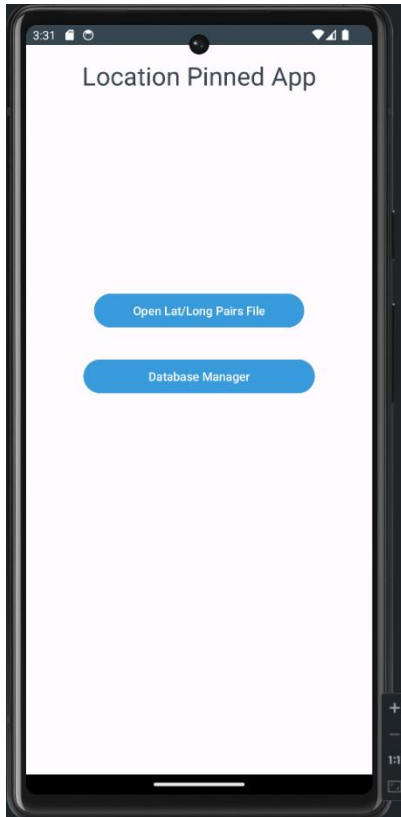


2) Selecting file from file browser:

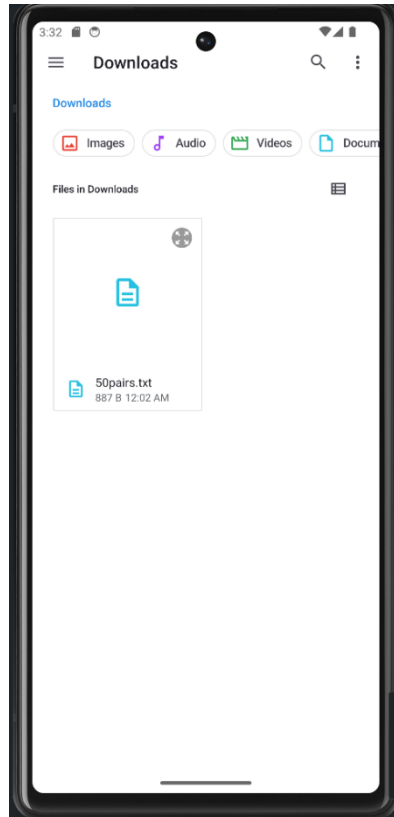


3) Converting to Addresses:

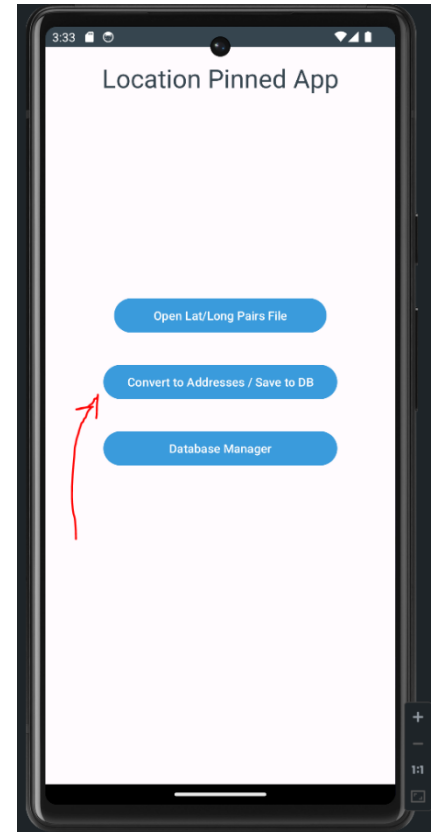


4) Location permission requested

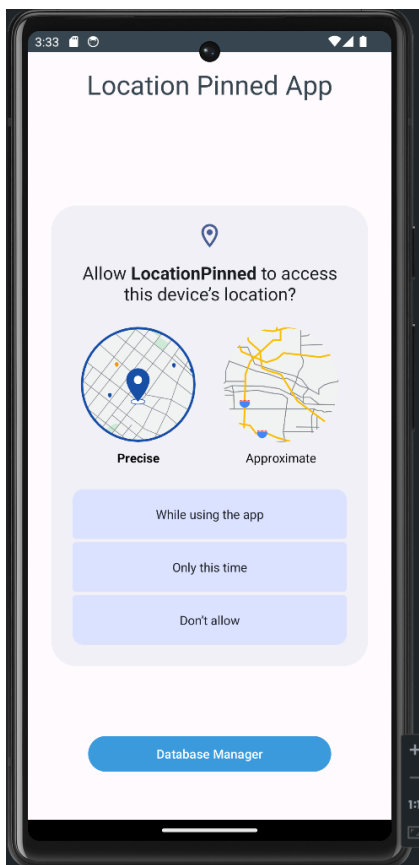


5) Addresses are loaded:

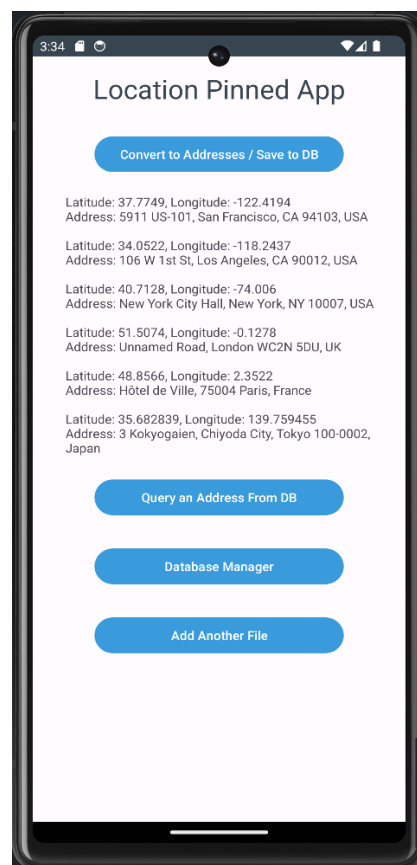


6) Query an address from the DB:

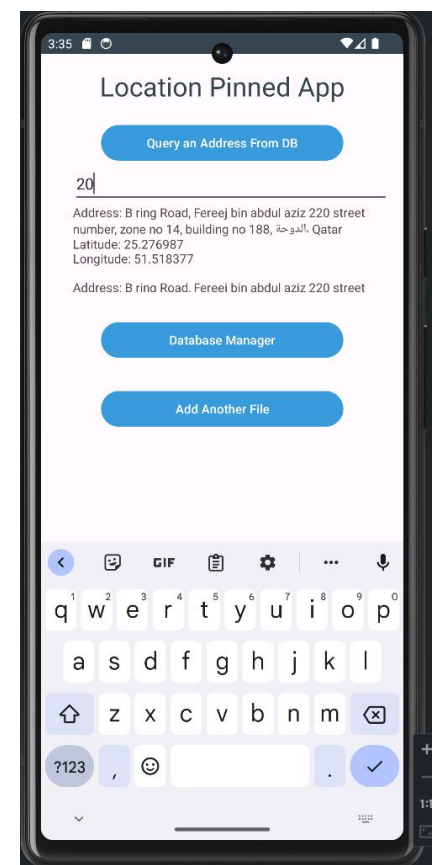


7) Database manager (add/edit/delete):

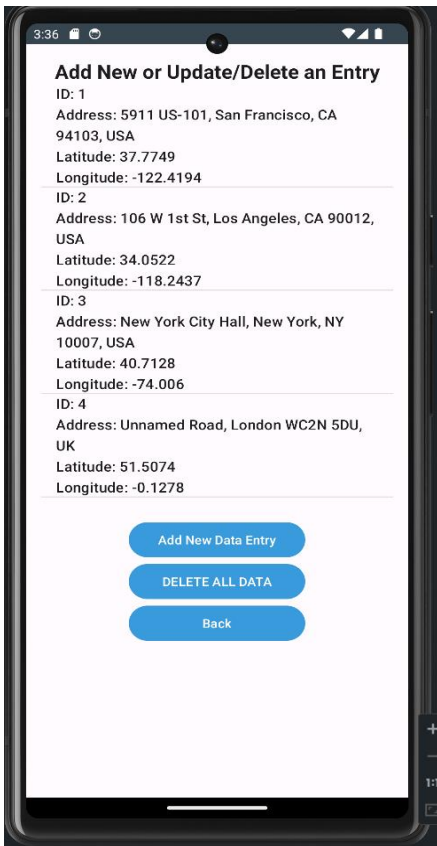


8) An entry is selected:

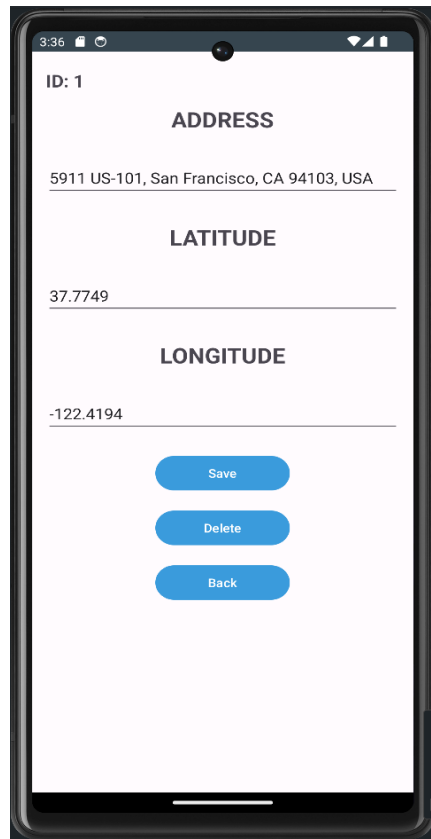


9) The same entry is edited:

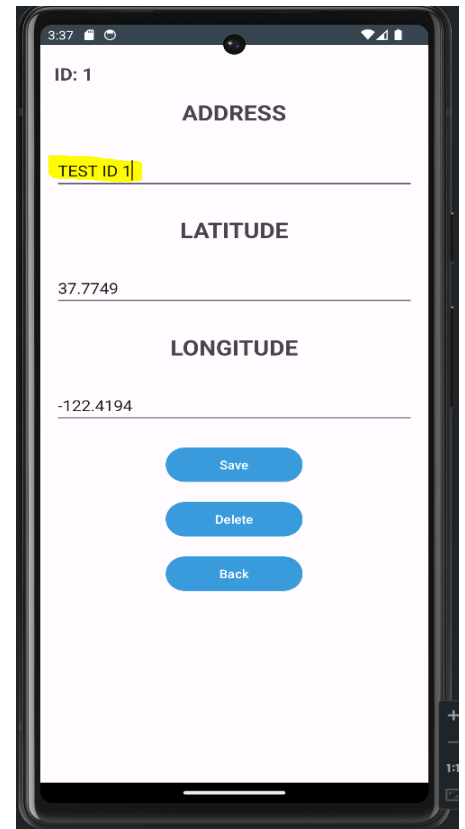


10) Edited entry is saved:

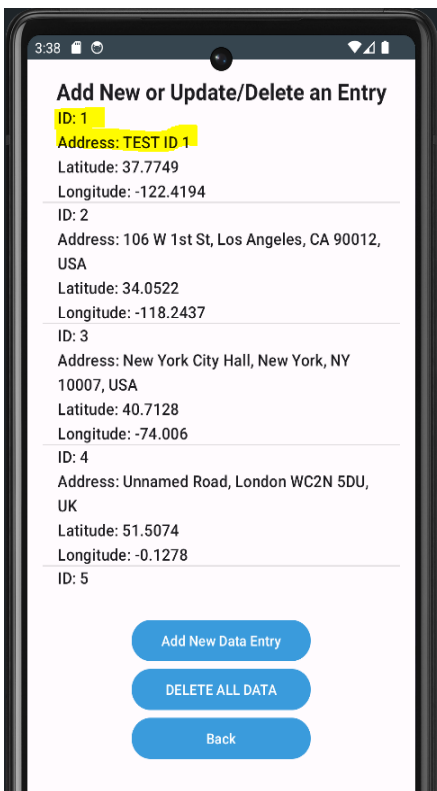

11) The same entry is deleted:

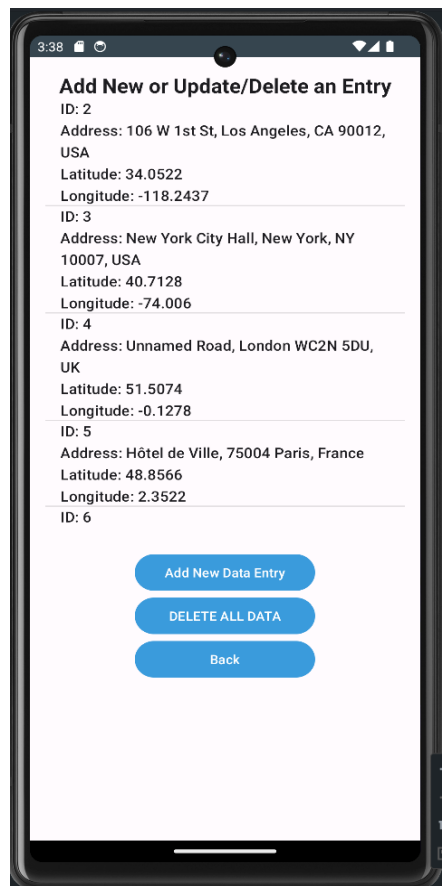

12) User clicks "DELETE ALL DATA":

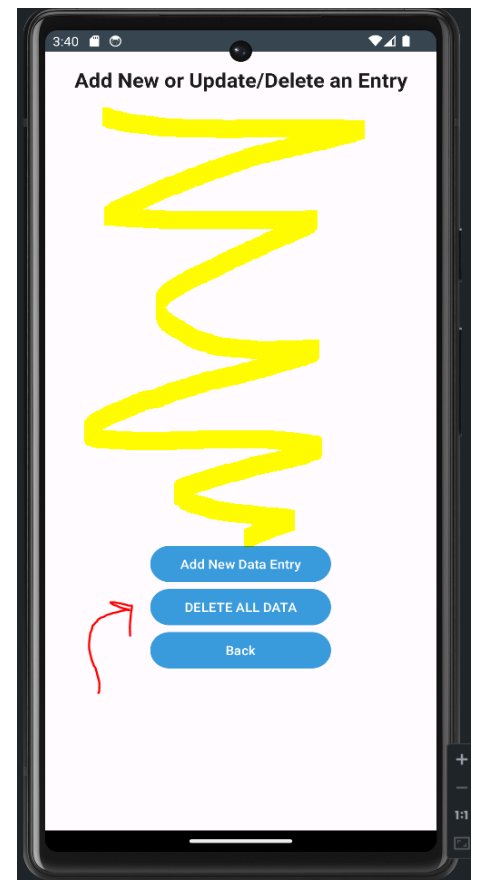

After the “Back” button is pressed, user can either query for more addresses, access the Database Manager, or Add another latitude/longitude file to the database.

