


LLaDA denoising · task = geometry_two · steps = 256 · block_length = 256

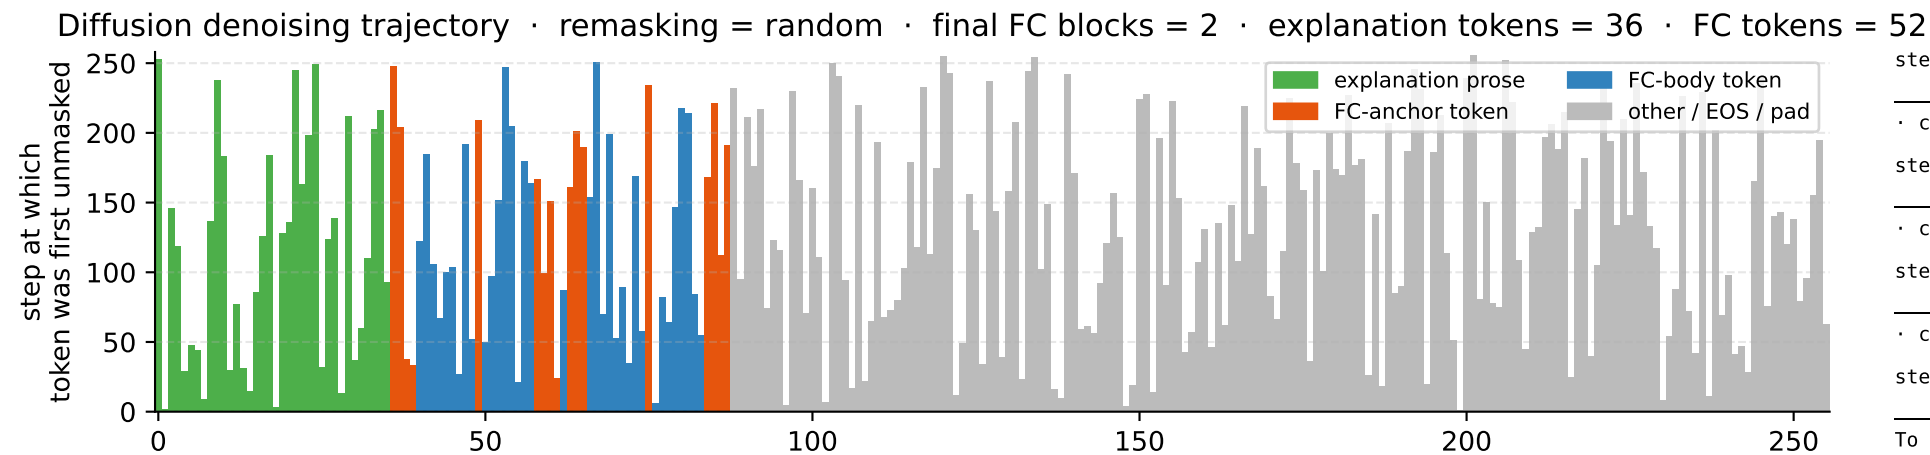

```
step 64/256 (64/256 unmasked)
exp 13/36    fc 13/52
```

```

· compute· area and the sphere···=, I·· the····_volume· the· set to····_call>····_area· "·":·3····>···· "·_volume· "·":·radius··········<|endoftext>····<|endoftext>····<|endoftext>····<|endoftext|>··········<|en

```

```
step 128/256 (128/256 unmasked)
exp 21/36    fc 26/52
```


```
· compute_circle_area_and_the_sphere...=3, I will call the circle..._volume function. the set to .. _call> .name": "circle_area. ".": {"...3...function> <...name. "sphere_volume. ".": {"radius...}} .. _call.<|endoftext|>...<|endo
```

```
step 192/256    (192/256 unmasked)
exp  28/36      fc  40/52
```

```
· compute the circle area and the sphere volume. r=3, I will call both the circle_area and volume function with the set to ... call> {"name": "circle_area", ".": {"radius": 3}} </function_call> <function> .name "sphere_volume", ".":
```

```
step 256/256    (256/256 unmasked)
exp  36/36      fc  52/52
```

To compute the circle area and the sphere volume for $r=3$, I will call both the circle area function and the sphere volume function with the radius set to 3. `<function call> {"name": "circle area", "arguments": {"radius": 3}}` `</function call>`

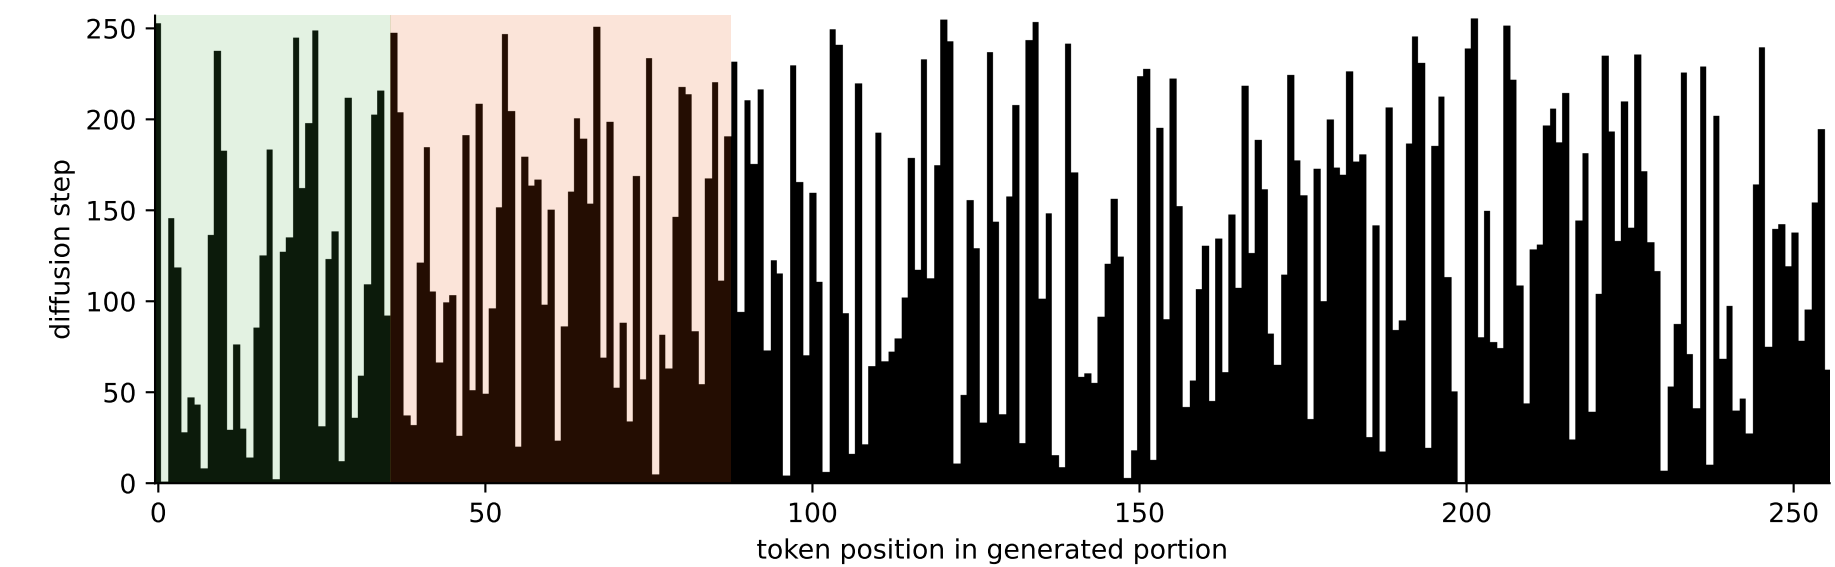

Stabilisation curves: % of explanation vs FC tokens revealed at each step

