



数据库实验-实验环境构建 26

- Docker 安装


- 在 <https://www.docker.com/get-started/> 下载 Docker Desktop

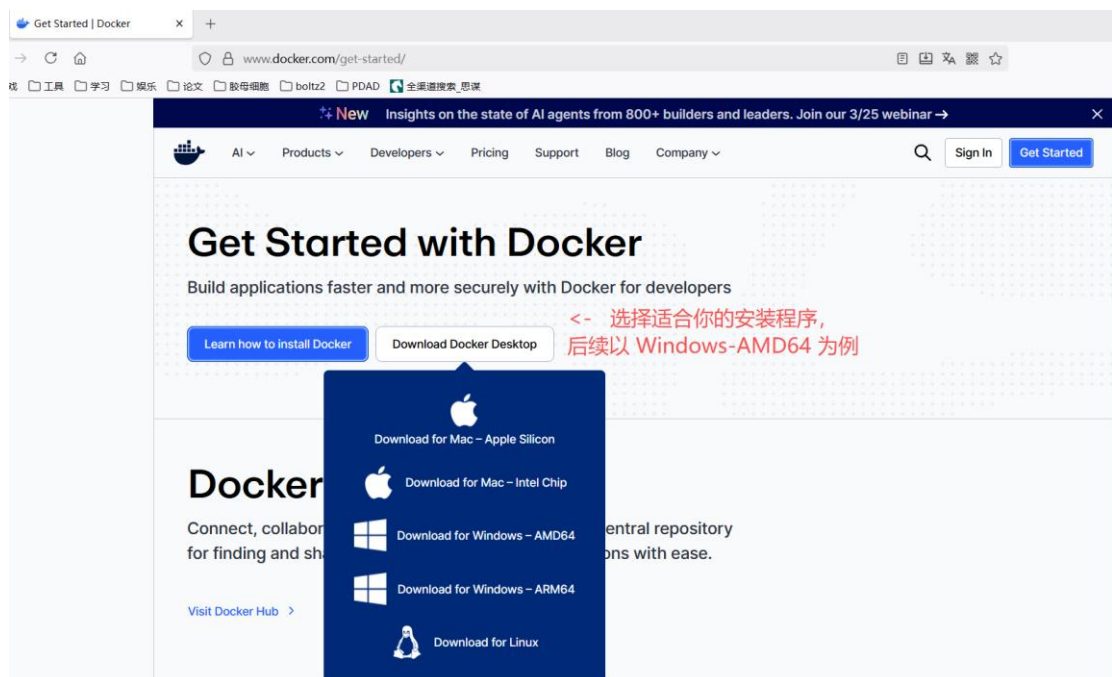


- 使用默认配置继续安装

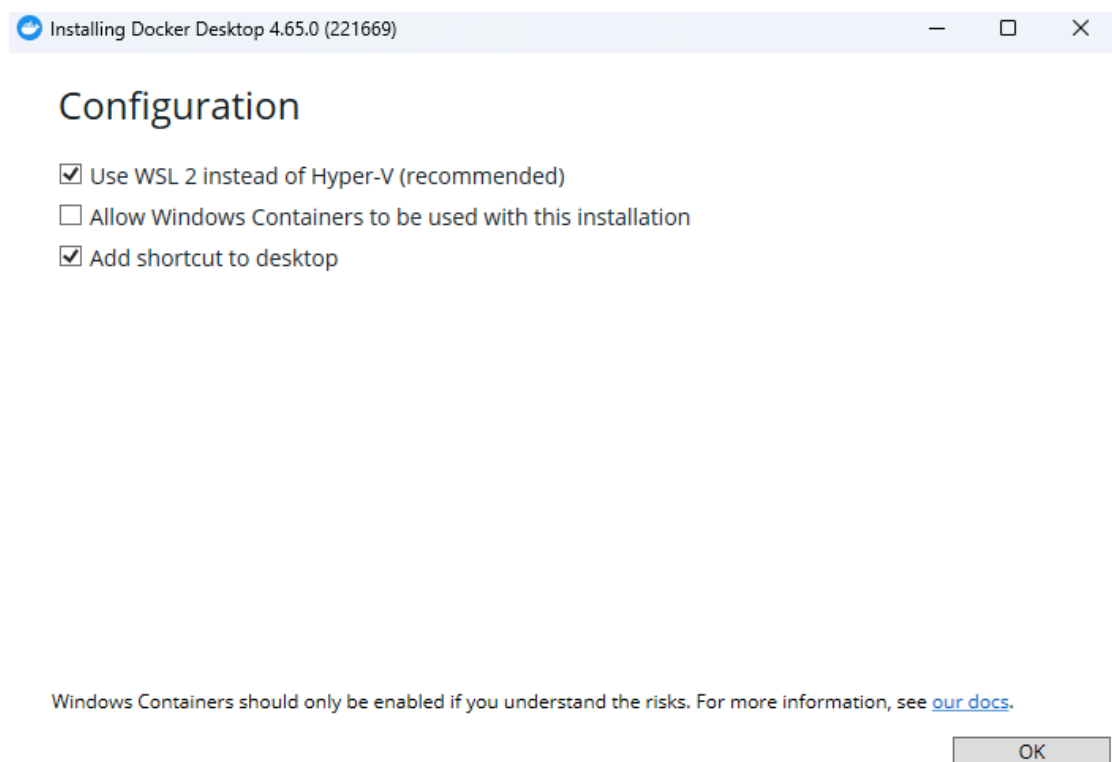

- Docker 会默认安装在你的 C 盘下的该路径

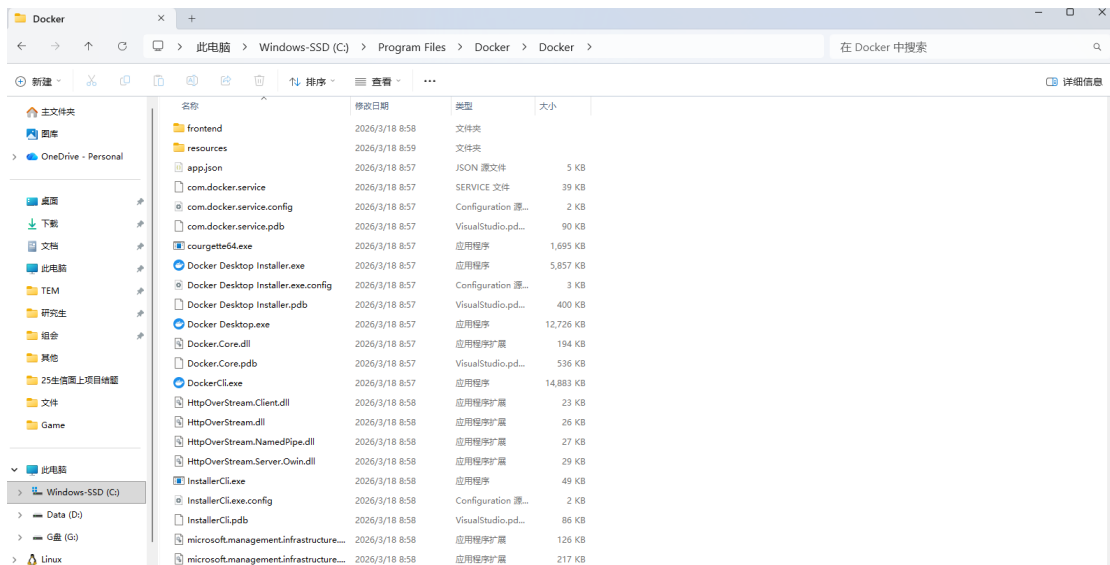

- 打开 Docker，如图所示，接受服务协议：

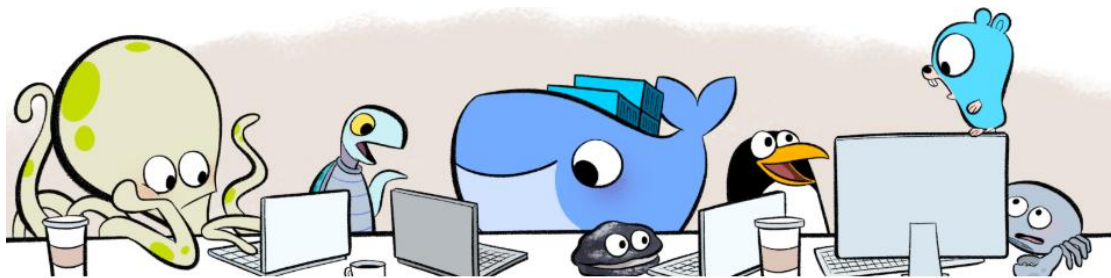

Docker Subscription Service Agreement

By selecting **accept**, you agree to the [Subscription Service Agreement](#), the [Docker Data Processing Agreement](#), the [Data Privacy Policy](#) and the [Docker AI Supplemental Terms](#).


Commercial use of Docker Desktop at a company of more than 250 employees OR more than \$10 million in annual revenue requires a paid subscription (Pro, Team, or Business). [See subscription details](#)

[View Full Terms](#)

[Accept](#)

[Close](#)


- 登录界面可以选择注册一个个人账号，也可以选择 **skip**，直接以不登录状态使用
- 进入 Docker

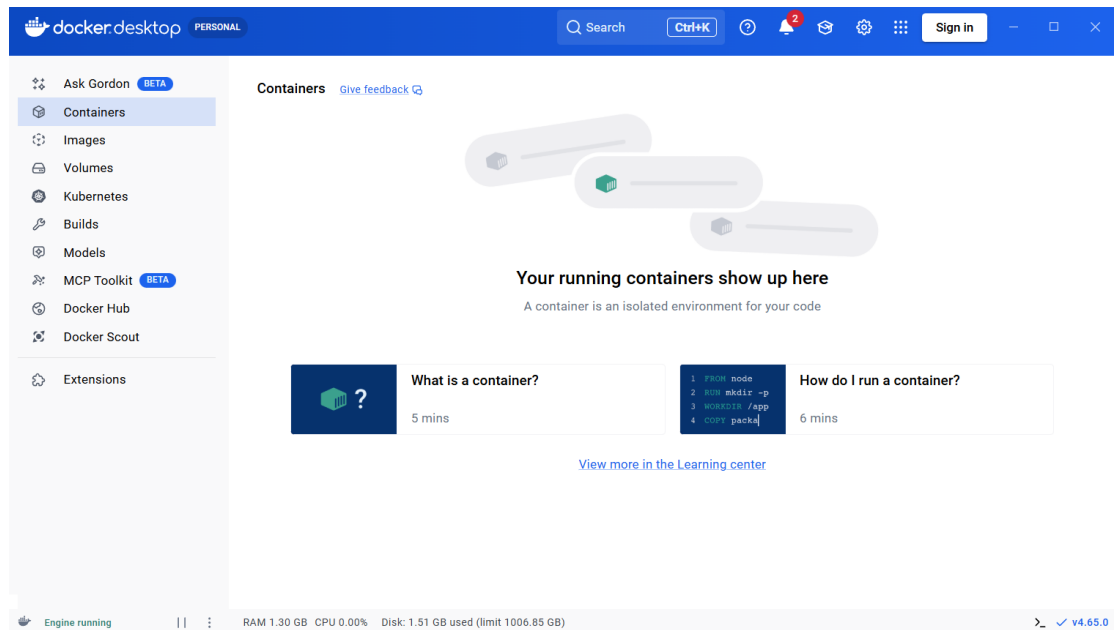


- 下面两个步骤会使用你 C 盘大约 7-8G 的存储空间，请保证有充足空间，或看下面“空间不足怎么办”章节

- **miniob 环境搭建**


- 上方搜索栏搜索 miniob，找到 oceanbase/miniob，点击 Pull

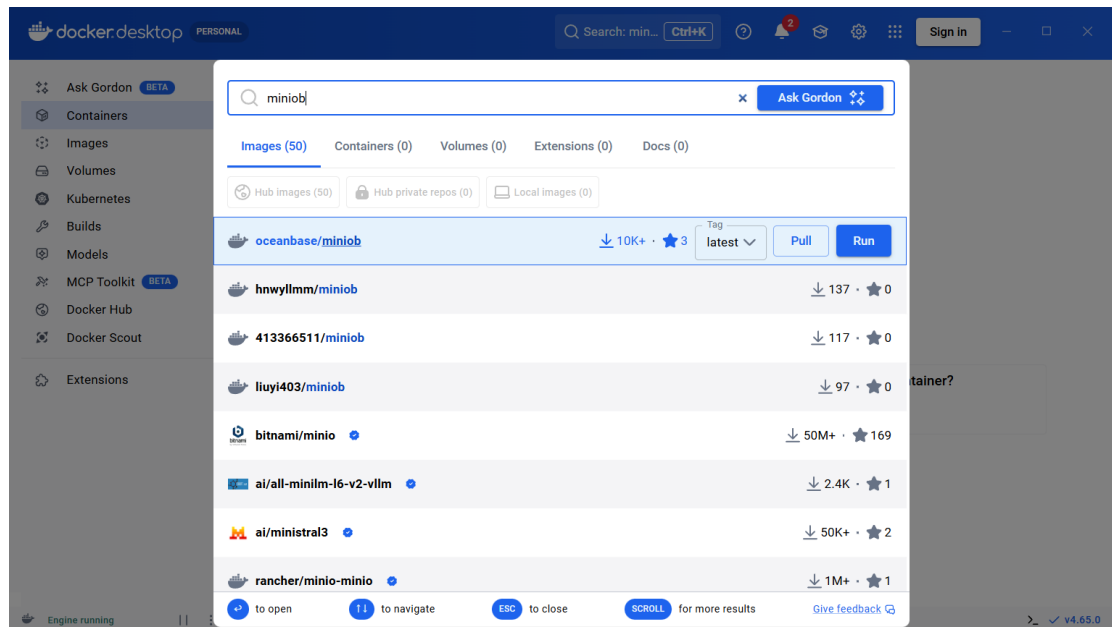


- 如果出现这种情况，请打开你的 VPN 再试

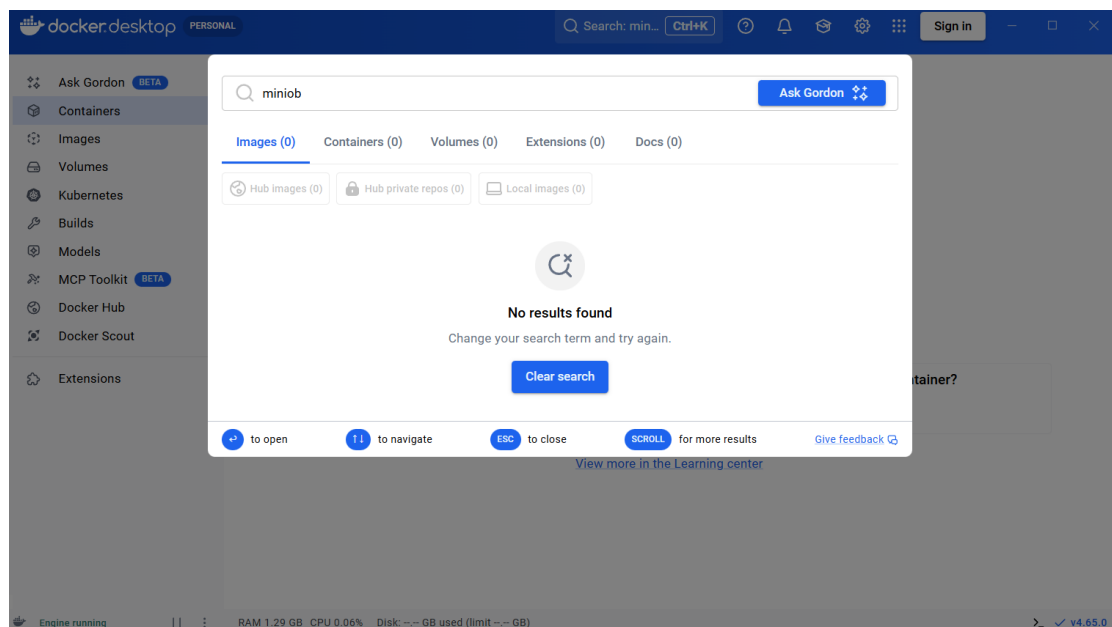


- 下载完成后，点开 Docker 左侧 Images，应该是如下界面

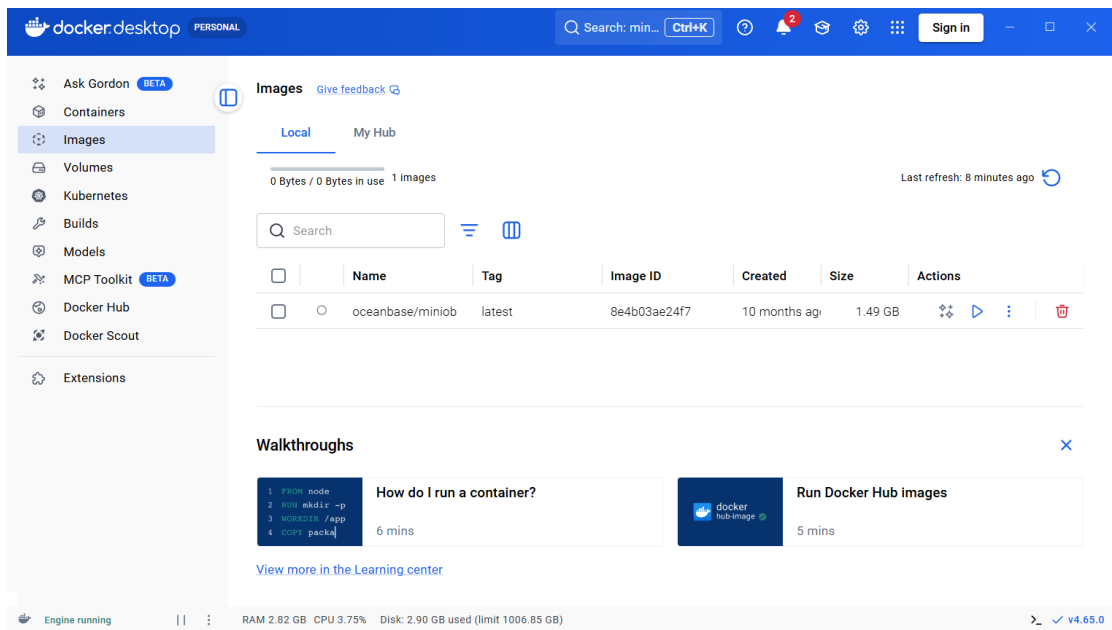


- 点击 Run，进入配置界面

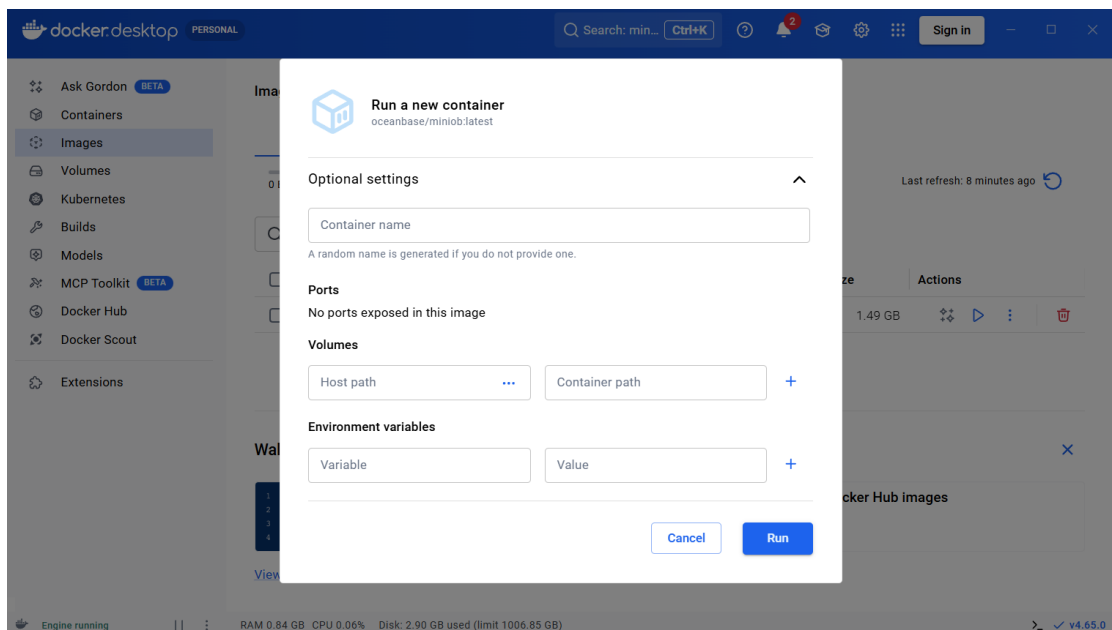

- 名字随便起一个，或是默认随机起名都行，端口不需要，环境变量不需要，点击 Run
- 看到 Logs 里出现 starter scripts run successfully!

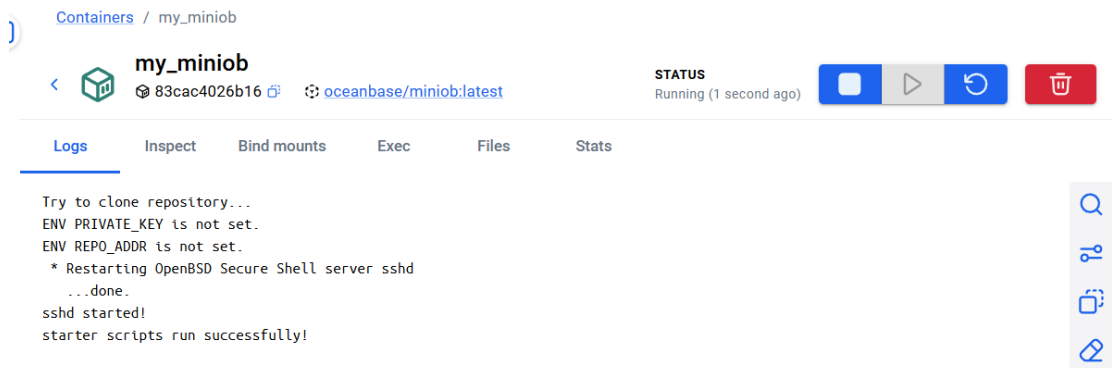

- 点击 Exec，切换至终端（注意在 Exec 中想要复制黏贴时，不要使用 CTRL+C 等快捷键，使用鼠标右键代替）

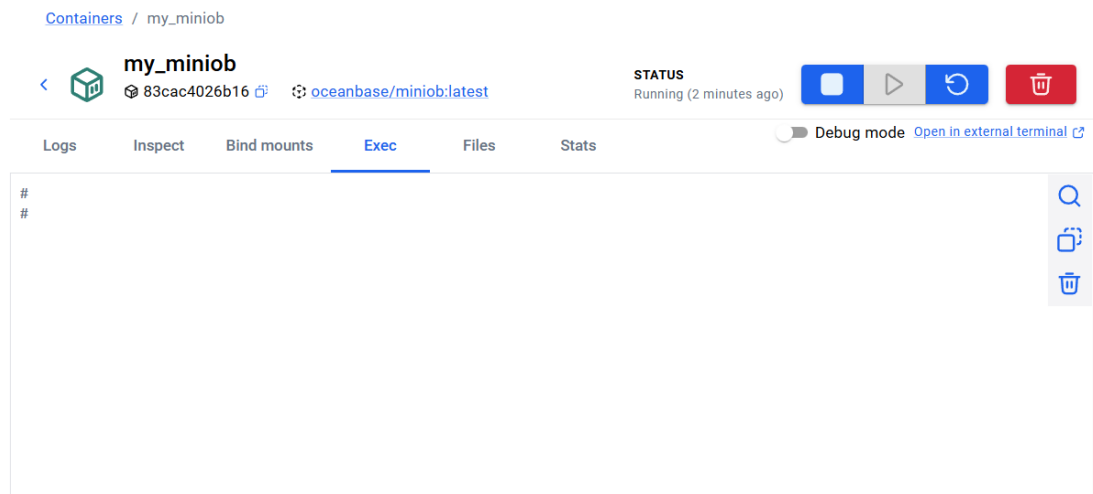


- 输入 `git clone https://github.com/oceanbase/miniob.git`
- 输入 `cd miniob`
- 输入 `bash build.sh --make -j4`

```
#
# ls
docker
# git clone https://github.com/oceanbase/miniob.git
Cloning into 'miniob'...
remote: Enumerating objects: 7690, done.
remote: Total 7690 (delta 0), reused 0 (delta 0), pack-reused 7690 (from 1)
Receiving objects: 100% (7690/7690), 43.93 MiB | 3.14 MiB/s, done.
Resolving deltas: 100% (4191/4191), done.
# ls
docker miniob
# cd miniob
# ls
benchmark CMakeLists.txt CONTRIBUTING.md docker etc NOTICE src tools
build.sh CODE_OF_CONDUCT.md deps docs License README.md test unittest
# bash build.sh --make -j4
THIRD_PARTY_INSTALL_PREFIX is /root/miniob/deps/3rd/usr/local
build.sh --make -j4
Build type: debug
create soft link for build_debug, linked by directory named build
```

- 看到出现 100%并回到终端即可

```
[100%] Linking CXX executable ../pax_storage_test
[100%] Linking CXX executable ../ring_buffer_test
[100%] Built target ring_buffer_test
[100%] Built target pax_storage_test
[100%] Linking CXX executable ../record_manager_test
[100%] Built target record_manager_test
#
```

- 输入 `cd build`
- 输入 `./bin/observer -s miniob.sock -f ../etc/observer.ini &` （若没有自动回到终端，按下 `Enter` 即可解决）
- 输入 `./bin/obclient -s miniob.sock` ，看到显示 `miniob >` 即为成功，至此 miniob 安装配置完成

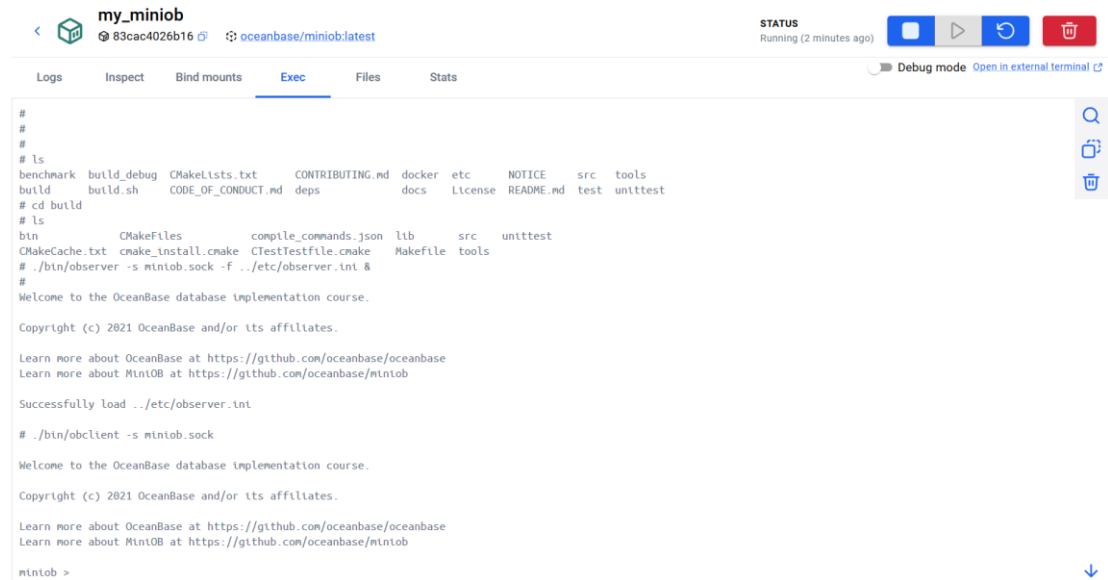


The screenshot shows a Docker container named `my_miniob` (ID: 83cac4026b16) running the `oceanbase/miniob:latest` image. The terminal output shows the following sequence of commands and their results:


```
#  
#  
# ls  
benchmark  build_debug  CMakeLists.txt  CONTRIBUTING.md  docker  etc  NOTICE  src  tools  
build      build.sh     CODE_OF_CONDUCT.md  deps            docs    License  README.md  test  unittest  
# cd build  
# ls  
bin          CMakeFiles      compile_commands.json  lib      src  unittest  
CMakeCache.txt  cmake_install.cmake  CTestTestfile.cmake    Makefile  tools  
# ./bin/observer -s miniob.sock -f ../etc/observer.ini &  
#  
Welcome to the OceanBase database implementation course.  
  
Copyright (c) 2021 OceanBase and/or its affiliates.  
  
Learn more about OceanBase at https://github.com/oceanbase/oceanbase  
Learn more about MiniOB at https://github.com/oceanbase/miniob  
  
Successfully load ../etc/observer.ini  
  
# ./bin/obclient -s miniob.sock  
  
Welcome to the OceanBase database implementation course.  
  
Copyright (c) 2021 OceanBase and/or its affiliates.  
  
Learn more about OceanBase at https://github.com/oceanbase/oceanbase  
Learn more about MiniOB at https://github.com/oceanbase/miniob  
  
miniob >
```

- **OceanBase 环境搭建**


- 上方搜索栏搜索 oceanbase，找到 oceanbase/oceanbase-ce，点击 Pull

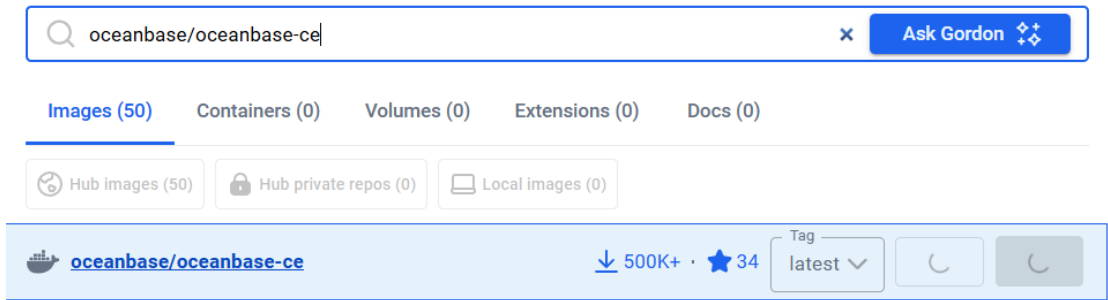

- 下载完成后，在 Images 里面可以看到

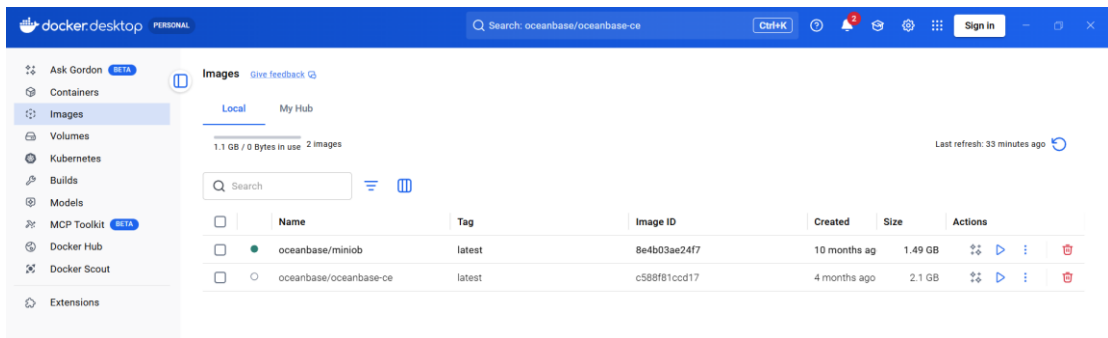

- 点击 Run
- 等待至看到出现 boot success!

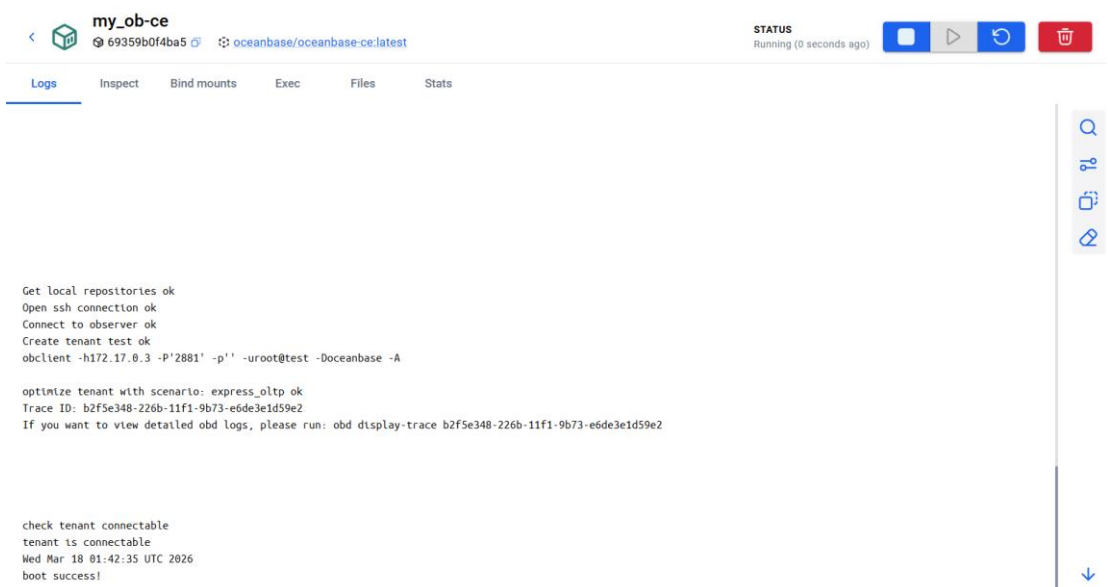

- 切换至 Exec，输入 `obclient -uroot@sys -h127.1 -P2881`
- 看到如下输出即完成



```
Logs    Inspect  Bind mounts  Exec    Files    Stats

sh-4.4# obclient -uroot@sys -h127.1 -P2881
Welcome to the OceanBase. Commands end with ; or \g.
Your OceanBase connection id is 3221522088
Server version: OceanBase_CE 4.3.5.5 (r105000012025111711-c10174c0486c38f64a2222486986bbe15d5da0dc) (Built Nov 17 2025 12:20:00)

Copyright (c) 2000, 2018, OceanBase and/or its affiliates. All rights reserved.


Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

obclient(root@sys)[(none)]> █
```

- 部署完成后，可以在左侧 Containers 内看到你刚才创建的两个容器，可以快速 `stop/start`，防止长时间占用内存

- 空间不足怎么办

- Docker 使用的空间全部默认是 C 盘，如果需要变动，可以打开 Docker 上方的 Settings，看以下位置，可按需修改

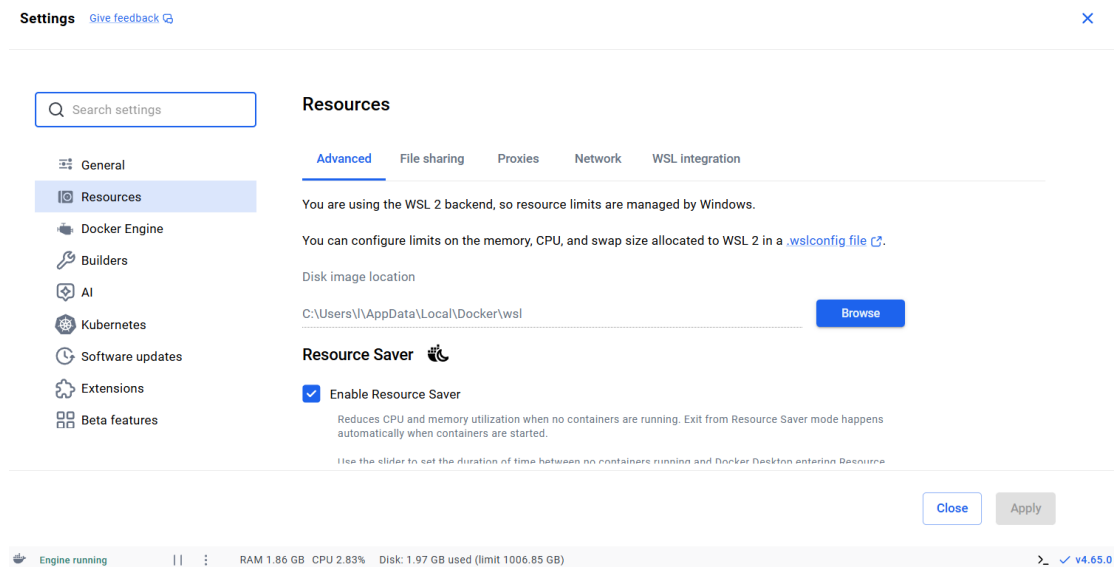

- 变动存储位置会删除原本使用的空间及信息！