

Description | **Accepted** × | Editorial | Solutions | 🔍 <

< All Submissions 🔗

Accepted 26 / 26 testcases passed Time taken: 17m 36s


 Xalepit submitted at Mar 14, 2026 14:54  

🕒 Runtime

0 ms | Beats 100.00% 🏆

⚙️ Memory

10.82 MB | Beats 34.98%

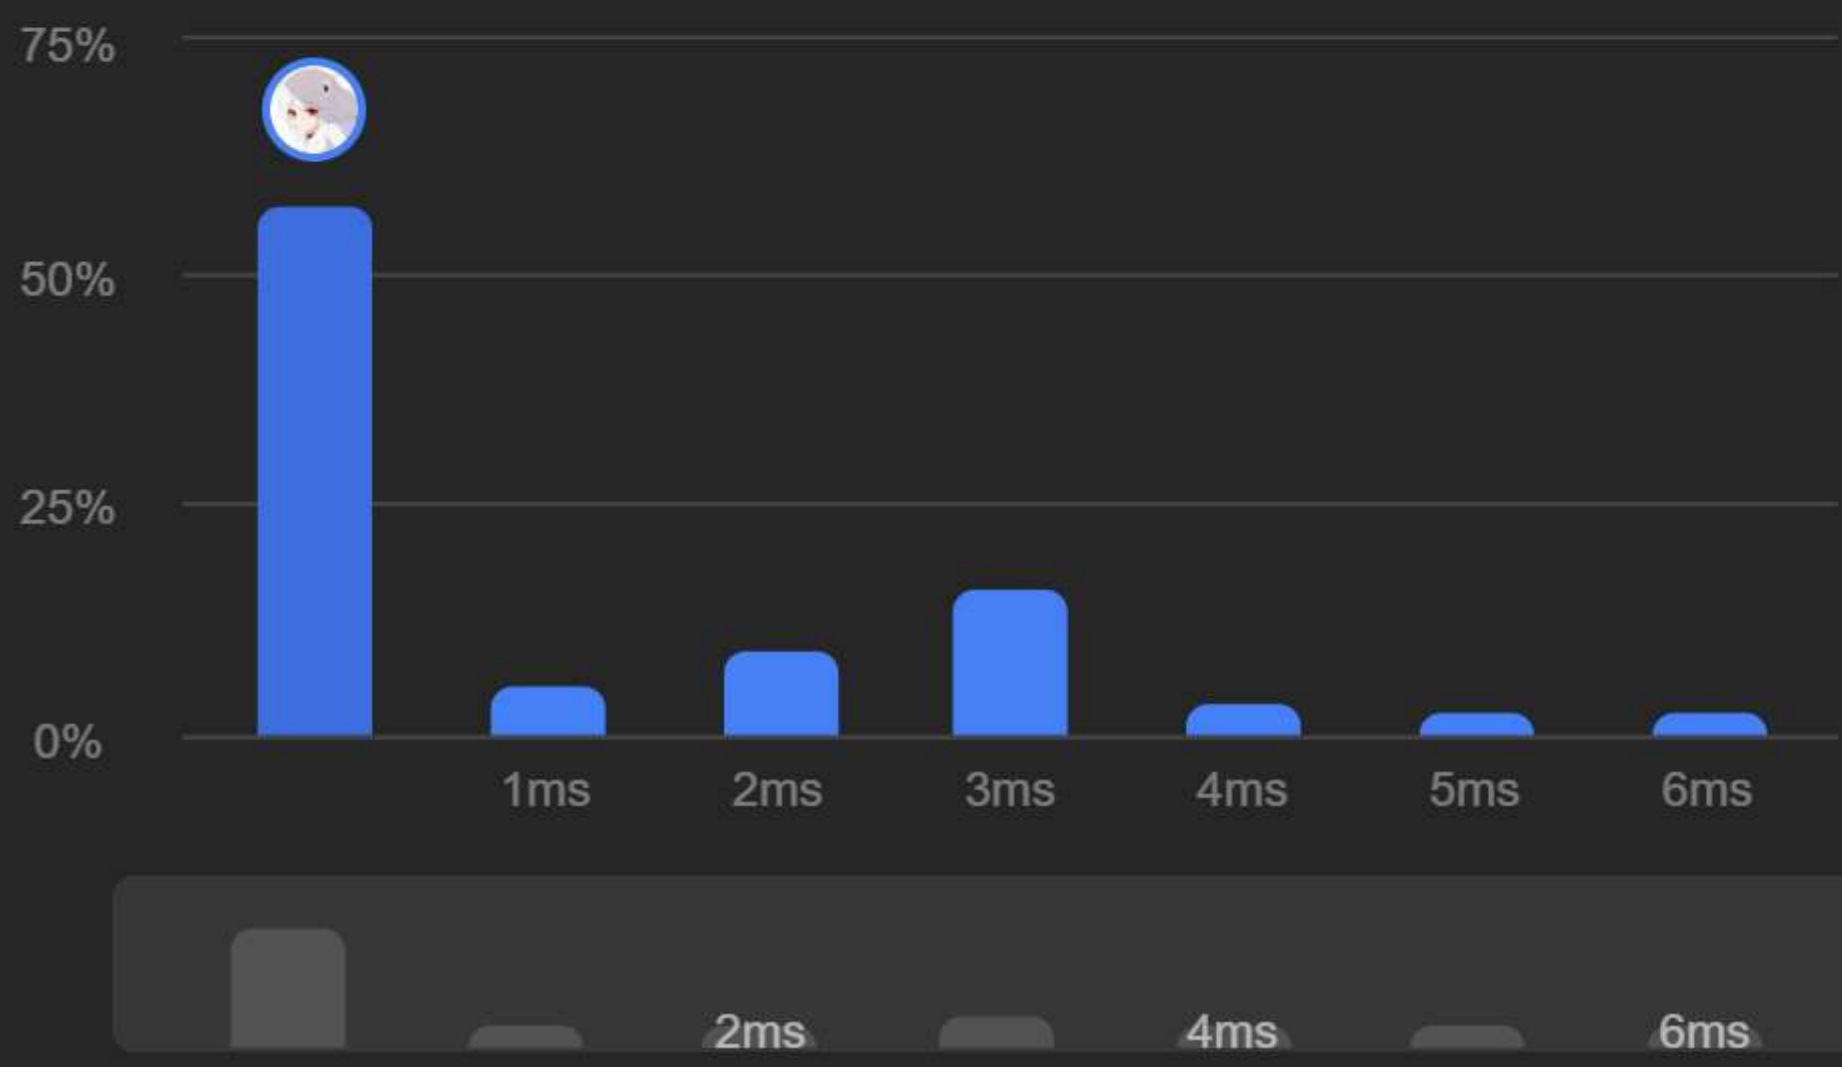

 **Code** 2452769 幸可函

C++ ▾ 🔒 Auto    ↺ ↻

```
1 class Solution {
2 public:
3     vector<vector<int>> answer;
4
5     vector<vector<int>> permute(vector<int>& nums) {
6         perm(nums, 0);
7         return answer;
8     }
9     void perm(vector<int>& nums, int k) {
10         if (k == nums.size()) // 仅在所有位置军排列好时输出一次结果
11             answer.push_back(nums);
12         for (size_t i = k; i < nums.size();
13             i++) { // k表示在确定第[k]个位置放哪个元素
14             swap(
15                 nums[i],
16                 nums[k]); // 第k个位置一次可以放k~n-1位置的元素，在循环内依次交换
17             perm(nums, k + 1); // 产生k后位置的全排列
18             swap(nums[i], nums[k]); // 恢复现场
19         }
20     }
21     void swap(int& n, int& m) {
22         int temp = n;
23         n = m;
24         m = temp;
25     }
26 }
```

Saved Ln 16, Col 22

☑️ Testcase | >_ Test Result