

# Assignment 2

Xiang Li

2023/11/8

## Exercise 1

1

```
raw_df = read.csv("data/Airbnb_Ragusa.csv")
```

2

```
valid_df = raw_df[, c("neighbourhood_cleansed", "latitude",  
  "longitude", "price")]  
head(valid_df, 5)
```

```
##   neighbourhood_cleansed latitude longitude   price  
## 1                      Ragusa 36.92940  14.62523 $110.00  
## 2                      Modica 36.85759  14.76121  $56.00  
## 3                      Modica 36.86113  14.76306  $40.00  
## 4                      Modica 36.83871  14.76097  $51.00  
## 5                      Modica 36.85793  14.76054 $140.00
```

3

```
valid_df$price = gsub("[\$]", "", valid_df$price)  
valid_df$price = gsub("[,]", "", valid_df$price)  
valid_df$price = as.numeric(valid_df$price)  
head(valid_df, 5)
```

```
##   neighbourhood_cleansed latitude longitude price  
## 1                      Ragusa 36.92940  14.62523   110  
## 2                      Modica 36.85759  14.76121    56  
## 3                      Modica 36.86113  14.76306    40  
## 4                      Modica 36.83871  14.76097    51  
## 5                      Modica 36.85793  14.76054   140
```

4


```
ave_price_df = aggregate(valid_df[, "price", drop = FALSE],
  by = list(neighbourhood_cleansed = valid_df$neighbourhood_cleansed),
  mean)
ave_price_df
```

```
##   neighbourhood_cleansed    price
## 1             Acate 86.07143
## 2   Chiaramonte Gulfi 141.60000
## 3             Comiso 83.00000
## 4       Giarratana 175.12500
## 5             Ispica 185.40506
## 6             Modica 149.42586
## 7   Monterosso Almo 97.40000
## 8       Pozzallo 128.07692
## 9             Ragusa 132.16701
## 10  Santa Croce Camerina 259.73265
## 11             Scicli 184.02929
## 12          Vittoria 100.49490
```

5


```
coloursvector = rainbow(12)
par(mar = c(5, 10, 4, 2))
barplot(height = ave_price_df$price, names.arg = ave_price_df$neighbourhood_cleansed,
  horiz = TRUE, col = coloursvector, main = "Average Price per Neighbourhood",
  xlim = c(0, max(ave_price_df$price)), xlab = "average price",
  ylab = "", las = 1)
```

## Average Price per Neighbourhood

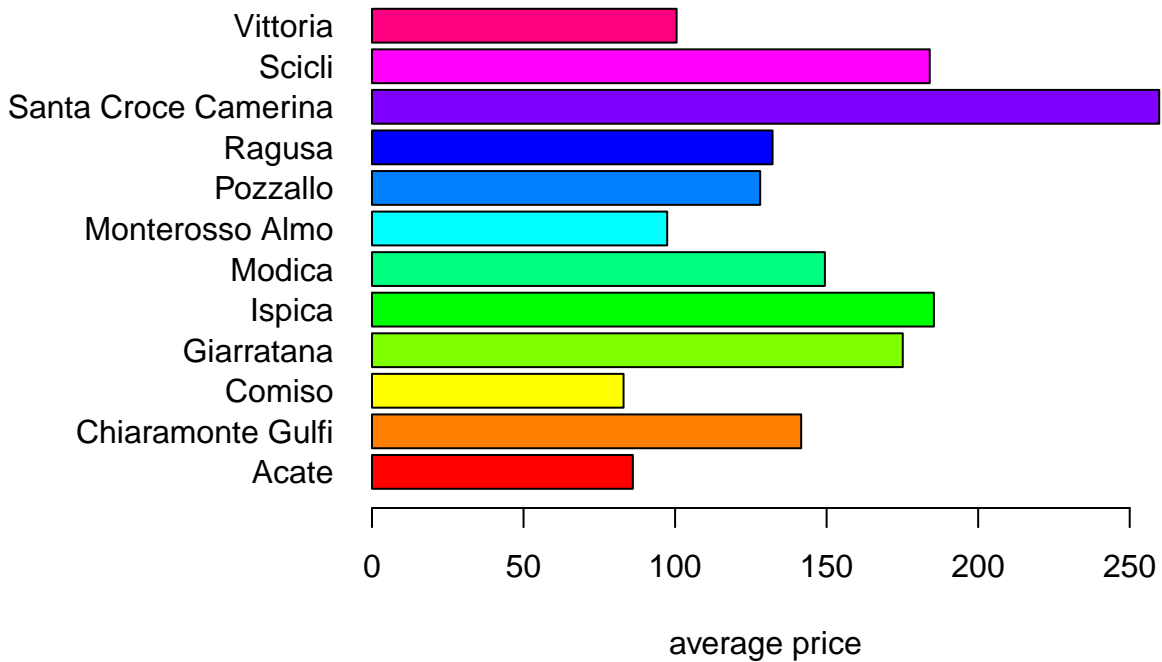


6

```
ave_price_df$color = coloursvector
valid_df = merge(valid_df, ave_price_df[, c("neighbourhood_cleansed",
"color")], by = "neighbourhood_cleansed", all = TRUE)
plot(valid_df$longitude, valid_df$latitude, type = "p",
col = valid_df$color, ylim = c(min(valid_df$latitude),
max(valid_df$latitude) + 0.1), xlim = c(min(valid_df$longitude),
max(valid_df$longitude) + 0.1), ylab = "latitude",
xlab = "longitude", main = "Position Distribution of Airbnbns")
```

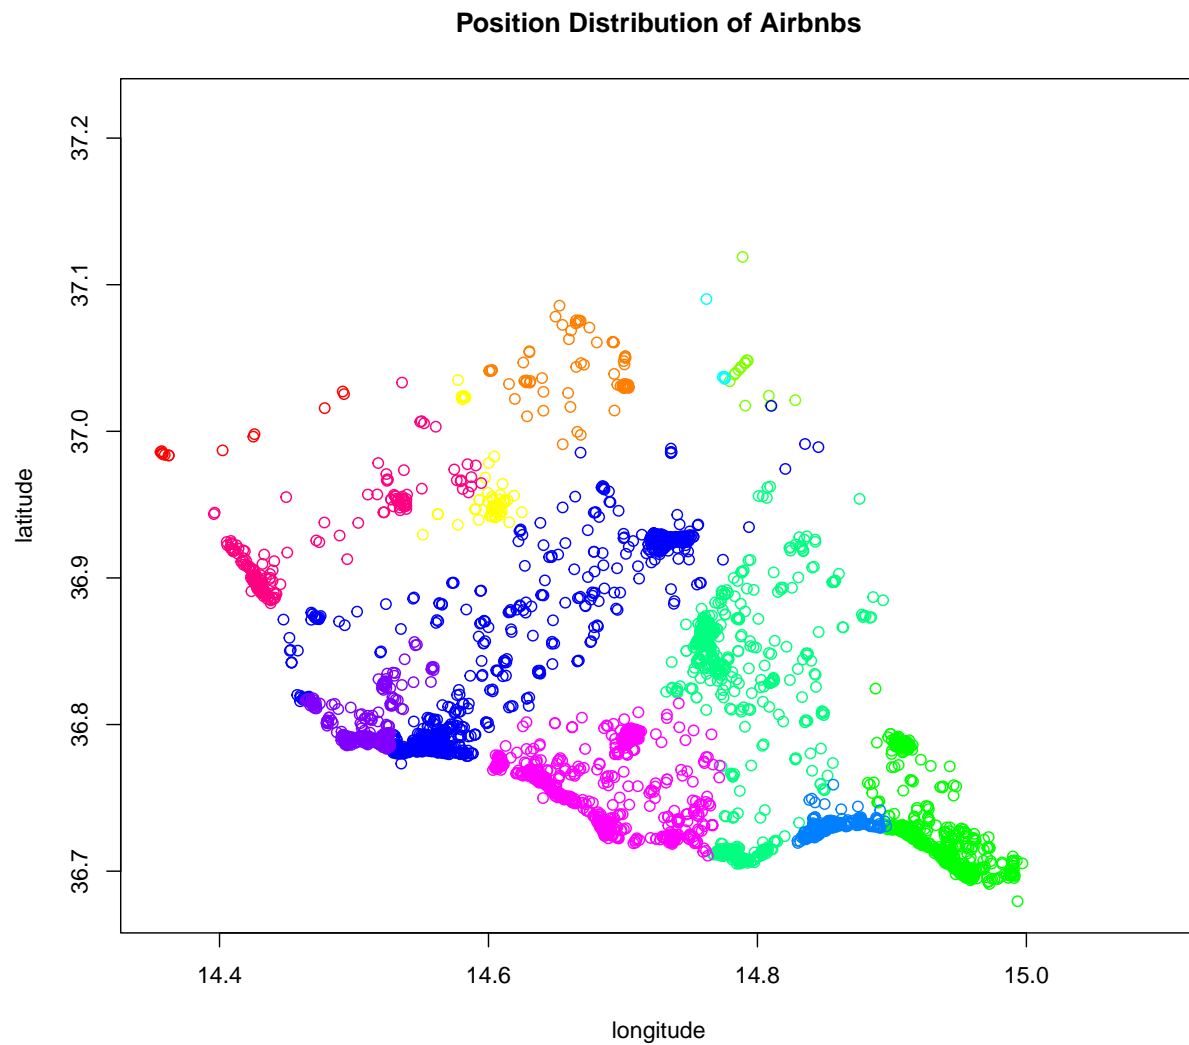

7

```
plot(valid_df$longitude, valid_df$latitude, type = "p",
     col = valid_df$color, ylim = c(min(valid_df$latitude),
                                     max(valid_df$latitude) + 0.1), xlim = c(min(valid_df$longitude),
                                     max(valid_df$longitude) + 0.1), ylab = "latitude",
     xlab = "longitude", main = "Position Distribution of Airbnbs",
     mar = c(5, 4, 6, 4))
legend(x = "topright", legend = ave_price_df$neighbourhood_cleansed,
     pch = "o", col = ave_price_df$color)
```

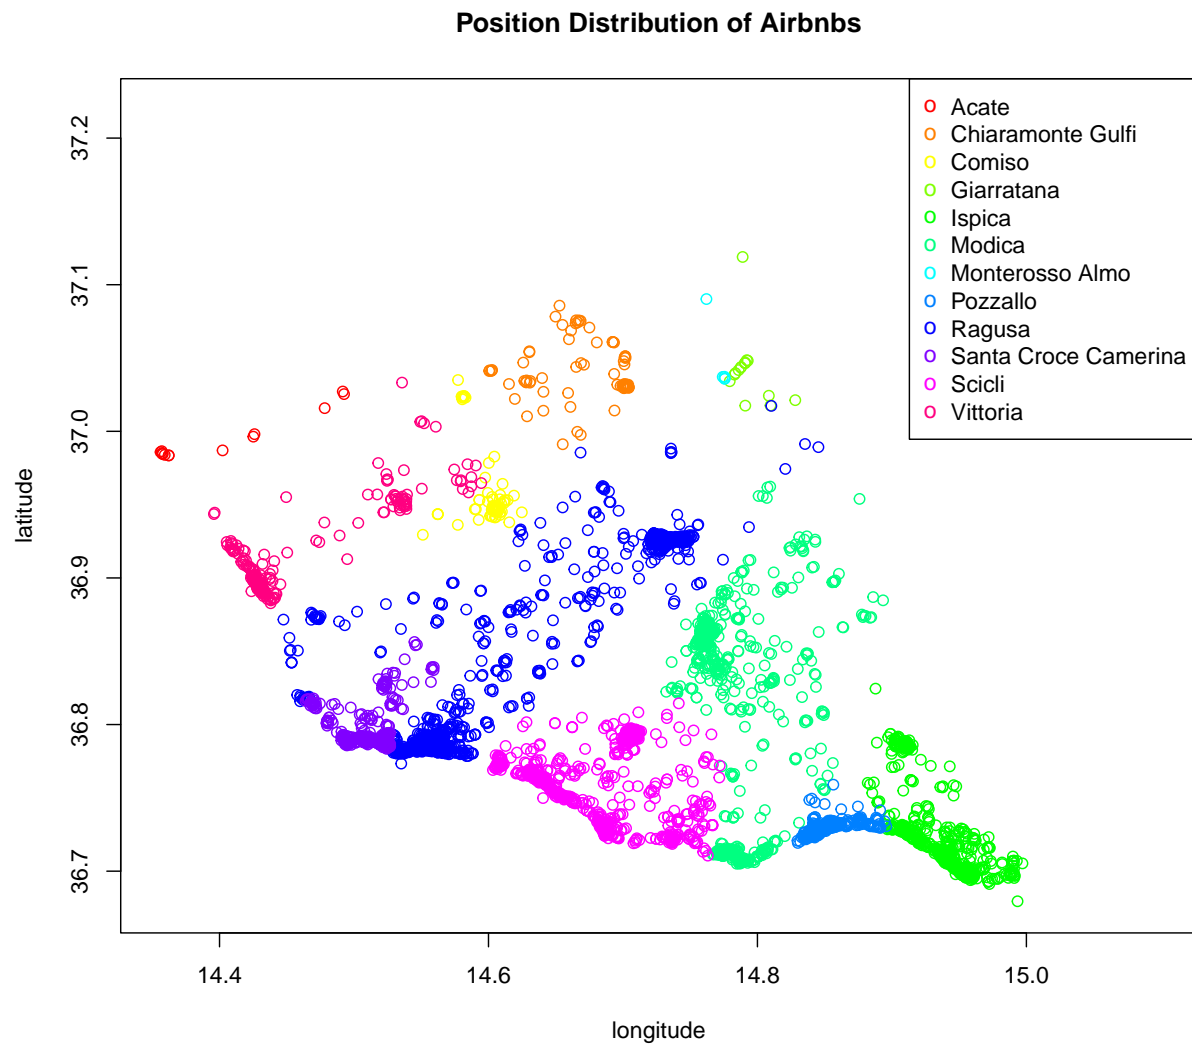


9

Yes, the two maps are similar.


10

```
plot(valid_df$longitude, valid_df$latitude, type = "p",
     col = valid_df$color, ylim = c(36.5, max(valid_df$latitude) +
     0.1), xlim = c(min(valid_df$longitude), max(valid_df$longitude) +
     0.1), ylab = "latitude", xlab = "longitude", main = "Position Distribution of Airbnbs")
legend(x = "topright", legend = ave_price_df$neighbourhood_cleansed,
     pch = "o", col = ave_price_df$color)
points(x = 14.4346, y = 36.5532, pch = 17, col = "black")
```

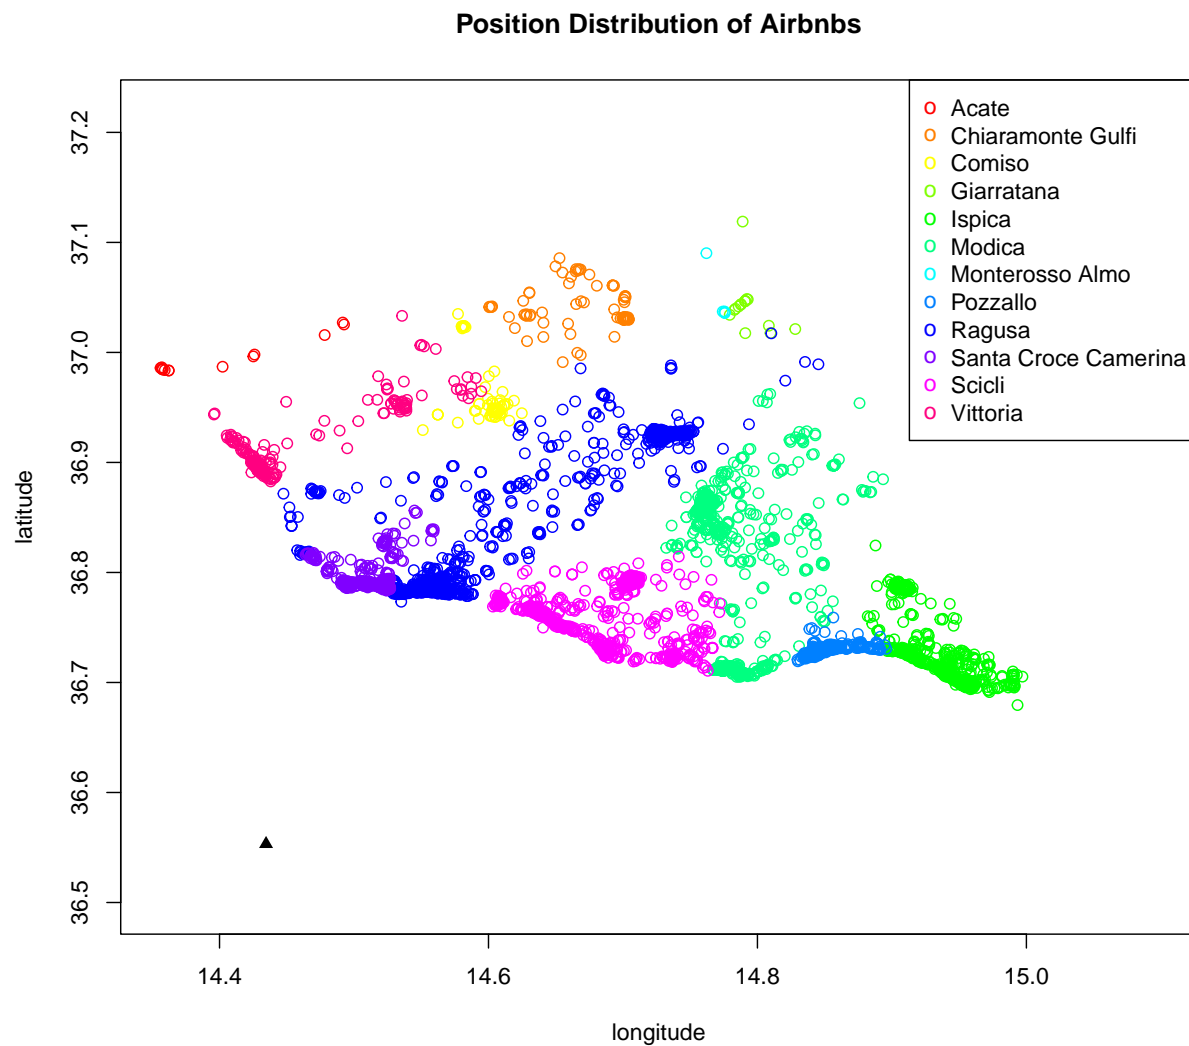

11

```
plot(valid_df$longitude, valid_df$latitude, type = "p",
     col = valid_df$color, ylim = c(36.5, max(valid_df$latitude) +
     0.1), xlim = c(min(valid_df$longitude), max(valid_df$longitude) +
     0.1), ylab = "latitude", xlab = "longitude", main = "Position Distribution of Airbnbs")
legend(x = "topright", legend = ave_price_df$neighbourhood_cleansed,
     pch = "o", col = ave_price_df$color)
points(x = 14.4346, y = 36.5532, pch = 17, col = "black")
legend(x = "bottomright", legend = "Ragusa cathedral", pch = 17,
     col = "black")
```

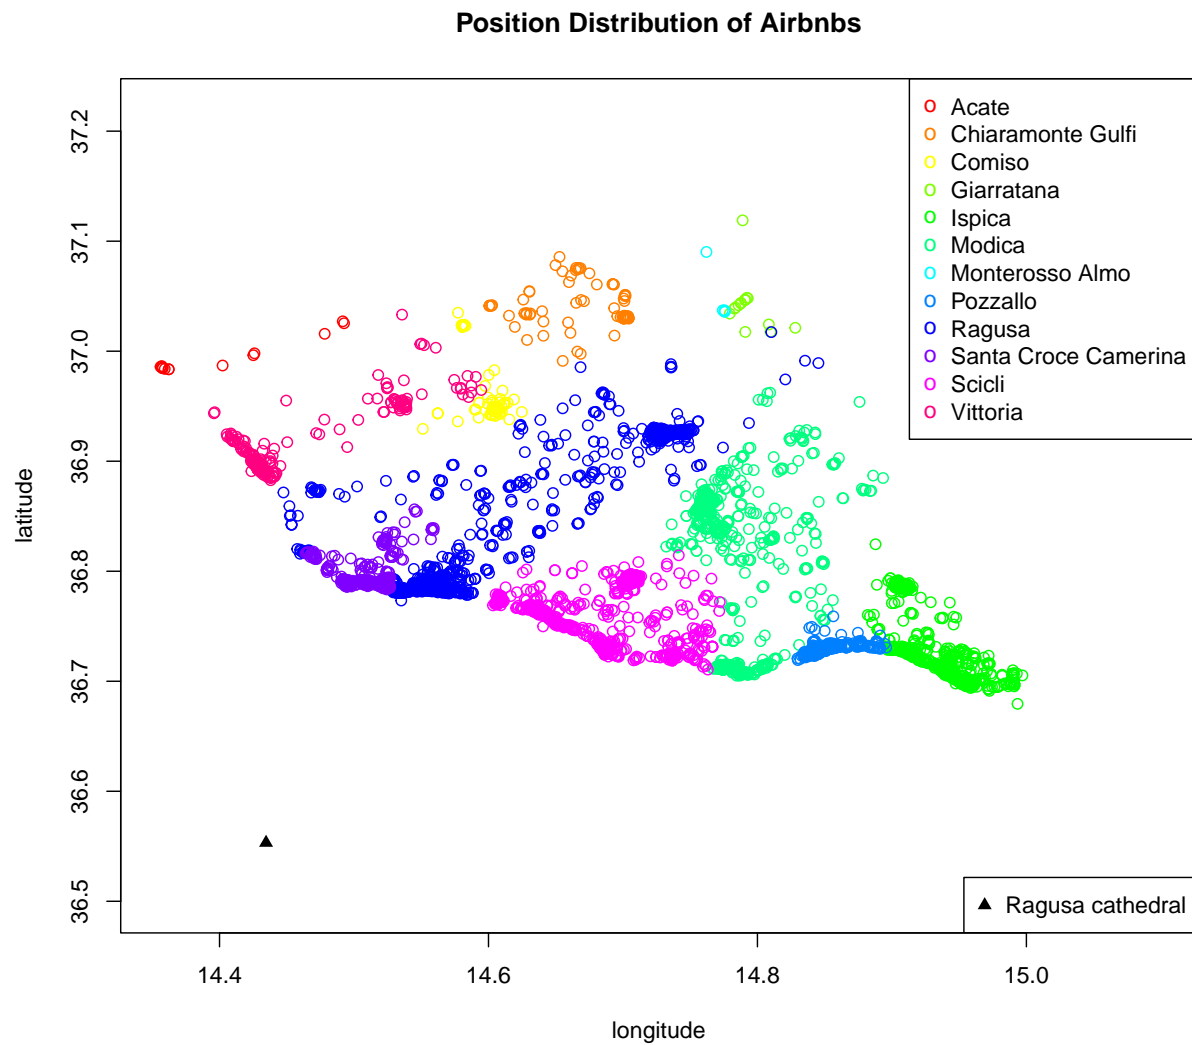

12

```
jpeg(file = "plot/Assignment2_Exercise1_12.jpg", width = 9,
      height = 8, units = "in", res = 300, quality = 100)
plot(valid_df$longitude, valid_df$latitude, type = "p",
      col = valid_df$color, ylim = c(36.5, max(valid_df$latitude) +
      0.1), xlim = c(min(valid_df$longitude), max(valid_df$longitude) +
      0.1), ylab = "latitude", xlab = "longitude", main = "Position Distribution of Airbnbs")
legend(x = "topright", legend = ave_price_df$neighbourhood_cleansed,
      pch = "o", col = ave_price_df$color)
points(x = 14.4346, y = 36.5532, pch = 17, col = "black")
legend(x = "bottomright", legend = "Ragusa cathedral", pch = 17,
      col = "black")
dev.off()
```

## pdf

```
## 2
```

## Exercise 2

### Task 1

```
stock_price_df = read.csv("data/AAPL_complete.csv")
stock_price_df$Open = as.numeric(stock_price_df$Open)
stock_price_df$Date = as.Date(stock_price_df$Date, "%Y-%m-%d")
stock_price_df = stock_price_df[order(stock_price_df$Date),
]
head(stock_price_df, 5)
```

```
##      Date Close.Last   Volume   Open   High   Low
## 1 2010-03-01    29.8557 137312041 29.3928 29.9286 29.3500
## 2 2010-03-02    29.8357 141486282 29.9900 30.1186 29.6771
## 3 2010-03-03    29.9043  92846488 29.8486 29.9814 29.7057
## 4 2010-03-04    30.1014  89591907 29.8971 30.1314 29.8043
## 5 2010-03-05    31.2786 224647427 30.7057 31.3857 30.6614
```

### Task 2

```
simulate_investment = function(start_date, end_date, investment_USD) {
  if (!is.character(start_date) | !is.character(end_date) |
      !is.numeric(investment_USD)) {
    warning("The input is not available!!!")
  }
  start_date_d = as.Date(start_date, "%Y-%m-%d")
  end_date_d = as.Date(end_date, "%Y-%m-%d")
  if (is.na(start_date_d) | is.na(end_date_d)) {
    warning("The dates entered do not exist or are not correctly formatted!!!")
  }
  min_date = min(stock_price_df$Date)
  max_date = max(stock_price_df$Date)
  if (start_date_d < min_date | end_date_d > max_date |
      start_date_d > end_date_d) {
    warning("The dates entered exceed the limit or are in reverse order!!!")
  }
  hold_price_df = stock_price_df[(stock_price_df$Date >=
    start_date_d) & (stock_price_df$Date <= end_date_d),
  ]
  buy_price = hold_price_df$Open[1]
  stock = floor(investment_USD/buy_price)
  cash = investment_USD - buy_price * stock
  hold_price_df$Value = hold_price_df$Open * stock + cash
  hold_price_df$Profit = round(hold_price_df$Value - investment_USD,
    2)
  result_df = hold_price_df[, c("Date", "Value", "Profit")]
}
```



```
    return(result_df)
}
```

### Task 3


```
simulate_investment("2011-10-01", "2011-10-11", 10000)
```

##	Date	Value	Profit
## 580	2011-10-01	10000.000	0.00
## 581	2011-10-02	10000.000	0.00
## 582	2011-10-03	9826.444	-173.56
## 583	2011-10-04	9677.296	-322.70
## 584	2011-10-05	9504.748	-495.25
## 585	2011-10-06	9645.400	-354.60
## 586	2011-10-07	9708.400	-291.60
## 587	2011-10-08	9708.400	-291.60
## 588	2011-10-09	9708.400	-291.60
## 589	2011-10-10	9793.522	-206.48
## 590	2011-10-11	10140.148	140.15

### Task 4

```
df_summary = simulate_investment("2011-10-01", "2016-10-01",
                                   5000)
plot(df_summary$Date, df_summary$Value, type = "l", xlab = "Date",
     ylab = "Value", main = "Value From 2011-10-01 To 2016-10-01",
     col = "lightblue")
abline(h = 5000, col = "red")
```

### Value From 2011-10-01 To 2016-10-01

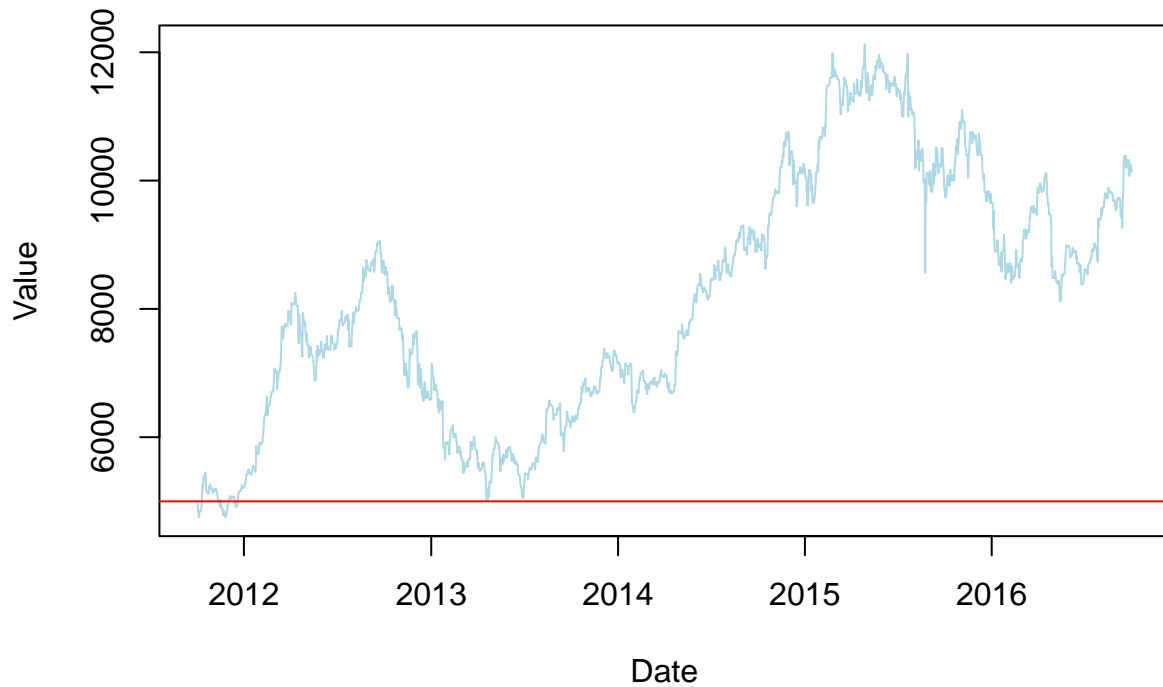

The Value takes the highest value in April 2015, so it would be best to sell the stock in April 2015.

### Task 5

```
ind = which.max(df_summary$Value)
list(Date = df_summary$Date[ind], Value = df_summary$Value[ind])
```

```
## $Date
## [1] "2015-04-28"
##
## $Value
## [1] 12123.7
```