

What is your name and affiliation?

Gavin Wong, Computer Science Undergraduate

What is your field of research or study?

Computer Science and Software Engineering

Read the introduction to rTisane, making highlights + notes + connections as you go. Explain your process.

- Used a more general approach, where they were highlighting anything that might have been important (words, phrases, sentences)
- Initial skim was more of an exploratory one to get an initial feel for the paper
- Took notes as they went with the help of previous background knowledge as well as Gemini assistance
- Did not connect anything within the same topic

Go back and reread the introduction, trying to answer the question: What is the methodology of the paper? Use the add read feature to make additional highlights + notes + connections with another color. Explain your process during this second read.

- From the first read, still remembered that the methodology mostly resided in the last paragraph
- Connected all the nodes about methodology back to things identified in the initial read where they were exploring what could be important

Do you think using this tool helped deepen your understanding of the text? How so?

- Yes, helped a lot in exploring ideas very quickly as not only can we visualize our thoughts, but also augment them with notes we impose on each node as well as the help that the LLM provides
- Establishing connections between also helped link sections that were far apart in the paper together – making the reading experience more cohesive
- Spent less time than normal scrolling back to the paper since can just refer to the graph

Did you encounter any difficulties using our interface?


- Wish there was a zoom feature and page jump feature on the PDF reader
 - Felt very limited as they had to manual zoom and manually scroll to their desired section of the paper

Rate the tool's usefulness and what other features you would want to see.

- Usefulness : 8/10

- Wish you could take notes on the node component itself to reduce barrier – especially for shorter notes
- Ability to connect nodes while labelling and taking notes on each connection – could help them with establishing different types of connections and relationships

Please take a screenshot of your highlights and graph to send to us.

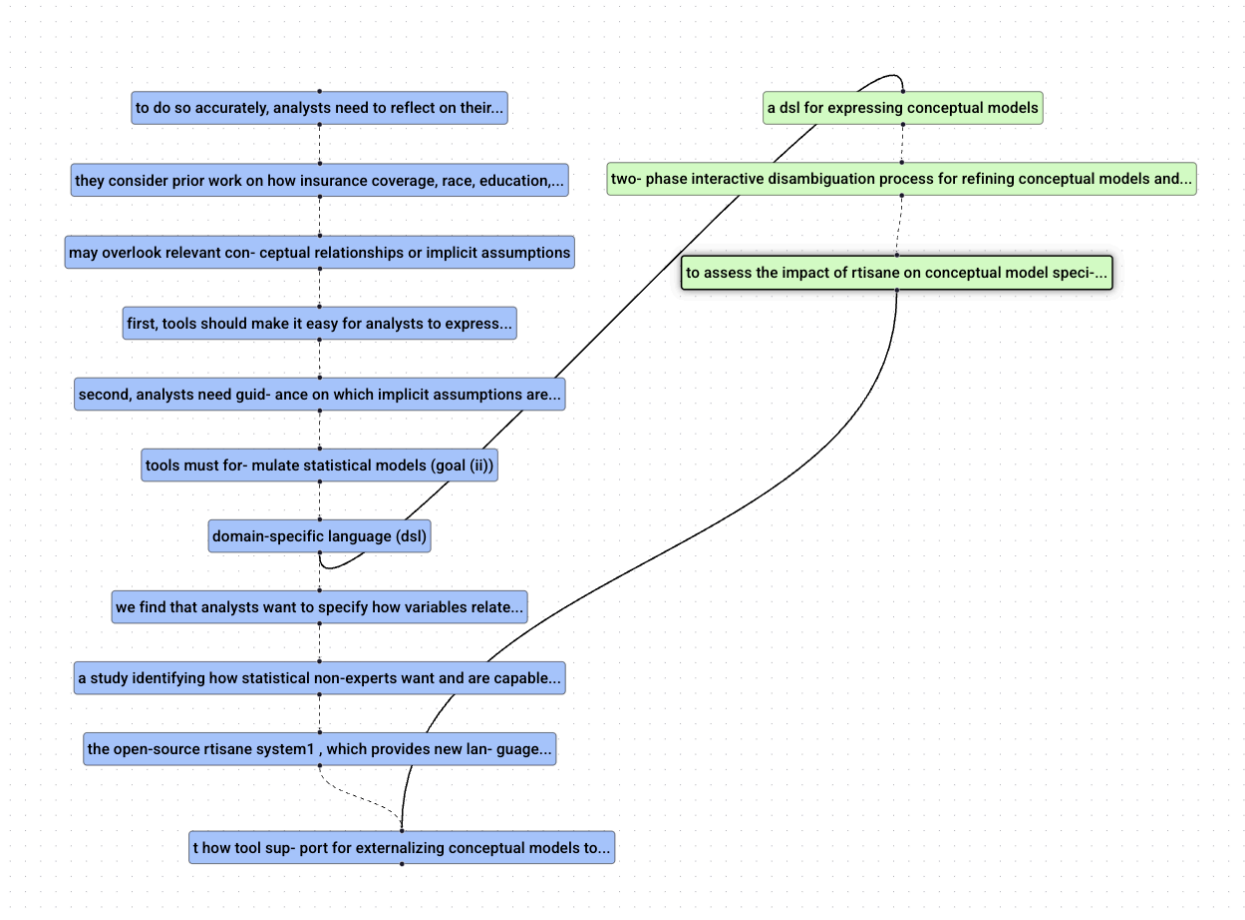



rTisane: Externalizing Conceptual Models for Data Analysis Prompts Reconsideration of Domain Assumptions and Facilitates Statistical Modeling

Eunice Jun

emjun@cs.ucla.edu

University of California, Los Angeles
USA

Jeffrey Heer

jheer@cs.washington.edu

University of Washington
USA

Edward Misback

misback@cs.washington.edu

University of Washington
USA

René Just

rjust@cs.washington.edu

University of Washington
USA

ABSTRACT

Statistical models should accurately reflect analysts' domain knowledge about variables and their relationships. While recent tools let analysts express these assumptions and use them to produce a resulting statistical model, it remains unclear what analysts want to express and how externalization impacts statistical model quality. This paper addresses these gaps. We first conduct an exploratory study of analysts using a domain-specific language (DSL) to express *conceptual models*. We observe a preference for detailing *how* variables relate and a desire to allow, and then later resolve, ambiguity in their conceptual models. We leverage these findings to develop rTisane, a DSL for expressing conceptual models augmented with an interactive disambiguation process. In a controlled evaluation, we find that analysts reconsidered their assumptions, self-reported externalizing their assumptions accurately, and maintained analysis intent with rTisane. Additionally, rTisane enabled some analysts to author statistical models they were unable to specify manually. For others, rTisane resulted in models that better fit the data or enabled iterative improvement.

CCS CONCEPTS

• Human-centered computing → User interface toolkits; User interface programming; Empirical studies in HCI.

KEYWORDS

statistical analysis; linear modeling; end-user programming; end-user elicitation; domain-specific language

ACM Reference Format:

Eunice Jun, Edward Misback, Jeffrey Heer, and René Just. 2024. rTisane: Externalizing Conceptual Models for Data Analysis Prompts Reconsideration of Domain Assumptions and Facilitates Statistical Modeling. In *Proceedings of the CHI Conference on Human Factors in Computing Systems (CHI '24)*.



This work is licensed under a Creative Commons Attribution International 4.0 License.

CHI '24, May 11–16, 2024, Honolulu, HI, USA

© 2024 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-0330-0/24/05

<https://doi.org/10.1145/3613904.3642267>

May 11–16, 2024, Honolulu, HI, USA. ACM, New York, NY, USA, 16 pages.
<https://doi.org/10.1145/3613904.3642267>

1 INTRODUCTION

In order to answer research questions and test hypotheses, analysts must translate their research questions and hypotheses into statistical models. To do so accurately, analysts need to reflect on their implicit understanding of the domain and consider how to represent this conceptual knowledge in a statistical model. For example, consider a health policy researcher interested in accurately estimating the influence of insurance coverage on health outcomes. To formulate a statistical model, they consider prior work on how insurance coverage, race, education, and health outcomes relate to each other and other constructs. Then, they go to formulate a statistical model including or excluding covariates to account for confounding in these relationships [7].

A researcher who skips this process may overlook relevant conceptual relationships or implicit assumptions, resulting in statistical models (and conclusions) that are faulty or meaningless as answers to their motivating research question.

Key to this explanatory modeling process is analysts' domain knowledge, captured in *process models* [20] or *conceptual models* [13]. Conceptual models include variables and their relationships that are important to a domain. Figure 1 shows an example conceptual model from our exploratory study (Section 3). A number of software tools exist for building conceptual models. For example, Tisane [15], an open-source library for authoring generalized linear models with or without mixed effects, enables analysts to explicate their conceptual models and derives valid statistical models from them. Tisane has helped HCI researchers catch and fix analysis bugs prior to publication [4]. Other tools such as Dagitty [28] and DoWhy [25] also support analysts in externalizing conceptual models as causal graphs to reason through statistical modeling choices. These software tools support (i) conceptual model specification and (ii) statistical model formulation based on expressed conceptual models.

To benefit from these tools, analysts must be able to accurately externalize their implicit conceptual models (goal (i)). This goal presents two usability challenges. First, tools should make it easy for analysts to express their conceptual models. At the very least,

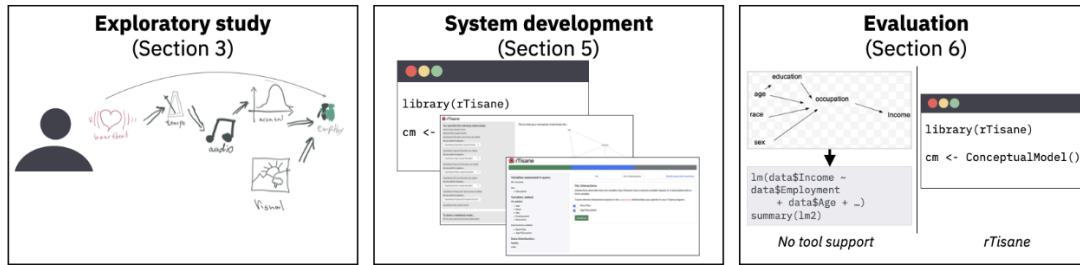


Figure 1: Visual overview of paper.

Through an exploratory study, we investigate how to better support statistical non-experts in specifying their conceptual models (Section 3). Based on findings, we develop rTisane, a system for specifying and refining conceptual models in order to derive statistical models (Section 5). We compare rTisane to a scaffolded workflow in a within-subjects controlled lab study (Section 6). We find that using rTisane to externalize conceptual models deepened consideration of implicit assumptions and helped maintain analysis intent. We also find that rTisane enabled a few analysts to author statistical models they were not able to author on their own. For others, rTisane's output statistical models fit the data better or facilitated iteration.

tools should not hinder specification. **Second, analysts need guidance on which implicit assumptions are important to externalize.** Addressing both challenges is particularly important for making these analysis tools usable for domain experts who have statistical experience but limited expertise (i.e., many researchers).

After analysts externalize conceptual models, **tools must formulate statistical models (goal (ii))** in order to obtain high-quality statistical inferences. To ensure quality, there are two challenges to statistical model formulation: fidelity of the statistical model to the conceptual model and good statistical model fit to data. These criteria provide checks on one another. For instance, for any data set, an overfit statistical model can be found that satisfies the model fit criterion as well as possible without accurately representing the analyst's implicit conceptual model. As another example, a statistical model representing an unreasonable conceptual model may not fit real-world data well. We prioritize correspondence of conceptual models to statistical models and then, given this correspondence, consider statistical model fit.

This paper investigates how to support both accurate conceptual model specification and quality statistical model formulation. We focus on the design and implementation of a **domain-specific language (DSL)** for expressing conceptual models and using conceptual models to author statistical models. We focus on DSL design since end-users and graphical systems alike can benefit from DSLs. Our users are analysts who have domain expertise, experience with generalized linear modeling, and experience programming in R, but are not statistical experts. We refer to these end-users as *statistical non-experts*.

We start with an exploratory study to identify challenges statistical non-experts face when expressing their conceptual models. **We find that analysts want to specify how variables relate causally (e.g., "more heartbeat alignment leads to more empathy") instead of stating that one causes another (e.g., "heartbeat alignment causes empathy").** Analysts also want to express ambiguity in their conceptual models, and, if necessary to derive statistical models, clarify any ambiguity in an interactive refinement step. Based on these

findings, we develop rTisane, a system for externalizing conceptual models to author generalized linear models (GLMs). rTisane consists of (i) **a DSL for expressing conceptual models** and (ii) **a two-phase interactive disambiguation process for refining conceptual models and then deriving statistical models.** rTisane leverages an informative graphical user interface (GUI) for disambiguation. The result of this entire process is a script for fitting a statistical model that is guaranteed to reflect the expressed-then-refined conceptual model. **To assess the impact of rTisane on conceptual model specification and statistical model formulation,** we compare rTisane to **a scaffolded workflow without tool support in a within-subjects lab study.** We find that rTisane's DSL makes it easy for analysts to specify conceptual models and guides them to think more critically about their implicit assumptions. Furthermore, rTisane helps analysts focus on their analysis intents, and analysts are not surprised by rTisane's output statistical models. Of 13 analysts, three were only able to author a statistical model by using rTisane. Another six analysts were able to author statistical models that fit the data just as well, if not better, than statistical models they author without tool support. Figure 1 visually shows the three parts of this paper.

In summary, we contribute

- **A study identifying how statistical non-experts want and are capable of expressing their implicit domain assumptions.**
- **The open-source rTisane system¹, which provides new language constructs for expressing conceptual models** and a two-phase interactive disambiguation process for resolving ambiguity in conceptual models and deriving statistical models, and
- **Evidence from a controlled lab study about how tool support for externalizing conceptual models to author statistical models leads to thorough conceptual model specification and quality statistical models.**

¹<https://rtisane.tisane-stats.org>