
1. GPT does not reliably flag manipulated image inputs, though classifiers easily can

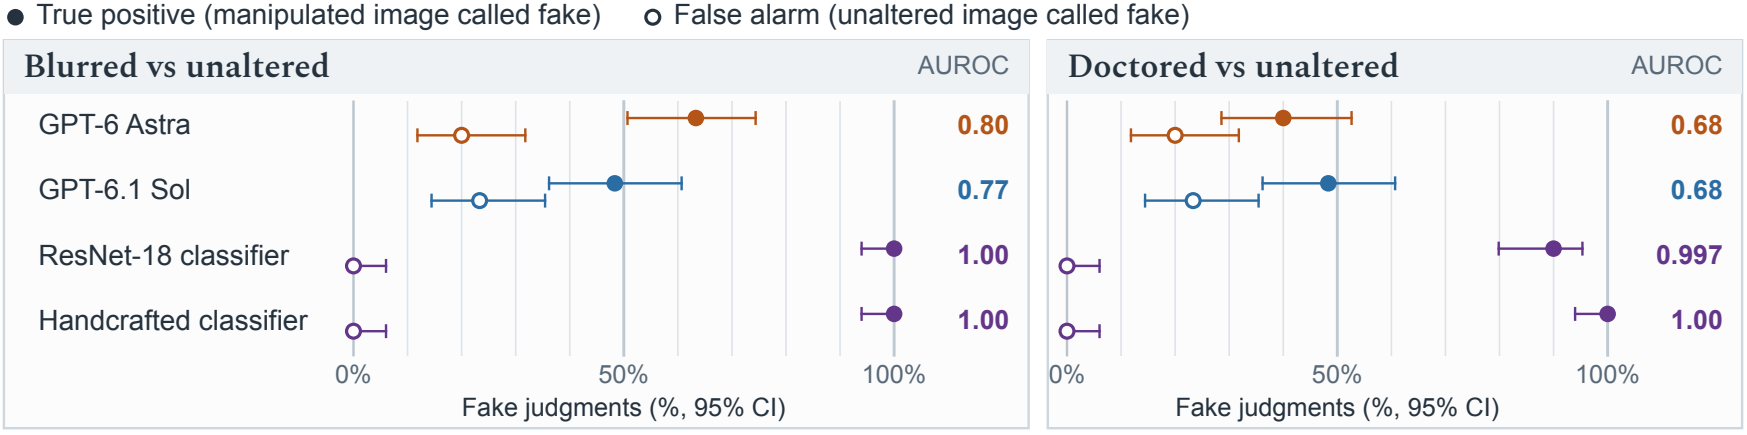

Dots: models' answer to "Is this real or fake?"; classifiers' held-out probability above a 50% cutoff (leave-one-task-out cross-validation).
Handcrafted classifier: ridge logistic regression on 5 forensic statistics per camera image.
ResNet-18 classifier: ridge logistic regression on frozen, untuned ImageNet ResNet-18 features.