
1. GPT does not reliably flag doctored images, though classifiers easily can

● True positive (doctored image called fake) ○ False alarm (unaltered image called fake)

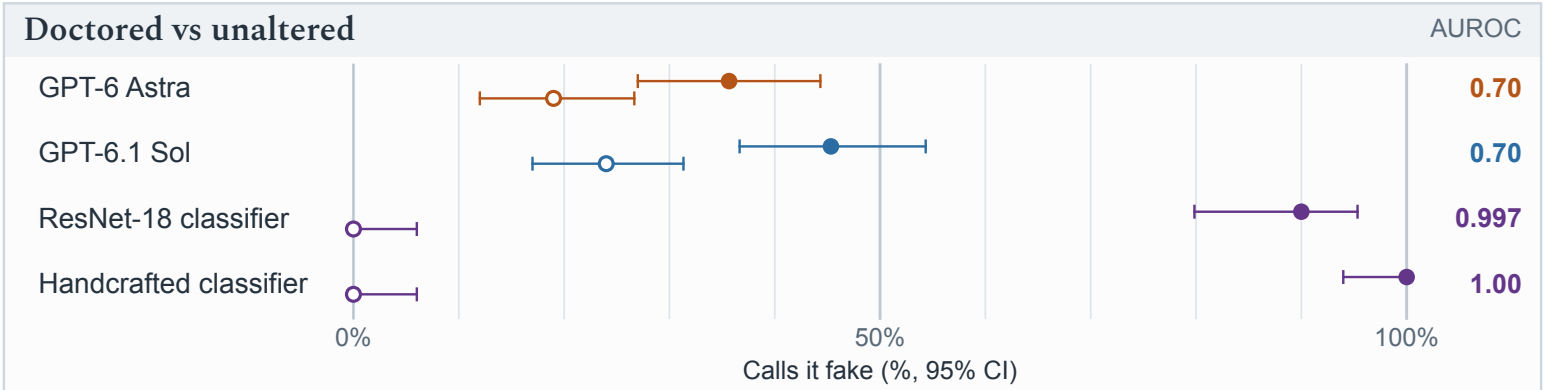

Models: share of 5 answers per image to “Is this real or fake?” calling it fake; AUROC from the mean stated P(fake).
Classifiers: held-out probability above a 50% cutoff, from leave-one-task-out cross-validation.
Handcrafted classifier: ridge logistic regression on 5 forensic statistics per camera image.
ResNet-18 classifier: ridge logistic regression on frozen, untuned ImageNet ResNet-18 features.