

1. GPT does not reliably flag manipulated image inputs, though a small classifier can separate them

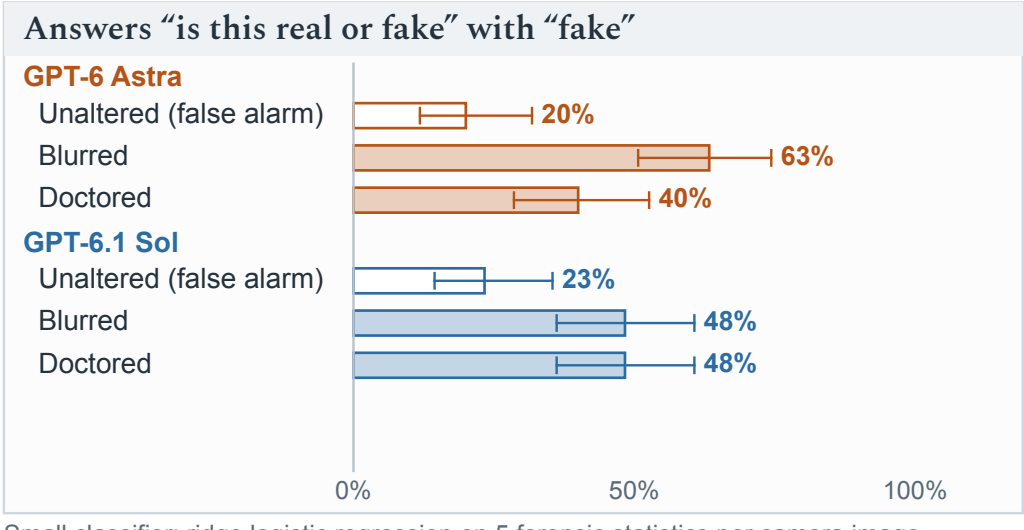

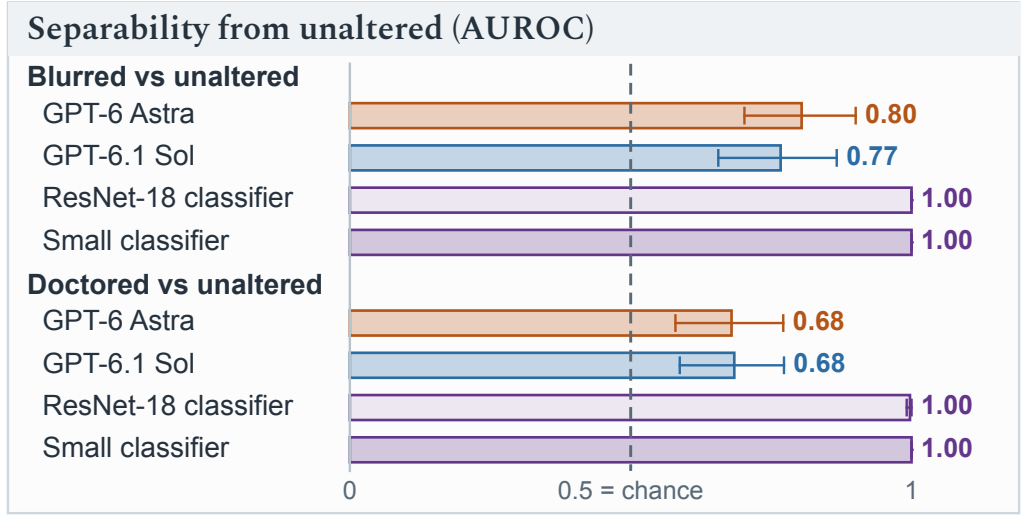

Small classifier: ridge logistic regression on 5 forensic statistics per camera image.
ResNet-18 classifier: ridge logistic regression on frozen, untuned ImageNet ResNet-18 features.
Classifier AUROC is leave-one-task-out cross-validated: trained on four tasks, scored on the held-out task.