

1. GPT does not reliably flag manipulated image inputs, though classifiers easily can

● manipulated snapshot called fake ○ unaltered snapshot called fake (false alarm)

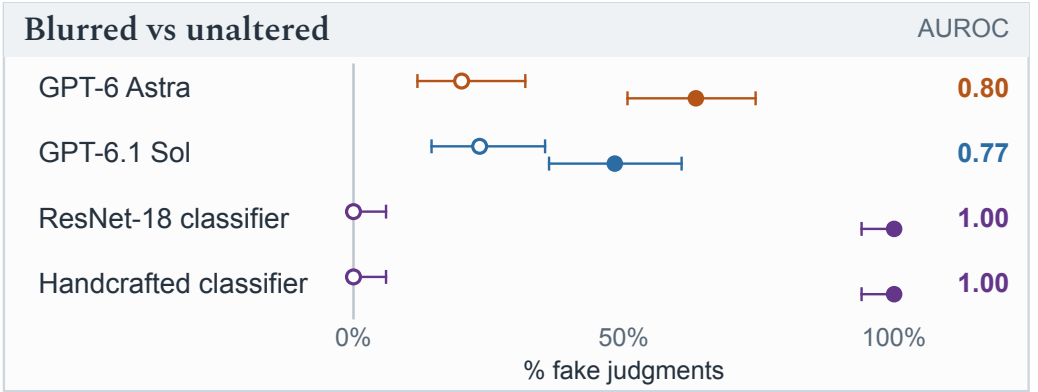

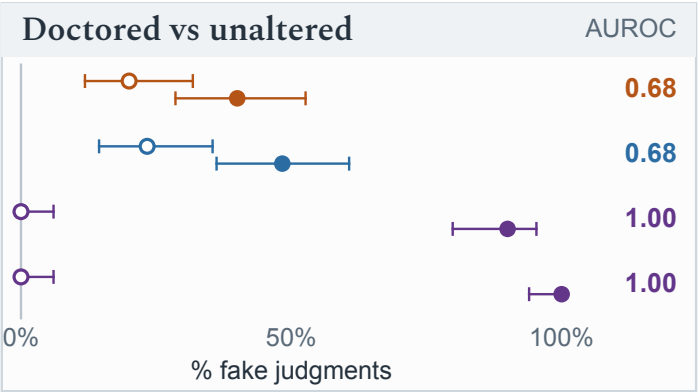

Models: answer to “Is this real or fake?”. Classifiers: held-out probability above 0.5, from leave-one-task-out cross-validation.
Handcrafted classifier: ridge logistic regression on 5 forensic statistics per camera image.
ResNet-18 classifier: ridge logistic regression on frozen, untuned ImageNet ResNet-18 features.