

1. GPT does not reliably flag manipulated image inputs, though a small classifier can separate them

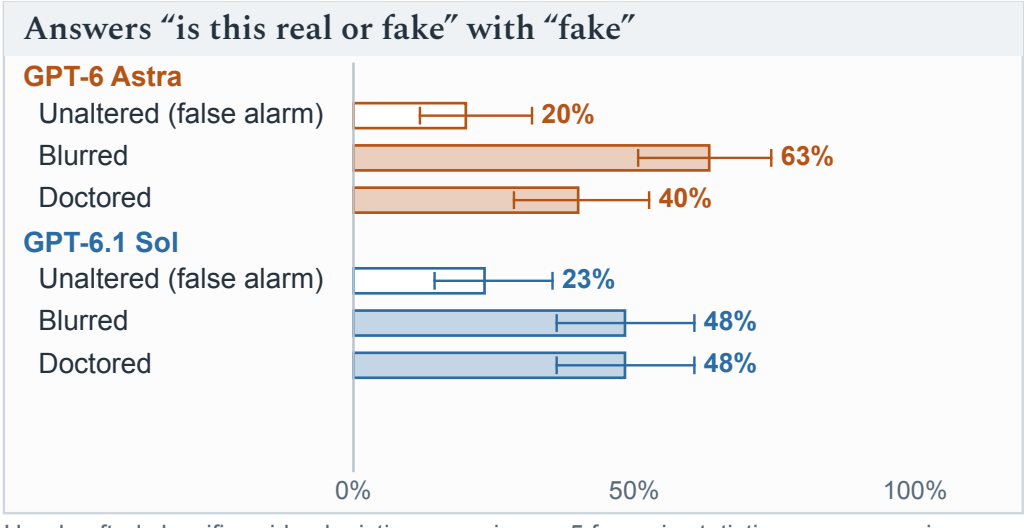

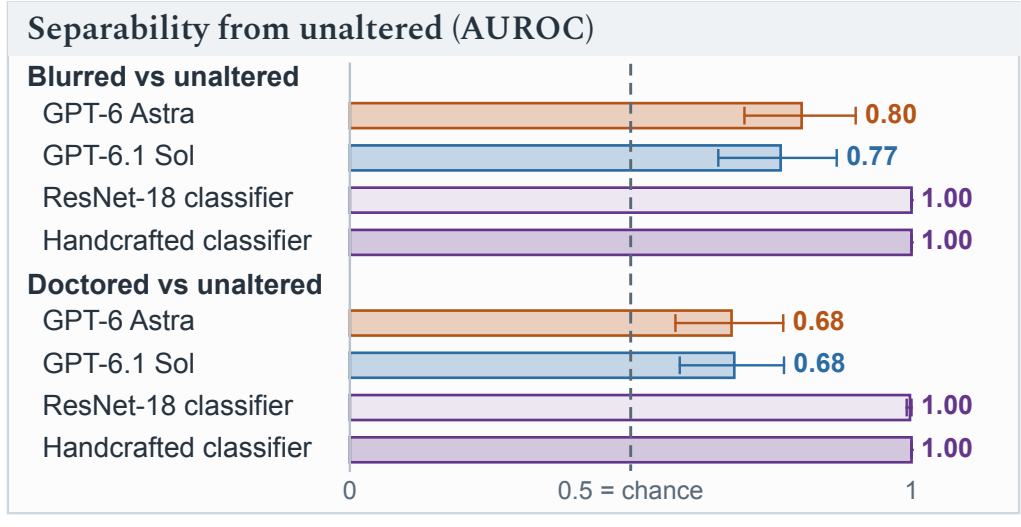

Handcrafted classifier: ridge logistic regression on 5 forensic statistics per camera image.
ResNet-18 classifier: ridge logistic regression on frozen, untuned ImageNet ResNet-18 features.
Classifier AUROC from leave-one-task-out cross-validation.