

Red Hat Enterprise Linux 9.0 Beta Security hardening

Securing Red Hat Enterprise Linux 9

Last Updated: 2022-02-08

Red Hat Enterprise Linux 9.0 Beta Security hardening

Securing Red Hat Enterprise Linux 9

Legal Notice

Copyright © 2022 Red Hat, Inc.

The text of and illustrations in this document are licensed by Red Hat under a Creative Commons Attribution–Share Alike 3.0 Unported license ("CC-BY-SA"). An explanation of CC-BY-SA is available at

http://creativecommons.org/licenses/by-sa/3.0/

. In accordance with CC-BY-SA, if you distribute this document or an adaptation of it, you must provide the URL for the original version.

Red Hat, as the licensor of this document, waives the right to enforce, and agrees not to assert, Section 4d of CC-BY-SA to the fullest extent permitted by applicable law.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo, the Red Hat logo, JBoss, OpenShift, Fedora, the Infinity logo, and RHCE are trademarks of Red Hat, Inc., registered in the United States and other countries.

Linux [®] is the registered trademark of Linus Torvalds in the United States and other countries.

Java [®] is a registered trademark of Oracle and/or its affiliates.

XFS [®] is a trademark of Silicon Graphics International Corp. or its subsidiaries in the United States and/or other countries.

MySQL ® is a registered trademark of MySQL AB in the United States, the European Union and other countries.

Node.js ® is an official trademark of Joyent. Red Hat is not formally related to or endorsed by the official Joyent Node.js open source or commercial project.

The OpenStack [®] Word Mark and OpenStack logo are either registered trademarks/service marks or trademarks/service marks of the OpenStack Foundation, in the United States and other countries and are used with the OpenStack Foundation's permission. We are not affiliated with, endorsed or sponsored by the OpenStack Foundation, or the OpenStack community.

All other trademarks are the property of their respective owners.

Abstract

This title assists users and administrators in learning the processes and practices of securing workstations and servers against local and remote intrusion, exploitation, and malicious activity. Focused on Red Hat Enterprise Linux but detailing concepts and techniques valid for all Linux systems, this guide details the planning and the tools involved in creating a secured computing environment for the data center, workplace, and home. With proper administrative knowledge, vigilance, and tools, systems running Linux can be both fully functional and secured from most common intrusion and exploit methods.

Table of Contents

RHEL BETA RELEASE	5
MAKING OPEN SOURCE MORE INCLUSIVE	6
PROVIDING FEEDBACK ON RED HAT DOCUMENTATION	7
CHAPTER 1. SECURING RHEL DURING INSTALLATION 1.1. BIOS AND UEFI SECURITY 1.1.1. BIOS passwords 1.1.2. Non-BIOS-based systems security 1.2. DISK PARTITIONING 1.3. RESTRICTING NETWORK CONNECTIVITY DURING THE INSTALLATION PROCESS 1.4. INSTALLING THE MINIMUM AMOUNT OF PACKAGES REQUIRED 1.5. POST-INSTALLATION PROCEDURES	8 8 8 8 9 9
CHAPTER 2. USING SYSTEM-WIDE CRYPTOGRAPHIC POLICIES 2.1. SYSTEM-WIDE CRYPTOGRAPHIC POLICIES Tool for managing crypto policies Strong crypto defaults by removing insecure cipher suites and protocols Algorithms disabled in all policy levels Algorithms enabled in the crypto-policies levels	11 11 12 12 12 13
 2.2. SWITCHING THE SYSTEM-WIDE CRYPTOGRAPHIC POLICY TO MODE COMPATIBLE WITH EARLIER RELEASES 2.3. EXCLUDING AN APPLICATION FROM FOLLOWING SYSTEM-WIDE CRYPTO POLICIES 2.3.1. Examples of opting out of system-wide crypto policies 2.4. CUSTOMIZING SYSTEM-WIDE CRYPTOGRAPHIC POLICIES WITH SUBPOLICIES 2.5. CREATING AND SETTING A CUSTOM SYSTEM-WIDE CRYPTOGRAPHIC POLICY 	14 14 15 16 17
3.1. CRYPTOGRAPHIC HARDWARE SUPPORT THROUGH PKCS #11 3.2. USING SSH KEYS STORED ON A SMART CARD 3.3. CONFIGURING APPLICATIONS TO AUTHENTICATE USING CERTIFICATES FROM SMART CARDS 3.4. USING HSMS PROTECTING PRIVATE KEYS IN APACHE 3.5. USING HSMS PROTECTING PRIVATE KEYS IN NGINX 3.6. ADDITIONAL RESOURCES	 19 19 19 21 21 22 22
CHAPTER 4. CONTROLLING ACCESS TO SMART CARDS USING POLKIT 4.1. SMART-CARD ACCESS CONTROL THROUGH POLKIT 4.2. TROUBLESHOOTING PROBLEMS RELATED TO PC/SC AND POLKIT 4.3. DISPLAYING MORE DETAILED INFORMATION ABOUT POLKIT AUTHORIZATION TO PC/SC 4.4. ADDITIONAL RESOURCES	2323232526
CHAPTER 5. USING SHARED SYSTEM CERTIFICATES 5.1. THE SYSTEM-WIDE TRUST STORE 5.2. ADDING NEW CERTIFICATES 5.3. MANAGING TRUSTED SYSTEM CERTIFICATES 5.4. ADDITIONAL RESOURCES	27 27 27 28 29
CHAPTER 6. SCANNING THE SYSTEM FOR CONFIGURATION COMPLIANCE AND VULNERABILITIES . 6.1. CONFIGURATION COMPLIANCE TOOLS IN RHEL 6.2. VULNERABILITY SCANNING 6.2.1. Red Hat Security Advisories OVAL feed 6.2.2. Scanning the system for vulnerabilities	30 30 30 30 31

6.2.3. Scanning remote systems for vulnerabilities	32
6.3. CONFIGURATION COMPLIANCE SCANNING	33
6.3.1. Configuration compliance in RHEL	33
6.3.2. Possible results of an OpenSCAP scan	34
6.3.3. Viewing profiles for configuration compliance	34
6.3.4. Assessing configuration compliance with a specific baseline	36
6.4. REMEDIATING THE SYSTEM TO ALIGN WITH A SPECIFIC BASELINE	37
6.5. REMEDIATING THE SYSTEM TO ALIGN WITH A SPECIFIC BASELINE USING THE SSG ANSIBLE	20
PLAYBOOK	38
6.6. CREATING A REMEDIATION ANSIBLE PLAYBOOK TO ALIGN THE SYSTEM WITH A SPECIFIC BASELIN	1E 39
6.7. CREATING A REMEDIATION BASH SCRIPT FOR A LATER APPLICATION	40
6.8. SCANNING THE SYSTEM WITH A CUSTOMIZED PROFILE USING SCAP WORKBENCH	40
6.8.1. Using SCAP Workbench to scan and remediate the system	40
6.8.2. Customizing a security profile with SCAP Workbench	42
6.8.3. Related information	44
6.9. DEPLOYING SYSTEMS THAT ARE COMPLIANT WITH A SECURITY PROFILE IMMEDIATELY AFTER AN INSTALLATION	44
6.9.1. Profiles not compatible with Server with GUI	44
6.9.2. Deploying baseline-compliant RHEL systems using the graphical installation	45
6.9.3. Deploying baseline compliant RHEL systems using Kickstart	46
6.10. SCANNING CONTAINER AND CONTAINER IMAGES FOR VULNERABILITIES	47
6.11. ASSESSING SECURITY COMPLIANCE OF A CONTAINER OR A CONTAINER IMAGE WITH A SPECIFIC	.,
BASELINE	48
6.12. SCAP SECURITY GUIDE PROFILES SUPPORTED IN RHEL 9	49
6.13. RELATED INFORMATION	51
CHAPTER 7. CHECKING INTEGRITY WITH AIDE	53
7.1. INSTALLING AIDE	53
7.2. PERFORMING INTEGRITY CHECKS WITH AIDE	53
7.3. UPDATING AN AIDE DATABASE	54
7.4. FILE-INTEGRITY TOOLS: AIDE AND IMA	54
7.5. ADDITIONAL RESOURCES	55
CHAPTER 8. ENCRYPTING BLOCK DEVICES USING LUKS	56
8.1. LUKS DISK ENCRYPTION	56
8.2. LUKS VERSIONS IN RHEL	57
8.3. OPTIONS FOR DATA PROTECTION DURING LUKS2 RE-ENCRYPTION	58
8.4. ENCRYPTING EXISTING DATA ON A BLOCK DEVICE USING LUKS2	58
8.5. ENCRYPTING EXISTING DATA ON A BLOCK DEVICE USING LUKS2 WITH A DETACHED HEADER	59
8.6. ENCRYPTING A BLANK BLOCK DEVICE USING LUKS2	60
CHAPTER 9. CONFIGURING AUTOMATED UNLOCKING OF ENCRYPTED VOLUMES USING POLICY-BASE	
DECRYPTION	
9.1. NETWORK-BOUND DISK ENCRYPTION	62
9.2. INSTALLING AN ENCRYPTION CLIENT - CLEVIS	63
9.3. DEPLOYING A TANG SERVER WITH SELINUX IN ENFORCING MODE	64
9.4. ROTATING TANG SERVER KEYS AND UPDATING BINDINGS ON CLIENTS	65
9.5. CONFIGURING AUTOMATED UNLOCKING USING A TANG KEY IN THE WEB CONSOLE	c ¬
Q 6 RASIC NRDE AND TRM2 ENCRYPTION OF IENT OPERATIONS	67 70
9.6. BASIC NBDE AND TPM2 ENCRYPTION-CLIENT OPERATIONS	70
9.7. CONFIGURING MANUAL ENROLLMENT OF LUKS-ENCRYPTED VOLUMES	70 71
	70 71

9.10. CONFIGURING AUTOMATED ENROLLMENT OF LUKS-ENCRYPTED VOLUMES USING KICKSTART 9.11. CONFIGURING AUTOMATED UNLOCKING OF A LUKS-ENCRYPTED REMOVABLE STORAGE DEVICE.	
	78
9.12. DEPLOYING HIGH-AVAILABILITY NBDE SYSTEMS	79
9.12.1. High-available NBDE using Shamir's Secret Sharing	79
9.12.1.1. Example 1: Redundancy with two Tang servers	80
9.12.1.2. Example 2: Shared secret on a Tang server and a TPM device	80
9.13. DEPLOYMENT OF VIRTUAL MACHINES IN A NBDE NETWORK	81
9.14. BUILDING AUTOMATICALLY-ENROLLABLE VM IMAGES FOR CLOUD ENVIRONMENTS USING NB	DE
	81
9.15. DEPLOYING TANG AS A CONTAINER	82
9.16. INTRODUCTION TO THE CLEVIS AND TANG SYSTEM ROLES	83
9.17. USING THE NBDE_SERVER SYSTEM ROLE FOR SETTING UP MULTIPLE TANG SERVERS	84
9.18. USING THE NBDE_CLIENT SYSTEM ROLE FOR SETTING UP MULTIPLE CLEVIS CLIENTS	85
9.19. ADDITIONAL RESOURCES	86
CHAPTER 10. AUDITING THE SYSTEM	. 88
10.1. LINUX AUDIT	88
10.2. AUDIT SYSTEM ARCHITECTURE	89
10.3. CONFIGURING AUDITD FOR A SECURE ENVIRONMENT	90
10.4. STARTING AND CONTROLLING AUDITD	91
10.5. UNDERSTANDING AUDIT LOG FILES	92
10.6. USING AUDITCTL FOR DEFINING AND EXECUTING AUDIT RULES	96
10.7. DEFINING PERSISTENT AUDIT RULES	97
10.8. USING PRE-CONFIGURED RULES FILES	97
10.9. USING AUGENRULES TO DEFINE PERSISTENT RULES	98
10.10. DISABLING AUGENRULES	98
10.11. SETTING UP AUDIT TO MONITOR SOFTWARE UPDATES	99
10.12. MONITORING USER LOGIN TIMES WITH AUDIT	101
10.13. ADDITIONAL RESOURCES	102
IO.IS. ADDITIONAL RESOURCES	102
CHAPTER 11. BLOCKING AND ALLOWING APPLICATIONS USING FAPOLICYD	. 103
11.2. DEPLOYING FAPOLICYD	103
11.3. MARKING FILES AS TRUSTED USING AN ADDITIONAL SOURCE OF TRUST	104
11.4. ADDING CUSTOM ALLOW AND DENY RULES FOR FAPOLICYD	105
11.5. ENABLING FAPOLICYD INTEGRITY CHECKS	107
11.6. TROUBLESHOOTING PROBLEMS RELATED TO FAPOLICYD	108
11.7. ADDITIONAL RESOURCES	110
CHAPTER 12. PROTECTING SYSTEMS AGAINST INTRUSIVE USB DEVICES	111
12.1. USBGUARD	111
12.2. INSTALLING USBGUARD	111
12.3. BLOCKING AND AUTHORIZING A USB DEVICE USING CLI	112
12.4. PERMANENTLY BLOCKING AND AUTHORIZING A USB DEVICE	113
12.5. CREATING A CUSTOM POLICY FOR USB DEVICES	114
12.6. CREATING A STRUCTURED CUSTOM POLICY FOR USB DEVICES	115
12.7. AUTHORIZING USERS AND GROUPS TO USE THE USBGUARD IPC INTERFACE	117
12.8. LOGGING USBGUARD AUTHORIZATION EVENTS TO THE LINUX AUDIT LOG	118
12.9. ADDITIONAL RESOURCES	118

RHEL BETA RELEASE

Red Hat provides Red Hat Enterprise Linux Beta access to all subscribed Red Hat accounts. The purpose of Beta access is to:

- Provide an opportunity to customers to test major features and capabilities prior to the general availability release and provide feedback or report issues.
- Provide Beta product documentation as a preview. Beta product documentation is under development and is subject to substantial change.

Note that Red Hat does not support the usage of RHEL Beta releases in production use cases. For more information, see What does Beta mean in Red Hat Enterprise Linux and can I upgrade a RHEL Beta installation to a General Availability (GA) release?.

MAKING OPEN SOURCE MORE INCLUSIVE

Red Hat is committed to replacing problematic language in our code, documentation, and web properties. We are beginning with these four terms: master, slave, blacklist, and whitelist. Because of the enormity of this endeavor, these changes will be implemented gradually over several upcoming releases. For more details, see our CTO Chris Wright's message.

PROVIDING FEEDBACK ON RED HAT DOCUMENTATION

We appreciate your input on our documentation. Please let us know how we could make it better. To do so:

- For simple comments on specific passages:
 - 1. Make sure you are viewing the documentation in the *Multi-page HTML* format. In addition, ensure you see the **Feedback** button in the upper right corner of the document.
 - 2. Use your mouse cursor to highlight the part of text that you want to comment on.
 - 3. Click the Add Feedback pop-up that appears below the highlighted text.
 - 4. Follow the displayed instructions.
- For submitting more complex feedback, create a Bugzilla ticket:
 - 1. Go to the Bugzilla website.
 - 2. As the Component, use **Documentation**.
 - 3. Fill in the **Description** field with your suggestion for improvement. Include a link to the relevant part(s) of documentation.
 - 4. Click Submit Bug.

CHAPTER 1. SECURING RHEL DURING INSTALLATION

Security begins even before you start the installation of Red Hat Enterprise Linux. Configuring your system securely from the beginning makes it easier to implement additional security settings later.

1.1. BIOS AND UEFI SECURITY

Password protection for the BIOS (or BIOS equivalent) and the boot loader can prevent unauthorized users who have physical access to systems from booting using removable media or obtaining root privileges through single user mode. The security measures you should take to protect against such attacks depends both on the sensitivity of the information on the workstation and the location of the machine.

For example, if a machine is used in a trade show and contains no sensitive information, then it may not be critical to prevent such attacks. However, if an employee's laptop with private, unencrypted SSH keys for the corporate network is left unattended at that same trade show, it could lead to a major security breach with ramifications for the entire company.

If the workstation is located in a place where only authorized or trusted people have access, however, then securing the BIOS or the boot loader may not be necessary.

1.1.1. BIOS passwords

The two primary reasons for password protecting the BIOS of a computer are [1]:

- 1. **Preventing changes to BIOS settings** If an intruder has access to the BIOS, they can set it to boot from a CD-ROM or a flash drive. This makes it possible for them to enter rescue mode or single user mode, which in turn allows them to start arbitrary processes on the system or copy sensitive data.
- 2. **Preventing system booting** Some BIOSes allow password protection of the boot process. When activated, an attacker is forced to enter a password before the BIOS launches the boot loader.

Because the methods for setting a BIOS password vary between computer manufacturers, consult the computer's manual for specific instructions.

If you forget the BIOS password, it can either be reset with jumpers on the motherboard or by disconnecting the CMOS battery. For this reason, it is good practice to lock the computer case if possible. However, consult the manual for the computer or motherboard before attempting to disconnect the CMOS battery.

1.1.2. Non-BIOS-based systems security

Other systems and architectures use different programs to perform low-level tasks roughly equivalent to those of the BIOS on x86 systems. For example, the *Unified Extensible Firmware Interface (UEFI)* shell.

For instructions on password protecting BIOS-like programs, see the manufacturer's instructions.

1.2. DISK PARTITIONING

Red Hat recommends creating separate partitions for the **/boot**, **/**, **/home**, **/tmp**, and **/var/tmp/** directories.

/boot

This partition is the first partition that is read by the system during boot up. The boot loader and kernel images that are used to boot your system into Red Hat Enterprise Linux 9 are stored in this partition. This partition should not be encrypted. If this partition is included in / and that partition is encrypted or otherwise becomes unavailable then your system is not able to boot.

/home

When user data (/home) is stored in / instead of in a separate partition, the partition can fill up causing the operating system to become unstable. Also, when upgrading your system to the next version of Red Hat Enterprise Linux 9 it is a lot easier when you can keep your data in the /home partition as it is not be overwritten during installation. If the root partition (/) becomes corrupt your data could be lost forever. By using a separate partition there is slightly more protection against data loss. You can also target this partition for frequent backups.

/tmp and /var/tmp/

Both the /tmp and /var/tmp/ directories are used to store data that does not need to be stored for a long period of time. However, if a lot of data floods one of these directories it can consume all of your storage space. If this happens and these directories are stored within / then your system could become unstable and crash. For this reason, moving these directories into their own partitions is a good idea.



NOTE

During the installation process, you have an option to encrypt partitions. You must supply a passphrase. This passphrase serves as a key to unlock the bulk encryption key, which is used to secure the partition's data.

1.3. RESTRICTING NETWORK CONNECTIVITY DURING THE INSTALLATION PROCESS

When installing Red Hat Enterprise Linux 9, the installation medium represents a snapshot of the system at a particular time. Because of this, it may not be up-to-date with the latest security fixes and may be vulnerable to certain issues that were fixed only after the system provided by the installation medium was released.

When installing a potentially vulnerable operating system, always limit exposure only to the closest necessary network zone. The safest choice is the "no network" zone, which means to leave your machine disconnected during the installation process. In some cases, a LAN or intranet connection is sufficient while the Internet connection is the riskiest. To follow the best security practices, choose the closest zone with your repository while installing Red Hat Enterprise Linux 9 from a network.

1.4. INSTALLING THE MINIMUM AMOUNT OF PACKAGES REQUIRED

It is best practice to install only the packages you will use because each piece of software on your computer could possibly contain a vulnerability. If you are installing from the DVD media, take the opportunity to select exactly what packages you want to install during the installation. If you find you need another package, you can always add it to the system later.

1.5. POST-INSTALLATION PROCEDURES

The following steps are the security-related procedures that should be performed immediately after installation of Red Hat Enterprise Linux 9.

• Update your system. Enter the following command as root:

dnf update

 Even though the firewall service, firewalld, is automatically enabled with the installation of Red Hat Enterprise Linux, there are scenarios where it might be explicitly disabled, for example in the kickstart configuration. In such a case, it is recommended to consider re-enabling the firewall.
 To start firewalld enter the following commands as root:

systemctl start firewalld # systemctl enable firewalld

- To enhance security, disable services you do not need. For example, if there are no printers installed on your computer, disable the **cups** service using the following command:
 - # systemctl disable cups

To review active services, enter the following command:

\$ systemctl list-units | grep service

^[1] Since system BIOSes differ between manufacturers, some may not support password protection of either type, while others may support one type but not the other.

CHAPTER 2. USING SYSTEM-WIDE CRYPTOGRAPHIC POLICIES

Crypto policies is a system component that configures the core cryptographic subsystems, covering the TLS, IPSec, SSH, DNSSec, and Kerberos protocols. It provides a small set of policies, which the administrator can select.

2.1. SYSTEM-WIDE CRYPTOGRAPHIC POLICIES

When a system-wide policy is set up, applications in RHEL follow it and refuse to use algorithms and protocols that do not meet the policy, unless you explicitly request the application to do so. That is, the policy applies to the default behavior of applications when running with the system-provided configuration but you can override it if required.

RHEL 9 contains the following predefined policies:

DEFAULT	The default system-wide cryptographic policy level offers secure settings for current threat models. It allows the TLS 1.2 and 1.3 protocols, as well as the IKEv2 and SSH2 protocols. The RSA keys and Diffie-Hellman parameters are accepted if they are at least 2048 bits long.
LEGACY	This policy ensures maximum compatibility with Red Hat Enterprise Linux 6 and earlier; it is less secure due to an increased attack surface. SHA-1 is allowed to be used as TLS hash, signature, and algorithm. CBC-mode ciphers are allowed to be used with SSH. Applications using GnuTLS allow certificates signed with SHA-1. It allows the TLS 1.2 and 1.3 protocols, as well as the IKEv2 and SSH2 protocols. The RSA keys and Diffie-Hellman parameters are accepted if they are at least 2048 bits long.
FUTURE	A conservative security level that is believed to withstand any near-term future attacks. This level does not allow the use of SHA-1 in DNSSec or as an HMAC. SHA2-224 and SHA3-224 hashes are disabled. 128-bit ciphers are disabled. CBC-mode ciphers are disabled except in Kerberos. It allows the TLS 1.2 and 1.3 protocols, as well as the IKEv2 and SSH2 protocols. The RSA keys and Diffie-Hellman parameters are accepted if they are at least 3072 bits long.
FIPS	A policy level that conforms with the FIPS 140-2 requirements. This is used internally by the fips-mode-setup tool, which switches the RHEL system into FIPS mode.

Red Hat continuously adjusts all policy levels so that all libraries, except when using the LEGACY policy, provide secure defaults. Even though the LEGACY profile does not provide secure defaults, it does not include any algorithms that are easily exploitable. As such, the set of enabled algorithms or acceptable key sizes in any provided policy may change during the lifetime of Red Hat Enterprise Linux.

Such changes reflect new security standards and new security research. If you must ensure interoperability with a specific system for the whole lifetime of Red Hat Enterprise Linux, you should opt-out from cryptographic-policies for components that interact with that system or re-enable specific algorithms using custom policies.



IMPORTANT

Because a cryptographic key used by a certificate on the Customer Portal API does not meet the requirements by the **FUTURE** system-wide cryptographic policy, the **redhat-support-tool** utility does not work with this policy level at the moment.

To work around this problem, use the **DEFAULT** crypto policy while connecting to the Customer Portal API.



NOTE

The specific algorithms and ciphers described in the policy levels as allowed are available only if an application supports them.

Tool for managing crypto policies

To view or change the current system-wide cryptographic policy, use the **update-crypto-policies** tool, for example:

\$ update-crypto-policies --show DEFAULT # update-crypto-policies --set FUTURE Setting system policy to FUTURE

To ensure that the change of the cryptographic policy is applied, restart the system.

Strong crypto defaults by removing insecure cipher suites and protocols

The following list contains cipher suites and protocols removed from the core cryptographic libraries in Red Hat Enterprise Linux 9. They are not present in the sources, or their support is disabled during the build, so applications cannot use them.

- DES (since RHEL 7)
- All export grade cipher suites (since RHEL 7)
- MD5 in signatures (since RHEL 7)
- SSLv2 (since RHEL 7)
- SSLv3 (since RHEL 8)
- All ECC curves < 224 bits (since RHEL 6)
- All binary field ECC curves (since RHEL 6)

Algorithms disabled in all policy levels

The following algorithms are disabled in **LEGACY**, **DEFAULT**, **FUTURE** and **FIPS** cryptographic policies included in RHEL 9. They can be enabled only by applying a custom cryptographic policy or by an explicit configuration of individual applications, but the resulting configuration would not be considered supported.

- TLS older than version 1.2 (since RHEL 9, was < 1.0 in RHEL 8)
- DTLS older than version 1.2 (since RHEL 9, was < 1.0 in RHEL 8)
- DH with parameters < 2048 bits (since RHEL 9, was < 1024 bits in RHEL 8)

- RSA with key size < 2048 bits (since RHEL 9, was < 1024 bits in RHEL 8)
- DSA (since RHEL 9, was < 1024 bits in RHEL 8)
- 3DES (since RHEL 9)
- RC4 (since RHEL 9)
- FFDHE-1024 (since RHEL 9)
- DHE-DSS (since RHEL 9)
- Camellia (since RHEL 9)
- ARIA
- IKEv1 (since RHEL 8)

Algorithms enabled in the crypto-policies levels

The following table shows the comparison of all four crypto-policies levels with regard to select algorithms.

	LEGACY	DEFAULT	FIPS	FUTURE
IKEv1	no	no	no	no
3DES	no	no	no	no
RC4	no	no	no	no
DH	min. 2048-bit	min. 2048-bit	min. 2048-bit	min. 3072-bit
RSA	min. 2048-bit	min. 2048-bit	min. 2048-bit	min. 3072-bit
DSA	no	no	no	no
TLS v1.1 and older	no	no	no	no
TLS v1.2 and newer	yes	yes	yes	yes
SHA-1 in digital signatures and certificates	yes	no ^[a]	no	no
CBC mode ciphers	yes	no ^[b]	no ^[c]	no ^[d]
Symmetric ciphers with keys < 256 bits	yes	yes	yes	no

LEGACY	DEFAULT	FIPS	FUTURE
[a] allowed for DNSSec			
[b] CBC ciphers are disabled for SSH			
[c] CBC ciphers are disabled for all protocols except Kerberos			
[d] CBC ciphers are disabled for all protocols except Kerberos			

Additional resources

• update-crypto-policies(8) man page

2.2. SWITCHING THE SYSTEM-WIDE CRYPTOGRAPHIC POLICY TO MODE COMPATIBLE WITH EARLIER RELEASES

The default system-wide cryptographic policy in Red Hat Enterprise Linux 9 does not allow communication using older, insecure protocols. For environments that require to be compatible with Red Hat Enterprise Linux 6 and in some cases also with earlier releases, the less secure **LEGACY** policy level is available.



WARNING

Switching to the **LEGACY** policy level results in a less secure system and applications.

Procedure

 To switch the system-wide cryptographic policy to the **LEGACY** level, enter the following command as **root**:

update-crypto-policies --set LEGACY Setting system policy to LEGACY

Additional resources

- For the list of available cryptographic policy levels, see the **update-crypto-policies(8)** man page.
- For defining custom cryptographic policies, see the Custom Policies section in the updatecrypto-policies(8) man page and the Crypto Policy Definition Format section in the cryptopolicies(7) man page.

2.3. EXCLUDING AN APPLICATION FROM FOLLOWING SYSTEM-WIDE CRYPTO POLICIES

You can customize cryptographic settings used by your application preferably by configuring supported cipher suites and protocols directly in the application.

You can also remove a symlink related to your application from the /etc/crypto-policies/back-ends directory and replace it with your customized cryptographic settings. This configuration prevents the use of system-wide cryptographic policies for applications that use the excluded back end. Furthermore, this modification is not supported by Red Hat.

2.3.1. Examples of opting out of system-wide crypto policies

wget

To customize cryptographic settings used by the **wget** network downloader, use **--secure-protocol** and **--ciphers** options. For example:

\$ wget --secure-protocol= TLSv1_1 --ciphers="SECURE128" https://example.com

See the HTTPS (SSL/TLS) Options section of the wget(1) man page for more information.

curl

To specify ciphers used by the **curl** tool, use the **--ciphers** option and provide a colon-separated list of ciphers as a value. For example:

\$ curl https://example.com --ciphers '@SECLEVEL=0:DES-CBC3-SHA:RSA-DES-CBC3-SHA'

See the **curl(1)** man page for more information.

Firefox

Even though you cannot opt out of system-wide cryptographic policies in the **Firefox** web browser, you can further restrict supported ciphers and TLS versions in Firefox's Configuration Editor. Type **about:config** in the address bar and change the value of the **security.tls.version.min** option as required. Setting **security.tls.version.min** to **1** allows TLS 1.0 as the minimum required, **security.tls.version.min 2** enables TLS 1.1, and so on.

OpenSSH

To opt out of system-wide crypto policies for your **OpenSSH** client, perform one of the following tasks:

- For a given user, override the global **ssh_config** with a user-specific configuration in the ~/.ssh/config file.
- For the entire system, specify the crypto policy in a drop-in configuration file located in the /etc/ssh/ssh_config.d/ directory, with a two-digit number prefix smaller than 50, so that it lexicographically precedes the 50-redhat.conf file, and with a .conf suffix, for example, 49-crypto-policy-override.conf.

See the **ssh** config(5) man page for more information.

Libreswan

See the Configuring IPsec connections that opt out of the system-wide crypto policies in the Securing networks document for detailed information.

Additional resources

update-crypto-policies(8) man page

2.4. CUSTOMIZING SYSTEM-WIDE CRYPTOGRAPHIC POLICIES WITH SUBPOLICIES

Use this procedure to adjust the set of enabled cryptographic algorithms or protocols.

You can either apply custom subpolicies on top of an existing system-wide cryptographic policy or define such a policy from scratch.

The concept of scoped policies allows enabling different sets of algorithms for different back ends. You can limit each configuration directive to specific protocols, libraries, or services.

Furthermore, directives can use asterisks for specifying multiple values using wildcards.

Procedure

- 1. Checkout to the /etc/crypto-policies/policies/modules/ directory:
 - # cd /etc/crypto-policies/policies/modules/
- 2. Create subpolicies for your adjustments, for example:

touch MYCRYPTO-1.pmod # touch SCOPES-AND-WILDCARDS.pmod



IMPORTANT

Use upper-case letters in file names of policy modules.

3. Open the policy modules in a text editor of your choice and insert options that modify the system-wide cryptographic policy, for example:

vi MYCRYPTO-1.pmod

```
min_rsa_size = 3072
hash = SHA2-384 SHA2-512 SHA3-384 SHA3-512
```

vi SCOPES-AND-WILDCARDS.pmod

```
# Disable the AES-128 cipher, all modes cipher = -AES-128-*
```

Disable CHACHA20-POLY1305 for the TLS protocol (OpenSSL, GnuTLS, NSS, and OpenJDK)

cipher@TLS = -CHACHA20-POLY1305

Allow using the FFDHE-1024 group with the SSH protocol (libssh and OpenSSH) group@SSH = FFDHE-1024+

Disable all CBC mode ciphers for the SSH protocol (libssh and OpenSSH) cipher@SSH = -*-CBC

Allow the AES-256-CBC cipher in applications using libssh cipher@libssh = AES-256-CBC+

- 4. Save the changes in the module files.
- 5. Apply your policy adjustments to the **DEFAULT** system-wide cryptographic policy level:
 - # update-crypto-policies --set DEFAULT: MYCRYPTO-1:SCOPES-AND-WILDCARDS
- 6. To make your cryptographic settings effective for already running services and applications, restart the system:
 - # reboot

Additional resources

- Custom Policies section in the update-crypto-policies(8) man page
- Crypto Policy Definition Format section in the crypto-policies(7) man page
- How to customize crypto policies in RHEL 8.2 Red Hat blog article

2.5. CREATING AND SETTING A CUSTOM SYSTEM-WIDE CRYPTOGRAPHIC POLICY

The following steps demonstrate customizing the system-wide cryptographic policies by a complete policy file.

Procedure

1. Create a policy file for your customizations:

cd /etc/crypto-policies/policies/ # touch *MYPOLICY*.pol

Alternatively, start by copying one of the four predefined policy levels:

 $\label{eq:continuous} \mbox{$\#$ cp /usr/share/crypto-policies/policies/} \mbox{$DEFAULT$.pol /etc/crypto-policies/} \mbox{$policies/MYPOLICY$.pol }$

- 2. Edit the file with your custom cryptographic policy in a text editor of your choice to fit your requirements, for example:
 - # vi /etc/crypto-policies/policies/MYPOLICY.pol
- 3. Switch the system-wide cryptographic policy to your custom level:
 - # update-crypto-policies --set MYPOLICY
- 4. To make your cryptographic settings effective for already running services and applications, restart the system:

reboot

Additional resources

- Custom Policies section in the update-crypto-policies(8) man page and the Crypto Policy Definition Format section in the crypto-policies(7) man page
- How to customize crypto policies in RHEL 8.2 Red Hat blog article

CHAPTER 3. CONFIGURING APPLICATIONS TO USE CRYPTOGRAPHIC HARDWARE THROUGH PKCS #11

Separating parts of your secret information on dedicated cryptographic devices, such as smart cards and cryptographic tokens for end-user authentication and hardware security modules (HSM) for server applications, provides an additional layer of security. In RHEL, support for cryptographic hardware through the PKCS #11 API is consistent across different applications, and the isolation of secrets on cryptographic hardware is not a complicated task.

3.1. CRYPTOGRAPHIC HARDWARE SUPPORT THROUGH PKCS #11

PKCS #11 (Public-Key Cryptography Standard) defines an application programming interface (API) to cryptographic devices that hold cryptographic information and perform cryptographic functions. These devices are called tokens, and they can be implemented in a hardware or software form.

A PKCS #11 token can store various object types including a certificate; a data object; and a public, private, or secret key. These objects are uniquely identifiable through the PKCS #11 URI scheme.

A PKCS #11 URI is a standard way to identify a specific object in a PKCS #11 module according to the object attributes. This enables you to configure all libraries and applications with the same configuration string in the form of a URI.

RHEL provides the OpenSC PKCS #11 driver for smart cards by default. However, hardware tokens and HSMs can have their own PKCS #11 modules that do not have their counterpart in the system. You can register such PKCS #11 modules with the **p11-kit** tool, which acts as a wrapper over the registered smart card drivers in the system.

To make your own PKCS #11 module work on the system, add a new text file to the /etc/pkcs11/modules/ directory

You can add your own PKCS #11 module into the system by creating a new text file in the /etc/pkcs11/modules/ directory. For example, the OpenSC configuration file in p11-kit looks as follows:

\$ cat /usr/share/p11-kit/modules/opensc.module module: opensc-pkcs11.so

Additional resources

- The PKCS #11 URI Scheme
- Controlling access to smart cards

3.2. USING SSH KEYS STORED ON A SMART CARD

Red Hat Enterprise Linux enables you to use RSA and ECDSA keys stored on a smart card on OpenSSH clients. Use this procedure to enable authentication using a smart card instead of using a password.

Prerequisites

On the client side, the opensc package is installed and the pcscd service is running.

Procedure

1. List all keys provided by the OpenSC PKCS #11 module including their PKCS #11 URIs and save the output to the *keys.pub* file:

```
$ ssh-keygen -D pkcs11: > keys.pub
$ ssh-keygen -D pkcs11:
ssh-rsa AAAAB3NzaC1yc2E...KKZMzcQZzx
pkcs11:id=%02;object=SIGN%20pubkey;token=SSH%20key;manufacturer=piv_II?module-path=/usr/lib64/pkcs11/opensc-pkcs11.so
ecdsa-sha2-nistp256 AAA...J0hkYnnsM=
pkcs11:id=%01;object=PIV%20AUTH%20pubkey;token=SSH%20key;manufacturer=piv_II?
module-path=/usr/lib64/pkcs11/opensc-pkcs11.so
```

2. To enable authentication using a smart card on a remote server (example.com), transfer the public key to the remote server. Use the **ssh-copy-id** command with keys.pub created in the previous step:

\$ ssh-copy-id -f -i keys.pub username@example.com

3. To connect to example.com using the ECDSA key from the output of the **ssh-keygen -D** command in step 1, you can use just a subset of the URI, which uniquely references your key, for example:

```
$ ssh -i "pkcs11:id=%01?module-path=/usr/lib64/pkcs11/opensc-pkcs11.so" example.com 
Enter PIN for 'SSH key': [example.com] $
```

4. You can use the same URI string in the ~/.ssh/config file to make the configuration permanent:

```
$ cat ~/.ssh/config
IdentityFile "pkcs11:id=%01?module-path=/usr/lib64/pkcs11/opensc-pkcs11.so"
$ ssh example.com
Enter PIN for 'SSH key':
[example.com] $
```

Because OpenSSH uses the **p11-kit-proxy** wrapper and the OpenSC PKCS #11 module is registered to PKCS#11 Kit, you can simplify the previous commands:

```
$ ssh -i "pkcs11:id=%01" example.com
Enter PIN for 'SSH key':
[example.com] $
```

If you skip the **id=** part of a PKCS #11 URI, OpenSSH loads all keys that are available in the proxy module. This can reduce the amount of typing required:

```
$ ssh -i pkcs11: example.com
Enter PIN for 'SSH key':
[example.com] $
```

Additional resources

- Fedora 28: Better smart card support in OpenSSH
- p11-kit(8), opensc.conf(5), pcscd(8), ssh(1), and ssh-keygen(1) man pages

3.3. CONFIGURING APPLICATIONS TO AUTHENTICATE USING CERTIFICATES FROM SMART CARDS

Authentication using smart cards in applications may increase security and simplify automation.

• The **wget** network downloader enables you to specify PKCS #11 URIs instead of paths to locally stored private keys, and thus simplifies creating scripts for tasks that require safely stored private keys and certificates. For example:

\$ wget --private-key 'pkcs11:token=softhsm;id=%01;type=private?pin-value=111111' -- certificate 'pkcs11:token=softhsm;id=%01;type=cert' https://example.com/

See the wget(1) man page for more information.

Specifying PKCS #11 URI for use by the curl tool is analogous:

\$ curl --key 'pkcs11:token=softhsm;id=%01;type=private?pin-value=111111' --cert 'pkcs11:token=softhsm;id=%01;type=cert' https://example.com/

See the **curl(1)** man page for more information.



NOTE

Because a PIN is a security measure that controls access to keys stored on a smart card and the configuration file contains the PIN in the plain-text form, consider additional protection to prevent an attacker from reading the PIN. For example, you can use the **pin-source** attribute and provide a **file:** URI for reading the PIN from a file. See RFC 7512: PKCS #11 URI Scheme Query Attribute Semantics for more information. Note that using a command path as a value of the **pin-source** attribute is not supported.

 The Firefox web browser automatically loads the p11-kit-proxy module. This means that every supported smart card in the system is automatically detected. For using TLS client authentication, no additional setup is required and keys from a smart card are automatically used when a server requests them.

Using PKCS #11 URIs in custom applications

If your application uses the **GnuTLS** or **NSS** library, support for PKCS #11 URIs is ensured by their built-in support for PKCS #11. Also, applications relying on the **OpenSSL** library can access cryptographic hardware modules thanks to the **openssl-pkcs11** engine.

With applications that require working with private keys on smart cards and that do not use **NSS**, **GnuTLS**, and **OpenSSL**, use **p11-kit** to implement registering PKCS #11 modules.

Additional resources

p11-kit(8) man page.

3.4. USING HSMS PROTECTING PRIVATE KEYS IN APACHE

The **Apache** HTTP server can work with private keys stored on hardware security modules (HSMs), which helps to prevent the keys' disclosure and man-in-the-middle attacks. Note that this usually requires high-performance HSMs for busy servers.

For secure communication in the form of the HTTPS protocol, the **Apache** HTTP server (**httpd**) uses the OpenSSL library. OpenSSL does not support PKCS #11 natively. To utilize HSMs, you have to install the **openssl-pkcs11** package, which provides access to PKCS #11 modules through the engine interface. You can use a PKCS #11 URI instead of a regular file name to specify a server key and a certificate in the /etc/httpd/conf.d/ssl.conf configuration file, for example:

SSLCertificateFile "pkcs11:id=%01;token=softhsm;type=cert" SSLCertificateKeyFile "pkcs11:id=%01;token=softhsm;type=private?pin-value=111111"

Install the **httpd-manual** package to obtain complete documentation for the **Apache** HTTP Server, including TLS configuration. The directives available in the /etc/httpd/conf.d/ssl.conf configuration file are described in detail in /usr/share/httpd/manual/mod/mod_ssl.html.

3.5. USING HSMS PROTECTING PRIVATE KEYS IN NGINX

The **Nginx** HTTP server can work with private keys stored on hardware security modules (HSMs), which helps to prevent the keys' disclosure and man-in-the-middle attacks. Note that this usually requires high-performance HSMs for busy servers.

Because **Nginx** also uses the OpenSSL for cryptographic operations, support for PKCS #11 must go through the **openssl-pkcs11** engine. **Nginx** currently supports only loading private keys from an HSM, and a certificate must be provided separately as a regular file. Modify the **ssl_certificate** and **ssl_certificate** key options in the **server** section of the /etc/nginx/nginx.conf configuration file:

ssl_certificate /path/to/cert.pem ssl_certificate_key "engine:pkcs11:token=softhsm;id=%01;type=private?pin-value=111111";

Note that the **engine:pkcs11:** prefix is needed for the PKCS #11 URI in the **Nginx** configuration file. This is because the other **pkcs11** prefix refers to the engine name.

3.6. ADDITIONAL RESOURCES

• pkcs11.conf(5) man page.

CHAPTER 4. CONTROLLING ACCESS TO SMART CARDS USING POLKIT

To cover possible threats that cannot be prevented by mechanisms built into smart cards, such as PINs, PIN pads, and biometrics, and for more fine-grained control, RHEL uses the **polkit** framework for controlling access control to smart cards.

System administrators can configure **polkit** to fit specific scenarios, such as smart-card access for non-privileged or non-local users or services.

4.1. SMART-CARD ACCESS CONTROL THROUGH POLKIT

The Personal Computer/Smart Card (PC/SC) protocol specifies a standard for integrating smart cards and their readers into computing systems. In RHEL, the **pcsc-lite** package provides middleware to access smart cards that use the PC/SC API. A part of this package, the **pcscd** (PC/SC Smart Card) daemon, ensures that the system can access a smart card using the PC/SC protocol.

Because access-control mechanisms built into smart cards, such as PINs, PIN pads, and biometrics, do not cover all possible threats, RHEL uses the **polkit** framework for more robust access control. The **polkit** authorization manager can grant access to privileged operations. In addition to granting access to disks, you can use **polkit** also to specify policies for securing smart cards. For example, you can define which users can perform which operations with a smart card.

After installing the **pcsc-lite** package and starting the **pcscd** daemon, the system enforces policies defined in the /**usr/share/polkit-1/actions/** directory. The default system-wide policy is in the /**usr/share/polkit-1/actions/org.debian.pcsc-lite.policy** file. Polkit policy files use the XML format and the syntax is described in the **polkit(8)** man page.

The **polkitd** service monitors the /etc/polkit-1/rules.d/ and /usr/share/polkit-1/rules.d/ directories for any changes in rule files stored in these directories. The files contain authorization rules in JavaScript format. System administrators can add custom rule files in both directories, and **polkitd** reads them in lexical order based on their file name. If two files have the same names, then the file in /etc/polkit-1/rules.d/ is read first.

Additional resources

• polkit(8), polkitd(8), and pcscd(8) man pages.

4.2. TROUBLESHOOTING PROBLEMS RELATED TO PC/SC AND POLKIT

Polkit policies that are automatically enforced after you install the **pcsc-lite** package and start the **pcscd** daemon may ask for authentication in the user's session even if the user does not directly interact with a smart card. In GNOME, you can see the following error message:

Authentication is required to access the PC/SC daemon

Note that the system can install the **pcsc-lite** package as a dependency when you install other packages related to smart cards such as **opensc**.

If your scenario does not require any interaction with smart cards and you want to prevent displaying authorization requests for the PC/SC daemon, you can remove the **pcsc-lite** package. Keeping the minimum of necessary packages is a good security practice anyway.

If you use smart cards, start troubleshooting by checking the rules in the system-provided policy file at /usr/share/polkit-1/actions/org.debian.pcsc-lite.policy. You can add your custom rule files to the policy in the /etc/polkit-1/rules.d/ directory, for example, 03-allow-pcscd.rules. Note that the rule files use the JavaScript syntax, the policy file is in the XML format.

To understand what authorization requests the system displays, check the Journal log, for example:

```
$ journalctl -b | grep pcsc ...
Process 3087 (user: 1001) is NOT authorized for action: access_pcsc ...
```

The previous log entry means that the user is not authorized to perform an action by the policy. You can solve this denial by adding a corresponding rule to /etc/polkit-1/rules.d/.

You can search also for log entries related to the **polkitd** unit, for example:

```
$ journalctl -u polkit ...
polkitd[NNN]: Error compiling script /etc/polkit-1/rules.d/00-debug-pcscd.rules ...
polkitd[NNN]: Operator of unix-session:c2 FAILED to authenticate to gain authorization for action org.debian.pcsc-lite.access_pcsc for unix-process:4800:14441 [/usr/libexec/gsd-smartcard] (owned by unix-user:group) ...
```

In the previous output, the first entry means that the rule file contains some syntax error. The second entry means that the user failed to gain the access to **pcscd**.

You can also list all applications that use the PC/SC protocol by a short script. Create an executable file, for example, **pcsc-apps.sh**, and insert the following code:

```
#!/bin/bash

cd /proc

for p in [0-9]*
do
    if grep libpcsclite.so.1.0.0 $p/maps &> /dev/null
    then
    echo -n "process: "
    cat $p/cmdline
    echo " ($p)"
    fi
    done
```

Run the script as root:

```
# ./pcsc-apps.sh
process: /usr/libexec/gsd-smartcard (3048)
enable-sync --auto-ssl-client-auth --enable-crashpad (4828)
...
```

Additional resources

journalctl, polkit(8), polkitd(8), and pcscd(8) man pages.

4.3. DISPLAYING MORE DETAILED INFORMATION ABOUT POLKIT AUTHORIZATION TO PC/SC

In the default configuration, the **polkit** authorization framework sends only limited information to the Journal log. You can extend **polkit** log entries related to the PC/SC protocol by adding new rules.

Prerequisites

- You have installed the **pcsc-lite** package on your system.
- The **pcscd** daemon is running.

Procedure

- 1. Create a new file in the /etc/polkit-1/rules.d/ directory:
 - # touch /etc/polkit-1/rules.d/00-test.rules
- 2. Edit the file in an editor of your choice, for example:
 - # vi /etc/polkit-1/rules.d/00-test.rules
- 3. Insert the following lines:

```
polkit.addRule(function(action, subject) {
  if (action.id == "org.debian.pcsc-lite.access_pcsc" ||
    action.id == "org.debian.pcsc-lite.access_card") {
  polkit.log("action=" + action);
  polkit.log("subject=" + subject);
  }
});
```

Save the file, and exit the editor.

4. Restart the **pcscd** and **polkit** services:

systemctl restart pcscd.service pcscd.socket polkit.service

Verification

- Make an authorization request for pcscd. For example, open the Firefox web browser or use the pkcs11-tool -L command provided by the opensc package.
- 2. Display the extended log entries, for example:

```
# journalctl -u polkit --since "1 hour ago" polkitd[1224]: <no filename>:4: action=[Action id='org.debian.pcsc-lite.access_pcsc'] polkitd[1224]: <no filename>:5: subject=[Subject pid=2020481 user=user' groups=user,wheel,mock,wireshark seat=null session=null local=true active=true]
```

Additional resources

• polkit(8) and polkitd(8) man pages.

4.4. ADDITIONAL RESOURCES

• Controlling access to smart cards Red Hat Blog article.

CHAPTER 5. USING SHARED SYSTEM CERTIFICATES

The shared system certificates storage enables NSS, GnuTLS, OpenSSL, and Java to share a default source for retrieving system certificate anchors and block-list information. By default, the trust store contains the Mozilla CA list, including positive and negative trust. The system allows updating the core Mozilla CA list or choosing another certificate list.

5.1. THE SYSTEM-WIDE TRUST STORE

In Red Hat Enterprise Linux, the consolidated system-wide trust store is located in the /etc/pki/ca-trust/ and /usr/share/pki/ca-trust-source/ directories. The trust settings in /usr/share/pki/ca-trust-source/ are processed with lower priority than settings in /etc/pki/ca-trust/.

Certificate files are treated depending on the subdirectory they are installed to the following directories:

- for trust anchors
 - /usr/share/pki/ca-trust-source/anchors/ or
 - o /etc/pki/ca-trust/source/anchors/
- for distrusted certificates
 - /usr/share/pki/ca-trust-source/blacklist/ or
 - /etc/pki/ca-trust/source/blacklist/
- for certificates in the extended BEGIN TRUSTED file format
 - /usr/share/pki/ca-trust-source/ or
 - /etc/pki/ca-trust/source/



NOTE

In a hierarchical cryptographic system, a trust anchor is an authoritative entity which other parties consider being trustworthy. In the X.509 architecture, a root certificate is a trust anchor from which a chain of trust is derived. To enable chain validation, the trusting party must have access to the trust anchor first.

5.2. ADDING NEW CERTIFICATES

To acknowledge applications on your system with a new source of trust, add the corresponding certificate to the system-wide store, and use the **update-ca-trust** command.

Prerequisites

• The **ca-certificates** package is present on the system.

Procedure

 To add a certificate in the simple PEM or DER file formats to the list of CAs trusted on the system, copy the certificate file to the /usr/share/pki/ca-trust-source/anchors/ or /etc/pki/catrust/source/anchors/ directory, for example: # cp ~/certificate-trust-examples/Cert-trust-test-ca.pem /usr/share/pki/ca-trust-source/anchors/

2. To update the system-wide trust store configuration, use the **update-ca-trust** command:

update-ca-trust



NOTE

While the Firefox browser is able to use an added certificate without executing **update-ca-trust**, Red Hat recommends to use the **update-ca-trust** command after a CA change. Also note that browsers, such as Firefox, Epiphany, or Chromium, cache files, and you might have to clear browser's cache or restart your browser to load the current system certificates configuration.

5.3. MANAGING TRUSTED SYSTEM CERTIFICATES

The **trust** command provides a convenient way for managing certificates in the shared system-wide trust store.

• To list, extract, add, remove, or change trust anchors, use the **trust** command. To see the built-in help for this command, enter it without any arguments or with the **--help** directive:

\$ trust

usage: trust command <args>...

Common trust commands are:

list List trust or certificates

extract Extract certificates and trust

extract-compat Extract trust compatibility bundles anchor Add, remove, change trust anchors dump Dump trust objects in internal format

See 'trust <command> --help' for more information

To list all system trust anchors and certificates, use the trust list command:

\$ trust list
pkcs11:id=%d2%87%b4%e3%df%37%27%93%55%f6%56%ea%81%e5%36%cc%8c%1e%3
f%bd;type=cert
 type: certificate
 label: ACCVRAIZ1
 trust: anchor
 category: authority

pkcs11:id=%a6%b3%e1%2b%2b%49%b6%d7%73%a1%aa%94%f5%01%e7%73%65%4c%
ac%50;type=cert
 type: certificate
 label: ACEDICOM Root
 trust: anchor
 category: authority

• To store a trust anchor into the system-wide trust store, use the **trust anchor** sub-command and specify a path to a certificate. Replace *path.to/certificate.crt* by a path to your certificate and its file name:

trust anchor path.to/certificate.crt

• To remove a certificate, use either a path to a certificate or an ID of a certificate:

```
# trust anchor --remove path.to/certificate.crt
# trust anchor --remove "pkcs11:id=%AA%BB%CC%DD%EE;type=cert"
```

Additional resources

• All sub-commands of the **trust** commands offer a detailed built-in help, for example:

5.4. ADDITIONAL RESOURCES

• update-ca-trust(8) and trust(1) man pages

CHAPTER 6. SCANNING THE SYSTEM FOR CONFIGURATION COMPLIANCE AND VULNERABILITIES

A compliance audit is a process of determining whether a given object follows all the rules specified in a compliance policy. The compliance policy is defined by security professionals who specify the required settings, often in the form of a checklist, that a computing environment should use.

Compliance policies can vary substantially across organizations and even across different systems within the same organization. Differences among these policies are based on the purpose of each system and its importance for the organization. Custom software settings and deployment characteristics also raise a need for custom policy checklists.

6.1. CONFIGURATION COMPLIANCE TOOLS IN RHEL

Red Hat Enterprise Linux provides tools that enable you to perform a fully automated compliance audit. These tools are based on the Security Content Automation Protocol (SCAP) standard and are designed for automated tailoring of compliance policies.

- SCAP Workbench The **scap-workbench** graphical utility is designed to perform configuration and vulnerability scans on a single local or remote system. You can also use it to generate security reports based on these scans and evaluations.
- OpenSCAP The OpenSCAP library, with the accompanying oscap command-line utility, is
 designed to perform configuration and vulnerability scans on a local system, to validate
 configuration compliance content, and to generate reports and guides based on these scans
 and evaluations.
- SCAP Security Guide (SSG) The scap-security-guide package provides the latest collection
 of security policies for Linux systems. The guidance consists of a catalog of practical hardening
 advice, linked to government requirements where applicable. The project bridges the gap
 between generalized policy requirements and specific implementation guidelines.
- Script Check Engine (SCE) SCE is an extension to the SCAP protocol that enables administrators to write their security content using a scripting language, such as Bash, Python, and Ruby. The SCE extension is provided in the **openscap-engine-sce** package. The SCE itself is not part of the SCAP standard.

To perform automated compliance audits on multiple systems remotely, you can use the OpenSCAP solution for Red Hat Satellite.

Additional resources

- oscap(8), scap-workbench(8), and scap-security-quide(8) man pages
- Red Hat Security Demos: Creating Customized Security Policy Content to Automate Security Compliance
- Red Hat Security Demos: Defend Yourself with RHEL Security Technologies
- Security Compliance Management in the Administering Red Hat Satellite Guide .

6.2. VULNERABILITY SCANNING

6.2.1. Red Hat Security Advisories OVAL feed

Red Hat Enterprise Linux security auditing capabilities are based on the Security Content Automation Protocol (SCAP) standard. SCAP is a multi-purpose framework of specifications that supports automated configuration, vulnerability and patch checking, technical control compliance activities, and security measurement.

SCAP specifications create an ecosystem where the format of security content is well-known and standardized although the implementation of the scanner or policy editor is not mandated. This enables organizations to build their security policy (SCAP content) once, no matter how many security vendors they employ.

The Open Vulnerability Assessment Language (OVAL) is the essential and oldest component of SCAP. Unlike other tools and custom scripts, OVAL describes a required state of resources in a declarative manner. OVAL code is never executed directly but using an OVAL interpreter tool called scanner. The declarative nature of OVAL ensures that the state of the assessed system is not accidentally modified.

Like all other SCAP components, OVAL is based on XML. The SCAP standard defines several document formats. Each of them includes a different kind of information and serves a different purpose.

Red Hat Product Security helps customers evaluate and manage risk by tracking and investigating all security issues affecting Red Hat customers. It provides timely and concise patches and security advisories on the Red Hat Customer Portal. Red Hat creates and supports OVAL patch definitions, providing machine-readable versions of our security advisories.

Because of differences between platforms, versions, and other factors, Red Hat Product Security qualitative severity ratings of vulnerabilities do not directly align with the Common Vulnerability Scoring System (CVSS) baseline ratings provided by third parties. Therefore, we recommend that you use the RHSA OVAL definitions instead of those provided by third parties.

The RHSA OVAL definitions are available individually and as a complete package, and are updated within an hour of a new security advisory being made available on the Red Hat Customer Portal.

Each OVAL patch definition maps one-to-one to a Red Hat Security Advisory (RHSA). Because an RHSA can contain fixes for multiple vulnerabilities, each vulnerability is listed separately by its Common Vulnerabilities and Exposures (CVE) name and has a link to its entry in our public bug database.

The RHSA OVAL definitions are designed to check for vulnerable versions of RPM packages installed on a system. It is possible to extend these definitions to include further checks, for example, to find out if the packages are being used in a vulnerable configuration. These definitions are designed to cover software and updates shipped by Red Hat. Additional definitions are required to detect the patch status of third-party software.

Additional resources

- Red Hat and OVAL compatibility
- Red Hat and CVE compatibility
- Notifications and Advisories in the Product Security Overview
- Security Data Metrics

6.2.2. Scanning the system for vulnerabilities

The **oscap** command-line utility enables you to scan local systems, validate configuration compliance content, and generate reports and guides based on these scans and evaluations. This utility serves as a front end to the OpenSCAP library and groups its functionalities to modules (sub-commands) based on

the type of SCAP content it processes.

Prerequisites

• The **AppStream** repository is enabled.

Procedure

- 1. Install the **openscap-scanner** and **bzip2** packages:
 - # dnf install openscap-scanner bzip2
- 2. Download the latest RHSA OVAL definitions for your system:
 - $\label{eq:www.redhat.com/security/data/oval/v2/RHEL9/rhel-9.oval.xml.bz2 | bzip2 -decompress > rhel-9.oval.xml \\$
- 3. Scan the system for vulnerabilities and save results to the *vulnerability.html* file:
 - # oscap oval eval --report vulnerability.html rhel-9.oval.xml

Verification

- Check the results in a browser of your choice, for example:
 - \$ firefox vulnerability.html &

Additional resources

- oscap(8) man page
- Red Hat OVAL definitions

6.2.3. Scanning remote systems for vulnerabilities

You can check also remote systems for vulnerabilities with the OpenSCAP scanner using the **oscap-ssh** tool over the SSH protocol.

Prerequisites

- The **AppStream** repository is enabled.
- The **openscap-scanner** package is installed on the remote systems.
- The SSH server is running on the remote systems.

Procedure

- 1. Install the **openscap-utils** and **bzip2** packages:
 - # dnf install openscap-utils bzip2

2. Download the latest RHSA OVAL definitions for your system:

wget -O - https://www.redhat.com/security/data/oval/v2/RHEL9/rhel-9.oval.xml.bz2 | bzip2 - decompress > rhel-9.oval.xml

3. Scan a remote system with the *machine1* host name, SSH running on port 22, and the *joesec* user name for vulnerabilities and save results to the *remote-vulnerability.html* file:

oscap-ssh joesec@machine1 22 oval eval --report remote-vulnerability.html rhel-9.oval.xml

Additional resources

- oscap-ssh(8)
- Red Hat OVAL definitions

6.3. CONFIGURATION COMPLIANCE SCANNING

6.3.1. Configuration compliance in RHEL

You can use configuration compliance scanning to conform to a baseline defined by a specific organization. For example, if you work with the US government, you might have to align your systems with the Operating System Protection Profile (OSPP), and if you are a payment processor, you might have to align your systems with the Payment Card Industry Data Security Standard (PCI-DSS). You can also perform configuration compliance scanning to harden your system security.

Red Hat recommends you follow the Security Content Automation Protocol (SCAP) content provided in the SCAP Security Guide package because it is in line with Red Hat best practices for affected components.

The SCAP Security Guide package provides content which conforms to the SCAP 1.2 and SCAP 1.3 standards. The **openscap scanner** utility is compatible with both SCAP 1.2 and SCAP 1.3 content provided in the SCAP Security Guide package.





IMPORTANT

Performing a configuration compliance scanning does not guarantee the system is compliant.

The SCAP Security Guide suite provides profiles for several platforms in a form of data stream documents. A data stream is a file that contains definitions, benchmarks, profiles, and individual rules. Each rule specifies the applicability and requirements for compliance. RHEL provides several profiles for compliance with security policies. In addition to the industry standard, Red Hat data streams also contain information for remediation of failed rules.

Structure of compliance scanning resources





A profile is a set of rules based on a security policy, such as OSPP, PCI-DSS, and Health Insurance Portability and Accountability Act (HIPAA). This enables you to audit the system in an automated way for compliance with security standards.

You can modify (tailor) a profile to customize certain rules, for example, password length. For more information on profile tailoring, see Customizing a security profile with SCAP Workbench.

6.3.2. Possible results of an OpenSCAP scan

Depending on various properties of your system and the data stream and profile applied to an OpenSCAP scan, each rule may produce a specific result. This is a list of possible results with brief explanations of what they mean.

Table 6.1. Possible results of an OpenSCAP scan

Result	Explanation
Pass	The scan did not find any conflicts with this rule.
Fail	The scan found a conflict with this rule.
Not checked	OpenSCAP does not perform an automatic evaluation of this rule. Check whether your system conforms to this rule manually.
Not applicable	This rule does not apply to the current configuration.
Not selected	This rule is not part of the profile. OpenSCAP does not evaluate this rule and does not display these rules in the results.
Error	The scan encountered an error. For additional information, you can enter the oscap command with the verbose DEVEL option. Consider opening a bug report.
Unknown	The scan encountered an unexpected situation. For additional information, you can enter the oscap command with the `verbose DEVEL option. Consider opening a bug report.

6.3.3. Viewing profiles for configuration compliance

Before you decide to use profiles for scanning or remediation, you can list them and check their detailed descriptions using the **oscap info** sub-command.

Prerequisites

• The openscap-scanner and scap-security-guide packages are installed.

Procedure

1. List all available files with security compliance profiles provided by the SCAP Security Guide project:

\$ Is /usr/share/xml/scap/ssg/content/ ssg-rhel9-ds.xml

2. Display detailed information about a selected data stream using the **oscap info** sub-command. XML files containing data streams are indicated by the **-ds** string in their names. In the **Profiles** section, you can find a list of available profiles and their IDs:

\$ oscap info /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml Profiles: Title: ANSSI-BP-028 (enhanced) ld: xccdf_org.ssgproject.content_profile_anssi_bp28_enhanced Title: ANSSI-BP-028 (high) ld: xccdf_org.ssgproject.content_profile_anssi_bp28_high Title: ANSSI-BP-028 (intermediary) ld: xccdf_org.ssgproject.content_profile_anssi_bp28_intermediary Title: ANSSI-BP-028 (minimal) ld: xccdf org.ssgproject.content profile anssi bp28 minimal Title: [DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 2 - Server ld: xccdf org.ssgproject.content profile cis Title: [DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 1 - Server ld: xccdf org.ssgproject.content profile cis server l1 Title: [DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 1 - Workstation Id: xccdf_org.ssgproject.content_profile_cis_workstation_l1 Title: [DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 2 - Workstation ld: xccdf org.ssgproject.content profile cis workstation 12 Title: [RHEL9 DRAFT] Criminal Justice Information Services (CJIS) Security Policy ld: xccdf_org.ssgproject.content_profile_cjis Title: Unclassified Information in Non-federal Information Systems and Organizations (NIST 800-171) ld: xccdf org.ssgproject.content profile cui Title: [DRAFT] Australian Cyber Security Centre (ACSC) Essential Eight ld: xccdf org.ssgproject.content profile e8 Title: [RHEL9 DRAFT] Health Insurance Portability and Accountability Act (HIPAA) ld: xccdf org.ssgproject.content profile hipaa

Title: [RHEL9 DRAFT] Australian Cyber Security Centre (ACSC) ISM Official

ld: xccdf_org.ssgproject.content_profile_ism_o

Title: [RHEL9 DRAFT] Protection Profile for General Purpose Operating Systems ld: xccdf org.ssgproject.content profile ospp

Title: [RHEL9 DRAFT] PCI-DSS v3.2.1 Control Baseline for Red Hat Enterprise Linux 9

ld: xccdf org.ssgproject.content profile pci-dss

Title: [RHEL9 DRAFT] Red Hat Corporate Profile for Certified Cloud Providers (RH CCP)

ld: xccdf_org.ssgproject.content_profile_rht-ccp

Title: Standard System Security Profile for Red Hat Enterprise Linux 9

ld: xccdf org.ssgproject.content profile standard

Title: [DRAFT] DISA STIG for Red Hat Enterprise Linux 9

Id: xccdf_org.ssgproject.content_profile_stig
Title: [DRAFT] DISA STIG with GUI for Red Hat Enterprise Linux 9
Id: xccdf_org.ssgproject.content_profile_stig_gui

3. Select a profile from the data-stream file and display additional details about the selected profile. To do so, use **oscap info** with the **--profile** option followed by the last section of the ID displayed in the output of the previous command. For example, the ID of the HIPPA profile is: **xccdf_org.ssgproject.content_profile_hipaa**, and the value for the **--profile** option is **hipaa**:

 $\$ \ oscap \ info \ --profile \ hipaa \ /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml$

..

Profile

Title: [RHEL9 DRAFT] Health Insurance Portability and Accountability Act (HIPAA) Id: xccdf_org.ssgproject.content_profile_hipaa

Description: The HIPAA Security Rule establishes U.S. national standards to protect individuals' electronic personal health information that is created, received, used, or maintained by a covered entity. The Security Rule requires appropriate administrative, physical and technical safeguards to ensure the confidentiality, integrity, and security of electronic protected health information. This profile configures Red Hat Enterprise Linux 9 to the HIPAA Security Rule identified for securing of electronic protected health information. Use of this profile in no way guarantees or makes claims against legal compliance against the HIPAA Security Rule(s).

Additional resources

• scap-security-guide(8) man page

6.3.4. Assessing configuration compliance with a specific baseline

To determine whether your system conforms to a specific baseline, follow these steps.

Prerequisites

- The openscap-scanner and scap-security-guide packages are installed
- You know the ID of the profile within the baseline with which the system should comply. To find the ID, see Viewing Profiles for Configuration Compliance.

Procedure

1. Evaluate the compliance of the system with the selected profile and save the scan results in the report.html HTML file, for example:

\$ sudo oscap xccdf eval --report report.html --profile hipaa /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml

2. Optional: Scan a remote system with the **machine1** host name, SSH running on port **22**, and the **joesec** user name for compliance and save results to the **remote-report.html** file:

\$ oscap-ssh joesec@machine1 22 xccdf eval --report remote_report.html --profile hipaa /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml

Additional resources

- scap-security-guide(8) man page
- SCAP Security Guide documentation in the file:///usr/share/doc/scap-security-guide/ directory
- Guide to the Secure Configuration of Red Hat Enterprise Linux 9-beta installed with the **scap-security-guide-doc** package

6.4. REMEDIATING THE SYSTEM TO ALIGN WITH A SPECIFIC BASELINE

Use this procedure to remediate the RHEL system to align with a specific baseline. This example uses the Health Insurance Portability and Accountability Act (HIPAA) profile.



WARNING

If not used carefully, running the system evaluation with the **Remediate** option enabled might render the system non-functional. Red Hat does not provide any automated method to revert changes made by security-hardening remediations. Remediations are supported on RHEL systems in the default configuration. If your system has been altered after the installation, running remediation might not make it compliant with the required security profile.

Prerequisites

• The **scap-security-guide** package is installed on your RHEL system.

Procedure

- 1. Use the **oscap** command with the **--remediate** option:
 - \$ sudo oscap xccdf eval --profile hipaa --remediate /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml
- 2. Restart your system.

Verification

- 1. Evaluate compliance of the system with the HIPAA profile, and save scan results in the **hipaa_report.html** file:
 - \$ oscap xccdf eval --report *hipaa_report.html* --profile hipaa /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml

Additional resources

• scap-security-guide(8) and oscap(8) man pages

6.5. REMEDIATING THE SYSTEM TO ALIGN WITH A SPECIFIC BASELINE USING THE SSG ANSIBLE PLAYBOOK

Use this procedure to remediate your system with a specific baseline using the Ansible playbook file from the SCAP Security Guide project. This example uses the Health Insurance Portability and Accountability Act (HIPAA) profile.



WARNING

If not used carefully, running the system evaluation with the **Remediate** option enabled might render the system non-functional. Red Hat does not provide any automated method to revert changes made by security-hardening remediations. Remediations are supported on RHEL systems in the default configuration. If your system has been altered after the installation, running remediation might not make it compliant with the required security profile.

Prerequisites

- Install scap-security-guide package.
- Install **ansible-core** package. See the Ansible Installation Guide for more information.



NOTE

With RHEL 9, Ansible Engine is no more supported, instead it ships a smaller version that is **ansible-core** package which only contains builtin modules. Note that many Ansible remediation use modules from community and posix collections, which are not among the builtin modules. In this case, your can use bash remediation as a substitute to Ansible remediation. In order to use Ansible remediation you should have the **Ansible Automation Platform** subscription.

Procedure

1. Remediate your system to align with HIPAA using Ansible:

ansible-playbook -i localhost, -c local /usr/share/scap-security-guide/ansible/rhel8-playbook-hipaa.yml

2. Restart the system.

Verification

1. Evaluate compliance of the system with the HIPAA profile, and save scan results in the **hipaa_report.html** file:

oscap xccdf eval --profile hipaa --report hipaa_report.html /usr/share/xml/scap/ssg/content/ssg-rhel8-ds.xml

Additional resources

- scap-security-guide(8) and oscap(8) man pages
- Ansible Documentation

6.6. CREATING A REMEDIATION ANSIBLE PLAYBOOK TO ALIGN THE SYSTEM WITH A SPECIFIC BASELINE

You can create an Ansible playbook containing only the remediations that are required to align your system with a specific baseline. This example uses the Health Insurance Portability and Accountability Act (HIPAA) profile. With this procedure, you create a smaller playbook that does not cover already satisfied requirements. By following these steps, you do not modify your system in any way, you only prepare a file for later application.



NOTE

With RHEL 9, Ansible Engine is no more supported, instead it ships a smaller version that is **ansible-core** package which only contains builtin modules. Note that many Ansible remediation use modules from community and posix collections, which are not among the builtin modules. In this case, your can use bash remediation as a substitute to Ansible remediation. In order to use Ansible remediation you should have the **Ansible Automation Platform** subscription.

Prerequisites

• The **scap-security-guide** package is installed on your RHEL system.

Procedure

1. Scan the system and save the results:

oscap xccdf eval --profile hipaa --results *hipaa-results.xml* /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml

2. Generate an Ansible playbook based on the file generated in the previous step:

oscap xccdf generate fix --fix-type ansible --profile hipaa --output hipaa-remediations.yml hipaa-results.xml

 The hipaa-remediations.yml file contains Ansible remediations for rules that failed during the scan performed in step 1. After reviewing this generated file, you can apply it with the ansibleplaybook hipaa-remediations.yml command.

Verification

• In a text editor of your choice, review that the **hipaa-remediations.yml** file contains rules that failed in the scan performed in step 1.

Additional resources

- scap-security-guide(8) and oscap(8) man pages
- Ansible Documentation

6.7. CREATING A REMEDIATION BASH SCRIPT FOR A LATER APPLICATION

Use this procedure to create a Bash script containing remediations that align your system with a security profile such as HIPAA. Using the following steps, you do not do any modifications to your system, you only prepare a file for later application.

Prerequisites

• The **scap-security-guide** package is installed on your RHEL system.

Procedure

1. Use the **oscap** command to scan the system and to save the results to an XML file. In the following example, **oscap** evaluates the system against the **hipaa** profile:

oscap xccdf eval --profile hipaa --results *hipaa-results.xml* /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml

2. Generate a Bash script based on the results file generated in the previous step:

oscap xccdf generate fix --profile hipaa --fix-type bash --output hipaa-remediations.sh hipaa-results.xml

3. The **hipaa-remediations.sh** file contains remediations for rules that failed during the scan performed in step 1. After reviewing this generated file, you can apply it with the **./hipaa-remediations.sh** command when you are in the same directory as this file.

Verification

• In a text editor of your choice, review that the **hipaa-remediations.sh** file contains rules that failed in the scan performed in step 1.

Additional resources

scap-security-guide(8), oscap(8), and bash(1) man pages

6.8. SCANNING THE SYSTEM WITH A CUSTOMIZED PROFILE USING SCAP WORKBENCH

SCAP Workbench, which is contained in the **scap-workbench** package, is a graphical utility that enables users to perform configuration and vulnerability scans on a single local or a remote system, perform remediation of the system, and generate reports based on scan evaluations. Note that **SCAP Workbench** has limited functionality compared with the **oscap** command-line utility. **SCAP Workbench** processes security content in the form of data-stream files.

6.8.1. Using SCAP Workbench to scan and remediate the system


To evaluate your system against the selected security policy, use the following procedure.

Prerequisites

• The **scap-workbench** package is installed on your system.

Procedure

- To run SCAP Workbench from the GNOME Classic desktop environment, press the Super key to enter the Activities Overview, type scap-workbench, and then press Enter. Alternatively, use:
 - \$ scap-workbench &
- 2. Select a security policy using either of the following options:
 - Load Content button on the starting window
 - Open content from SCAP Security Guide
 - Open Other Content in the File menu, and search the respective XCCDF, SCAP RPM, or data stream file.

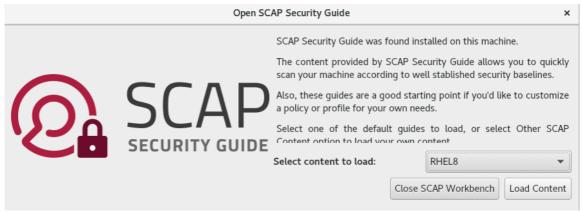


3. You can allow automatic correction of the system configuration by selecting the **Remediate** check box. With this option enabled, **SCAP Workbench** attempts to change the system configuration in accordance with the security rules applied by the policy. This process should fix the related checks that fail during the system scan.



WARNING

If not used carefully, running the system evaluation with the **Remediate** option enabled might render the system non-functional. Red Hat does not provide any automated method to revert changes made by security-hardening remediations. Remediations are supported on RHEL systems in the default configuration. If your system has been altered after the installation, running remediation might not make it compliant with the required security profile.

4. Scan your system with the selected profile by clicking the **Scan** button.

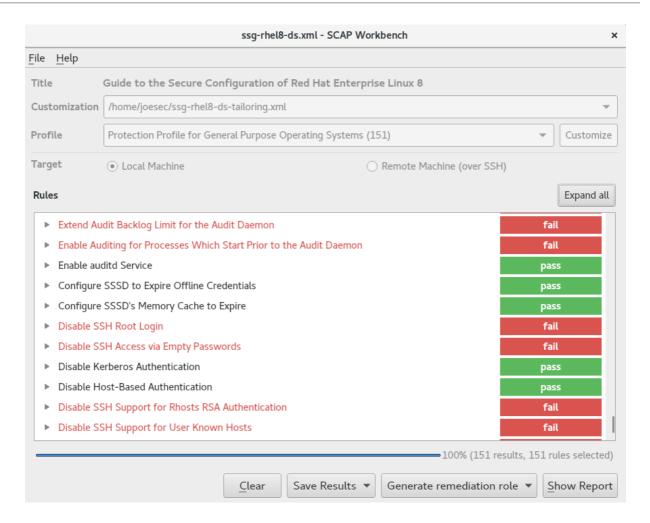

- 5. To store the scan results in form of an XCCDF, ARF, or HTML file, click the **Save Results** combo box. Choose the **HTML Report** option to generate the scan report in human-readable format. The XCCDF and ARF (data stream) formats are suitable for further automatic processing. You can repeatedly choose all three options.
- 6. To export results-based remediations to a file, use the **Generate remediation role** pop-up menu.

6.8.2. Customizing a security profile with SCAP Workbench

You can customize a security profile by changing parameters in certain rules (for example, minimum password length), removing rules that you cover in a different way, and selecting additional rules, to implement internal policies. You cannot define new rules by customizing a profile.

The following procedure demonstrates the use of **SCAP Workbench** for customizing (tailoring) a profile. You can also save the tailored profile for use with the **oscap** command-line utility.


Prerequisites

The scap-workbench package is installed on your system.


Procedure

- Run SCAP Workbench, and select the profile to customize by using either Open content from SCAP Security Guide or Open Other Content in the File menu.
- 2. To adjust the selected security profile according to your needs, click the **Customize** button.

This opens the new Customization window that enables you to modify the currently selected profile without changing the original data stream file. Choose a new profile ID.

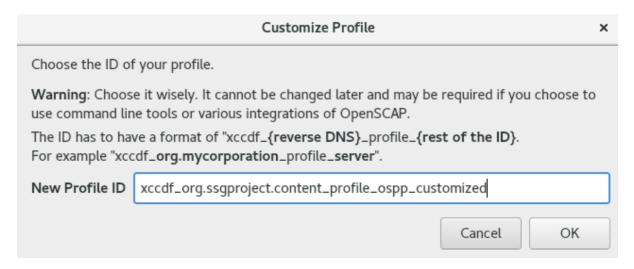

- 3. Find a rule to modify using either the tree structure with rules organized into logical groups or the **Search** field.
- 4. Include or exclude rules using check boxes in the tree structure, or modify values in rules where applicable.

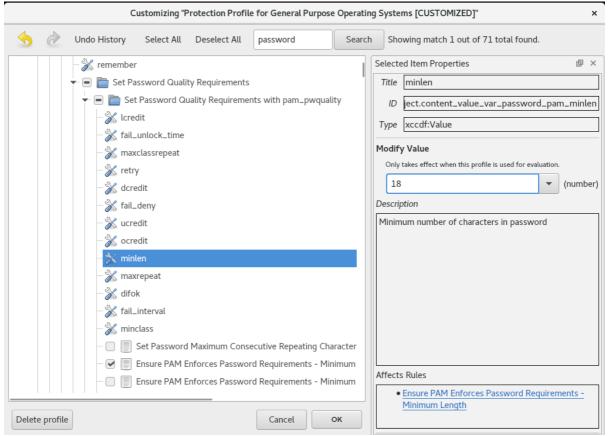

- 5. Confirm the changes by clicking the **OK** button.
- 6. To store your changes permanently, use one of the following options:
 - Save a customization file separately by using Save Customization Only in the File menu.
 - Save all security content at once by Save All in the File menu.
 If you select the Into a directory option, SCAP Workbench saves both the data stream file and the customization file to the specified location. You can use this as a backup solution.

By selecting the **As RPM** option, you can instruct **SCAP Workbench** to create an RPM package containing the data stream file and the customization file. This is useful for distributing the security content to systems that cannot be scanned remotely, and for delivering the content for further processing.



NOTE

Because **SCAP Workbench** does not support results-based remediations for tailored profiles, use the exported remediations with the **oscap** command-line utility.

6.8.3. Related information

- scap-workbench(8) man page
- SCAP Workbench User Manual
- Deploy customized SCAP policies with Satellite 6.x a Knowledge Base article on tailoring scripts

6.9. DEPLOYING SYSTEMS THAT ARE COMPLIANT WITH A SECURITY PROFILE IMMEDIATELY AFTER AN INSTALLATION

You can use the OpenSCAP suite to deploy RHEL systems that are compliant with a security profile, such as OSPP, PCI-DSS, and HIPAA profile, immediately after the installation process. Using this deployment method, you can apply specific rules that cannot be applied later using remediation scripts, for example, a rule for password strength and partitioning.

6.9.1. Profiles not compatible with Server with GUI

Certain security profiles provided as part of the **SCAP Security Guide** are not compatible with the extended package set included in the **Server with GUI** base environment. Therefore, do not select **Server with GUI** when installing systems compliant with one of the following profiles:

Table 6.2. Profiles not compatible with Server with GUI

Profile name	Profile ID	Justification	Notes
[DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 2 - Server	xccdf_org.ssgprojec t.content_profile_cis	Packages xorg-x11- server-Xorg, xorg- x11-server-common, xorg-x11-server- utils, and xorg-x11- server-Xwayland are part of the Server with GUI package set, but the policy requires their removal.	

Profile name	Profile ID	Justification	Notes
[DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 1 - Server	xccdf_org.ssgprojec t.content_profile_cis _server_l1	Packages xorg-x11- server-Xorg, xorg- x11-server-common, xorg-x11-server- utils, and xorg-x11- server-Xwayland are part of the Server with GUI package set, but the policy requires their removal.	
Unclassified Information in Non-federal Information Systems and Organizations (NIST 800-171)	xccdf_org.ssgprojec t.content_profile_cui	The nfs-utils package is part of the Server with GUI package set, but the policy requires its removal.	
[RHEL9 DRAFT] Protection Profile for General Purpose Operating Systems	xccdf_org.ssgprojec t.content_profile_os pp	The nfs-utils package is part of the Server with GUI package set, but the policy requires its removal.	BZ#1787156
[DRAFT] DISA STIG for Red Hat Enterprise Linux 9	xccdf_org.ssgprojec t.content_profile_sti g	Packages xorg-x11- server-Xorg, xorg- x11-server-common, xorg-x11-server- utils, and xorg-x11- server-Xwayland are part of the Server with GUI package set, but the policy requires their removal.	To install a RHEL system as a Server with GUI aligned with DISA STIG, you can use the DISA STIG with GUI profile BZ#1648162

6.9.2. Deploying baseline-compliant RHEL systems using the graphical installation

Use this procedure to deploy a RHEL system that is aligned with a specific baseline. This example uses Protection Profile for General Purpose Operating System (OSPP).



WARNING

Certain security profiles provided as part of the **SCAP Security Guide** are not compatible with the extended package set included in the **Server with GUI** base environment. For additional details, see Profiles not compatible with a GUI server .

Prerequisites

- You have booted into the **graphical** installation program. Note that the **OSCAP Anaconda Add-on** does not support interactive text-only installation.
- You have accessed the **Installation Summary** window.

Procedure

- 1. From the **Installation Summary** window, click **Software Selection**. The **Software Selection** window opens.
- 2. From the **Base Environment** pane, select the **Server** environment. You can select only one base environment.
- 3. Click **Done** to apply the setting and return to the **Installation Summary** window.
- 4. Click **Security Policy**. The **Security Policy** window opens.
- 5. To enable security policies on the system, toggle the **Apply security policy** switch to **ON**.
- 6. Select Protection Profile for General Purpose Operating Systems from the profile pane.
- 7. Click **Select Profile** to confirm the selection.
- 8. Confirm the changes in the **Changes that were done or need to be done** pane that is displayed at the bottom of the window. Complete any remaining manual changes.
- 9. Because OSPP has strict partitioning requirements that must be met, create separate partitions for /boot, /home, /var, /var/log, /var/tmp, and /var/log/audit.
- 10. Complete the graphical installation process.



NOTE

The graphical installation program automatically creates a corresponding Kickstart file after a successful installation. You can use the /root/anaconda-ks.cfg file to automatically install OSPP-compliant systems.

Verification

• To check the current status of the system after installation is complete, reboot the system and start a new scan:

oscap xccdf eval --profile ospp --report eval_postinstall_report.html /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml

Additional resources

Configuring manual partitioning

6.9.3. Deploying baseline-compliant RHEL systems using Kickstart

Use this procedure to deploy RHEL systems that are aligned with a specific baseline. This example uses Protection Profile for General Purpose Operating System (OSPP).

Prerequisites

• The **scap-security-guide** package is installed on your RHEL 9 system.

Procedure

- 1. Open the /usr/share/scap-security-guide/kickstart/ssg-rhel9-ospp-ks.cfg Kickstart file in an editor of your choice.
- 2. Update the partitioning scheme to fit your configuration requirements. For OSPP compliance, the separate partitions for /boot, /home, /var, /var/log, /var/tmp, and /var/log/audit must be preserved, and you can only change the size of the partitions.



WARNING

Because the **OSCAP Anaconda Addon** plugin does not support text-only installation, do not use the **text** option in your Kickstart file. For more information, see RHBZ#1674001.

3. Start a Kickstart installation as described in Performing an automated installation using Kickstart.



IMPORTANT

Passwords in the hash form cannot be checked for OSPP requirements.

Verification

1. To check the current status of the system after installation is complete, reboot the system and start a new scan:

oscap xccdf eval --profile ospp --report eval_postinstall_report.html /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml

Additional resources

OSCAP Anaconda Addon

6.10. SCANNING CONTAINER AND CONTAINER IMAGES FOR VULNERABILITIES

Use this procedure to find security vulnerabilities in a container or a container image.

Prerequisites

• The **openscap-utils** package is installed.

Procedure

1. Download the latest RHSA OVAL definitions for your system:

wget -O - https://www.redhat.com/security/data/oval/v2/RHEL9/rhel-9.oval.xml.bz2 | bzip2 - decompress > rhel-9.oval.xml

2. Get the ID of a container or a container image, for example:

podman images
REPOSITORY TAG IMAGE ID CREATED SIZE
registry.access.redhat.com/ubi8/ubi latest 096cae65a207 7 weeks ago 239 MB

3. Scan the container or the container image for vulnerabilities and save results to the *vulnerability.html* file:

oscap-podman 096cae65a207 oval eval --report vulnerability.html rhel-9.oval.xml

Note that the **oscap-podman** command requires root privileges, and the ID of a container is the first argument.

Verification

- Check the results in a browser of your choice, for example:
 - \$ firefox vulnerability.html &

Additional resources

• For more information, see the **oscap-podman(8)** and **oscap(8)** man pages.

6.11. ASSESSING SECURITY COMPLIANCE OF A CONTAINER OR A CONTAINER IMAGE WITH A SPECIFIC BASELINE

Follow these steps to assess compliance of your container or a container image with a specific security baseline, such as Operating System Protection Profile (OSPP), Payment Card Industry Data Security Standard (PCI-DSS), and Health Insurance Portability and Accountability Act (HIPAA).

Prerequisites

• The **openscap-utils** and **scap-security-guide** packages are installed.

Procedure

1. Get the ID of a container or a container image, for example:

podman images
REPOSITORY TAG IMAGE ID CREATED SIZE
registry.access.redhat.com/ubi8/ubi latest 096cae65a207 7 weeks ago 239 MB

2. Evaluate the compliance of the container image with the HIPAA profile and save scan results into the *report.html* HTML file

oscap-podman 096cae65a207 xccdf eval --report report.html --profile hipaa /usr/share/xml/scap/ssg/content/ssg-rhel9-ds.xml

Replace 096cae65a207 with the ID of your container image and the *hipaa* value with ospp or pci-dss if you assess security compliance with the OSPP or PCI-DSS baseline. Note that the **oscap-podman** command requires root privileges.

Verification

• Check the results in a browser of your choice, for example:

\$ firefox report.html &



NOTE

The rules marked as *notapplicable* are rules that do not apply to containerized systems. These rules apply only to bare-metal and virtualized systems.

Additional resources

- oscap-podman(8) and scap-security-guide(8) man pages.
- file:///usr/share/doc/scap-security-guide/ directory.

6.12. SCAP SECURITY GUIDE PROFILES SUPPORTED IN RHEL 9

Use only the SCAP content provided in the particular minor release of RHEL. This is because components that participate in hardening are sometimes updated with new capabilities. SCAP content changes to reflect these updates, but it is not always backward compatible.

In the following tables, you can find the profiles provided in RHEL 9, together with the version of the policy with which the profile aligns.

Table 6.3. SCAP Security Guide profiles supported in RHEL 9

Profile name	Profile ID	Policy version
French National Agency for the Security of Information Systems (ANSSI) BP-028 High Level	xccdf_org.ssgproject.conten t_profile_anssi_bp28_high	1.2
French National Agency for the Security of Information Systems (ANSSI) BP-028 Enhanced Level	xccdf_org.ssgproject.conten t_profile_anssi_bp28_enhan ced	1.2
French National Agency for the Security of Information Systems (ANSSI) BP-028 Intermediary Level	xccdf_org.ssgproject.conten t_profile_anssi_bp28_interm ediary	1.2

Profile name	Profile ID	Policy version
French National Agency for the Security of Information Systems (ANSSI) BP-028 Minimal Level	xccdf_org.ssgproject.conten t_profile_anssi_bp28_minim al	1.2
[DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 2 - Server	xccdf_org.ssgproject.conten t_profile_cis	DRAFT
[DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 1 - Server	xccdf_org.ssgproject.conten t_profile_cis_server_l1	DRAFT
[DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 1 - Workstation	xccdf_org.ssgproject.conten t_profile_cis_workstation_l1	DRAFT
[DRAFT] CIS Red Hat Enterprise Linux 9 Benchmark for Level 2 - Workstation	xccdf_org.ssgproject.conten t_profile_cis_workstation_l2	DRAFT
[RHEL9 DRAFT] Criminal Justice Information Services (CJIS) Security Policy	xccdf_org.ssgproject.conten t_profile_cjis	5.4
Unclassified Information in Non- federal Information Systems and Organizations (NIST 800-171)	xccdf_org.ssgproject.conten t_profile_cui	r2
[DRAFT] Australian Cyber Security Centre (ACSC) Essential Eight	xccdf_org.ssgproject.conten t_profile_e8	not versioned
[RHEL9 DRAFT] Health Insurance Portability and Accountability Act (HIPAA)	xccdf_org.ssgproject.conten t_profile_hipaa	not versioned
[RHEL9 DRAFT] Australian Cyber Security Centre (ACSC) ISM Official	xccdf_org.ssgproject.conten t_profile_ism_o	not versioned
[RHEL9 DRAFT] Protection Profile for General Purpose Operating Systems	xccdf_org.ssgproject.conten t_profile_ospp	4.2.1
[RHEL9 DRAFT] PCI-DSS v3.2.1 Control Baseline for Red Hat Enterprise Linux 9	xccdf_org.ssgproject.conten t_profile_pci-dss	3.2.1

Profile name	Profile ID	Policy version
[RHEL9 DRAFT] Red Hat Corporate Profile for Certified Cloud Providers (RH CCP)	xccdf_org.ssgproject.conten t_profile_rht-ccp	not versioned
Standard System Security Profile for Red Hat Enterprise Linux 9	xccdf_org.ssgproject.conten t_profile_standard	not versioned
[DRAFT] DISA STIG for Red Hat Enterprise Linux 9	xccdf_org.ssgproject.conten t_profile_stig	DRAFT
[DRAFT] DISA STIG with GUI for Red Hat Enterprise Linux 9	xccdf_org.ssgproject.conten t_profile_stig_gui	DRAFT

6.13. RELATED INFORMATION

- Supported versions of the SCAP Security Guide in RHEL
- The OpenSCAP project page The home page of the OpenSCAP project provides detailed information about the **oscap** utility and other components and projects related to SCAP.
- The SCAP Workbench project page The home page of the SCAP Workbench project provides detailed information about the **scap-workbench** application.
- The SCAP Security Guide (SSG) project page The home page of the SSG project that provides the latest security content for Red Hat Enterprise Linux.
- Red Hat Security Demos: Creating Customized Security Policy Content to Automate Security
 Compliance A hands-on lab to get initial experience in automating security compliance using
 the tools that are included in Red Hat Enterprise Linux to comply with both industry standard
 security policies and custom security policies. If you want training or access to these lab
 exercises for your team, contact your Red Hat account team for additional details.
- Red Hat Security Demos: Defend Yourself with RHEL Security Technologies A hands-on lab to learn how to implement security at all levels of your RHEL system, using the key security technologies available to you in Red Hat Enterprise Linux, including OpenSCAP. If you want training or access to these lab exercises for your team, contact your Red Hat account team for additional details.
- National Institute of Standards and Technology (NIST) SCAP page This page represents a
 vast collection of SCAP-related materials, including SCAP publications, specifications, and the
 SCAP Validation Program.
- National Vulnerability Database (NVD) This page represents the largest repository of SCAP content and other SCAP standards-based vulnerability management data.
- Red Hat OVAL content repository This is a repository containing OVAL definitions for vulnerabilities of Red Hat Enterprise Linux systems. This is the recommended source of vulnerability content.
- MITRE CVE This is a database of publicly known security vulnerabilities provided by the MITRE corporation. For RHEL, using OVAL CVE content provided by Red Hat is recommended.

- MITRE OVAL This is an OVAL-related project provided by the MITRE corporation. Among other OVAL-related information, these pages contain the OVAL language and a repository of OVAL content with thousands of OVAL definitions. Note that for scanning RHEL, using OVAL CVE content provided by Red Hat is recommended.
- Managing security compliance in Red Hat Satellite This set of guides describes, among other topics, how to maintain system security on multiple systems by using OpenSCAP.

CHAPTER 7. CHECKING INTEGRITY WITH AIDE

Advanced Intrusion Detection Environment (**AIDE**) is a utility that creates a database of files on the system, and then uses that database to ensure file integrity and detect system intrusions.

7.1. INSTALLING AIDE

The following steps are necessary to install **AIDE** and to initiate its database.

Prerequisites

• The **AppStream** repository is enabled.

Procedure

- 1. To install the aide package:
 - # dnf install aide
- 2. To generate an initial database:
 - # aide --init



NOTE

In the default configuration, the **aide --init** command checks just a set of directories and files defined in the /etc/aide.conf file. To include additional directories or files in the **AIDE** database, and to change their watched parameters, edit /etc/aide.conf accordingly.

- 3. To start using the database, remove the .new substring from the initial database file name:
 - # mv /var/lib/aide/aide.db.new.gz /var/lib/aide/aide.db.gz
- 4. To change the location of the **AIDE** database, edit the /etc/aide.conf file and modify the **DBDIR** value. For additional security, store the database, configuration, and the /usr/sbin/aide binary file in a secure location such as a read-only media.

7.2. PERFORMING INTEGRITY CHECKS WITH AIDE

Prerequisites

• AIDE is properly installed and its database is initialized. See Installing AIDE

Procedure

1. To initiate a manual check:

aide --check Start timestamp: 2018-07-11 12:41:20 +0200 (AIDE 0.16) AIDE found differences between database and filesystem!! ... [trimmed for clarity]

2. At a minimum, configure the system to run **AIDE** weekly. Optimally, run **AIDE** daily. For example, to schedule a daily execution of **AIDE** at *04:05* a.m. using the **cron** command, add the following line to the /etc/crontab file:

05 4 * * * root /usr/sbin/aide --check

7.3. UPDATING AN AIDE DATABASE

After verifying the changes of your system such as, package updates or configuration files adjustments, Red Hat recommends updating your baseline **AIDE** database.

Prerequisites

• AIDE is properly installed and its database is initialized. See Installing AIDE

Procedure

1. Update your baseline AIDE database:

aide --update

The aide --update command creates the /var/lib/aide/aide.db.new.gz database file.

2. To start using the updated database for integrity checks, remove the **.new** substring from the file name.

7.4. FILE-INTEGRITY TOOLS: AIDE AND IMA

Red Hat Enterprise Linux provides several tools for checking and preserving the integrity of files and directories on your system. The following table helps you decide which tool better fits your scenario.

Table 7.1. Comparison between AIDE and IMA

Question	Advanced Intrusion Detection Environment (AIDE)	Integrity Measurement Architecture (IMA)
What	AIDE is a utility that creates a database of files and directories on the system. This database serves for checking file integrity and detect intrusion detection.	IMA detects if a file is altered by checking file measurement (hash values) compared to previously stored extended attributes.
How	AIDE uses rules to compare the integrity state of the files and directories.	IMA uses file hash values to detect the intrusion.

Question	Advanced Intrusion Detection Environment (AIDE)	Integrity Measurement Architecture (IMA)
Why	Detection - AIDE detects if a file is modified by verifying the rules.	Detection and Prevention - IMA detects and prevents an attack by replacing the extended attribute of a file.
Usage	AIDE detects a threat when the file or directory is modified.	IMA detects a threat when someone tries to alter the entire file.
Extension	AIDE checks the integrity of files and directories on the local system.	IMA ensures security on the local and remote systems.

7.5. ADDITIONAL RESOURCES

- aide(1) man page
- Kernel integrity subsystem

CHAPTER 8. ENCRYPTING BLOCK DEVICES USING LUKS

Disk encryption protects the data on a block device by encrypting it. To access the device's decrypted contents, a user must provide a passphrase or key as authentication. This is particularly important when it comes to mobile computers and removable media: it helps to protect the device's contents even if it has been physically removed from the system. The LUKS format is a default implementation of block device encryption in RHEL.

8.1. LUKS DISK ENCRYPTION

The Linux Unified Key Setup-on-disk-format (LUKS) enables you to encrypt block devices and it provides a set of tools that simplifies managing the encrypted devices. LUKS allows multiple user keys to decrypt a master key, which is used for the bulk encryption of the partition.

RHEL utilizes LUKS to perform block device encryption. By default, the option to encrypt the block device is unchecked during the installation. If you select the option to encrypt your disk, the system prompts you for a passphrase every time you boot the computer. This passphrase "unlocks" the bulk encryption key that decrypts your partition. If you choose to modify the default partition table, you can choose which partitions you want to encrypt. This is set in the partition table settings.

What LUKS does

- LUKS encrypts entire block devices and is therefore well-suited for protecting contents of mobile devices such as removable storage media or laptop disk drives.
- The underlying contents of the encrypted block device are arbitrary, which makes it useful for encrypting swap devices. This can also be useful with certain databases that use specially formatted block devices for data storage.
- LUKS uses the existing device mapper kernel subsystem.
- LUKS provides passphrase strengthening, which protects against dictionary attacks.
- LUKS devices contain multiple key slots, allowing users to add backup keys or passphrases.

What LUKS does not do

- Disk-encryption solutions like LUKS protect the data only when your system is off. Once the system is on and LUKS has decrypted the disk, the files on that disk are available to anyone who would normally have access to them.
- LUKS is not well-suited for scenarios that require many users to have distinct access keys to the same device. The LUKS1 format provides eight key slots, LUKS2 up to 32 key slots.
- LUKS is not well-suited for applications requiring file-level encryption.

Ciphers

The default cipher used for LUKS is **aes-xts-plain64**. The default key size for LUKS is 512 bits. The default key size for LUKS with **Anaconda** (XTS mode) is 512 bits. Ciphers that are available are:

- AES Advanced Encryption Standard
- Twofish (a 128-bit block cipher)
- Serpent

Additional resources

- LUKS Project Home Page
- LUKS On-Disk Format Specification
- FIPS PUB 197

8.2. LUKS VERSIONS IN RHEL

In RHEL, the default format for LUKS encryption is LUKS2. The legacy LUKS1 format remains fully supported and it is provided as a format compatible with earlier RHEL releases.

The LUKS2 format is designed to enable future updates of various parts without a need to modify binary structures. LUKS2 internally uses JSON text format for metadata, provides redundancy of metadata, detects metadata corruption and allows automatic repairs from a metadata copy.



IMPORTANT

Do not use LUKS2 in systems that must be compatible with legacy systems that support only LUKS1. Note that RHEL 7 supports the LUKS2 format since version 7.6.



WARNING

LUKS2 and LUKS1 use different commands to encrypt the disk. Using the wrong command for a LUKS version might cause data loss.

LUKS version	Encryption command
LUKS2	cryptsetup reencrypt
LUKS1	cryptsetup-reencrypt

Online re-encryption

The LUKS2 format supports re-encrypting encrypted devices while the devices are in use. For example, you do not have to unmount the file system on the device to perform the following tasks:

- Change the volume key
- Change the encryption algorithm

When encrypting a non-encrypted device, you must still unmount the file system. You can remount the file system after a short initialization of the encryption.

The LUKS1 format does not support online re-encryption.

Conversion

The LUKS2 format is inspired by LUKS1. In certain situations, you can convert LUKS1 to LUKS2. The conversion is not possible specifically in the following scenarios:

- A LUKS1 device is marked as being used by a Policy-Based Decryption (PBD Clevis) solution.
 The cryptsetup tool refuses to convert the device when some luksmeta metadata are detected.
- A device is active. The device must be in the inactive state before any conversion is possible.

8.3. OPTIONS FOR DATA PROTECTION DURING LUKS2 RE-ENCRYPTION

LUKS2 provides several options that prioritize performance or data protection during the re-encryption process:

checksum

This is the default mode. It balances data protection and performance.

This mode stores individual checksums of the sectors in the re-encryption area, so the recovery process can detect which sectors LUKS2 already re-encrypted. The mode requires that the block device sector write is atomic.

journal

That is the safest mode but also the slowest. This mode journals the re-encryption area in the binary area, so LUKS2 writes the data twice.

none

This mode prioritizes performance and provides no data protection. It protects the data only against safe process termination, such as the **SIGTERM** signal or the user pressing **CtrI+C**. Any unexpected system crash or application crash might result in data corruption.

You can select the mode using the **--resilience** option of **cryptsetup**.

If a LUKS2 re-encryption process terminates unexpectedly by force, LUKS2 can perform the recovery in one of the following ways:

- Automatically, during the next LUKS2 device open action. This action is triggered either by the
 cryptsetup open command or by attaching the device with systemd-cryptsetup.
- Manually, by using the **cryptsetup repair** command on the LUKS2 device.

8.4. ENCRYPTING EXISTING DATA ON A BLOCK DEVICE USING LUKS2

This procedure encrypts existing data on a not yet encrypted device using the LUKS2 format. A new LUKS header is stored in the head of the device.

Prerequisites

- The block device contains a file system.
- You have backed up your data.



WARNING

You might lose your data during the encryption process: due to a hardware, kernel, or human failure. Ensure that you have a reliable backup before you start encrypting the data.

Procedure

- 1. Unmount all file systems on the device that you plan to encrypt. For example:
 - # umount /dev/sdb1
- 2. Make free space for storing a LUKS header. Choose one of the following options that suits your scenario:
 - In the case of encrypting a logical volume, you can extend the logical volume without resizing the file system. For example:
 - # Ivextend -L+32M vg00/lv00
 - Extend the partition using partition management tools, such as **parted**.
 - Shrink the file system on the device. You can use the **resize2fs** utility for the ext2, ext3, or ext4 file systems. Note that you cannot shrink the XFS file system.
- 3. Initialize the encryption. For example:
 - # cryptsetup reencrypt \ --encrypt \ --init-only \ --reduce-device-size 32M \ /dev/sdb1 sdb1_encrypted

The command asks you for a passphrase and starts the encryption process.

- 4. Mount the device:
 - # mount /dev/mapper/sdb1_encrypted /mnt/sdb1_encrypted
- 5. Start the online encryption:
 - # cryptsetup reencrypt --resume-only /dev/sdb1

Additional resources

cryptsetup(8), Ivextend(8), resize2fs(8), and parted(8) man pages

8.5. ENCRYPTING EXISTING DATA ON A BLOCK DEVICE USING LUKS2 WITH A DETACHED HEADER

This procedure encrypts existing data on a block device without creating free space for storing a LUKS header. The header is stored in a detached location, which also serves as an additional layer of security. The procedure uses the LUKS2 encryption format.

Prerequisites

- The block device contains a file system.
- You have backed up your data.



WARNING

You might lose your data during the encryption process: due to a hardware, kernel, or human failure. Ensure that you have a reliable backup before you start encrypting the data.

Procedure

- 1. Unmount all file systems on the device. For example:
 - # umount /dev/sdb1
- 2. Initialize the encryption:

cryptsetup reencrypt \ --encrypt \ --init-only \ --header /path/to/header \ /dev/sdb1 sdb1_encrypted

Replace /path/to/header with a path to the file with a detached LUKS header. The detached LUKS header has to be accessible so that the encrypted device can be unlocked later.

The command asks you for a passphrase and starts the encryption process.

- 3. Mount the device:
 - # mount /dev/mapper/sdb1_encrypted /mnt/sdb1_encrypted
- 4. Start the online encryption:
 - # cryptsetup reencrypt --resume-only --header /path/to/header /dev/sdb1

Additional resources

cryptsetup(8) man page

8.6. ENCRYPTING A BLANK BLOCK DEVICE USING LUKS2

This procedure provides information about encrypting a blank block device using the LUKS2 format.

Prerequisites

• A blank block device.

Procedure

- 1. Setup a partition as an encrypted LUKS partition:
 - # cryptsetup luksFormat /dev/sdb1
- 2. Open an encrypted LUKS partition:
 - # cryptsetup open /dev/sdb1 sdb1_encrypted

This unlocks the partition and maps it to a new device using the device mapper. This alerts kernel that **device** is an encrypted device and should be addressed through LUKS using the /dev/mapper/device_mapped_name so as not to overwrite the encrypted data.

- 3. To write encrypted data to the partition, it must be accessed through the device mapped name. To do this, you must create a file system. For example:
 - # mkfs -t ext4 /dev/mapper/sdb1_encrypted
- 4. Mount the device:
 - # mount /dev/mapper/sdb1_encrypted mount-point

Additional resources

• cryptsetup(8) man page

CHAPTER 9. CONFIGURING AUTOMATED UNLOCKING OF ENCRYPTED VOLUMES USING POLICY-BASED DECRYPTION

The Policy-Based Decryption (PBD) is a collection of technologies that enable unlocking encrypted root and secondary volumes of hard drives on physical and virtual machines. PBD uses a variety of unlocking methods, such as user passwords, a Trusted Platform Module (TPM) device, a PKCS #11 device connected to a system, for example, a smart card, or a special network server.

PBD allows combining different unlocking methods into a policy, which makes it possible to unlock the same volume in different ways. The current implementation of the PBD in Red Hat Enterprise Linux consists of the Clevis framework and plug-ins called *pins*. Each pin provides a separate unlocking capability. Currently, the following pins are available:


- tang allows volumes to be unlocked using a network server
- tpm2 allows volumes to be unlocked using a TPM2 policy

The Network Bound Disc Encryption (NBDE) is a subcategory of PBD that allows binding encrypted volumes to a special network server. The current implementation of the NBDE includes a Clevis pin for the Tang server and the Tang server itself.

9.1. NETWORK-BOUND DISK ENCRYPTION

In Red Hat Enterprise Linux, NBDE is implemented through the following components and technologies:

Figure 9.1. NBDE scheme when using a LUKS1-encrypted volume. The luksmeta package is not used for LUKS2 volumes.

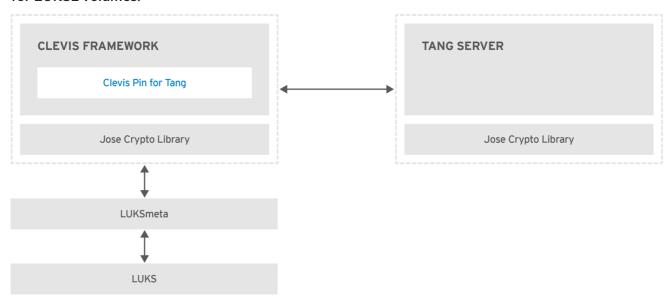

RHEL_453350_0717

Tang is a server for binding data to network presence. It makes a system containing your data available when the system is bound to a certain secure network. Tang is stateless and does not require TLS or authentication. Unlike escrow-based solutions, where the server stores all encryption keys and has knowledge of every key ever used, Tang never interacts with any client keys, so it never gains any identifying information from the client.

Clevis is a pluggable framework for automated decryption. In NBDE, Clevis provides automated unlocking of LUKS volumes. The **clevis** package provides the client side of the feature.

A *Clevis pin* is a plug-in into the Clevis framework. One of such pins is a plug-in that implements interactions with the NBDE server – Tang.

Clevis and Tang are generic client and server components that provide network-bound encryption. In Red Hat Enterprise Linux, they are used in conjunction with LUKS to encrypt and decrypt root and non-root storage volumes to accomplish Network-Bound Disk Encryption.

Both client- and server-side components use the José library to perform encryption and decryption operations.

When you begin provisioning NBDE, the Clevis pin for Tang server gets a list of the Tang server's advertised asymmetric keys. Alternatively, since the keys are asymmetric, a list of Tang's public keys can be distributed out of band so that clients can operate without access to the Tang server. This mode is called *offline provisioning*.

The Clevis pin for Tang uses one of the public keys to generate a unique, cryptographically-strong encryption key. Once the data is encrypted using this key, the key is discarded. The Clevis client should store the state produced by this provisioning operation in a convenient location. This process of encrypting data is the *provisioning step*.

The LUKS version 2 (LUKS2) is the default disk-encryption format in RHEL, hence, the provisioning state for NBDE is stored as a token in a LUKS2 header. The leveraging of provisioning state for NBDE by the **luksmeta** package is used only for volumes encrypted with LUKS1.

The Clevis pin for Tang supports both LUKS1 and LUKS2 without specification need. Clevis can encrypt plain-text files but you have to use the **cryptsetup** tool for encrypting block devices. See the Encrypting block devices using LUKS for more information.

When the client is ready to access its data, it loads the metadata produced in the provisioning step and it responds to recover the encryption key. This process is the *recovery step*.

In NBDE, Clevis binds a LUKS volume using a pin so that it can be automatically unlocked. After successful completion of the binding process, the disk can be unlocked using the provided Dracut unlocker.



NOTE

If the **kdump** kernel crash dumping mechanism is set to save the content of the system memory to a LUKS-encrypted device, you are prompted for entering a password during the second kernel boot.

9.2. INSTALLING AN ENCRYPTION CLIENT - CLEVIS

Use this procedure to deploy and start using the Clevis pluggable framework on your system.

Procedure

- 1. To install Clevis and its pins on a system with an encrypted volume:
 - # dnf install clevis
- 2. To decrypt data, use a **clevis decrypt** command and provide a cipher text in the JSON Web Encryption (JWE) format, for example:

\$ clevis decrypt < secret.jwe

Additional resources

- clevis(1) man page
- Built-in CLI help after entering the **clevis** command without any argument:

\$ clevis Usage: clevis COMMAND [OPTIONS]

clevis decrypt
clevis encrypt sss
clevis encrypt tang
clevis encrypt tang
clevis encrypt tym2
clevis luks bind
clevis luks list

Decrypts using the policy defined at encryption time
Encrypts using a Shamir's Secret Sharing policy
Encrypts using a Tang binding server policy
Encrypts using a TPM2.0 chip binding policy
Binds a LUKS device using the specified policy
Lists pins bound to a LUKSv1 or LUKSv2 device

clevis luks pass Returns the LUKS passphrase used for binding a particular slot.

clevis luks regen Regenerate LUKS metadata

clevis luks report Report any key rotation on the server side clevis luks unbind Unbinds a pin bound to a LUKS volume

clevis luks unlock Unlocks a LUKS volume

9.3. DEPLOYING A TANG SERVER WITH SELINUX IN ENFORCING MODE

Use this procedure to deploy a Tang server running on a custom port as a confined service in SELinux enforcing mode.

Prerequisites

• The **policycoreutils-python-utils** package and its dependencies are installed.

Procedure

- 1. To install the **tang** package and its dependencies, enter the following command as **root**:
 - # dnf install tang
- 2. Pick an unoccupied port, for example, 7500/tcp, and allow the **tangd** service to bind to that port:
 - # semanage port -a -t tangd_port_t -p tcp 7500

Note that a port can be used only by one service at a time, and thus an attempt to use an already occupied port implies the **ValueError: Port already defined** error message.

3. Open the port in the firewall:

firewall-cmd --add-port=7500/tcp # firewall-cmd --runtime-to-permanent

4. Enable the tangd service:

systemctl enable tangd.socket

5. Create an override file:

systemctl edit tangd.socket

6. In the following editor screen, which opens an empty **override.conf** file located in the /etc/systemd/system/tangd.socket.d/ directory, change the default port for the Tang server from 80 to the previously picked number by adding the following lines:

[Socket] ListenStream= ListenStream=7500

Save the file and exit the editor.

- 7. Reload the changed configuration:
 - # systemctl daemon-reload
- 8. Check that your configuration is working:

systemctl show tangd.socket -p Listen Listen=[::]:7500 (Stream)

9. Start the tangd service:

systemctl start tangd.socket

Because **tangd** uses the **systemd** socket activation mechanism, the server starts as soon as the first connection comes in. A new set of cryptographic keys is automatically generated at the first start. To perform cryptographic operations such as manual key generation, use the **jose** utility.

Additional resources

 tang(8), semanage(8), firewall-cmd(1), jose(1), systemd.unit(5), and systemd.socket(5) man pages

9.4. ROTATING TANG SERVER KEYS AND UPDATING BINDINGS ON CLIENTS

Use the following steps to rotate your Tang server keys and update existing bindings on clients. The precise interval at which you should rotate them depends on your application, key sizes, and institutional policy.

Alternatively, you can rotate Tang keys by using the **nbde_server** RHEL system role. See Using the nbde_server system role for setting up multiple Tang servers for more information.

Prerequisites

- A Tang server is running.
- The **clevis** and **clevis-luks** packages are installed on your clients.

Procedure

1. Rename all keys in the /var/db/tang key database directory to have a leading . to hide them from advertisement. Note that the file names in the following example differs from unique file names in the key database directory of your Tang server:

```
# cd /var/db/tang
# ls -l
-rw-r--r--. 1 root root 349 Feb 7 14:55 UV6dqXSwe1bRKG3KbJmdiR020hY.jwk
-rw-r--r--. 1 root root 354 Feb 7 14:55 y9hxLTQSiSB5jSEGWnjhY8fDTJU.jwk
# mv UV6dqXSwe1bRKG3KbJmdiR020hY.jwk .UV6dqXSwe1bRKG3KbJmdiR020hY.jwk
# mv y9hxLTQSiSB5jSEGWnjhY8fDTJU.jwk .y9hxLTQSiSB5jSEGWnjhY8fDTJU.jwk
```

2. Check that you renamed and therefore hid all keys from the Tang server advertisement:

```
# Is -I
total 0
```

3. Generate new keys using the /usr/libexec/tangd-keygen command in /var/db/tang on the Tang server:

```
# /usr/libexec/tangd-keygen /var/db/tang
# ls /var/db/tang
3ZWS6-cDrCG61UPJS2BMmPU4l54.jwk zyLuX6hijUy_PSeUEFDi7hi38.jwk
```

4. Check that your Tang server advertises the signing key from the new key pair, for example:

```
# tang-show-keys 7500
3ZWS6-cDrCG61UPJS2BMmPU4I54
```

5. On your NBDE clients, use the **clevis luks report** command to check if the keys advertised by the Tang server remains the same. You can identify slots with the relevant binding using the **clevis luks list** command, for example:

```
# clevis luks list -d /dev/sda2
1: tang '{"url":"http://tang.srv"}'
# clevis luks report -d /dev/sda2 -s 1
...
Report detected that some keys were rotated.
Do you want to regenerate luks metadata with "clevis luks regen -d /dev/sda2 -s 1"? [ynYN]
```

6. To regenerate LUKS metadata for the new keys either press **y** to the prompt of the previous command, or use the **clevis luks regen** command:

```
# clevis luks regen -d /dev/sda2 -s 1
```

7. When you are sure that all old clients use the new keys, you can remove the old keys from the Tang server, for example:

```
# cd /var/db/tang
# rm .*.jwk
```



WARNING

Removing the old keys while clients are still using them can result in data loss. If you accidentally remove such keys, use the **clevis luks regen** command on the clients, and provide your LUKS password manually.

Additional resources

 tang-show-keys(1), clevis-luks-list(1), clevis-luks-report(1), and clevis-luks-regen(1) man pages

9.5. CONFIGURING AUTOMATED UNLOCKING USING A TANG KEY IN THE WEB CONSOLE

Configure automated unlocking of a LUKS-encrypted storage device using a key provided by a Tang server.

Prerequisites


- The RHEL 9 web console has been installed. For details, see Installing the web console.
- The **cockpit-storaged** package is installed on your system.
- The **cockpit.socket** service is running at port 9090.
- The clevis, tang, and clevis-dracut packages are installed.
- A Tang server is running.

Procedure

- 1. Open the RHEL web console by entering the following address in a web browser:
 - https://*localhost*:9090


Replace the *localhost* part by the remote server's host name or IP address when you connect to a remote system.

- 2. Provide your credentials and click **Storage**. Select an encrypted device and click **Encryption** in the **Content** part:
- 3. Click + in the **Keys** section to add a Tang key:

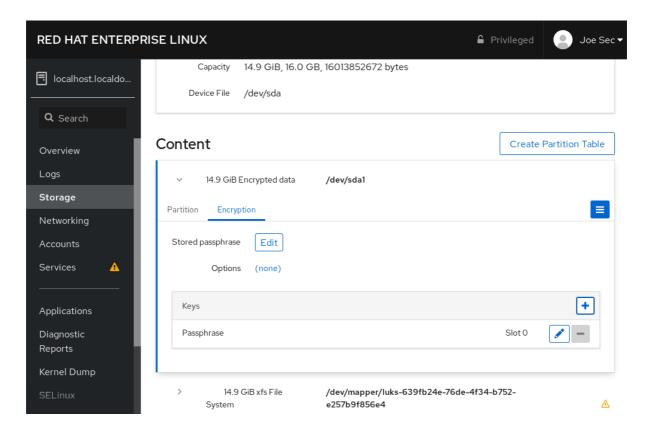

4. Provide the address of your Tang server and a password that unlocks the LUKS-encrypted device. Click **Add** to confirm:

Add Key

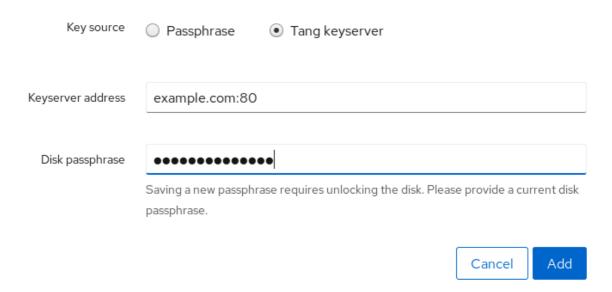

5. The following dialog window provides a command to verify that the key hash matches.

You can obtain the key hash using the following command on the Tang server running on the port 7500:

tang-show-keys 7500 3ZWS6-cDrCG61UPJS2BMmPU4I54

1. Click **Trust key** when the key hashes in the web console and in the output of previously listed commands are the same:

Verify key

Make sure the key hash from the Tang server matches:

3ZWS6-cDrCG61UPJS2BMmPU4I54

```
Manually check with SSH: ssh localhost tang-show-keys 7500

If tang-show-keys is not available, run the following:

ssh localhost "curl -s localhost:7500/adv |
   jose fmt -j- -g payload -y -o- |
   jose jwk use -i- -r -u verify -o- |
   jose jwk thp -i-"


Cancel Trust key
```

2. To enable the early boot system to process the disk binding, click **Terminal** at the bottom of the left navigation bar and enter the following commands:

```
# dnf install clevis-dracut
# grubby --update-kernel=ALL --args="rd.neednet=1"
# dracut -fv --regenerate-all
```

Verification

1. Check that the newly added Tang key is now listed in the **Keys** section with the **Keyserver** type:

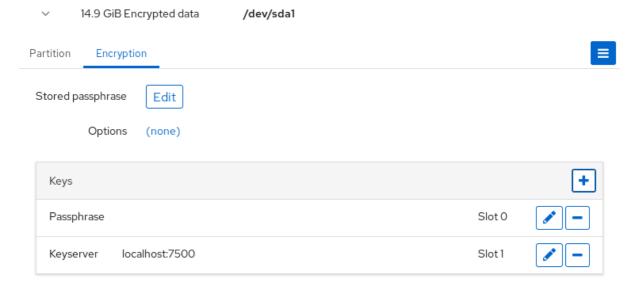

2. Verify that the bindings are available for the early boot, for example:

Isinitrd | grep clevis clevis

```
clevis-pin-sss
clevis-pin-tang
clevis-pin-tpm2
-rwxr-xr-x 1 root root 1600 Feb 11 16:30 usr/bin/clevis
-rwxr-xr-x 1 root root 1654 Feb 11 16:30 usr/bin/clevis-decrypt
...
-rwxr-xr-x 2 root root 45 Feb 11 16:30 usr/lib/dracut/hooks/initqueue/settled/60-clevis-hook.sh
-rwxr-xr-x 1 root root 2257 Feb 11 16:30 usr/libexec/clevis-luks-askpass
```

Additional resources

• Getting started using the RHEL web console

9.6. BASIC NBDE AND TPM2 ENCRYPTION-CLIENT OPERATIONS

The Clevis framework can encrypt plain-text files and decrypt both ciphertexts in the JSON Web Encryption (JWE) format and LUKS-encrypted block devices. Clevis clients can use either Tang network servers or Trusted Platform Module 2.0 (TPM 2.0) chips for cryptographic operations.

The following commands demonstrate the basic functionality provided by Clevis on examples containing plain-text files. You can also use them for troubleshooting your NBDE or Clevis+TPM deployments.

Encryption client bound to a Tang server

 To check that a Clevis encryption client binds to a Tang server, use the clevis encrypt tang sub-command:

\$ clevis encrypt tang '{"url":"http://tang.srv:port"}' < input-plain.txt > secret.jwe The advertisement contains the following signing keys:

_Oslk0T-E2l6qjfdDiwVmidoZjA

Do you wish to trust these keys? [ynYN] y

Change the http://tang.srv:port URL in the previous example to match the URL of the server where **tang** is installed. The secret.jwe output file contains your encrypted cipher text in the JWE format. This cipher text is read from the input-plain.txt input file.

Alternatively, if your configuration requires a non-interactive communication with a Tang server without SSH access, you can download an advertisement and save it to a file:

\$ curl -sfg http://tang.srv:port/adv -o adv.jws

Use the advertisement in the adv.jws file for any following tasks, such as encryption of files or messages:

\$ echo 'hello' | clevis encrypt tang '{"url":"http://tang.srv:port","adv":"adv.jws"}'

• To decrypt data, use the **clevis decrypt** command and provide the cipher text (JWE):

\$ clevis decrypt < secret.jwe > output-plain.txt

- -----

Encryption client using TPM 2.0

• To encrypt using a TPM 2.0 chip, use the **clevis encrypt tpm2** sub-command with the only argument in form of the JSON configuration object:

 $\c clevis encrypt tpm2 '{}' < input-plain.txt > secret.jwe$

To choose a different hierarchy, hash, and key algorithms, specify configuration properties, for example:

- \$ clevis encrypt tpm2 '{"hash":"sha1","key":"rsa"}' < input-plain.txt > secret.jwe
- To decrypt the data, provide the ciphertext in the JSON Web Encryption (JWE) format:
 - \$ clevis decrypt < secret.jwe > output-plain.txt

The pin also supports sealing data to a Platform Configuration Registers (PCR) state. That way, the data can only be unsealed if the PCR hashes values match the policy used when sealing.

For example, to seal the data to the PCR with index 0 and 7 for the SHA-1 bank:

\$ clevis encrypt tpm2 '{"pcr_bank":"sha1","pcr_ids":"0,7"}' < input-plain.txt > secret.jwe



WARNING

Hashes in PCRs can be rewritten, and you no longer can unlock your encrypted volume. For this reason, add a strong passphrase that enable you to unlock the encrypted volume manually even when a value in a PCR changes.

If the system cannot automatically unlock your encrypted volume after an upgrade of the **shim-x64** package, follow the steps in the Clevis TPM2 no longer decrypts LUKS devices after a restart KCS article.

Additional resources

- clevis-encrypt-tang(1), clevis-luks-unlockers(7), clevis(1), and clevis-encrypt-tpm2(1) man pages
- **clevis**, **clevis decrypt**, and **clevis encrypt tang** commands without any arguments show the built-in CLI help, for example:

\$ clevis encrypt tang Usage: clevis encrypt tang CONFIG < PLAINTEXT > JWE ...

9.7. CONFIGURING MANUAL ENROLLMENT OF LUKS-ENCRYPTED VOLUMES

Use the following steps to configure unlocking of LUKS-encrypted volumes with NBDE.

Prerequisites

• A Tang server is running and available.

Procedure

1. To automatically unlock an existing LUKS-encrypted volume, install the **clevis-luks** subpackage:

dnf install clevis-luks

2. Identify the LUKS-encrypted volume for PBD. In the following example, the block device is referred as /dev/sda2:

3. Bind the volume to a Tang server using the **clevis luks bind** command:

clevis luks bind -d /dev/sda2 tang '{"url":"http://tang.srv"}'
The advertisement contains the following signing keys:

_Oslk0T-E2l6qjfdDiwVmidoZjA

Do you wish to trust these keys? [ynYN] y You are about to initialize a LUKS device for metadata storage. Attempting to initialize it may result in data loss if data was already written into the LUKS header gap in a different format. A backup is advised before initialization is performed.

Do you wish to initialize /dev/sda2? [yn] y Enter existing LUKS password:

This command performs four steps:

- a. Creates a new key with the same entropy as the LUKS master key.
- b. Encrypts the new key with Clevis.
- c. Stores the Clevis JWE object in the LUKS2 header token or uses LUKSMeta if the non-default LUKS1 header is used.
- d. Enables the new key for use with LUKS.



NOTE

The binding procedure assumes that there is at least one free LUKS password slot. The **clevis luks bind** command takes one of the slots.

- 4. The volume can now be unlocked with your existing password as well as with the Clevis policy.
- 5. To enable the early boot system to process the disk binding, use the **dracut** tool on an already installed system:

dnf install clevis-dracut

In Red Hat Enterprise Linux 9, Clevis produces a generic **initrd** (initial ramdisk) without host-specific configuration options and does not automatically add parameters such as **rd.neednet=1** to the kernel command line. If your configuration relies on a Tang pin that requires network during early boot, use the **--hostonly-cmdline** argument and **dracut** adds **rd.neednet=1** when it detects a Tang binding:

dracut -fv --regenerate-all --hostonly-cmdline

Alternatively, create a .conf file in the /etc/dracut.conf.d/, and add the hostonly_cmdline=yes option to the file, for example:

echo "hostonly_cmdline=yes" > /etc/dracut.conf.d/clevis.conf



NOTE

You can also ensure that networking for a Tang pin is available during early boot by using the **grubby** tool on the system where Clevis is installed:

grubby --update-kernel=ALL --args="rd.neednet=1"

Then you can use dracut without --hostonly-cmdline:

dracut -fv --regenerate-all

Verification

 To verify that the Clevis JWE object is successfully placed in a LUKS header, use the clevis luks list command:

clevis luks list -d /dev/sda2 1: tang '{"url":"http://tang.srv:port"}'



IMPORTANT

To use NBDE for clients with static IP configuration (without DHCP), pass your network configuration to the **dracut** tool manually, for example:

```
# dracut -fv --regenerate-all --kernel-cmdline "ip=192.0.2.10::192.0.2.1:255.255.0::ens3:none"
```

Alternatively, create a .conf file in the /etc/dracut.conf.d/ directory with the static network information. For example:

```
# cat /etc/dracut.conf.d/static_ip.conf
kernel_cmdline="ip=192.0.2.10::192.0.2.1:255.255.255.0::ens3:none"
```

Regenerate the initial RAM disk image:

dracut -fv --regenerate-all

Additional resources

- clevis-luks-bind(1) and dracut.cmdline(7) man pages.
- RHEL Network boot options

9.8. CONFIGURING MANUAL ENROLLMENT OF LUKS-ENCRYPTED VOLUMES USING A TPM 2.0 POLICY

Use the following steps to configure unlocking of LUKS-encrypted volumes by using a Trusted Platform Module 2.0 (TPM 2.0) policy.

Prerequisites

- An accessible TPM 2.0-compatible device.
- A system with the 64-bit Intel or 64-bit AMD architecture.

Procedure

1. To automatically unlock an existing LUKS-encrypted volume, install the clevis-luks subpackage:

dnf install clevis-luks

2. Identify the LUKS-encrypted volume for PBD. In the following example, the block device is referred as /dev/sda2:

3. Bind the volume to a TPM 2.0 device using the **clevis luks bind** command, for example:

clevis luks bind -d /dev/sda2 tpm2 '{"hash":"sha1","key":"rsa"}' ...

Do you wish to initialize /dev/sda2? [yn] y Enter existing LUKS password:

This command performs four steps:

- a. Creates a new key with the same entropy as the LUKS master key.
- b. Encrypts the new key with Clevis.
- c. Stores the Clevis JWE object in the LUKS2 header token or uses LUKSMeta if the non-default LUKS1 header is used.
- d. Enables the new key for use with LUKS.



NOTE

The binding procedure assumes that there is at least one free LUKS password slot. The **clevis luks bind** command takes one of the slots.

Alternatively, if you want to seal data to specific Platform Configuration Registers (PCR) states, add the **pcr_bank** and **pcr_ids** values to the **clevis luks bind** command, for example:

clevis luks bind -d /dev/sda2 tpm2 '{"hash":"sha1","key":"rsa","pcr_bank":"sha1","pcr_ids":"0,1"}'



WARNING

Because the data can only be unsealed if PCR hashes values match the policy used when sealing and the hashes can be rewritten, add a strong passphrase that enable you to unlock the encrypted volume manually when a value in a PCR changes.

If the system cannot automatically unlock your encrypted volume after an upgrade of the **shim-x64** package, follow the steps in the Clevis TPM2 no longer decrypts LUKS devices after a restart KCS article.

- 4. The volume can now be unlocked with your existing password as well as with the Clevis policy.
- 5. To enable the early boot system to process the disk binding, use the **dracut** tool on an already installed system:

dnf install clevis-dracut # dracut -fv --regenerate-all

Verification

 To verify that the Clevis JWE object is successfully placed in a LUKS header, use the clevis luks list command:

```
# clevis luks list -d /dev/sda2
1: tpm2 '{"hash":"sha1","key":"rsa"}'
```

Additional resources

• clevis-luks-bind(1), clevis-encrypt-tpm2(1), and dracut.cmdline(7) man pages

9.9. REMOVING A CLEVIS PIN FROM A LUKS-ENCRYPTED VOLUME MANUALLY

Use the following procedure for manual removing the metadata created by the **clevis luks bind** command and also for wiping a key slot that contains passphrase added by Clevis.



IMPORTANT

The recommended way to remove a Clevis pin from a LUKS-encrypted volume is through the **clevis luks unbind** command. The removal procedure using **clevis luks unbind** consists of only one step and works for both LUKS1 and LUKS2 volumes. The following example command removes the metadata created by the binding step and wipe the key slot 1 on the /dev/sda2 device:

clevis luks unbind -d /dev/sda2 -s 1

Prerequisites

• A LUKS-encrypted volume with a Clevis binding.

Procedure

1. Check which LUKS version the volume, for example /dev/sda2, is encrypted by and identify a slot and a token that is bound to Clevis:

```
# cryptsetup luksDump /dev/sda2
LUKS header information
Version: 2
...
Keyslots: 0: luks2
...
1: luks2
    Key: 512 bits
    Priority: normal
    Cipher: aes-xts-plain64
...
    Tokens: 0: clevis
    Keyslot: 1
...
```

In the previous example, the Clevis token is identified by O and the associated key slot is 1.

2. In case of LUKS2 encryption, remove the token:

cryptsetup token remove --token-id 0 /dev/sda2

3. If your device is encrypted by LUKS1, which is indicated by the Version: 1 string in the output of the cryptsetup luksDump command, perform this additional step with the luksmeta wipe command:

luksmeta wipe -d /dev/sda2 -s 1

4. Wipe the key slot containing the Clevis passphrase:

cryptsetup luksKillSlot /dev/sda2 1

Additional resources

• clevis-luks-unbind(1), cryptsetup(8), and luksmeta(8) man pages

9.10. CONFIGURING AUTOMATED ENROLLMENT OF LUKS-ENCRYPTED VOLUMES USING KICKSTART

Follow the steps in this procedure to configure an automated installation process that uses Clevis for the enrollment of LUKS-encrypted volumes.

Procedure

1. Instruct Kickstart to partition the disk such that LUKS encryption has enabled for all mount points, other than /boot, with a temporary password. The password is temporary for this step of the enrollment process.

```
part /boot --fstype="xfs" --ondisk=vda --size=256
part / --fstype="xfs" --ondisk=vda --grow --encrypted --passphrase=temppass
```

Note that OSPP-compliant systems require a more complex configuration, for example:

```
part /boot --fstype="xfs" --ondisk=vda --size=256
part / --fstype="xfs" --ondisk=vda --size=2048 --encrypted --passphrase=temppass
part /var --fstype="xfs" --ondisk=vda --size=1024 --encrypted --passphrase=temppass
part /tmp --fstype="xfs" --ondisk=vda --size=1024 --encrypted --passphrase=temppass
part /home --fstype="xfs" --ondisk=vda --size=2048 --grow --encrypted --
passphrase=temppass
part /var/log --fstype="xfs" --ondisk=vda --size=1024 --encrypted --passphrase=temppass
part /var/log/audit --fstype="xfs" --ondisk=vda --size=1024 --encrypted --
passphrase=temppass
```

2. Install the related Clevis packages by listing them in the **%packages** section:

%packages clevis-dracut clevis-luks clevis-systemd %end

- 3. Optionally, to ensure that you can unlock the encrypted volume manually when required, add a strong passphrase before you remove the temporary passphrase. See the How to add a passphrase, key, or keyfile to an existing LUKS device article for more information.
- 4. Call **clevis luks bind** to perform binding in the **%post** section. Afterward, remove the temporary password:

```
%post clevis luks bind -y -k - -d /dev/vda2 \ tang '{"url":"http://tang.srv"}' <<< "temppass" cryptsetup luksRemoveKey /dev/vda2 <<< "temppass" dracut -fv --regenerate-all %end
```

If your configuration relies on a Tang pin that requires network during early boot or you use NBDE clients with static IP configurations, you have to modify the **dracut** command as described in Configuring manual enrollment of LUKS-encrypted volumes.

Note that the **-y** option for the **clevis luks bind** command is available from RHEL 8.3. In RHEL 8.2 and older, replace **-y** by **-f** in the **clevis luks bind** command and download the advertisement from the Tang server:

%post curl -sfg http://tang.srv/adv -o adv.jws clevis luks bind -f -k - -d /dev/vda2 \ tang '{"url":"http://tang.srv","adv":"adv.jws"}' <<< "temppass" cryptsetup luksRemoveKey /dev/vda2 <<< "temppass" dracut -fv --regenerate-all %end



WARNING

The **cryptsetup luksRemoveKey** command prevents any further administration of a LUKS2 device on which you apply it. You can recover a removed master key using the **dmsetup** command only for LUKS1 devices.

You can use an analogous procedure when using a TPM 2.0 policy instead of a Tang server.

Additional resources

- clevis(1), clevis-luks-bind(1), cryptsetup(8), and dmsetup(8) man pages
- Installing Red Hat Enterprise Linux 9-beta using Kickstart

9.11. CONFIGURING AUTOMATED UNLOCKING OF A LUKS-ENCRYPTED REMOVABLE STORAGE DEVICE

Use this procedure to set up an automated unlocking process of a LUKS-encrypted USB storage device.

Procedure

- 1. To automatically unlock a LUKS-encrypted removable storage device, such as a USB drive, install the **clevis-udisks2** package:
 - # dnf install clevis-udisks2
- 2. Reboot the system, and then perform the binding step using the **clevis luks bind** command as described in Configuring manual enrollment of LUKS-encrypted volumes, for example:
 - # clevis luks bind -d /dev/sdb1 tang '{"url":"http://tang.srv"}'
- 3. The LUKS-encrypted removable device can be now unlocked automatically in your GNOME desktop session. The device bound to a Clevis policy can be also unlocked by the clevis luks unlock command:
 - # clevis luks unlock -d /dev/sdb1

You can use an analogous procedure when using a TPM 2.0 policy instead of a Tang server.

Additional resources

clevis-luks-unlockers(7) man page

9.12. DEPLOYING HIGH-AVAILABILITY NBDE SYSTEMS

Tang provides two methods for building a high-availability deployment:

Client redundancy (recommended)

Clients should be configured with the ability to bind to multiple Tang servers. In this setup, each Tang server has its own keys and clients can decrypt by contacting a subset of these servers. Clevis already supports this workflow through its **sss** plug-in. Red Hat recommends this method for a high-availability deployment.

Key sharing

For redundancy purposes, more than one instance of Tang can be deployed. To set up a second or any subsequent instance, install the **tang** packages and copy the key directory to the new host using **rsync** over **SSH**. Note that Red Hat does not recommend this method because sharing keys increases the risk of key compromise and requires additional automation infrastructure.

9.12.1. High-available NBDE using Shamir's Secret Sharing

Shamir's Secret Sharing (SSS) is a cryptographic scheme that divides a secret into several unique parts. To reconstruct the secret, a number of parts is required. The number is called threshold and SSS is also referred to as a thresholding scheme.

Clevis provides an implementation of SSS. It creates a key and divides it into a number of pieces. Each piece is encrypted using another pin including even SSS recursively. Additionally, you define the threshold \mathbf{t} . If an NBDE deployment decrypts at least \mathbf{t} pieces, then it recovers the encryption key and the decryption process succeeds. When Clevis detects a smaller number of parts than specified in the threshold, it prints an error message.

9.12.1.1. Example 1: Redundancy with two Tang servers

The following command decrypts a LUKS-encrypted device when at least one of two Tang servers is available:

```
# clevis luks bind -d /dev/sda1 sss '{"t":1,"pins":{"tang":[{"url":"http://tang1.srv"}, {"url":"http://tang2.srv"}]}}'
```

The previous command used the following configuration scheme:

In this configuration, the SSS threshold **t** is set to **1** and the **clevis luks bind** command successfully reconstructs the secret if at least one from two listed **tang** servers is available.

9.12.1.2. Example 2: Shared secret on a Tang server and a TPM device

The following command successfully decrypts a LUKS-encrypted device when both the **tang** server and the **tpm2** device are available:

```
# clevis luks bind -d /dev/sda1 sss '{"t":2,"pins":{"tang":[{"url":"http://tang1.srv"}], "tpm2": {"pcr_ids":"0,7"}}}'
```

The configuration scheme with the SSS threshold 't' set to '2' is now:

```
{
    "t":2,
    "pins":{
        "tang":[
            {
                 "url":"http://tang1.srv"
            }
        ],
        "tpm2":{
                 "pcr_ids":"0,7"
        }
    }
}
```

Additional resources

 tang(8) (section High Availability), clevis(1) (section Shamir's Secret Sharing), and clevisencrypt-sss(1) man pages

9.13. DEPLOYMENT OF VIRTUAL MACHINES IN A NBDE NETWORK

The **clevis luks bind** command does not change the LUKS master key. This implies that if you create a LUKS-encrypted image for use in a virtual machine or cloud environment, all the instances that run this image will share a master key. This is extremely insecure and should be avoided at all times.

This is not a limitation of Clevis but a design principle of LUKS. If you wish to have encrypted root volumes in a cloud, you need to make sure that you perform the installation process (usually using Kickstart) for each instance of Red Hat Enterprise Linux in a cloud as well. The images cannot be shared without also sharing a LUKS master key.

If you intend to deploy automated unlocking in a virtualized environment, Red Hat strongly recommends that you use systems such as lorax or virt-install together with a Kickstart file (see Configuring automated enrollment of LUKS-encrypted volumes using Kickstart) or another automated provisioning tool to ensure that each encrypted VM has a unique master key.



NOTE

Automated unlocking with a TPM 2.0 policy is not supported in a virtual machine.

Additional resources

• clevis-luks-bind(1) man page

9.14. BUILDING AUTOMATICALLY-ENROLLABLE VM IMAGES FOR CLOUD ENVIRONMENTS USING NBDE

Deploying automatically-enrollable encrypted images in a cloud environment can provide a unique set of challenges. Like other virtualization environments, it is recommended to reduce the number of instances started from a single image to avoid sharing the LUKS master key.

Therefore, the best practice is to create customized images that are not shared in any public repository and that provide a base for the deployment of a limited amount of instances. The exact number of instances to create should be defined by deployment's security policies and based on the risk tolerance associated with the LUKS master key attack vector.

To build LUKS-enabled automated deployments, systems such as Lorax or virt-install together with a Kickstart file should be used to ensure master key uniqueness during the image building process.

Cloud environments enable two Tang server deployment options which we consider here. First, the Tang server can be deployed within the cloud environment itself. Second, the Tang server can be deployed outside of the cloud on independent infrastructure with a VPN link between the two infrastructures.

Deploying Tang natively in the cloud does allow for easy deployment. However, given that it shares infrastructure with the data persistence layer of ciphertext of other systems, it may be possible for both the Tang server's private key and the Clevis metadata to be stored on the same physical disk. Access to this physical disk permits a full compromise of the ciphertext data.



IMPORTANT

For this reason, Red Hat strongly recommends maintaining a physical separation between the location where the data is stored and the system where Tang is running. This separation between the cloud and the Tang server ensures that the Tang server's private key cannot be accidentally combined with the Clevis metadata. It also provides local control of the Tang server if the cloud infrastructure is at risk.

9.15. DEPLOYING TANG AS A CONTAINER

The **rhel9-tang** container image provides Tang-server decryption capabilities for Clevis clients that run either in OpenShift Container Platform (OCP) clusters or in separate virtual machines.

Prerequisites

- The **podman** package and its dependencies are installed on the system.
- You have logged in on the registry.redhat.io container catalog using the podman login registry.redhat.io command. See Red Hat Container Registry Authentication for more information.
- The Clevis client is installed on systems containing LUKS-encrypted volumes that you want to automatically unlock by using a Tang server.

Procedure

- 1. Pull the **rhel9-tang** container image from the **registry.redhat.io** registry:
 - # podman pull registry.redhat.io/rhel9/rhel9-tang
- 2. Run the container, specify its port, and specify the path to the Tang keys. The previous example runs the **rhel9-tang** container, specifies the port *7500*, and indicates a path to the Tang keys of the /**var/db/tang** directory:

podman run -d -p *7500*:_7500_ -v tang-keys:/var/db/tang --name tang registry.redhat.io/rhel{ProductNumber}/rhel{ProductNumber}-tang

Note that Tang uses port 80 by default but this may collide with other services such as the Apache HTTP server.

3. [Optional] For increased security, rotate the Tang keys periodically. You can use the **tangd-rotate-keys** script, for example:

podman run --rm -v tang-keys:/var/db/tang

 $registry.red hat. io/rhel \{Product Number\}/rhel \{Product Number\}-tang\ tangd-rotate-keys\ -v\ -d\ /var/db/tang\ -v\ -d\ /var/db/ta$

Rotated key 'rZAMKAseaXBe0rcKXL1hCClq-DY.jwk' -> .'rZAMKAseaXBe0rcKXL1hCClq-DY.jwk'

Rotated key 'x1Alpc6WmnCU-CabD8_4q18vDuw.jwk' -> .'x1Alpc6WmnCU-CabD8 4q18vDuw.jwk'

Created new key GrMMX WfdqomIU 4RyjpcdIXb0E.jwk

Created new key dTTfn17sZZqVAp80u3ygFDHtjk.jwk

Keys rotated successfully.

Verification

 On a system that contains LUKS-encrypted volumes for automated unlocking by the presence of the Tang server, check that the Clevis client can encrypt and decrypt a plain-text message using Tang:

echo test | clevis encrypt tang '{"url":"http://localhost:_7500_"}' | clevis decrypt The advertisement contains the following signing keys:

x1Alpc6WmnCU-CabD8 4q18vDuw

Do you wish to trust these keys? [ynYN] y test

The previous example command shows the **test** string at the end of its output when a Tang server is available on the *localhost* URL and communicates through port *7500*.

Additional resources

podman(1), clevis(1), and tang(8) man pages

9.16. INTRODUCTION TO THE CLEVIS AND TANG SYSTEM ROLES

RHEL System Roles is a collection of Ansible roles and modules that provide a consistent configuration interface to remotely manage multiple RHEL systems.

You can use Ansible roles for automated deployments of Policy-Based Decryption (PBD) solutions using Clevis and Tang. The **rhel-system-roles** package contains these system roles, the related examples, and also the reference documentation.

The **nbde_client** System Role enables you to deploy multiple Clevis clients in an automated way. Note that the **nbde_client** role supports only Tang bindings, and you cannot use it for TPM2 bindings at the moment.

The **nbde_client** role requires volumes that are already encrypted using LUKS. This role supports to bind a LUKS-encrypted volume to one or more Network-Bound (NBDE) servers - Tang servers. You can either preserve the existing volume encryption with a passphrase or remove it. After removing the passphrase, you can unlock the volume only using NBDE. This is useful when a volume is initially encrypted using a temporary key or password that you should remove after the system you provision the system.

If you provide both a passphrase and a key file, the role uses what you have provided first. If it does not find any of these valid, it attempts to retrieve a passphrase from an existing binding.

PBD defines a binding as a mapping of a device to a slot. This means that you can have multiple bindings for the same device. The default slot is slot 1.

The **nbde_client** role provides also the **state** variable. Use the **present** value for either creating a new binding or updating an existing one. Contrary to a **clevis luks bind** command, you can use **state: present** also for overwriting an existing binding in its device slot. The **absent** value removes a specified binding.

Using the **nbde_server** System Role, you can deploy and manage a Tang server as part of an automated disk encryption solution. This role supports the following features:

Rotating Tang keys

Deploying and backing up Tang keys

Additional resources

- For a detailed reference on Network-Bound Disk Encryption (NBDE) role variables, install the rhel-system-roles package, and see the README.md and README.html files in the /usr/share/doc/rhel-system-roles/nbde_client/ and /usr/share/doc/rhel-system-roles/nbde_server/ directories.
- For example system-roles playbooks, install the **rhel-system-roles** package, and see the /usr/share/ansible/roles/rhel-system-roles.nbde_server/examples/ directories.
- For more information on RHEL System Roles, see Introduction to RHEL System Roles

9.17. USING THE NBDE_SERVER SYSTEM ROLE FOR SETTING UP MULTIPLE TANG SERVERS

Follow the steps to prepare and apply an Ansible playbook containing your Tang server settings.

Prerequisites

- Access and permissions to one or more *managed nodes*, which are systems you want to configure with the **nbde_server** System Role.
- Access and permissions to a control node, which is a system from which Ansible Core configures other systems.

On the control node:

- The **ansible-core** and **rhel-system-roles** packages are installed.
- The **rhel-system-roles** package is installed.
- An inventory file which lists the managed nodes.

Procedure

 Prepare your playbook containing settings for Tang servers. You can either start from the scratch, or use one of the example playbooks from the /usr/share/ansible/roles/rhel-systemroles.nbde_server/examples/ directory.

cp /usr/share/ansible/roles/rhel-system-roles.nbde_server/examples/simple_deploy.yml ./my-tang-playbook.yml

2. Edit the playbook in a text editor of your choice, for example:

vi my-tang-playbook.yml

3. Add the required parameters. The following example playbook ensures deploying of your Tang server and a key rotation:

---- hosts: all nbde_server_rotate_keys: yes

roles:

- linux-system-roles.nbde server
- 4. Apply the finished playbook:

ansible-playbook -i host1,host2,host3 my-tang-playbook.yml



IMPORTANT

To ensure that networking for a Tang pin is available during early boot by using the **grubby** tool on the systems where Clevis is installed:

grubby --update-kernel=ALL --args="rd.neednet=1"

Additional resources

For more information, install the rhel-system-roles package, and see the /usr/share/doc/rhel-system-roles/nbde_server/ and usr/share/ansible/roles/rhel-system-roles.nbde_server/ directories.

9.18. USING THE NBDE_CLIENT SYSTEM ROLE FOR SETTING UP MULTIPLE CLEVIS CLIENTS

Follow the steps to prepare and apply an Ansible playbook containing your Clevis client settings.



NOTE

The **nbde_client** System Role supports only Tang bindings. This means that you cannot use it for TPM2 bindings at the moment.

Prerequisites

- Access and permissions to one or more *managed nodes*, which are systems you want to configure with the **nbde client** System Role.
- Access and permissions to a control node, which is a system from which Ansible Core configures other systems.

On the control node:

- The **ansible-core** and **rhel-system-roles** packages are installed.
- An inventory file which lists the managed nodes.
- Your volumes are already encrypted by LUKS.

Procedure

 Prepare your playbook containing settings for Clevis clients. You can either start from the scratch, or use one of the example playbooks from the /usr/share/ansible/roles/rhel-systemroles.nbde_client/examples/ directory. # cp /usr/share/ansible/roles/rhel-system-roles.nbde_client/examples/high_availability.yml ./my-clevis-playbook.yml

2. Edit the playbook in a text editor of your choice, for example:

vi my-clevis-playbook.yml

3. Add the required parameters. The following example playbook configures Clevis clients for automated unlocking of two LUKS-encrypted volumes by when at least one of two Tang servers is available:

- hosts: all

vars:

nbde_client_bindings:

- device: /dev/rhel/root encryption_key_src: /etc/luks/keyfile servers:
 - http://server1.example.com
 - http://server2.example.com
- device: /dev/rhel/swap encryption_key_src: /etc/luks/keyfile servers:
 - http://server1.example.com
 - http://server2.example.com

roles:

- linux-system-roles.nbde_client
- 4. Apply the finished playbook:

ansible-playbook -i host1,host2,host3 my-clevis-playbook.yml



IMPORTANT

To ensure that networking for a Tang pin is available during early boot by using the **grubby** tool on the system where Clevis is installed:

grubby --update-kernel=ALL --args="rd.neednet=1"

Additional resources

• For details about the parameters and additional information about the **nbde_client** System Role, install the **rhel-system-roles** package, and see the /usr/share/doc/rhel-system-roles/nbde_client/ and /usr/share/ansible/roles/rhel-system-roles.nbde_client/ directories.

9.19. ADDITIONAL RESOURCES

tang(8), clevis(1), jose(1), and clevis-luks-unlockers(7) man pages

• How to set up Network-Bound Disk Encryption with multiple LUKS devices (Clevis + Tang unlocking) Knowledgebase article

CHAPTER 10. AUDITING THE SYSTEM

Audit does not provide additional security to your system; rather, it can be used to discover violations of security policies used on your system. These violations can further be prevented by additional security measures such as SELinux.

10.1. LINUX AUDIT

The Linux Audit system provides a way to track security-relevant information on your system. Based on pre-configured rules, Audit generates log entries to record as much information about the events that are happening on your system as possible. This information is crucial for mission-critical environments to determine the violator of the security policy and the actions they performed.

The following list summarizes some of the information that Audit is capable of recording in its log files:

- Date and time, type, and outcome of an event.
- Sensitivity labels of subjects and objects.
- Association of an event with the identity of the user who triggered the event.
- All modifications to Audit configuration and attempts to access Audit log files.
- All uses of authentication mechanisms, such as SSH, Kerberos, and others.
- Changes to any trusted database, such as /etc/passwd.
- Attempts to import or export information into or from the system.
- Include or exclude events based on user identity, subject and object labels, and other attributes.

The use of the Audit system is also a requirement for a number of security-related certifications. Audit is designed to meet or exceed the requirements of the following certifications or compliance guides:

- Controlled Access Protection Profile (CAPP)
- Labeled Security Protection Profile (LSPP)
- Rule Set Base Access Control (RSBAC)
- National Industrial Security Program Operating Manual (NISPOM)
- Federal Information Security Management Act (FISMA)
- Payment Card Industry Data Security Standard (PCI-DSS)
- Security Technical Implementation Guides (STIG)

Audit has also been:

- Evaluated by National Information Assurance Partnership (NIAP) and Best Security Industries (BSI).
- Certified to LSPP/CAPP/RSBAC/EAL4+ on Red Hat Enterprise Linux 5.
- Certified to Operating System Protection Profile / Evaluation Assurance Level 4+ (OSPP/EAL4+) on Red Hat Enterprise Linux 6.

Use Cases

Watching file access

Audit can track whether a file or a directory has been accessed, modified, executed, or the file's attributes have been changed. This is useful, for example, to detect access to important files and have an Audit trail available in case one of these files is corrupted.

Monitoring system calls

Audit can be configured to generate a log entry every time a particular system call is used. This can be used, for example, to track changes to the system time by monitoring the **settimeofday**, **clock_adjtime**, and other time-related system calls.

Recording commands run by a user

Audit can track whether a file has been executed, so rules can be defined to record every execution of a particular command. For example, a rule can be defined for every executable in the /bin directory. The resulting log entries can then be searched by user ID to generate an audit trail of executed commands per user.

Recording execution of system pathnames

Aside from watching file access which translates a path to an inode at rule invocation, Audit can now watch the execution of a path even if it does not exist at rule invocation, or if the file is replaced after rule invocation. This allows rules to continue to work after upgrading a program executable or before it is even installed.

Recording security events

The **pam_faillock** authentication module is capable of recording failed login attempts. Audit can be set up to record failed login attempts as well and provides additional information about the user who attempted to log in.

Searching for events

Audit provides the **ausearch** utility, which can be used to filter the log entries and provide a complete audit trail based on several conditions.

Running summary reports

The **aureport** utility can be used to generate, among other things, daily reports of recorded events. A system administrator can then analyze these reports and investigate suspicious activity further.

Monitoring network access

The **nftables**, **iptables**, and **ebtables** utilities can be configured to trigger Audit events, allowing system administrators to monitor network access.



NOTE

System performance may be affected depending on the amount of information that is collected by Audit.

10.2. AUDIT SYSTEM ARCHITECTURE

The Audit system consists of two main parts: the user-space applications and utilities, and the kernel-side system call processing. The kernel component receives system calls from user-space applications and filters them through one of the following filters: user, task, fstype, or exit.

Once a system call passes the **exclude** filter, it is sent through one of the aforementioned filters, which, based on the Audit rule configuration, sends it to the Audit daemon for further processing.

The user-space Audit daemon collects the information from the kernel and creates entries in a log file. Other Audit user-space utilities interact with the Audit daemon, the kernel Audit component, or the Audit log files:

- **auditctl** the Audit control utility interacts with the kernel Audit component to manage rules and to control many settings and parameters of the event generation process.
- The remaining Audit utilities take the contents of the Audit log files as input and generate output based on user's requirements. For example, the **aureport** utility generates a report of all recorded events.

In RHEL 9, the Audit dispatcher daemon (**audisp**) functionality is integrated in the Audit daemon (**auditd**). Configuration files of plugins for the interaction of real-time analytical programs with Audit events are located in the /etc/audit/plugins.d/ directory by default.

10.3. CONFIGURING AUDITD FOR A SECURE ENVIRONMENT

The default **auditd** configuration should be suitable for most environments. However, if your environment has to meet strict security policies, the following settings are suggested for the Audit daemon configuration in the /etc/audit/auditd.conf file:

log_file

The directory that holds the Audit log files (usually /var/log/audit/) should reside on a separate mount point. This prevents other processes from consuming space in this directory and provides accurate detection of the remaining space for the Audit daemon.

max_log_file

Specifies the maximum size of a single Audit log file, must be set to make full use of the available space on the partition that holds the Audit log files.

max_log_file_action

Decides what action is taken once the limit set in **max_log_file** is reached, should be set to **keep_logs** to prevent Audit log files from being overwritten.

space_left

Specifies the amount of free space left on the disk for which an action that is set in the **space_left_action** parameter is triggered. Must be set to a number that gives the administrator enough time to respond and free up disk space. The **space_left** value depends on the rate at which the Audit log files are generated.

space_left_action

It is recommended to set the **space_left_action** parameter to **email** or **exec** with an appropriate notification method.

admin space left

Specifies the absolute minimum amount of free space for which an action that is set in the **admin_space_left_action** parameter is triggered, must be set to a value that leaves enough space to log actions performed by the administrator.

admin_space_left_action

Should be set to **single** to put the system into single-user mode and allow the administrator to free up some disk space.

disk_full_action

Specifies an action that is triggered when no free space is available on the partition that holds the Audit log files, must be set to **halt** or **single**. This ensures that the system is either shut down or operating in single-user mode when Audit can no longer log events.

disk_error_action

Specifies an action that is triggered in case an error is detected on the partition that holds the Audit log files, must be set to **syslog**, **single**, or **halt**, depending on your local security policies regarding the handling of hardware malfunctions.

flush

Should be set to **incremental_async**. It works in combination with the **freq** parameter, which determines how many records can be sent to the disk before forcing a hard synchronization with the hard drive. The **freq** parameter should be set to **100**. These parameters assure that Audit event data is synchronized with the log files on the disk while keeping good performance for bursts of activity.

The remaining configuration options should be set according to your local security policy.

10.4. STARTING AND CONTROLLING AUDITD

Once **auditd** is configured, start the service to collect Audit information and store it in the log files. Use the following command as the root user to start **auditd**:

service auditd start

To configure auditd to start at boot time:

systemctl enable auditd

A number of other actions can be performed on **auditd** using the **service auditd** action command, where action can be one of the following:

stop

Stops auditd.

restart

Restarts auditd.

reload or force-reload

Reloads the configuration of auditd from the /etc/audit/auditd.conf file.

rotate

Rotates the log files in the /var/log/audit/ directory.

resume

Resumes logging of Audit events after it has been previously suspended, for example, when there is not enough free space on the disk partition that holds the Audit log files.

condrestart or try-restart

Restarts auditd only if it is already running.

status

Displays the running status of **auditd**.



NOTE

The **service** command is the only way to correctly interact with the **auditd** daemon. You need to use the **service** command so that the **auid** value is properly recorded. You can use the **systemctl** command only for two actions: **enable** and **status**.

10.5. UNDERSTANDING AUDIT LOG FILES

By default, the Audit system stores log entries in the /var/log/audit/audit.log file; if log rotation is enabled, rotated audit.log files are stored in the same directory.

Add the following Audit rule to log every attempt to read or modify the /etc/ssh/sshd_config file:

auditctl -w /etc/ssh/sshd_config -p warx -k sshd_config

If the **auditd** daemon is running, for example, using the following command creates a new event in the Audit log file:

\$ cat /etc/ssh/sshd_config

This event in the **audit.log** file looks as follows:

type=SYSCALL msg=audit(1364481363.243:24287): arch=c000003e syscall=2 success=no exit=-13 a0=7fffd19c5592 a1=0 a2=7fffd19c4b50 a3=a items=1 ppid=2686 pid=3538 auid=1000 uid=1000 gid=1000 euid=1000 suid=1000 fsuid=1000 sgid=1000 fsgid=1000 tty=pts0 ses=1 comm="cat" exe="/bin/cat" subj=unconfined_u:unconfined_r:unconfined_t:s0-s0:c0.c1023 key="sshd_config" type=CWD msg=audit(1364481363.243:24287): cwd="/home/shadowman" type=PATH msg=audit(1364481363.243:24287): item=0 name="/etc/ssh/sshd_config" inode=409248 dev=fd:00 mode=0100600 ouid=0 ogid=0 rdev=00:00 obj=system_u:object_r:etc_t:s0 nametype=NORMAL cap_fp=none cap_fi=none cap_fe=0 cap_fver=0 type=PROCTITLE msg=audit(1364481363.243:24287): proctitle=636174002F6574632F7373682F737368645F636F6E666967

The above event consists of four records, which share the same time stamp and serial number. Records always start with the **type=** keyword. Each record consists of several *name=value* pairs separated by a white space or a comma. A detailed analysis of the above event follows:

First Record

type=SYSCALL

The **type** field contains the type of the record. In this example, the **SYSCALL** value specifies that this record was triggered by a system call to the kernel.

msg=audit(1364481363.243:24287):

The **msg** field records:

- a time stamp and a unique ID of the record in the form **audit(time_stamp:ID)**. Multiple records can share the same time stamp and ID if they were generated as part of the same Audit event. The time stamp is using the Unix time format seconds since 00:00:00 UTC on 1 January 1970.
- various event-specific *name=value* pairs provided by the kernel or user-space applications.

arch=c000003e

The **arch** field contains information about the CPU architecture of the system. The value, **c000003e**, is encoded in hexadecimal notation. When searching Audit records with the **ausearch** command, use the **-i** or **--interpret** option to automatically convert hexadecimal values into their human-readable equivalents. The **c000003e** value is interpreted as **x86_64**.

syscall=2

The **syscall** field records the type of the system call that was sent to the kernel. The value, **2**, can be matched with its human-readable equivalent in the /usr/include/asm/unistd_64.h file. In this case, **2** is the **open** system call. Note that the **ausyscall** utility allows you to convert system call numbers to their human-readable equivalents. Use the **ausyscall --dump** command to display a listing of all system calls along with their numbers. For more information, see the **ausyscall**(8) man page.

success=no

The **success** field records whether the system call recorded in that particular event succeeded or failed. In this case, the call did not succeed.

exit=-13

The **exit** field contains a value that specifies the exit code returned by the system call. This value varies for a different system call. You can interpret the value to its human-readable equivalent with the following command:

ausearch --interpret --exit -13

Note that the previous example assumes that your Audit log contains an event that failed with exit code **-13**.

a0=7fffd19c5592, a1=0, a2=7fffd19c5592, a3=a

The **a0** to **a3** fields record the first four arguments, encoded in hexadecimal notation, of the system call in this event. These arguments depend on the system call that is used; they can be interpreted by the **ausearch** utility.

items=1

The **items** field contains the number of PATH auxiliary records that follow the syscall record.

ppid=2686

The **ppid** field records the Parent Process ID (PPID). In this case, **2686** was the PPID of the parent process such as **bash**.

pid=3538

The **pid** field records the Process ID (PID). In this case, **3538** was the PID of the **cat** process.

auid=1000

The **auid** field records the Audit user ID, that is the loginuid. This ID is assigned to a user upon login and is inherited by every process even when the user's identity changes, for example, by switching user accounts with the **su - john** command.

uid=1000

The **uid** field records the user ID of the user who started the analyzed process. The user ID can be interpreted into user names with the following command: **ausearch -i --uid UID**.

gid=1000

The **gid** field records the group ID of the user who started the analyzed process.

euid=1000

The **euid** field records the effective user ID of the user who started the analyzed process.

suid=1000

The **suid** field records the set user ID of the user who started the analyzed process.

fsuid=1000

The **fsuid** field records the file system user ID of the user who started the analyzed process.

egid=1000

The **egid** field records the effective group ID of the user who started the analyzed process.

sgid=1000

The **sqid** field records the set group ID of the user who started the analyzed process.

fsgid=1000

The **fsgid** field records the file system group ID of the user who started the analyzed process.

tty=pts0

The **tty** field records the terminal from which the analyzed process was invoked.

ses=1

The **ses** field records the session ID of the session from which the analyzed process was invoked.

comm="cat"

The **comm** field records the command-line name of the command that was used to invoke the analyzed process. In this case, the **cat** command was used to trigger this Audit event.

exe="/bin/cat"

The **exe** field records the path to the executable that was used to invoke the analyzed process.

subj=unconfined_u:unconfined_r:unconfined_t:s0-s0:c0.c1023

The **subj** field records the SELinux context with which the analyzed process was labeled at the time of execution.

key="sshd_config"

The **key** field records the administrator-defined string associated with the rule that generated this event in the Audit log.

Second Record

type=CWD

In the second record, the **type** field value is **CWD** – current working directory. This type is used to record the working directory from which the process that invoked the system call specified in the first record was executed.

The purpose of this record is to record the current process's location in case a relative path winds up being captured in the associated PATH record. This way the absolute path can be reconstructed.

msg=audit(1364481363.243:24287)

The **msg** field holds the same time stamp and ID value as the value in the first record. The time stamp is using the Unix time format - seconds since 00:00:00 UTC on 1 January 1970.

cwd="/home/user_name"

The **cwd** field contains the path to the directory in which the system call was invoked.

Third Record

tvpe=PATH

In the third record, the **type** field value is **PATH**. An Audit event contains a **PATH**-type record for every path that is passed to the system call as an argument. In this Audit event, only one path (/etc/ssh/sshd_config) was used as an argument.

msg=audit(1364481363.243:24287):

The **msg** field holds the same time stamp and ID value as the value in the first and second record.

item=0

The **item** field indicates which item, of the total number of items referenced in the **SYSCALL** type record, the current record is. This number is zero-based; a value of **0** means it is the first item.

name="/etc/ssh/sshd_config"

The **name** field records the path of the file or directory that was passed to the system call as an argument. In this case, it was the /etc/ssh/sshd_config file.

inode=409248

The **inode** field contains the inode number associated with the file or directory recorded in this event. The following command displays the file or directory that is associated with the **409248** inode number:

find / -inum 409248 -print /etc/ssh/sshd_config

dev=fd:00

The **dev** field specifies the minor and major ID of the device that contains the file or directory recorded in this event. In this case, the value represents the /dev/fd/0 device.

mode=0100600

The **mode** field records the file or directory permissions, encoded in numerical notation as returned by the **stat** command in the **st_mode** field. See the **stat(2)** man page for more information. In this case, **0100600** can be interpreted as **-rw------**, meaning that only the root user has read and write permissions to the /etc/ssh/sshd_config file.

ouid=0

The **ouid** field records the object owner's user ID.

ogid=0

The **ogid** field records the object owner's group ID.

rdev=00:00

The **rdev** field contains a recorded device identifier for special files only. In this case, it is not used as the recorded file is a regular file.

obj=system_u:object_r:etc_t:s0

The **obj** field records the SELinux context with which the recorded file or directory was labeled at the time of execution.

nametype=NORMAL

The **nametype** field records the intent of each path record's operation in the context of a given syscall.

cap_fp=none

The **cap_fp** field records data related to the setting of a permitted file system-based capability of the file or directory object.

cap_fi=none

The **cap_fi** field records data related to the setting of an inherited file system-based capability of the file or directory object.

cap_fe=0

The **cap_fe** field records the setting of the effective bit of the file system-based capability of the file or directory object.

cap_fver=0

The **cap_fver** field records the version of the file system-based capability of the file or directory object.

Fourth Record

type=PROCTITLE

The **type** field contains the type of the record. In this example, the **PROCTITLE** value specifies that this record gives the full command-line that triggered this Audit event, triggered by a system call to the kernel.

proctitle=636174002F6574632F7373682F737368645F636F6E666967

The **proctitle** field records the full command-line of the command that was used to invoke the analyzed process. The field is encoded in hexadecimal notation to not allow the user to influence the Audit log parser. The text decodes to the command that triggered this Audit event. When searching Audit records with the **ausearch** command, use the **-i** or **--interpret** option to automatically convert hexadecimal values into their human-readable equivalents. The

636174002F6574632F7373682F737368645F636F6E666967 value is interpreted as **cat** /**etc/ssh/sshd_config**.

10.6. USING AUDITCTL FOR DEFINING AND EXECUTING AUDIT RULES

The Audit system operates on a set of rules that define what is captured in the log files. Audit rules can be set either on the command line using the **auditctl** utility or in the /**etc/audit/rules.d**/ directory.

The **auditctl** command enables you to control the basic functionality of the Audit system and to define rules that decide which Audit events are logged.

File-system rules examples

- 1. To define a rule that logs all write access to, and every attribute change of, the /etc/passwd file:
 - # auditctl -w /etc/passwd -p wa -k passwd_changes
- 2. To define a rule that logs all write access to, and every attribute change of, all the files in the /etc/selinux/ directory:
 - # auditctl -w /etc/selinux/ -p wa -k selinux_changes

System-call rules examples

- 1. To define a rule that creates a log entry every time the **adjtimex** or **settimeofday** system calls are used by a program, and the system uses the 64-bit architecture:
 - # auditctl -a always,exit -F arch=b64 -S adjtimex -S settimeofday -k time_change
- 2. To define a rule that creates a log entry every time a file is deleted or renamed by a system user whose ID is 1000 or larger:

auditctl -a always,exit -S unlink -S unlinkat -S rename -S renameat -F auid>=1000 -F auid!=4294967295 -k delete

Note that the **-F auid!=4294967295** option is used to exclude users whose login UID is not set.

Executable-file rules

To define a rule that logs all execution of the /bin/id program, execute the following command:

auditctl -a always,exit -F exe=/bin/id -F arch=b64 -S execve -k execution_bin_id

Additional resources

• audictl(8) man page.

10.7. DEFINING PERSISTENT AUDIT RULES

To define Audit rules that are persistent across reboots, you must either directly include them in the /etc/audit/rules.d/audit.rules file or use the augenrules program that reads rules located in the /etc/audit/rules.d/ directory.

Note that the /etc/audit/audit.rules file is generated whenever the auditd service starts. Files in /etc/audit/rules.d/ use the same auditctl command-line syntax to specify the rules. Empty lines and text following a hash sign (#) are ignored.

Furthermore, you can use the **auditctl** command to read rules from a specified file using the **-R** option, for example:

auditctl -R /usr/share/audit/sample-rules/30-stig.rules

10.8. USING PRE-CONFIGURED RULES FILES

In the /usr/share/audit/sample-rules directory, the audit package provides a set of pre-configured rules files according to various certification standards:

30-nispom.rules

Audit rule configuration that meets the requirements specified in the Information System Security chapter of the National Industrial Security Program Operating Manual.

30-ospp-v42*.rules

Audit rule configuration that meets the requirements defined in the OSPP (Protection Profile for General Purpose Operating Systems) profile version 4.2.

30-pci-dss-v31.rules

Audit rule configuration that meets the requirements set by Payment Card Industry Data Security Standard (PCI DSS) v3.1.

30-stig.rules

Audit rule configuration that meets the requirements set by Security Technical Implementation Guides (STIG).

To use these configuration files, copy them to the /etc/audit/rules.d/ directory and use the augenrules --load command, for example:

cd /usr/share/audit/sample-rules/ # cp 10-base-config.rules 30-stig.rules 31-privileged.rules 99-finalize.rules /etc/audit/rules.d/ # augenrules --load

You can order Audit rules using a numbering scheme. See the /usr/share/audit/sample-rules/README-rules file for more information.

Additional resources

audit.rules(7) man page.

10.9. USING AUGENRULES TO DEFINE PERSISTENT RULES

The **augenrules** script reads rules located in the **/etc/audit/rules.d/** directory and compiles them into an **audit.rules** file. This script processes all files that end with **.rules** in a specific order based on their natural sort order. The files in this directory are organized into groups with the following meanings:

- 10 Kernel and auditctl configuration
- 20 Rules that could match general rules but you want a different match
- 30 Main rules
- 40 Optional rules
- 50 Server-specific rules
- 70 System local rules
- 90 Finalize (immutable)

The rules are not meant to be used all at once. They are pieces of a policy that should be thought out and individual files copied to /etc/audit/rules.d/. For example, to set a system up in the STIG configuration, copy rules 10-base-config, 30-stig, 31-privileged, and 99-finalize.

Once you have the rules in the /etc/audit/rules.d/ directory, load them by running the augenrules script with the --load directive:

```
# augenrules --load
/sbin/augenrules: No change
No rules
enabled 1
failure 1
pid 742
rate_limit 0
...
```

Additional resources

• audit.rules(8) and augenrules(8) man pages.

10.10. DISABLING AUGENRULES

Use the following steps to disable the **augenrules** utility. This switches Audit to use rules defined in the /etc/audit/audit.rules file.

Procedure

- 1. Copy the /usr/lib/systemd/system/auditd.service file to the /etc/systemd/system/ directory:
 - # cp -f /usr/lib/systemd/system/auditd.service /etc/systemd/system/
- 2. Edit the /etc/systemd/system/auditd.service file in a text editor of your choice, for example:

vi /etc/systemd/system/auditd.service

3. Comment out the line containing **augenrules**, and uncomment the line containing the **auditctl** - **R** command:

#ExecStartPost=-/sbin/augenrules --load ExecStartPost=-/sbin/auditctl -R /etc/audit/audit.rules

- 4. Reload the **systemd** daemon to fetch changes in the **auditd.service** file:
 - # systemctl daemon-reload
- 5. Restart the **auditd** service:
 - # service auditd restart

Additional resources

- augenrules(8) and audit.rules(8) man pages.
- Auditd service restart overrides changes made to /etc/audit/audit.rules .

10.11. SETTING UP AUDIT TO MONITOR SOFTWARE UPDATES

You can use the pre-configured rule **44-installers.rules** to configure Audit to monitor the following utilities that install software:

dnf



NOTE

Because **dnf** is a symlink in RHEL, the path in the **dnf** Audit rule must include the target of the symlink. To receive correct Audit events, modify the **44-installers.rules** file by changing the **path=/usr/bin/dnf** path to /usr/bin/dnf-3.

- yum
- pip
- npm
- cpan
- gem
- luarocks

To monitor the **rpm** utility, install the **rpm-plugin-audit** package. Audit will then generate **SOFTWARE_UPDATE** events when it installs or updates a package. You can list these events by entering **ausearch -m SOFTWARE_UPDATE** on the command line.



NOTE

Pre-configured rule files cannot be used on systems with the **ppc64le** and **aarch64** architectures.

Prerequisites

auditd is configured in accordance with the settings provided in Configuring auditd for a secure
environment.

Procedure

- 1. Copy the pre-configured rule file **44-installers.rules** from the /usr/share/audit/sample-rules/ directory to the /etc/audit/rules.d/ directory:
 - # cp /usr/share/audit/sample-rules/44-installers.rules /etc/audit/rules.d/
- 2. Load the audit rules:
 - # augenrules --load

Verification

1. List the loaded rules:

auditctl -I

- -p x-w /usr/bin/dnf-3 -k software-installer
- -p x-w /usr/bin/yum -k software-installer
- -p x-w /usr/bin/pip -k software-installer
- -p x-w /usr/bin/npm -k software-installer
- -p x-w /usr/bin/cpan -k software-installer
- -p x-w /usr/bin/gem -k software-installer
- -p x-w /usr/bin/luarocks -k software-installer
- 2. Perform an installation, for example:
 - # dnf reinstall -y vim-enhanced
- 3. Search the Audit log for recent installation events, for example:

ausearch -ts recent -k software-installer

```
time->Thu Dec 16 10:33:46 2021

type=PROCTITLE msg=audit(1639668826.074:298):
proctitle=2F7573722F6C6962657865632F706C6174666F726D2D707974686F6E002F75737
22F62696E2F646E66007265696E7374616C6C002D790076696D2D656E68616E636564

type=PATH msg=audit(1639668826.074:298): item=2 name="/lib64/ld-linux-x86-64.so.2"
inode=10092 dev=fd:01 mode=0100755 ouid=0 ogid=0 rdev=00:00
obj=system_u:object_r:ld_so_t:s0 nametype=NORMAL cap_fp=0 cap_fi=0 cap_fe=0
cap_fver=0 cap_frootid=0

type=PATH msg=audit(1639668826.074:298): item=1 name="/usr/libexec/platform-python"
inode=4618433 dev=fd:01 mode=0100755 ouid=0 ogid=0 rdev=00:00
obj=system_u:object_r:bin_t:s0 nametype=NORMAL cap_fp=0 cap_fi=0 cap_fe=0
cap_fver=0 cap_frootid=0
```

```
type=PATH msg=audit(1639668826.074:298): item=0 name="/usr/bin/dnf" inode=6886099 dev=fd:01 mode=0100755 ouid=0 ogid=0 rdev=00:00 obj=system_u:object_r:rpm_exec_t:s0 nametype=NORMAL cap_fp=0 cap_fi=0 cap_fe=0 cap_fver=0 cap_frootid=0 type=CWD msg=audit(1639668826.074:298): cwd="/root" type=EXECVE msg=audit(1639668826.074:298): argc=5 a0="/usr/libexec/platform-python" a1="/usr/bin/dnf" a2="reinstall" a3="-y" a4="vim-enhanced" type=SYSCALL msg=audit(1639668826.074:298): arch=c000003e syscall=59 success=yes exit=0 a0=55c437f22b20 a1=55c437f2c9d0 a2=55c437f2aeb0 a3=8 items=3 ppid=5256 pid=5375 auid=0 uid=0 gid=0 euid=0 suid=0 fsuid=0 egid=0 sgid=0 fsgid=0 tty=pts0 ses=3 comm="dnf" exe="/usr/libexec/platform-python3.6" subj=unconfined_u:unconfined_r:unconfined_t:s0-s0:c0.c1023 key="software-installer"
```

10.12. MONITORING USER LOGIN TIMES WITH AUDIT

To monitor which users logged in at specific times, you do not need to configure Audit in any special way. You can use the **ausearch** or **aureport** tools, which provide different ways of presenting the same information.

Prerequisites

• **auditd** is configured in accordance with the settings provided in Configuring auditd for a secure environment.

Procedure

To display user log in times, use any one of the following commands:

• Search the audit log for the **USER_LOGIN** message type:

```
# ausearch -m USER_LOGIN -ts '12/02/2020' '18:00:00' -sv no time->Mon Nov 22 07:33:22 2021 type=USER_LOGIN msg=audit(1637584402.416:92): pid=1939 uid=0 auid=4294967295 ses=4294967295 subj=system_u:system_r:sshd_t:s0-s0:c0.c1023 msg='op=login acct=" (unknown)" exe="/usr/sbin/sshd" hostname=? addr=10.37.128.108 terminal=ssh res=failed'
```

- You can specify the date and time with the -ts option. If you do not use this option, ausearch provides results from today, and if you omit time, ausearch provides results from midnight.
- You can use the **-sv yes** option to filter out successful login attempts and **-sv no** for unsuccessful login attempts.
- Pipe the raw output of the **ausearch** command into the **aulast** utility, which displays the output in a format similar to the output of the **last** command. For example:

```
# ausearch --raw | aulast --stdin

root ssh 10.37.128.108 Mon Nov 22 07:33 - 07:33 (00:00)

root ssh 10.37.128.108 Mon Nov 22 07:33 - 07:33 (00:00)

root ssh 10.22.16.106 Mon Nov 22 07:40 - 07:40 (00:00)

reboot system boot 4.18.0-348.6.el8 Mon Nov 22 07:33
```

• Display the list of login events by using the **aureport** command with the **--login -i** options.

```
# aureport --login -i
```

Login Report

date time auid host term exe success event

- 1. 11/16/2021 13:11:30 root 10.40.192.190 ssh /usr/sbin/sshd yes 6920
- 2. 11/16/2021 13:11:31 root 10.40.192.190 ssh /usr/sbin/sshd yes 6925
- 3. 11/16/2021 13:11:31 root 10.40.192.190 ssh /usr/sbin/sshd yes 6930
- 4. 11/16/2021 13:11:31 root 10.40.192.190 ssh /usr/sbin/sshd yes 6935
- 5. 11/16/2021 13:11:33 root 10.40.192.190 ssh /usr/sbin/sshd yes 6940
- 6. 11/16/2021 13:11:33 root 10.40.192.190 /dev/pts/0 /usr/sbin/sshd yes 6945

Additional resources

- The ausearch(8) man page.
- The aulast(8) man page.
- The aureport(8) man page.

10.13. ADDITIONAL RESOURCES

- The RHEL Audit System Reference Knowledgebase article.
- The Auditd execution options in a container Knowledgebase article.
- The Linux Audit Documentation Project page .
- The audit package provides documentation in the /usr/share/doc/audit/ directory.
- auditd(8), auditctl(8), ausearch(8), audit.rules(7), audispd.conf(5), audispd(8), auditd.conf(5), ausearch-expression(5), aulast(8), aulastlog(8), aureport(8), ausyscall(8), autrace(8), and auvirt(8) man pages.

CHAPTER 11. BLOCKING AND ALLOWING APPLICATIONS USING FAPOLICYD

Setting and enforcing a policy that either allows or denies application execution based on a rule set efficiently prevents the execution of unknown and potentially malicious software.

11.1. INTRODUCTION TO FAPOLICYD

The **fapolicyd** software framework controls the execution of applications based on a user-defined policy. This is one of the most efficient ways to prevent running untrusted and possibly malicious applications on the system.

The **fapolicyd** framework provides the following components:

- fapolicyd service
- fapolicyd command-line utilities
- fapolicyd RPM plugin
- fapolicyd rule language

The administrator can define the **allow** and **deny** execution rules for any application with the possibility of auditing based on a path, hash, MIME type, or trust.

The **fapolicyd** framework introduces the concept of trust. An application is trusted when it is properly installed by the system package manager, and therefore it is registered in the system RPM database. The **fapolicyd** daemon uses the RPM database as a list of trusted binaries and scripts. The **fapolicyd** RPM plugin registers any system update that is handled by either the DNF package manager or the RPM Package Manager. The plugin notifies the **fapolicyd** daemon about changes in this database. Other ways of adding applications require the creation of custom rules and restarting the **fapolicyd** service.

The **fapolicyd** service configuration is located in the /etc/fapolicyd/ directory with the following structure:

- The **fapolicyd.rules** file contains **allow** and **deny** execution rules.
- The **fapolicyd.conf** file contains daemon's configuration options. This file is useful primarily for performance-tuning purposes.

You can use one of the ways for **fapolicyd** integrity checking:

- file-size checking
- comparing SHA-256 hashes
- Integrity Measurement Architecture (IMA) subsystem

By default, **fapolicyd** does no integrity checking. Integrity checking based on the file size is fast, but an attacker can replace the content of the file and preserve its byte size. Computing and checking SHA-256 checksums is more secure, but it affects the performance of the system. The **integrity = ima** option in **fapolicyd.conf** requires support for files extended attributes (also known as *xattr*) on all file systems containing executable files.

Additional resources

- fapolicyd(8), fapolicyd.rules(5), and fapolicyd.conf(5) man pages.
- The Enhancing security with the kernel integrity subsystem chapter in the Managing, monitoring, and updating the kernel document.

11.2. DEPLOYING FAPOLICYD

To deploy the **fapolicyd** framework in RHEL:

Procedure

1. Install the **fapolicyd** package:

dnf install fapolicyd

2. Enable and start the **fapolicyd** service:

systemctl enable --now fapolicyd

Verification

1. Verify that the **fapolicyd** service is running correctly:

systemctl status fapolicyd

• fapolicyd.service - File Access Policy Daemon

Loaded: loaded (/usr/lib/systemd/system/fapolicyd.service; enabled; vendor p> Active: active (running) since Tue 2019-10-15 18:02:35 CEST; 55s ago

Process: 8818 ExecStart=/usr/sbin/fapolicyd (code=exited, status=0/SUCCESS)

Main PID: 8819 (fapolicyd) Tasks: 4 (limit: 11500)

Memory: 78.2M

CGroup: /system.slice/fapolicyd.service —8819 /usr/sbin/fapolicyd

Oct 15 18:02:35 localhost.localdomain systemd[1]: Starting File Access Policy D>

Oct 15 18:02:35 localhost.localdomain fapolicyd[8819]: Initialization of the da>

Oct 15 18:02:35 localhost.localdomain fapolicyd[8819]: Reading RPMDB into memory

Oct 15 18:02:35 localhost.localdomain systemd[1]: Started File Access Policy Da>

Oct 15 18:02:36 localhost.localdomain fapolicyd[8819]: Creating database

2. Log in as a user without root privileges, and check that fapolicyd is working, for example:

\$ cp /bin/ls /tmp

\$ /tmp/ls

bash: /tmp/ls: Operation not permitted

11.3. MARKING FILES AS TRUSTED USING AN ADDITIONAL SOURCE OF TRUST

You can use this procedure for using an additional source of trust for fapolicyd.

The **fapolicyd** framework trusts files contained in the RPM database. The **fapolicyd** framework also supports use of the **/etc/fapolicyd/fapolicyd.trust** plain-text file as a source of trust. You can either modify **fapolicyd.trust** directly with a text editor or through **fapolicyd** CLI commands.



NOTE

Prefer marking files as trusted using **fapolicyd.trust** instead of writing custom **fapolicyd** rules.

Prerequisites

• The **fapolicyd** framework is deployed on your system.

Procedure

1. Copy your custom binary to the required directory, for example:

\$ cp /bin/ls /tmp \$ /tmp/ls

bash: /tmp/ls: Operation not permitted

2. Mark your custom binary as trusted:

fapolicyd-cli --file add /tmp/ls

Note that previous command add the corresponding line to /etc/fapolicyd/fapolicyd.trust.

3. Update the **fapolicyd** database:

fapolicyd-cli --update

4. Restart fapolicyd:

systemctl restart fapolicyd

Verification

1. Check that your custom binary can be now executed, for example:

\$ /tmp/ls ls

Additional resources

• fapolicyd.trust(5) man page.

11.4. ADDING CUSTOM ALLOW AND DENY RULES FOR FAPOLICYD

The default set of rules in the **fapolicyd** package does not affect system functions. For custom scenarios, such as storing binaries and scripts in a non-standard directory or adding applications without the **dnf** or **rpm** installers, you must modify existing or add new rules. The following steps demonstrate adding a new rule to allow a custom binary.

Prerequisites

• The **fapolicyd** framework is deployed on your system.

Procedure

1. Copy your custom binary to the required directory, for example:

\$ cp /bin/ls /tmp \$ /tmp/ls bash: /tmp/ls: Operation not permitted

2. Stop the **fapolicyd** service:

systemctl stop fapolicyd

3. Use debug mode to identify a corresponding rule. Because the output of the **fapolicyd --debug** command is verbose and you can stop it only by pressing **Ctrl+C** or killing the corresponding process, redirect the error output to a file:

```
# fapolicyd --debug 2> fapolicy.output & [1] 51341
```

Alternatively, you can run fapolicyd debug mode in another terminal.

4. Repeat the command that was not permitted:

```
$ /tmp/ls
bash: /tmp/ls: Operation not permitted
```

5. Stop debug mode by resuming it in the foreground and pressing **Ctrl+C**:

```
# fg
fapolicyd --debug
^Cshutting down...
Inter-thread max queue depth 1
Allowed accesses: 2
Denied accesses: 1
[...]
```

Alternatively, kill the process of **fapolicyd** debug mode:

```
# kill 51341
```

6. Find a rule that denies the execution of your application:

```
# cat fapolicy.output
[...]
rule:9 dec=deny_audit perm=execute auid=1000 pid=51362 exe=/usr/bin/bash : file=/tmp/ls
ftype=application/x-executable
[...]
```

7. Add a new **allow** rule *before* the rule that denied the execution of your custom binary in the /etc/fapolicyd/fapolicyd.rules file. The output of the previous command indicated that the rule is the rule number 9 in this example:

allow perm=execute exe=/usr/bin/bash trust=1 : path=/tmp/ls ftype=application/x-executable trust=0

Alternatively, you can allow executions of all binaries in the /tmp directory by adding the following rule in the /etc/fapolicyd/fapolicyd.rules file:

allow perm=execute exe=/usr/bin/bash trust=1 : dir=/tmp/ all trust=0

8. To prevent changes in the content of your custom binary, define the required rule using an SHA-256 checksum:

\$ sha256sum /tmp/ls 780b75c90b2d41ea41679fcb358c892b1251b68d1927c80fbc0d9d148b25e836 Is

Change the rule to the following definition:

allow perm=execute exe=/usr/bin/bash trust=1 : sha256hash=*780b75c90b2d41ea41679fcb358c892b1251b68d1927c80fbc0d9d148b25e836*

9. Start the fapolicyd service:

systemctl start fapolicyd

Verification

1. Check that your custom binary can be now executed, for example:

\$ /tmp/ls

Additional resources

• fapolicyd.trust(5) man page.

11.5. ENABLING FAPOLICYD INTEGRITY CHECKS

By default, **fapolicyd** does not perform integrity checking. You can configure **fapolicyd** to perform integrity checks by comparing either file sizes or SHA-256 hashes. You can also set integrity checks by using the Integrity Measurement Architecture (IMA) subsystem.

Prerequisites

• The **fapolicyd** framework is deployed on your system.

Procedure

1. Open the /etc/fapolicyd/fapolicyd.conf file in a text editor of your choice, for example:

vi /etc/fapolicyd/fapolicyd.conf

2. Change the value of the **integrity** option from **none** to **sha256**, save the file, and exit the editor:

```
integrity = sha256
```

3. Restart the **fapolicyd** service:

systemctl restart fapolicyd

Verification

- 1. Back up the file used for the verification:
 - # cp /bin/more /bin/more.bak
- 2. Change the content of the /bin/more binary:
 - # cat /bin/less > /bin/more
- 3. Use the changed binary as a regular user:

```
# su example.user
$ /bin/more /etc/redhat-release
bash: /bin/more: Operation not permitted
```

4. Revert the changes:

mv -f /bin/more.bak /bin/more

11.6. TROUBLESHOOTING PROBLEMS RELATED TO FAPOLICYD

The following section provides tips for basic troubleshooting of the **fapolicyd** application framework and guidance for adding applications using the **rpm** command.

Installing applications using rpm

- If you install an application using the **rpm** command, you have to perform a manual refresh of the **fapolicyd** RPM database:
 - 1. Install your application:
 - # rpm -i application.rpm
 - 2. Refresh the database:
 - # fapolicyd-cli --update

If you skip this step, the system can freeze and must be restarted.

Service status

If fapolicyd does not work correctly, check the service status:

systemctl status fapolicyd

Debug mode

- Debug mode provides detailed information about matched rules, database status, and more. To switch **fapolicyd** to debug mode:
 - 1. Stop the **fapolicyd** service:
 - # systemctl stop fapolicyd
 - 2. Use debug mode to identify a corresponding rule:
 - # fapolicyd --debug

Because the output of the **fapolicyd --debug** command is verbose, you can redirect the error output to a file:

fapolicyd --debug 2> fapolicy.output

Removing the fapolicyd database

• To solve problems related to the **fapolicyd** database, try to remove the database file:

systemctl stop fapolicyd # fapolicyd-cli --delete-db



WARNING

Do not remove the /var/lib/fapolicyd/ directory. The fapolicyd framework automatically restores only the database file in this directory.

Dumping the fapolicyd database

 The fapolicyd contains entries from all enabled trust sources. You can check the entries after dumping the database:

fapolicyd-cli --dump-db

Application pipe

• In rare cases, removing the **fapolicyd** pipe file can solve a lockup:

rm -f /var/run/fapolicyd/fapolicyd.fifo

Additional resources

• fapolicyd-cli(1) man page.

11.7. ADDITIONAL RESOURCES

- fapolicyd-related man pages listed by using the man -k fapolicyd command.
- The FOSDEM 2020 fapolicyd presentation.

CHAPTER 12. PROTECTING SYSTEMS AGAINST INTRUSIVE USB DEVICES

USB devices can be loaded with spyware, malware, or Trojans, which can steal your data or damage your system. As a Red Hat Enterprise Linux administrator, you can prevent such USB attacks with **USBGuard**.

12.1. USBGUARD

With the USBGuard software framework, you can protect your systems against intrusive USB devices by using basic lists of permitted and forbidden devices based on the USB device authorization feature in the kernel.

The USBGuard framework provides the following components:

- The system service component with an inter-process communication (IPC) interface for dynamic interaction and policy enforcement
- The command-line interface to interact with a running **usbguard** system service
- The rule language for writing USB device authorization policies
- The C++ API for interacting with the system service component implemented in a shared library

The **usbguard** system service configuration file (/etc/usbguard/usbguard-daemon.conf) includes the options to authorize the users and groups to use the IPC interface.



IMPORTANT

The system service provides the USBGuard public IPC interface. In Red Hat Enterprise Linux, the access to this interface is limited to the root user only by default.

Consider setting either the **IPCAccessControlFiles** option (recommended) or the **IPCAllowedUsers** and **IPCAllowedGroups** options to limit access to the IPC interface.

Ensure that you do not leave the Access Control List (ACL) unconfigured as this exposes the IPC interface to all local users and allows them to manipulate the authorization state of USB devices and modify the USBGuard policy.

12.2. INSTALLING USBGUARD

Use this procedure to install and initiate the **USBGuard** framework.

Procedure

- 1. Install the **usbguard** package:
 - # dnf install usbguard
- 2. Create an initial rule set:
 - # usbguard generate-policy > /etc/usbguard/rules.conf
- 3. Start the **usbquard** daemon and ensure that it starts automatically on boot:

systemctl enable --now usbguard

Verification

1. Verify that the **usbguard** service is running:

systemctl status usbguard

• usbguard.service - USBGuard daemon

Loaded: loaded (/usr/lib/systemd/system/usbguard.service; enabled; vendor preset:

disabled)

Active: active (running) since Thu 2019-11-07 09:44:07 CET; 3min 16s ago

Docs: man:usbguard-daemon(8)
Main PID: 6122 (usbguard-daemon)

Tasks: 3 (limit: 11493)

Memory: 1.2M

CGroup: /system.slice/usbguard.service

6122 /usr/sbin/usbguard-daemon -f -s -c /etc/usbguard/usbguard-daemon.conf

Nov 07 09:44:06 localhost.localdomain systemd[1]: Starting USBGuard daemon... Nov 07 09:44:07 localhost.localdomain systemd[1]: Started USBGuard daemon.

2. List USB devices recognized by **USBGuard**:

usbguard list-devices

4: allow id 1d6b:0002 serial "0000:02:00.0" name "xHCI Host Controller" hash...

Additional resources

• usbguard(1) and usbguard-daemon.conf(5) man pages.

12.3. BLOCKING AND AUTHORIZING A USB DEVICE USING CLI

This procedure outlines how to authorize and block a USB device using the **usbguard** command.

Prerequisites

• The **usbguard** service is installed and running.

Procedure

1. List USB devices recognized by **USBGuard**:

```
# usbguard list-devices
```

1: allow id 1d6b:0002 serial "0000:00:06.7" name "EHCI Host Controller" hash

"JDOb0BiktYs2ct3mSQKopnOOV2h9MGYADwhT+oUtF2s=" parent-hash

"4PHGcaDKWtPjKDwYpIRG722cB9SlGz9l9lea93+Gt9c=" via-port "usb1" with-interface 09:00:00

...

6: block id 1b1c:1ab1 serial "000024937962" name "Voyager" hash

"CrXgiaWlf2bZAU+5WkzOE7y0rdSO82XMzubn7HDb95Q=" parent-hash

"JDOb0BiktYs2ct3mSQKopnOOV2h9MGYADwhT+oUtF2s=" via-port "1-3" with-interface 08:06:50

2. Authorize the device 6 to interact with the system:

usbguard allow-device 6

3. Deauthorize and remove the device 6:

usbguard reject-device 6

4. Deauthorize and retain the device 6:

usbguard block-device 6



NOTE

USBGuard uses the *block* and *reject* terms with the following meanings:

- block: do not interact with this device for now.
- reject: ignore this device as if it does not exist.

Additional resources

- usbguard(1) man page.
- Built-in help listed by using the **usbguard --help** command.

12.4. PERMANENTLY BLOCKING AND AUTHORIZING A USB DEVICE

You can permanently block and authorize a USB device using the **-p** option. This adds a device-specific rule to the current policy.

Prerequisites

• The **usbguard** service is installed and running.

Procedure

- 1. Configure SELinux to allow the **usbguard** daemon to write rules.
 - a. Display the **semanage** Booleans relevant to **usbguard**.

```
# semanage boolean -l | grep usbguard usbguard_daemon_write_conf (off, off) Allow usbguard to daemon write conf usbguard_daemon_write_rules (on, on) Allow usbguard to daemon write rules
```

b. Optional: If the **usbguard_daemon_write_rules** Boolean is turned off, turn it on.

semanage boolean -m --on usbguard_daemon_write_rules

2. List USB devices recognized by USBGuard:

usbguard list-devices

1: allow id 1d6b:0002 serial "0000:00:06.7" name "EHCI Host Controller" hash

"JDOb0BiktYs2ct3mSQKopnOOV2h9MGYADwhT+oUtF2s=" parent-hash "4PHGcaDKWtPjKDwYpIRG722cB9SlGz9l9lea93+Gt9c=" via-port "usb1" with-interface 09:00:00

...

6: block id 1b1c:1ab1 serial "000024937962" name "Voyager" hash "CrXgiaWlf2bZAU+5WkzOE7y0rdSO82XMzubn7HDb95Q=" parent-hash "JDOb0BiktYs2ct3mSQKopnOOV2h9MGYADwhT+oUtF2s=" via-port "1-3" with-interface 08:06:50

3. Permanently authorize the device 6 to interact with the system:

usbguard allow-device 6 -p

- 4. Permanently deauthorize and remove the device 6:
 - # usbguard reject-device 6 -p
- 5. Permanently deauthorize and retain the device 6:

usbguard block-device 6 -p



NOTE

USBGuard uses the terms *block* and *reject* with the following meanings:

- block: do not interact with this device for now.
- reject: ignore this device as if it does not exist.

Verification

- 1. Check that **USBGuard** rules include the changes you made.
 - # usbguard list-rules

Additional resources

- usbguard(1) man page.
- Built-in help listed by using the **usbguard --help** command.

12.5. CREATING A CUSTOM POLICY FOR USB DEVICES

The following procedure contains steps for creating a rule set for USB devices that reflects the requirements of your scenario.

Prerequisites

- The **usbguard** service is installed and running.
- The /etc/usbguard/rules.conf file contains an initial rule set generated by the usbguard generate-policy command.

Procedure

- 1. Create a policy which authorizes the currently connected USB devices, and store the generated rules to the **rules.conf** file:
 - # usbguard generate-policy --no-hashes > ./rules.conf

The **--no-hashes** option does not generate hash attributes for devices. Avoid hash attributes in your configuration settings because they might not be persistent.

- 2. Edit the **rules.conf** file with a text editor of your choice, for example:
 - # vi ./rules.conf
- 3. Add, remove, or edit the rules as required. For example, the following rule allows only devices with a single mass storage interface to interact with the system:
 - allow with-interface equals { 08:*:* }

See the **usbguard-rules.conf(5)** man page for a detailed rule-language description and more examples.

- 4. Install the updated policy:
 - # install -m 0600 -o root -g root rules.conf /etc/usbguard/rules.conf
- 5. Restart the **usbguard** daemon to apply your changes:
 - # systemctl restart usbguard

Verification

1. Check that your custom rules are in the active policy, for example:

```
# usbguard list-rules
...
4: allow with-interface 08:*:*
...
```

Additional resources

• usbguard-rules.conf(5) man page.

12.6. CREATING A STRUCTURED CUSTOM POLICY FOR USB DEVICES

You can organize your custom **USBGuard** policy in several **.conf** files within the **/etc/usbguard/rules.d**/ directory. The **usbguard-daemon** then combines the main **rules.conf** file with the **.conf** files within the directory in alphabetical order.

Prerequisites

• The **usbguard** service is installed and running.

Procedure

1. Create a policy which authorizes the currently connected USB devices, and store the generated rules to a new **.conf** file, for example, **policy.conf**.

usbguard generate-policy --no-hashes > ./policy.conf

The **--no-hashes** option does not generate hash attributes for devices. Avoid hash attributes in your configuration settings because they might not be persistent.

2. Display the *policy.conf* file with a text editor of your choice, for example:

```
# vi ./policy.conf
...
allow id 04f2:0833 serial "" name "USB Keyboard" via-port "7-2" with-interface { 03:01:01 03:00:00 } with-connect-type "unknown" ...
```

3. Move selected lines into a separate .conf file.



NOTE

The two digits at the beginning of the file name specify the order in which the daemon reads the configuration files.

For example, copy the rules for your keyboards into a new .conf file.

grep "USB Keyboard" ./policy.conf > ./10keyboards.conf

4. Install the new policy to the /etc/usbguard/rules.d/ directory.

install -m 0600 -o root -g root 10keyboards.conf /etc/usbguard/rules.d/10keyboards.conf

5. Move the rest of the lines to a main **rules.conf** file.

```
# grep -v "USB Keyboard" ./policy.conf > ./rules.conf
```

6. Install the remaining rules.

install -m 0600 -o root -g root rules.conf /etc/usbguard/rules.conf

7. Restart the **usbguard** daemon to apply your changes.

systemctl restart usbguard

Verification

1. Display all active USBGuard rules.

```
# usbguard list-rules
...
15: allow id 04f2:0833 serial "" name "USB Keyboard" hash
```

"kxM/iddRe/WSCocgiuQIVs6Dn0VEza7KiHoDeTz0fyg=" parent-hash "2i6ZBJfTl5BakXF7Gba84/Cp1gslnNc1DM6vWQpie3s=" via-port "7-2" with-interface { 03:01:01 03:00:00 } with-connect-type "unknown" ...

- 2. Display the contents of the **rules.conf** file and all the **.conf** files in the **/etc/usbguard/rules.d/** directory.
 - # cat /etc/usbguard/rules.conf /etc/usbguard/rules.d/*.conf
- 3. Verify that the active rules contain all the rules from the files and are in the correct order.

Additional resources

• usbguard-rules.conf(5) man page.

12.7. AUTHORIZING USERS AND GROUPS TO USE THE USBGUARD IPC INTERFACE

Use this procedure to authorize a specific user or a group to use the USBGuard public IPC interface. By default, only the root user can use this interface.

Prerequisites

- The **usbguard** service is installed and running.
- The /etc/usbguard/rules.conf file contains an initial rule set generated by the usbguard generate-policy command.

Procedure

- 1. Edit the /etc/usbguard/usbguard-daemon.conf file with a text editor of your choice:
 - # vi /etc/usbguard/usbguard-daemon.conf
- 2. For example, add a line with a rule that allows all users in the **wheel** group to use the IPC interface, and save the file:
 - IPCAllowGroups=wheel
- 3. You can add users or groups also with the **usbguard** command. For example, the following command enables the *joesec* user to have full access to the **Devices** and **Exceptions** sections. Furthermore, *joesec* can list and modify the current policy:
 - # usbguard add-user joesec --devices ALL --policy modify, list --exceptions ALL

To remove the granted permissions for the *joesec* user, use the **usbguard remove-user joesec** command.

4. Restart the **usbguard** daemon to apply your changes:

systemctl restart usbguard

Additional resources

• usbguard(1) and usbguard-rules.conf(5) man pages.

12.8. LOGGING USBGUARD AUTHORIZATION EVENTS TO THE LINUX AUDIT LOG

Use the following steps to integrate logging of USBguard authorization events to the standard Linux Audit log. By default, the **usbguard** daemon logs events to the /**var/log/usbguard/usbguard-audit.log** file.

Prerequisites

- The **usbguard** service is installed and running.
- The auditd service is running.

Procedure

- 1. Edit the **usbguard-daemon.conf** file with a text editor of your choice:
 - # vi /etc/usbguard/usbguard-daemon.conf
- 2. Change the AuditBackend option from FileAudit to LinuxAudit:
 - AuditBackend=LinuxAudit
- 3. Restart the **usbguard** daemon to apply the configuration change:
 - # systemctl restart usbguard

Verification

- 1. Query the **audit** daemon log for a USB authorization event, for example:
 - # ausearch -ts recent -m USER_DEVICE

Additional resources

• usbguard-daemon.conf(5) man page.

12.9. ADDITIONAL RESOURCES

- usbguard(1), usbguard-rules.conf(5), usbguard-daemon(8), and usbguard-daemon.conf(5) man pages.
- USBGuard Homepage.