

DeepSeek-OCR in Gundam Style: Run Locally with Complex Documents



Fahd Mirza
48.1K subscribers

Join

Subscribe

190



Share

Ask

Download



5,698 views Oct 20, 2025 #deepseekocr #deepseekvl #deepseekvl2

This video locally installs DeepSeek-VL2 is a vision-language (VL) model designed to handle not only standard image-to-text OCR tasks but also more complex scenarios such as document layout understanding.

Hugging Face Search models, datasets, Models Datasets Spaces Docs Pricing Log In Sign Up

deepseek-ai/DeepSeek-OCR like 390 Follow DeepSeek 101k

Image-Text-to-Text Safetensors multilingual deepseek_vl_v2 deepseek vision-language ocr custom_code License: mit

Model card Files xet Community 12

Downloads last month 111

Safetensors Model size 3B params Tensor type BF16 Files info


Inference Providers NEW Image-Text-to-Text

This model isn't deployed by any Inference Provider. 39 Ask for provider support

DeepSeek Homepage Hugging Face DeepSeek AI

Discord DeepSeek AI Twitter deepseek ai

Github Model Download Paper Link Arxiv Paper

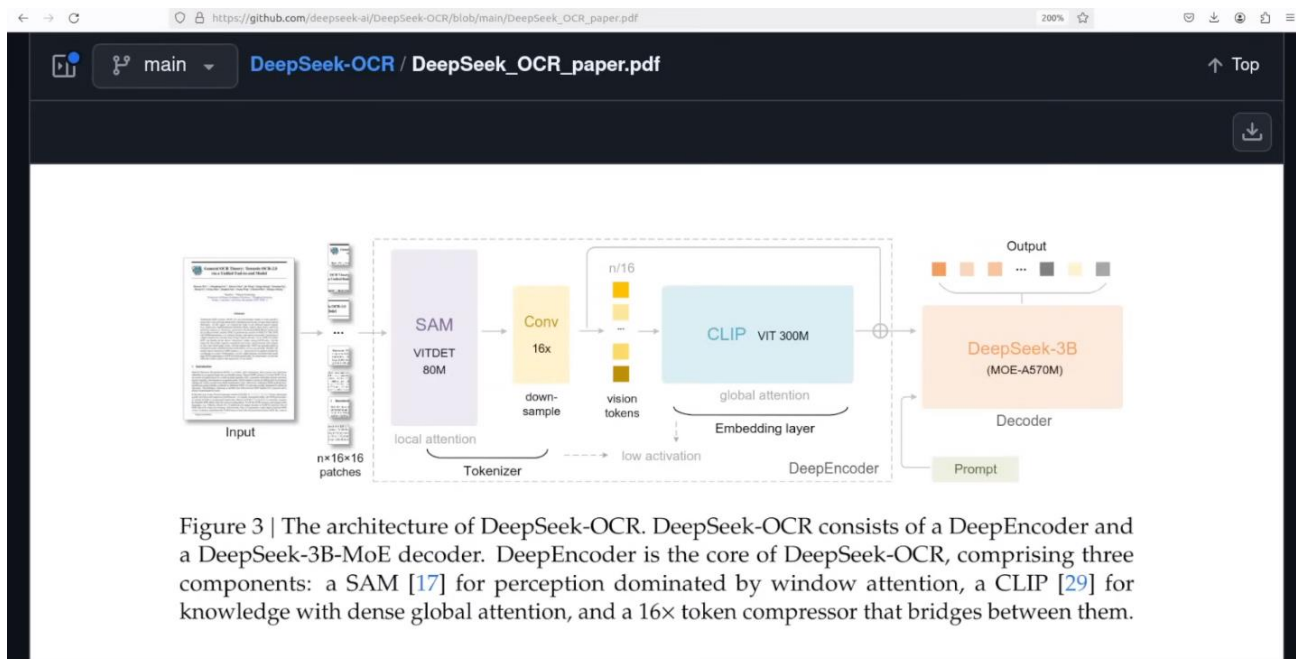

Arch Agent

Multi-Step Function Calling

Hot **7B** **NEW**

8:17

Arch-Agent 7B Local Install - Multi-Step AI Function Calling

Fahd Mirza • 1.1K views • 3 months ago

This video locally installs Arch-Agent 7B, which is a model for advanced function calling and agent-based applications. For Source Code, please ☕ Buy Me a Coffee to support the channel...

TOOL-USE LLM

Arch Function

3B

• Install & Test Locally 8:52

Arch Function 3B - Function Calling LLM for Agentic Apps - Install Locally

Fahd Mirza • 560 views • 9 months ago

This video locally installs Arch-Function-3B which is a tool-use LLM that packs a punch for accurate, low-latency multi-turn function calling. ☕ Get 50% Discount on any A6000 or A5000 GPU...

```

Ubuntu@0127-dsm2-ty6k-prmx70026:~/mycode/dso$ conda create -n ai python=3.11 -y && conda activate ai
Retrieving notices: ...working... done
Channels:
 - defaults
Platform: linux-64
Collecting package metadata (repodata.json): -

```

```

Ubuntu@0127-dsm2-ty6k-prmx70026: ~/mycode/dso/DeepSeek-OCR
Downloading and Extracting Packages:
Preparing transaction: done
Verifying transaction: done
Executing transaction: done
#
# To activate this environment, use
#
#     $ conda activate ai
#
# To deactivate an active environment, use
#
#     $ conda deactivate

(ai) Ubuntu@0127-dsm2-ty6k-prmx70026:~/mycode/dso$ git clone https://github.com/deepseek-ai/DeepSeek-OCR.git
Cloning into 'DeepSeek-OCR'...
remote: Enumerating objects: 31, done.
remote: Counting objects: 100% (1/1), done.
remote: Total 31 (delta 0), reused 1 (delta 0), pack-reused 30 (from 1)
Receiving objects: 100% (31/31), 7.78 MiB | 19.92 MiB/s, done.
Resolving deltas: 100% (1/1), done.
(ai) Ubuntu@0127-dsm2-ty6k-prmx70026:~/mycode/dso/DeepSeek-OCR$ pip install -r requirements.txt



```



```




(806 kB)
Using cached tqdm-4.67.1-py3-none-any.whl (78 kB)
Using cached typing_extensions-4.15.0-py3-none-any.whl (44 kB)
Using cached filelock-3.20.0-py3-none-any.whl (16 kB)
Using cached requests-2.32.5-py3-none-any.whl (64 kB)
Using cached charset_normalizer-3.4.4-cp311-cp311-manylinux2014_x86_64.manylinux_2_17_x86_64.manylinux_2_28_x86_64.whl (151 kB)
Using cached idna-3.11-py3-none-any.whl (71 kB)
Using cached urllib3-2.5.0-py3-none-any.whl (129 kB)
Using cached certifi-2025.10.5-py3-none-any.whl (163 kB)
Installing collected packages: urllib3, typing_extensions, tqdm, pyyaml, packaging, idna, hf-xet, fsspec, filelock, charset_normalizer, certifi, requests, huggingface_hub
Successfully installed certifi-2025.10.5 charset_normalizer-3.4.4 filelock-3.20.0 fsspec-2025.9.0 hf-xet-1.10 huggingface_hub-0.35.3 idna-3.11 packaging-25.0 pyyaml-6.0.3 requests-2.32.5 tqdm-4.67.1 typing_extensions-4.15.0 urllib3-2.5.0
(ai) Ubuntu@0127-dsm2-ty6k-prmx70026:~/mycode/dso/DeepSeek-OCR$ python DeepSeek-OCR-master/DeepSeek-OCR-hf/run_dpsk_ocr.py

```

```
Ubuntu@0127-dsm2-tyek-prxm70026: ~/mycode/dso/DeepSeek-OCR
- modeling_deepseekocr.py
- conversation.py
- configuration_deepseek_v2.py
- deepencoder.py
- modeling_deepseekv2.py
. Make sure to double-check they do not contain any added malicious code. To avoid downloading new versions
of the code file, you can pin a revision.
You are using a model of type deepseek_vl_v2 to instantiate a model of type DeepseekOCR. This is not support
ed for all configurations of models and can yield errors.
model.safetensors.index.json: 247kB [00:00, 314MB/s]
model-000001-of-000001.safetensors: 100%| 6.67G/6.67G [00:12<00:00, 546MB/s]
Downloading shards: 100%| 1/1 [00:12<00:00, 12.43s/it]
You are attempting to use Flash Attention 2.0 without specifying a torch dtype. This might lead to unexpect
ed behaviour
You are attempting to use Flash Attention 2.0 with a model not initialized on GPU. Make sure to move the mo
del to GPU after initializing it on CPU with `model.to('cuda')`.
Some weights of DeepseekOCRForCausalLM were not initialized from the model checkpoint at deepseek-ai/DeepSe
ek-OCR and are newly initialized: ['model.vision_model.embeddings.position_ids']
You should probably TRAIN this model on a down-stream task to be able to use it for predictions and inferen
ce.
* Running on local URL: http://0.0.0.0:7860, with SSR ⚡ (experimental, to disable set `ssr_mode=False` in
`launch()`)
* To create a public link, set `share=True` in `launch()`.
█
```

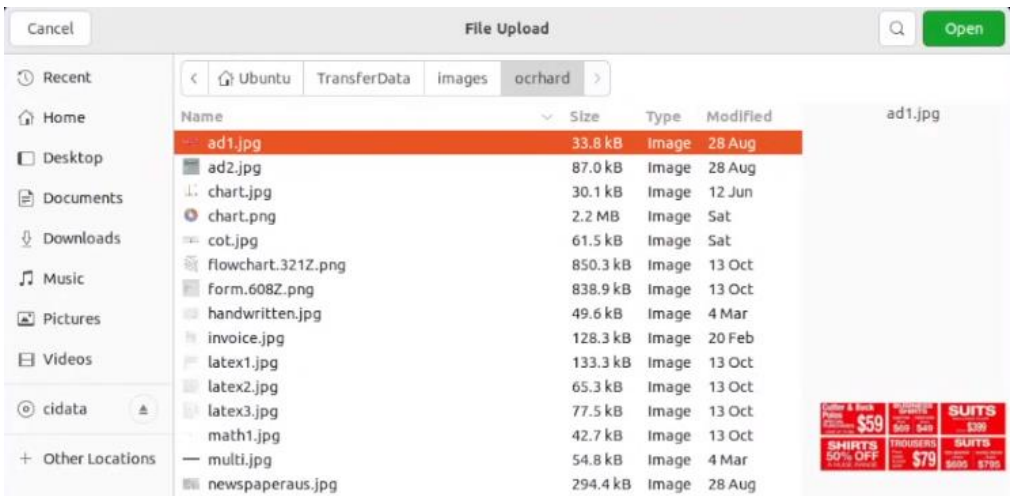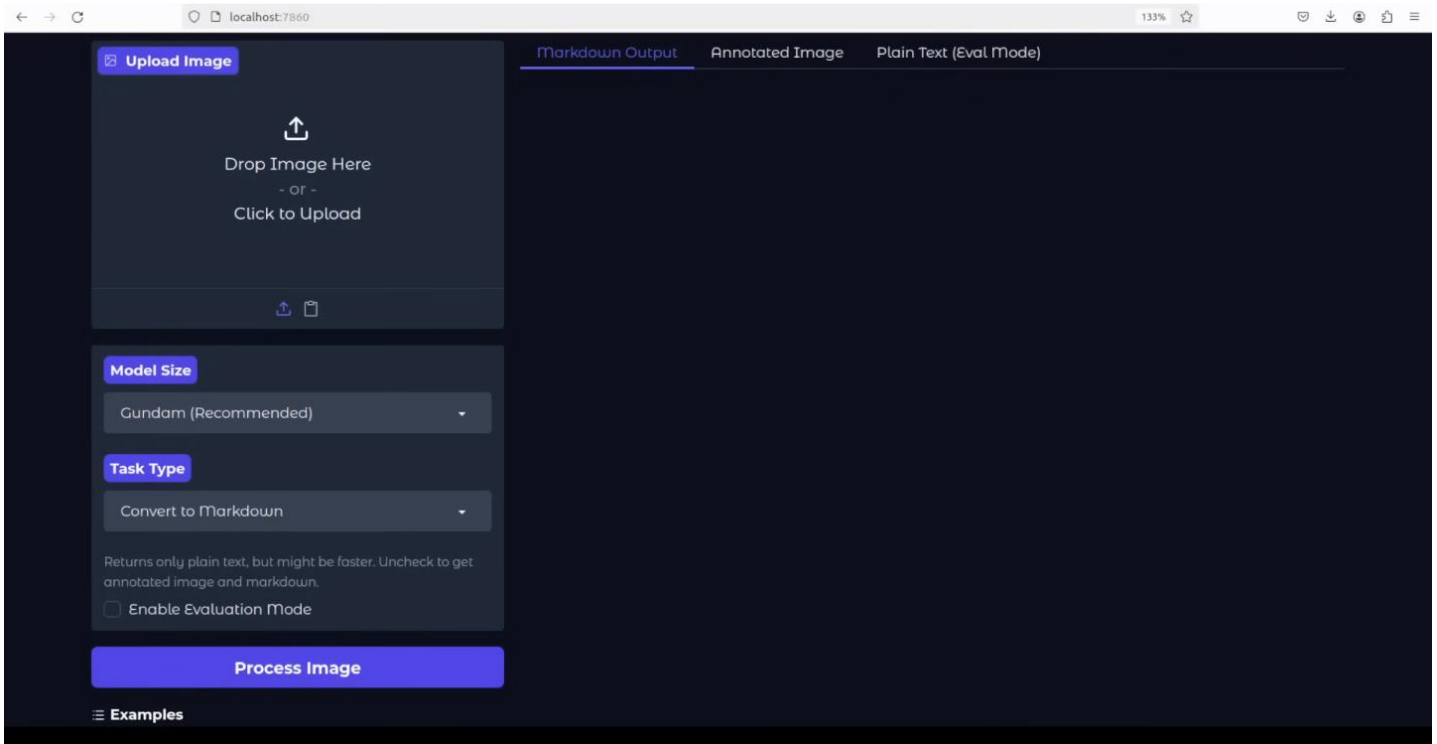

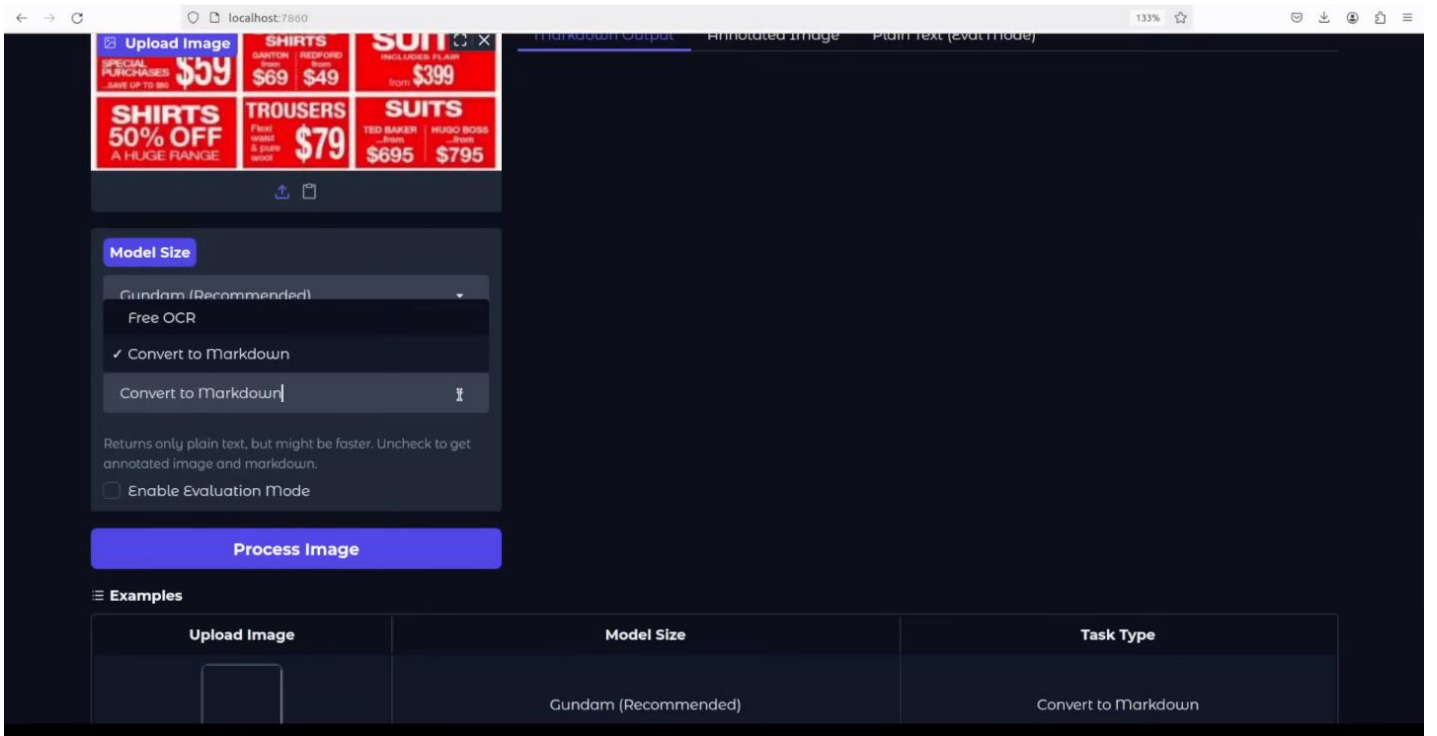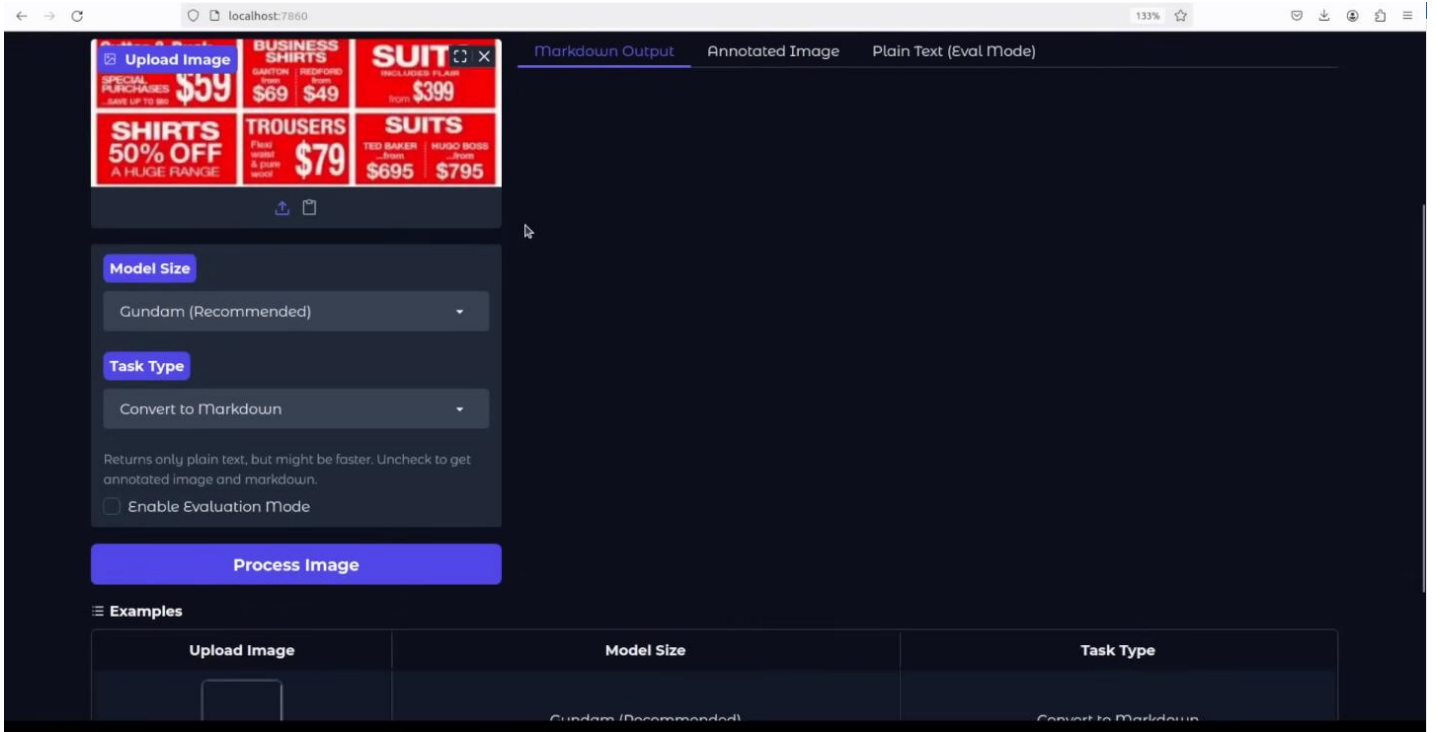

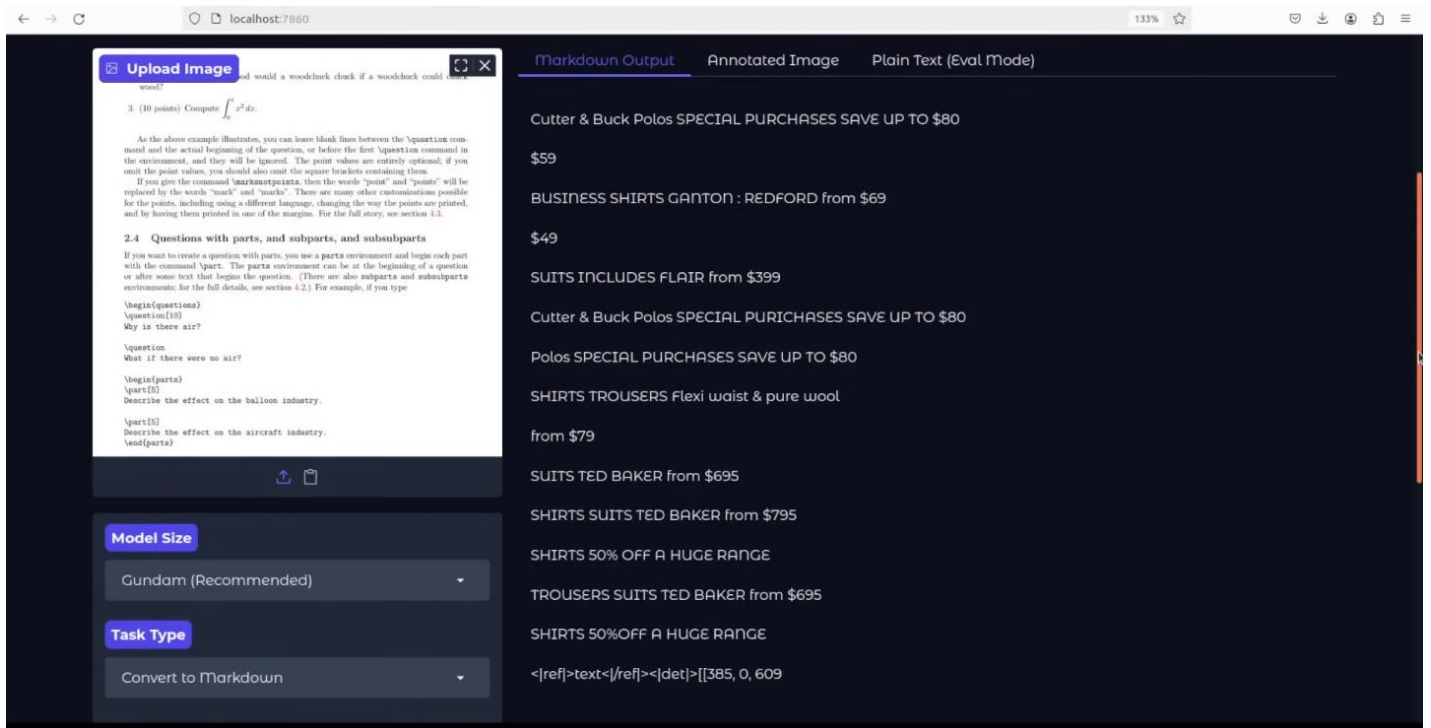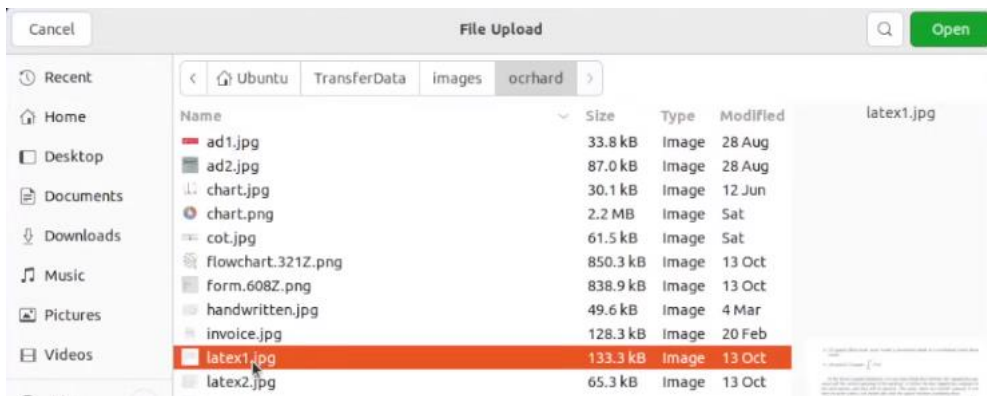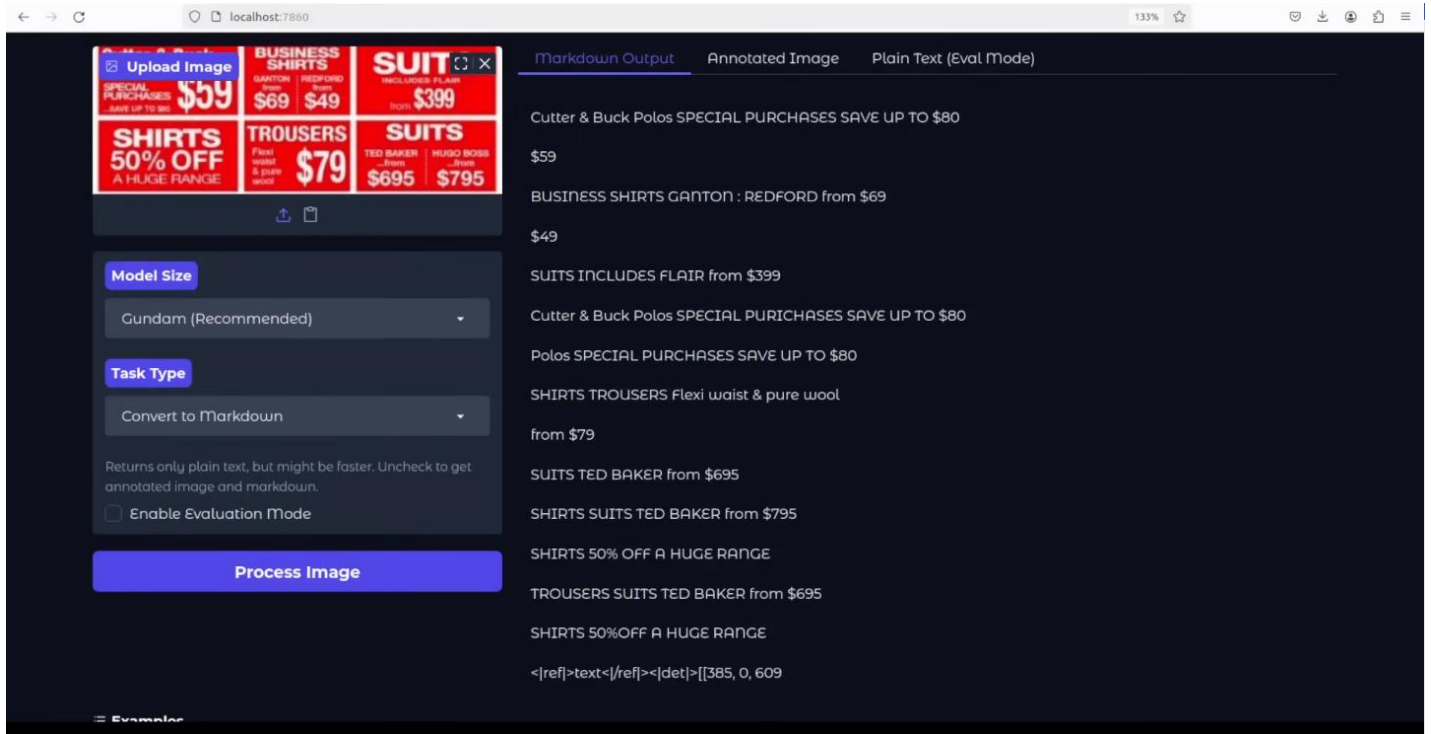

← → ↻

localhost:7860

133%

🔍 ⌵ 🔒 🏠 ☰

the environment, and they will be ignored. The point values are entirely optional; if you omit the point values, you should also omit the square brackets containing them.

If you give the command \marksnotpoints, then the words "point" and "points" will be replaced by the words "mark" and "marks". There are many other customizations possible for the points, including using a different language, changing the way the points are printed, and by having them printed in one of the margins. For the full story, see section 4.3.

2.4 Questions with parts, and subparts, and subsubparts

If you want to create a question with parts, you use a parts environment and begin each part with the command \part. The parts environment can be at the beginning of a question or after some text that begins the question. (There are also subparts and subsubparts environments; for the full details, see section 4.2.) For example, if you type

```
\begin{questions}
\question[10]
Why is there air?

\question
What if there were no air?

\begin{parts}
\part[5]
Describe the effect on the balloon industry.

\part[5]
Describe the effect on the aircraft industry.
\end{parts}
```

📄 📌

Model Size

Gundam (Recommended)

Task Type

Convert to Markdown

Returns only plain text, but might be faster. Uncheck to get annotated image and markdown.

☐ Enable Evaluation Mode

Process Image

As the above example illustrates, you can leave blank lines between the \question command and the actual beginning of the question, or before the first \question command in the environment, and they will be ignored. The point values are entirely optional; if you omit the point values, you should also omit the square brackets containing them.

If you give the command \marksnotpoints, then the words "point" and "points" will be replaced by the words "mark" and "marks". There are many other customizations possible for the points, including using a different language, changing the way the points are printed, and by having them printed in one of the margins. For the full story, see section 4.3.

2.4 Questions with parts, and subparts, and subsubparts

If you want to create a question with parts, you use a parts environment and begin each part with the command \part. The parts environment can be at the beginning of a question or after some text that begins the question. (There are also subparts and subsubparts environments; for the full details, see section 4.2.) For example, if you type

```
\begin{questions} \question[10] Why is there air?

\question What if there were no air?

\begin{parts} \part[5] Describe the effect on the balloon industry.

\part[5] Describe the effect on the aircraft industry. \end{parts}
```

← → ↻

localhost:7860

133%

🔍 ⌵ 🔒 🏠 ☰

📄 📌

Upload Image



Model Size

Gundam (Recommended)

Task Type

Convert to Markdown

Markdown Output

Annotated Image

Plain Text (Eval Mode)

localhost:7860

133%

Upload Image



Download

Copy

Model Size

Gundam (Recommended)

Task Type

Free OCR

Returns only plain text, but might be faster. Uncheck to get annotated image and markdown.

☐ Enable Evaluation Mode

Markdown Output

Annotated Image

Plain Text (Eval Mode)

Führerschein

Surname

First Name

20m

Blende

2419 20513

Zatertiernte

ZenzUm.OT/22

SunN8092

Miscinen

126602020

083122366621

853729

Deutschland

D