

Easiest Way to Create Voice AI Agent for Free Under 2 Minutes



Fahd Mirza
48.4K subscribers

Join

Subscribe

33



Share




Ask

Download



426 views Oct 26, 2025 #voiceai

This video shows the simplest tutorial to create voice ai agent. No GPU needed.

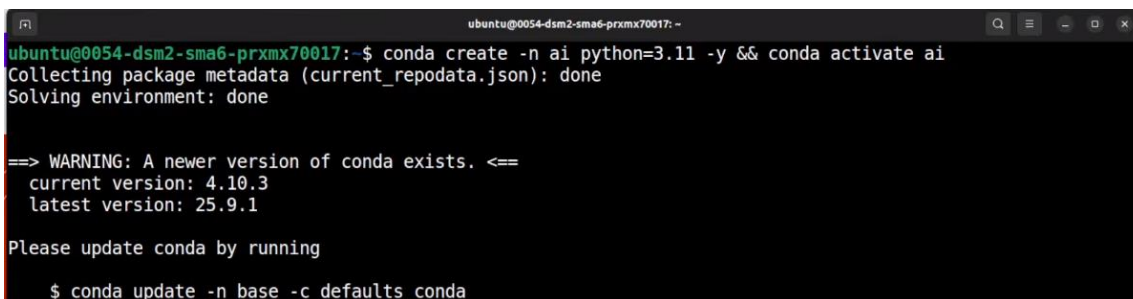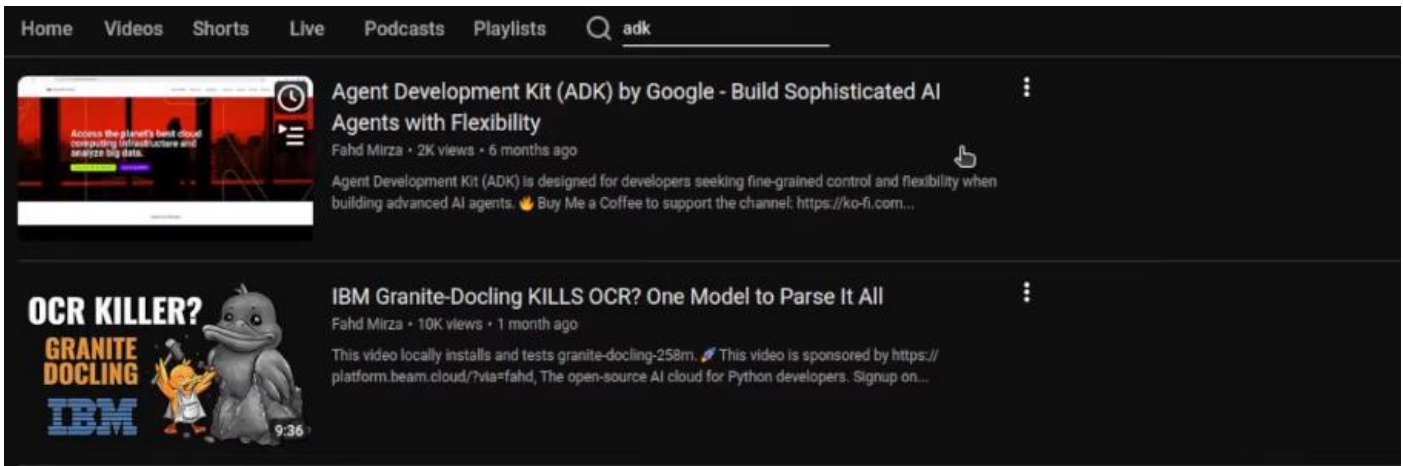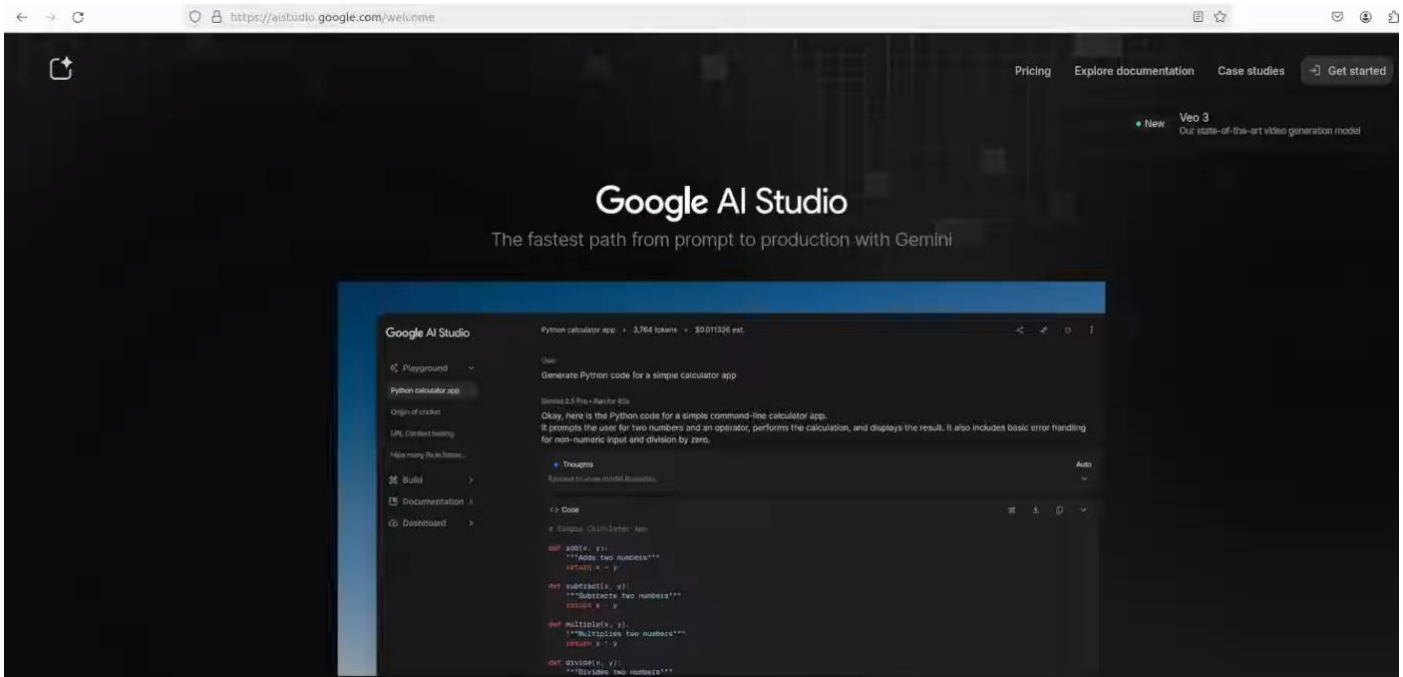

```

Verifying transaction: done
Executing transaction: done
#
# To activate this environment, use
#
#   $ conda activate ai
#
# To deactivate an active environment, use
#
#   $ conda deactivate

(ai) ubuntu@0054-dsm2-sma6-prxmx70017:~$ pip install -q google-adk>=1.12.0
(ai) ubuntu@0054-dsm2-sma6-prxmx70017:~$
(ai) ubuntu@0054-dsm2-sma6-prxmx70017:~$ export GEMINI_API_KEY=


```

```

(ai) ubuntu@0054-dsm2-sma6-prxmx70017:~$ adk create --type=code app_01 --model gemini-2.0-flash-live-001 --api_key $GEMINI_API_KEY
Agent created in /home/ubuntu/app_01:
- .env
- __init__.py
- agent.py
(ai) ubuntu@0054-dsm2-sma6-prxmx70017:~$ code .
(ai) ubuntu@0054-dsm2-sma6-prxmx70017:~$

```

This has created the voice AI agent for us

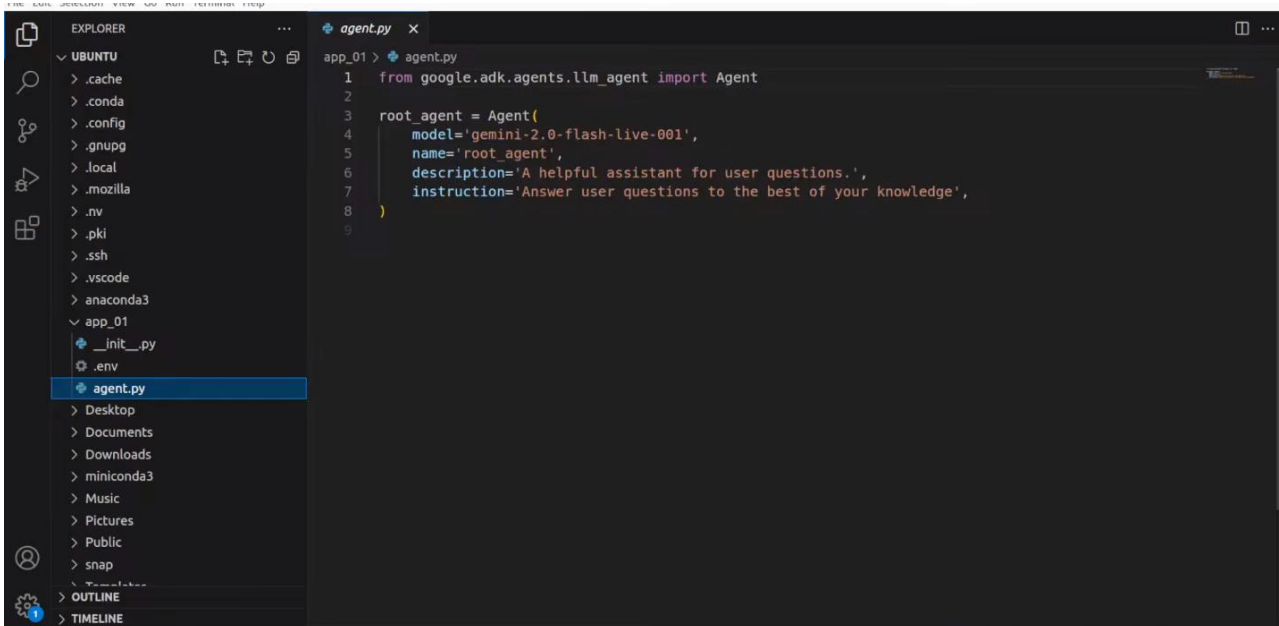


The screenshot shows the Visual Studio Code editor with the Explorer sidebar on the left displaying the file structure of the project. The file `agent.py` is selected. The main editor window shows the content of `agent.py`, which imports the `Agent` class from `google.adk.agents.llm_agent` and creates a `root_agent` instance with the following configuration:

```

1 from google.adk.agents.llm_agent import Agent
2
3 root_agent = Agent(
4     model='gemini-2.0-flash-live-001',
5     name='root_agent',
6     description='A helpful assistant for user questions.',
7     instruction='Answer user questions to the best of your knowledge',
8 )
9

```

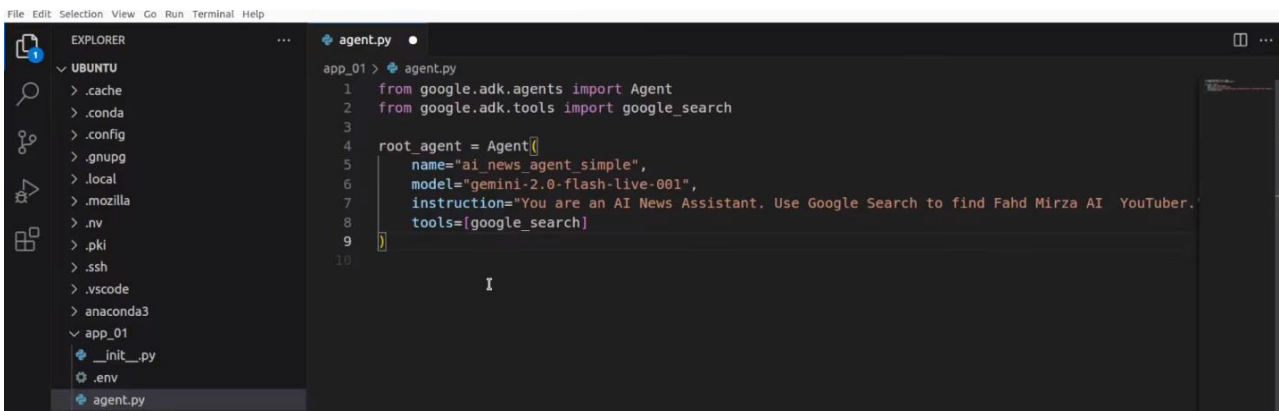

The screenshot shows the Visual Studio Code editor with the Explorer sidebar on the left displaying the file structure of the project. The file `agent.py` is selected. The main editor window shows the updated content of `agent.py`, which now imports the `google_search` tool from `google.adk.tools` and configures the `root_agent` with a specific name, model, instruction, and tools:

```

1 from google.adk.agents import Agent
2 from google.adk.tools import google_search
3
4 root_agent = Agent(
5     name="ai_news_agent simple",
6     model="gemini-2.0-flash-live-001",
7     instruction="You are an AI News Assistant. Use Google Search to find Fahd Mirza AI YouTuber.",
8     tools=[google_search]
9 )
10

```

```
ubuntu@0054-dsm2-sma6-prmx70017: ~  
(ai) ubuntu@0054-dsm2-sma6-prmx70017:~$ adk web --host 0.0.0.0 --port 8001  
/home/ubuntu/anaconda3/envs/ai/lib/python3.11/site-packages/google/adk/cli/fast_api.py:179: UserWarning: [EX  
PERIMENTAL] InMemoryCredentialService: This feature is experimental and may change or be removed in future v  
ersions without notice. It may introduce breaking changes at any time.  
credential_service = InMemoryCredentialService()  
/home/ubuntu/anaconda3/envs/ai/lib/python3.11/site-packages/google/adk/auth/credential_service/in_memory_cre  
dential_service.py:33: UserWarning: [EXPERIMENTAL] BaseCredentialService: This feature is experimental and m  
ay change or be removed in future versions without notice. It may introduce breaking changes at any time.  
super().__init__()  
INFO: Started server process [13723]  
INFO: Waiting for application startup.  
  
+-----+  
| ADK Web Server started |  
| For local testing, access at http://0.0.0.0:8001. |  
+-----+  
  
INFO: Application startup complete.  
INFO: Uvicorn running on http://0.0.0.0:8001 (Press CTRL+C to quit)
```

