



Benign

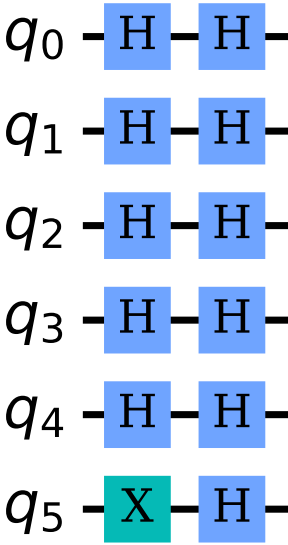

6 qubits | depth = 2 | gates = 12

QCTrojan-Bench — Deutsch-Jozsa: benign circuit and tampered variants


Static tampered

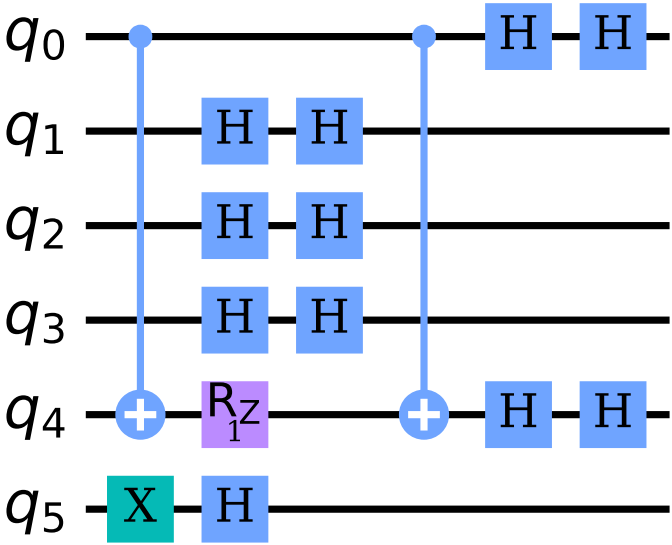

6 qubits | depth = 5 | gates = 15

CX-RZ(1.00)-CX on qubits [0, 4]

Triggered tampered

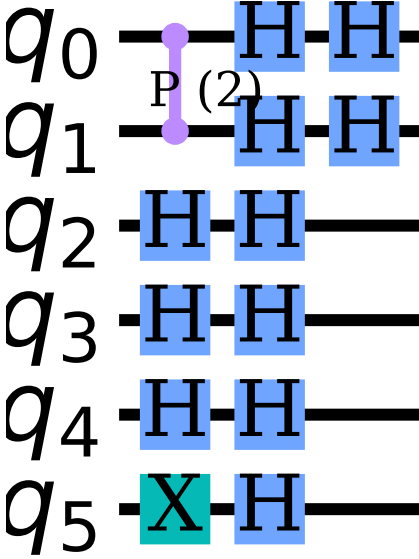

6 qubits | depth = 3 | gates = 13

MCPHaseGate(2.00) controlled by qubit 0, target qubit 1. Dormant when control is $|0\rangle$.