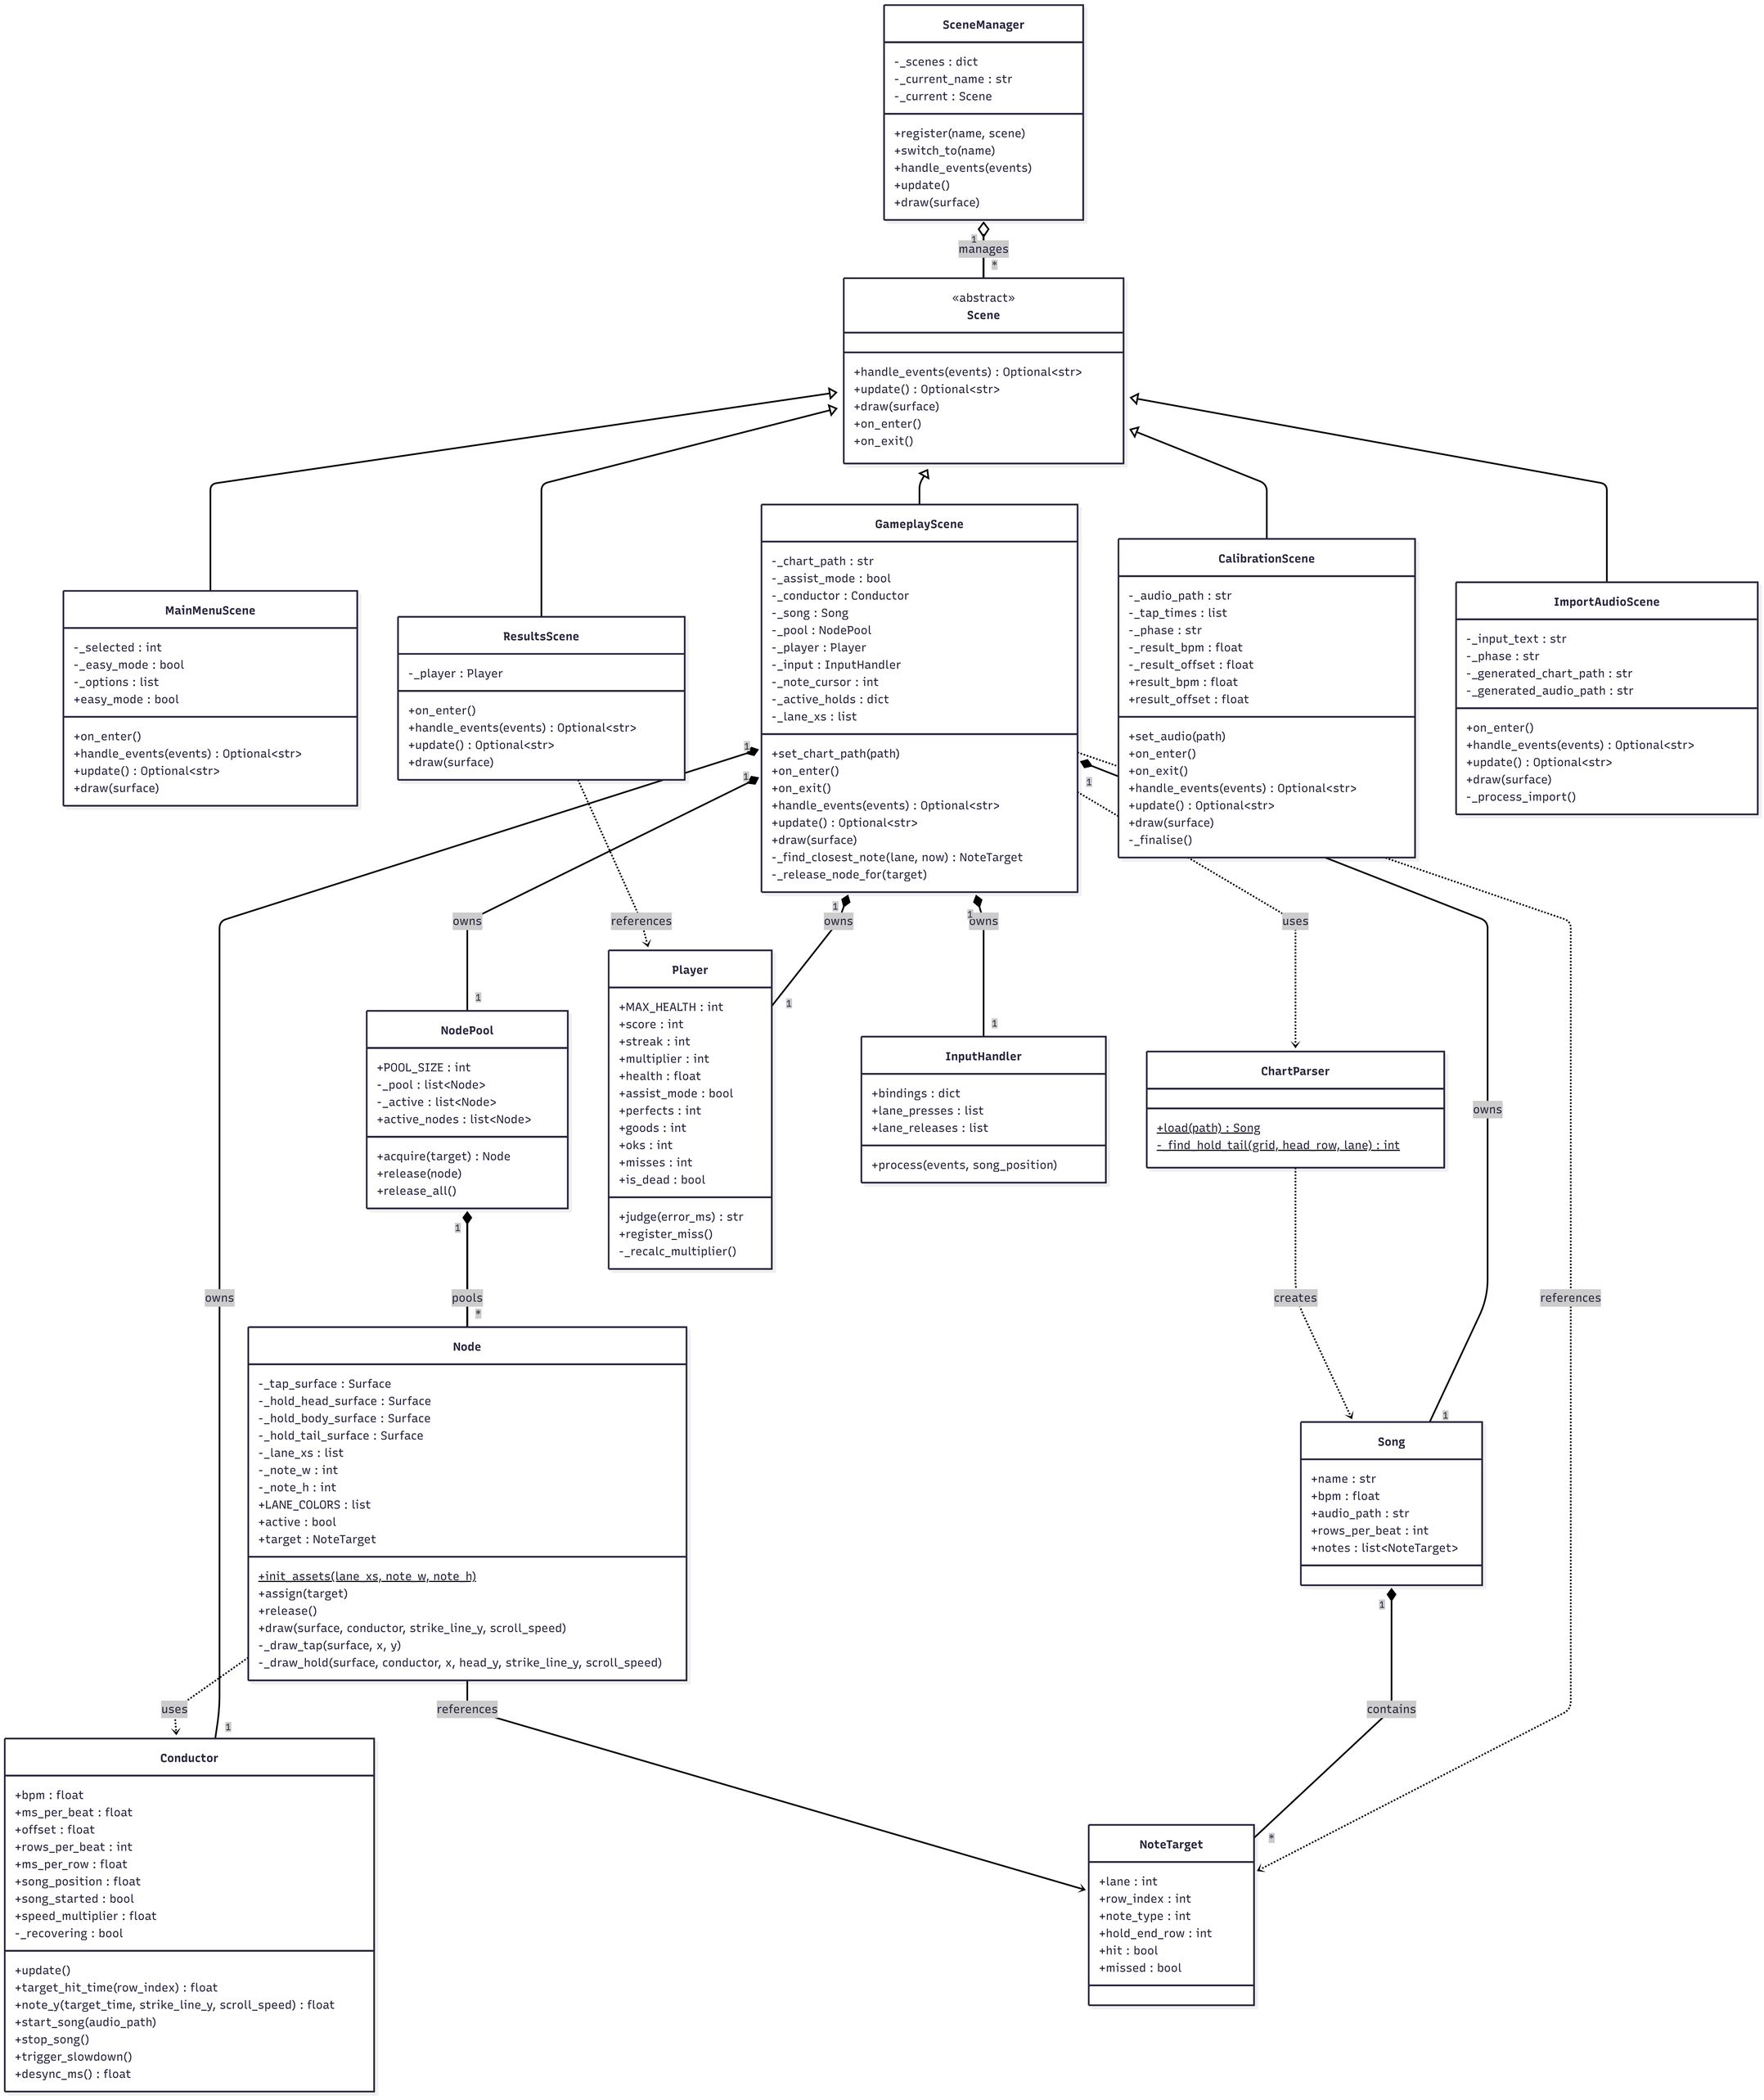
SceneManager
-_scenes : dict
-_current_name : str
-_current : Scene
+register(name, scene)
+switch_to(name)
+handle_events(events)
+update()
+draw(surface)
manages
«abstract»
Scene
+handle_events(events) : Optional<str>
+update() : Optional<str>
+draw(surface)
+on_enter()
+on_exit()
MainMenuScene
-_selected : int
-_easy_mode : bool
-_options : list
+easy_mode : bool
+on_enter()
+handle_events(events) : Optional<str>
+update() : Optional<str>
+draw(surface)
ResultsScene
-_player : Player
+on_enter()
+handle_events(events) : Optional<str>
+update() : Optional<str>
+draw(surface)
GameplayScene
-_chart_path : str
-_assist_mode : bool
-_conductor : Conductor
-_song : Song
-_pool : NodePool
-_player : Player
-_input : InputHandler
-_note_cursor : int
-_active_holds : dict
-_lane_xs : list
+set_chart_path(path)
+on_enter()
+on_exit()
+handle_events(events) : Optional<str>
+update() : Optional<str>
+draw(surface)
-_find_closest_note(lane, now) : NoteTarget
-_release_node_for(target)
CalibrationScene
-_audio_path : str
-_tap_times : list
-_phase : str
-_result_bpm : float
-_result_offset : float
+result_bpm : float
+result_offset : float
+set_audio(path)
+on_enter()
+on_exit()
+handle_events(events) : Optional<str>
+update() : Optional<str>
+draw(surface)
-_finalise()
ImportAudioScene
-_input_text : str
-_phase : str
-_generated_chart_path : str
-_generated_audio_path : str
+on_enter()
+handle_events(events) : Optional<str>
+update() : Optional<str>
+draw(surface)
-_process_import()
owns
references
owns
owns
uses
owns
owns
NodePool
+POOL_SIZE : int
-_pool : list<Node>
-_active : list<Node>
+active_nodes : list<Node>
+acquire(target) : Node
+release(node)
+release_all()
Player
+MAX_HEALTH : int
+score : int
+streak : int
+multiplier : int
+health : float
+assist_mode : bool
+perfects : int
+goods : int
+oks : int
+misses : int
+is_dead : bool
+judge(error_ms) : str
+register_miss()
-_recalc_multiplier()
InputHandler
+bindings : dict
+lane_presses : list
+lane_releases : list
+process(events, song_position)
ChartParser
+load(path) : Song
-_find_hold_tail(grid, head_row, lane) : int
pools
owns
creates
references
Node
-_tap_surface : Surface
-_hold_head_surface : Surface
-_hold_body_surface : Surface
-_hold_tail_surface : Surface
-_lane_xs : list
-_note_w : int
-_note_h : int
+LANE_COLORS : list
+active : bool
+target : NoteTarget
+init_assets(lane_xs, note_w, note_h)
+assign(target)
+release()
+draw(surface, conductor, strike_line_y, scroll_speed)
-_draw_tap(surface, x, y)
-_draw_hold(surface, conductor, x, head_y, strike_line_y, scroll_speed)
Song
+name : str
+bpm : float
+audio_path : str
+rows_per_beat : int
+notes : list<NoteTarget>
uses
references
contains
Conductor
+bpm : float
+ms_per_beat : float
+offset : float
+rows_per_beat : int
+ms_per_row : float
+song_position : float
+song_started : bool
+speed_multiplier : float
-_recovering : bool
+update()
+target_hit_time(row_index) : float
+note_y(target_time, strike_line_y, scroll_speed) : float
+start_song(audio_path)
+stop_song()
+trigger_slowdown()
+desync_ms() : float
NoteTarget
+lane : int
+row_index : int
+note_type : int
+hold_end_row : int
+hit : bool
+missed : bool